

# IC REPORT (WIFI)

**Applicant:** 8Devices

**Address of Applicant:** Gedimino 47, Kaunas, LT-44242, Lithuania

## Equipment Under Test (EUT)

**Product Name:** Komikan

**Model No.:** Komikan

**Canada IC:** 11468A-KOM

**Applicable standards:** RSS-Gen Issue 5, March 2019 Amendment 1  
RSS-247 Issue 2, February 2017

**Date of sample receipt:** 24 Mar., 2020

**Date of Test:** 24 Mar., to 06 May, 2020

**Date of report issued:** 07 May, 2020

**Test Result:** PASS\*

\* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Bruce Zhang  
Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the CCIS product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

**2 Version**

Version No.	Date	Description
00	07 May, 2020	Original

**Tested by:**Mike.Ou**Test Engineer****Date:** 07 May, 2020**Reviewed by:**Winner Zhang**Project Engineer****Date:** 07 May, 2020

### 3 Contents

	Page
1 COVER PAGE.....	1
2 VERSION .....	2
3 CONTENTS .....	3
4 TEST SUMMARY .....	4
5 GENERAL INFORMATION .....	5
5.1 CLIENT INFORMATION.....	5
5.2 GENERAL DESCRIPTION OF E.U.T.....	5
5.3 TEST ENVIRONMENT AND TEST MODE .....	6
5.4 DESCRIPTION OF SUPPORT UNITS.....	6
5.5 MEASUREMENT UNCERTAINTY .....	6
5.6 ADDITIONS TO, DEVIATIONS, OR EXCLUSIONS FROM THE METHOD .....	6
5.7 LABORATORY FACILITY.....	7
5.8 LABORATORY LOCATION .....	7
5.9 TEST INSTRUMENTS LIST.....	8
6 TEST RESULTS AND MEASUREMENT DATA .....	9
6.1 CONDUCTED EMISSION .....	9
6.2 CONDUCTED OUTPUT POWER .....	12
6.3 OCCUPY BANDWIDTH .....	20
6.4 POWER SPECTRAL DENSITY .....	29
6.5 BAND EDGE .....	35
6.5.1 Conducted Emission Method .....	35
6.5.2 Radiated Emission Method.....	40
6.6 SPURIOUS EMISSION .....	113
6.6.1 Conducted Emission Method .....	113
6.6.2 Radiated Emission Method.....	118
7 TEST SETUP PHOTO.....	140
8 EUT CONSTRUCTIONAL DETAILS.....	143

## 4 Test Summary

Test Items	Section	Result
AC Power Line Conducted Emission	RSS-GEN Section 8.8	Pass
Conducted Peak Output Power	RSS-247 Section 5.4(d)	Pass
6dB Emission Bandwidth 99% Occupied Bandwidth	RSS-247 Section 5.2(a)	Pass
Power Spectral Density	RSS-247 Section 5.2(b)	Pass
Band Edge	RSS-GEN Section 8.10 RSS-247 Section 5.5	Pass
Spurious Emission	RSS-GEN Section 6.13 RSS-247 Section 5.5	Pass
<b>Remark:</b>		
1. Pass: The EUT complies with the essential requirements in the standard. 2. N/A: Not Applicable. 3. The cable insertion loss used by "RF Output Power" and other conduction measurement items is 0.5dB (provided by the customer).		
<b>Test Method:</b>	ANSI C63.4-2014 ANSI C63.10-2013 KDB 558074 D01 15.247 Meas Guidance v05r02	

## 5 General Information

### 5.1 Client Information

Applicant:	8Devices
Address:	Gedimino 47, Kaunas, LT-44242, Lithuania
Manufacturer/ Factory:	8Devices
Address:	Gedimino 47, Kaunas, LT-44242, Lithuania

### 5.2 General Description of E.U.T.

Product Name:	Komikan
Model No.:	Komikan
Operation Frequency:	2412MHz~2462MHz (802.11b/802.11g/802.11n(HT20)) 2422MHz~2452MHz (802.11n(HT40))
Channel numbers:	11 for 802.11b/802.11g/802.11(HT20) 7 for 802.11n(HT40)
Channel separation:	5MHz
Modulation technology: (IEEE 802.11b)	Direct Sequence Spread Spectrum (DSSS)
Modulation technology: (IEEE 802.11g/802.11n)	Orthogonal Frequency Division Multiplexing(OFDM)
Data speed (IEEE 802.11b):	1Mbps, 2Mbps, 5.5Mbps, 11Mbps
Data speed (IEEE 802.11g):	6Mbps, 9Mbps, 12Mbps, 18Mbps, 24Mbps, 36Mbps, 48Mbps, 54Mbps
Data speed (IEEE 802.11n):	Up to 150Mbps
Antenna Type:	Ceramic Antenna, Whip Antenna, Flex Antenna
Antenna gain:	Ceramic Antenna: 2.09 dBi Flex Antenna: 3.2 dBi Whip Antenna: 4.0 dBi
Power supply:	DC 3.3V
Test Sample Condition:	The test samples were provided in good working order with no visible defects.

Operation Frequency each of channel for 802.11b/g/n(HT20)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		

Note:

- For 802.11n-HT40 mode, the channel number is from 3 to 9;
- Channel 1, 6 & 11 selected for 802.11b/g/n- HT20 as Lowest, Middle and Highest channel. Channel 3, 6 & 9 selected for 802.11n-HT40 as Lowest, Middle and Highest Channel.

### 5.3 Test environment and test mode

<b>Operating Environment:</b>	
Temperature:	24.0 °C
Humidity:	54 % RH
Atmospheric Pressure:	1010 mbar
<b>Test mode:</b>	
Transmitting mode	Keep the EUT in continuous transmitting with modulation
Remark:	<i>Conducted Emission and Radiated Emission below 1GHz pre-scan Ceramic Antenna and Flex Antenna and Whip Antenna, found Whip Antenna was worse case mode, the report only reflects the worst mode.</i>

The sample was placed 0.8m (below 1GHz)/1.5m (above 1GHz) above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:

<b>Per-scan all kind of data rate, the follow list were the worst case.</b>	
Mode	Data rate
802.11b	1Mbps
802.11g	6Mbps
802.11n(HT20)	6.5Mbps
802.11n(HT40)	13.5Mbps

### 5.4 Description of Support Units

Manufacturer	Description	Model	Serial Number	FCC ID/DoC
DELL	PC	OPTIPLEX7070	2J8XSZ2	DoC
DELL	MONITOR	SE2018HR	3M7QPY2	DoC
DELL	KEYBOARD	KB216d	N/A	DoC
DELL	MOUSE	MS116t1	N/A	DoC

Test Software:	RTL819x3.4-2016/01/15	Power setting: (Power index)	802.11b=52 802.11g=46 802.11n20=46 802.11n40=46
----------------	-----------------------	---------------------------------	--

### 5.5 Measurement Uncertainty

Parameters	Expanded Uncertainty
Conducted Emission (9kHz ~ 30MHz)	±1.60 dB (k=2)
Radiated Emission (9kHz ~ 30MHz)	±3.12 dB (k=2)
Radiated Emission (30MHz ~ 1000MHz)	±4.32 dB (k=2)
Radiated Emission (1GHz ~ 18GHz)	±5.38 dB (k=2)
Radiated Emission (18GHz ~ 40GHz)	±3.36 dB (k=2)

### 5.6 Additions to, deviations, or exclusions from the method

No
----

## 5.7 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

● **FCC - Designation No.: CN1211**

Shenzhen Zhongjian Nanfang Testing Co., Ltd. has been accredited as a testing laboratory by FCC(Federal Communications Commission). The test firm Registration No. is 727551.

● **ISED – CAB identifier.: CN0021**

The 3m Semi-anechoic chamber of Shenzhen Zhongjian Nanfang Testing Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1.

● **CNAS - Registration No.: CNAS L6048**

Shenzhen Zhongjian Nanfang Testing Co., Ltd. is accredited to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L6048.

● **A2LA - Registration No.: 4346.01**

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 General requirements for the competence of testing and calibration laboratories. The test scope can be found as below link: <https://portal.a2la.org/scopepdf/4346-01.pdf>

## 5.8 Laboratory Location

Shenzhen Zhongjian Nanfang Testing Co., Ltd.

Address: No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,  
Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755-23118282, Fax: +86-755-23116366

Email: info@ccis-cb.com, Website: <http://www.ccis-cb.com>

## 5.9 Test Instruments list

Radiated Emission:					
Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
3m SAC	SAEMC	9m*6m*6m	966	07-22-2017	07-21-2020
Loop Antenna	SCHWARZBECK	FMZB1519B	044	03-07-2020	03-06-2021
BiConiLog Antenna	SCHWARZBECK	VULB9163	497	03-07-2020	03-06-2021
Horn Antenna	SCHWARZBECK	BBHA9120D	916	03-07-2020	03-06-2021
Horn Antenna	SCHWARZBECK	BBHA9120D	1805	06-22-2017	06-21-2020
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170582	11-18-2019	11-17-2020
EMI Test Software	AUDIX	E3	Version: 6.110919b		
Pre-amplifier	HP	8447D	2944A09358	03-07-2020	03-06-2021
Pre-amplifier	CD	PAP-1G18	11804	03-07-2020	03-06-2021
Spectrum analyzer	Rohde & Schwarz	FSP30	101454	03-05-2020	03-04-2021
Spectrum analyzer	Rohde & Schwarz	FSP40	100363	11-18-2019	11-17-2020
EMI Test Receiver	Rohde & Schwarz	ESRP7	101070	03-05-2020	03-04-2021
Cable	ZDECL	Z108-NJ-NJ-81	1608458	03-07-2020	03-06-2021
Cable	MICRO-COAX	MFR64639	K10742-5	03-07-2020	03-06-2021
Cable	SUHNER	SUCOFLEX100	58193/4PE	03-07-2020	03-06-2021
RF Switch Unit	MWRFTEST	MW200	N/A	N/A	N/A
Test Software	MWRFTEST	MTS8200	Version: 2.0.0.0		

Conducted Emission:					
Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
EMI Test Receiver	Rohde & Schwarz	ESCI	101189	03-05-2020	03-04-2021
Pulse Limiter	SCHWARZBECK	OSRAM 2306	9731	03-05-2020	03-04-2021
LISN	CHASE	MN2050D	1447	03-05-2020	03-04-2021
LISN	Rohde & Schwarz	ESH3-Z5	8438621/010	07-21-2017	07-20-2020
Cable	HP	10503A	N/A	03-05-2020	03-04-2021
EMI Test Software	AUDIX	E3	Version: 6.110919b		


## 6 Test results and Measurement Data

### 6.1 Conducted Emission

Test Requirement:	RSS-GEN Section 8.8		
Test Frequency Range:	150 kHz to 30 MHz		
Class / Severity:	Class B		
Receiver setup:	RBW=9 kHz, VBW=30 kHz		
Limit:	Frequency range (MHz)		Limit (dBuV)
			Quasi-peak      Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
* Decreases with the logarithm of the frequency.			
Test procedure	<ol style="list-style-type: none"> <li>The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.), which provides a 50ohm/50uH coupling impedance for the measuring equipment.</li> <li>The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs).</li> <li>Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10(latest version) on conducted measurement.</li> </ol>		
Test setup:	<p><b>Reference Plane</b></p> <p>LISN                  LISN</p> <p>AUX Equipment      E.U.T</p> <p>Test table/Insulation plane</p> <p>AC power</p> <p>Filter</p> <p>EMI Receiver</p> <p>40cm      80cm</p> <p><i>Remark: E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</i></p>		
Test Instruments:	Refer to section 5.9 for details		
Test mode:	Refer to section 5.3 for details		
Test results:	Passed		

**Measurement Data:**

<b>Product name:</b>	Komikan	<b>Product model:</b>	Komikan
<b>Test by:</b>	Mike	<b>Test mode:</b>	Wi-Fi Tx mode
<b>Test frequency:</b>	150 kHz ~ 30 MHz	<b>Phase:</b>	Line
<b>Test voltage:</b>	AC 120 V/60 Hz	<b>Environment:</b>	Temp: 22.5°C Huni: 55%

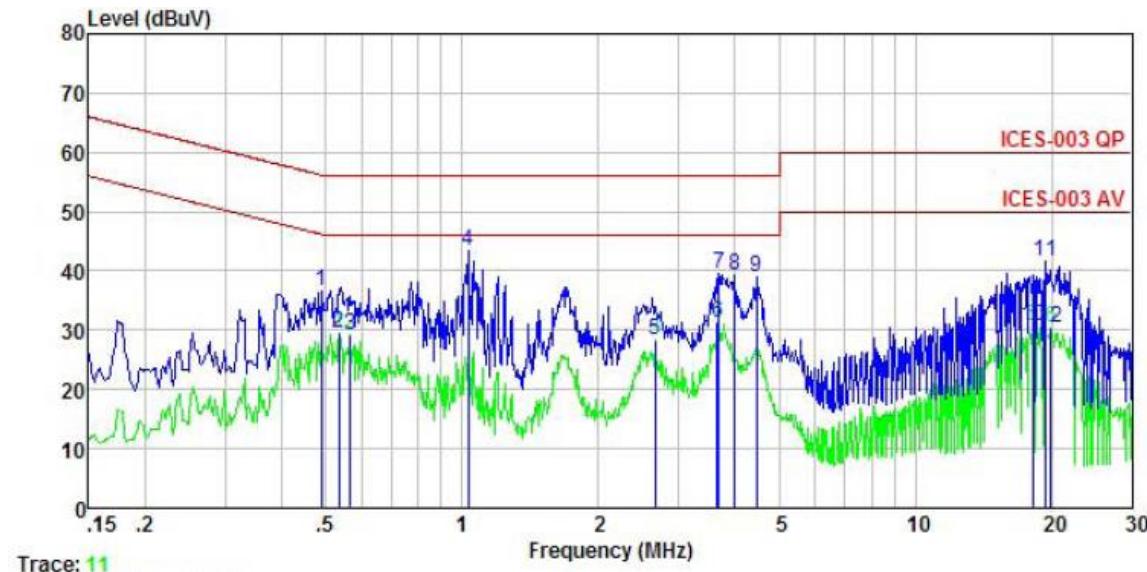


Freq MHz	Read Level dBuV	LISN Factor dB	Aux Factor dB	Cable Loss dB	Level dBuV	Limit Line dBuV	Over Limit dB	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.489	26.63	-0.39	-0.26	10.76	36.74	56.19	-19.45 QP
2	0.535	19.54	-0.39	-0.36	10.76	29.55	46.00	-16.45 Average
3	0.567	19.25	-0.39	-0.37	10.76	29.25	46.00	-16.75 Average
4	1.032	32.51	-0.38	0.42	10.87	43.42	56.00	-12.58 QP
5	2.664	18.11	-0.43	-0.24	10.93	28.37	46.00	-17.63 Average
6	3.661	21.00	-0.46	-0.09	10.90	31.35	46.00	-14.65 Average
7	3.681	29.14	-0.46	-0.09	10.90	39.49	56.00	-16.51 QP
8	3.985	28.86	-0.46	-0.05	10.89	39.24	56.00	-16.76 QP
9	4.454	28.41	-0.47	0.02	10.87	38.83	56.00	-17.17 QP
10	18.135	18.79	-0.87	1.82	10.92	30.66	50.00	-19.34 Average
11	19.428	30.35	-0.94	1.20	10.93	41.54	60.00	-18.46 QP
12	19.950	19.69	-0.97	0.89	10.93	30.54	50.00	-19.46 Average

**Notes:**

- An initial pre-scan was performed on the line and neutral lines with peak detector.
- Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
- Final Level = Receiver Read level + LISN Factor + Aux Factor + Cable Loss.

<b>Product name:</b>	Komikan	<b>Product model:</b>	Komikan
<b>Test by:</b>	Mike	<b>Test mode:</b>	Wi-Fi Tx mode
<b>Test frequency:</b>	150 kHz ~ 30 MHz	<b>Phase:</b>	Neutral
<b>Test voltage:</b>	AC 120 V/60 Hz	<b>Environment:</b>	Temp: 22.5°C Huni: 55%

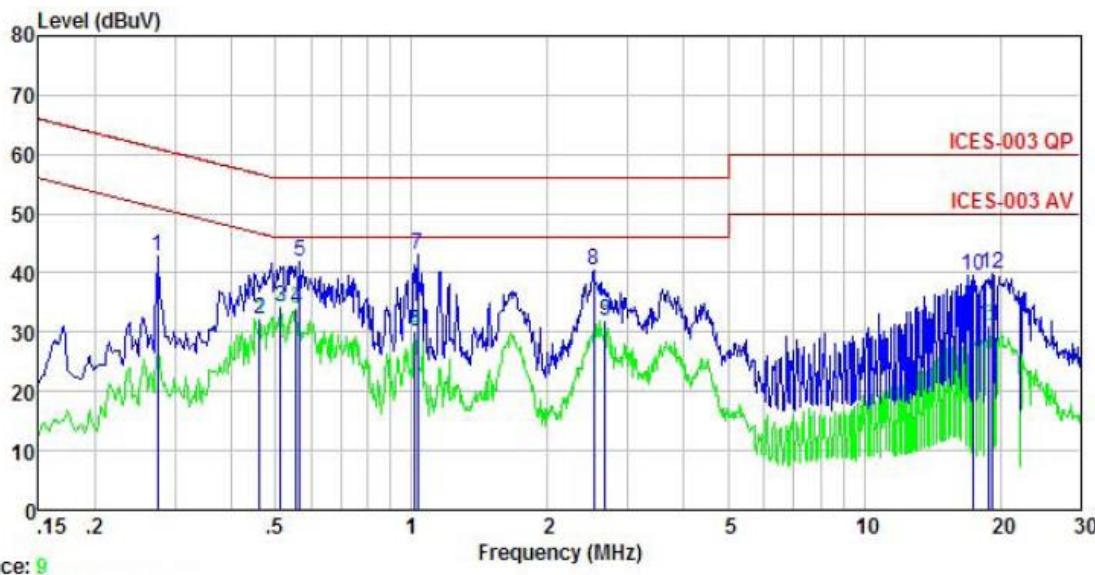


Freq MHz	Read Level dBuV	LISN Factor dB	Aux Factor dB	Cable Loss dB	Level dBuV	Limit Line dBuV	Over Limit dB	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.274	32.60	-0.64	0.01	10.74	42.71	60.98	-18.27 QP
2	0.461	22.11	-0.65	0.00	10.74	32.20	46.67	-14.47 Average
3	0.513	23.97	-0.65	0.03	10.76	34.11	46.00	-11.89 Average
4	0.555	23.70	-0.65	0.03	10.76	33.84	46.00	-12.16 Average
5	0.567	31.82	-0.65	0.03	10.76	41.96	56.00	-14.04 QP
6	1.016	19.86	-0.63	0.08	10.87	30.18	46.00	-15.82 Average
7	1.032	32.72	-0.63	0.08	10.87	43.04	56.00	-12.96 QP
8	2.527	29.78	-0.67	0.25	10.94	40.30	56.00	-15.70 QP
9	2.678	21.42	-0.67	0.27	10.93	31.95	46.00	-14.05 Average
10	17.383	28.06	-1.12	1.63	10.92	39.49	60.00	-20.51 QP
11	18.920	20.64	-1.29	0.81	10.92	31.08	50.00	-18.92 Average
12	19.122	29.39	-1.32	0.73	10.92	39.72	60.00	-20.28 QP

**Notes:**

- An initial pre-scan was performed on the line and neutral lines with peak detector.
- Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
- Final Level = Receiver Read level + LISN Factor + Aux Factor + Cable Loss.

## 6.2 Conducted Output Power

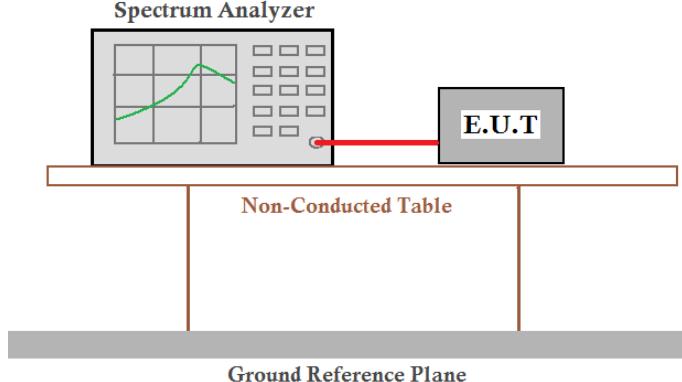Test Requirement:	RSS-247 Section 5.4 (d)
Limit:	1W(conducted Power) and 4W(EIRP)
Test setup:	
Test Instruments:	Refer to section 5.9 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

**Measurement Data:****Ceramic Antenna:**

Test CH		Conducted Power (dBm)	Total power (dBm)	Conducted Power Limit (dBm)	Ant. Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	Result
802.11b(SISO)								
Lowest	TX0	22.25	/	30.00	2.09	24.34	36.0	Pass
	TX1	22.56				24.65		
Middle	TX0	22.18	/	30.00	2.09	24.27	36.0	Pass
	TX1	22.15				24.24		
Highest	TX0	22.09	/	30.00	2.09	24.18	36.0	Pass
	TX1	20.51				22.60		
802.11g(SISO)								
Lowest	TX0	19.47	/	30.00	2.09	21.56	36.0	Pass
	TX1	20.01				22.10		
Middle	TX0	21.17	/	30.00	2.09	23.26	36.0	Pass
	TX1	21.35				23.44		
Highest	TX0	19.37	/	30.00	2.09	21.46	36.0	Pass
	TX1	19.74				21.83		
802.11n-HT20(MIMO)								
Lowest	TX0	19.60	22.48	29.93	2.09	24.57	36.0	Pass
	TX1	19.34				24.64		
Middle	TX0	19.56	22.55	29.93	2.09	24.38	36.0	Pass
	TX1	19.52				24.38		
Highest	TX0	19.10	22.29	29.67	2.09	23.77	36.0	Pass
	TX1	19.46				24.79		
802.11n-HT40(MIMO)								
Lowest	TX0	18.76	21.68	29.67	2.09	24.27	36.0	Pass
	TX1	18.58				23.77		
Middle	TX0	19.77	22.70	29.67	2.09	24.79	36.0	Pass
	TX1	19.60				24.27		
Highest	TX0	19.23	22.18	29.67	2.09	23.77	36.0	Pass
	TX1	19.10				24.79		

**Remark:**

- Because transmit signals are correlated, Directional gain =  $G_{ANT} + 10 \log(N_{ANT})$  dBi.
- So Ceramic Antenna: The Directional gain=2.09 + 10 log(2)=5.09dBi, The directional Gain of antenna is not exceed 6 dBi, so the limit of Power is 30 dBm(for 802.11n).
- Flex Antenna: The Directional gain=3.2 + 10 log(2)=6.2dBi, The directional Gain of antenna is greater than 6 dBi, so the limit of Power is 29.93 dBm (for 802.11n).
- Whip Antenna: The Directional gain=4 + 10 log(2)=7.0dBi, The directional Gain of antenna is greater than 6 dBi, so the limit of Power is 29.67dBm (for 802.11n).

## Flex Antenna:

Test CH		Conducted Power (dBm)	Total power (dBm)	Conducted Power Limit (dBm)	Ant. Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	Result					
802.11b(SISO)													
Lowest	TX0	22.25	/	30.00	3.2	25.45	36.0	Pass					
	TX1	22.56				25.76							
Middle	TX0	22.18	/	30.00	3.2	25.38	36.0	Pass					
	TX1	22.15				25.35							
Highest	TX0	22.09	/	30.00	3.2	25.29	36.0	Pass					
	TX1	20.51				23.71							
802.11g(SISO)													
Lowest	TX0	19.47	/	30.00	3.2	22.67	36.0	Pass					
	TX1	20.01				23.21							
Middle	TX0	21.17	/	30.00	3.2	24.37	36.0	Pass					
	TX1	21.35				24.55							
Highest	TX0	19.37	/	30.00	3.2	22.57	36.0	Pass					
	TX1	19.74				22.94							
802.11n-HT20(MIMO)													
Lowest	TX0	19.60	22.48	29.93	3.2	25.68	36.0	Pass					
	TX1	19.34				25.75							
Middle	TX0	19.56	22.55	29.93	3.2	25.49	36.0	Pass					
	TX1	19.52				25.49							
Highest	TX0	19.10	22.29	29.93	3.2	24.88	36.0	Pass					
	TX1	19.46				25.9							
802.11n-HT40(MIMO)													
Lowest	TX0	18.76	21.68	29.67	3.2	24.88	36.0	Pass					
	TX1	18.58				25.9							
Middle	TX0	19.77	22.70	29.67	3.2	25.38	36.0	Pass					
	TX1	19.60				25.38							
Highest	TX0	19.23	22.18	29.67	3.2	25.38							
	TX1	19.10				25.38							
<b>Remark:</b>													
1. Because transmit signals are correlated, Directional gain = $G_{ANT} + 10 \log(N_{ANT})$ dBi. 2. So Ceramic Antenna: The Directional gain=2.09 + 10 log(2)=5.09dBi, The directional Gain of antenna is not exceed 6 dBi, so the limit of Power is 30 dBm(for 802.11n). 3. Flex Antenna: The Directional gain=3.2 + 10 log(2)=6.2dBi, The directional Gain of antenna is greater than 6 dBi, so the limit of Power is 29.93 dBm (for 802.11n). 4. Whip Antenna: The Directional gain=4 + 10 log(2)=7.0dBi, The directional Gain of antenna is greater than 6 dBi, so the limit of Power is 29.67dBm (for 802.11n).													

**Whip Antenna:**


Test CH		Conducted Power (dBm)	Total power (dBm)	Conducted Power Limit (dBm)	Ant. Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	Result
802.11b(SISO)								
Lowest	TX0	22.25	/	30.00	4.0	26.25	36.0	Pass
	TX1	22.56				26.56		
Middle	TX0	22.18	/	30.00	4.0	26.18	36.0	Pass
	TX1	22.15				26.15		
Highest	TX0	22.09	/	30.00	4.0	26.09	36.0	Pass
	TX1	20.51				24.51		
802.11g(SISO)								
Lowest	TX0	19.47	/	30.00	4.0	23.47	36.0	Pass
	TX1	20.01				24.01		
Middle	TX0	21.17	/	30.00	4.0	25.17	36.0	Pass
	TX1	21.35				25.35		
Highest	TX0	19.37	/	30.00	4.0	23.37	36.0	Pass
	TX1	19.74				23.74		
802.11n-HT20(MIMO)								
Lowest	TX0	19.60	22.48	29.93	4.0	26.48	36.0	Pass
	TX1	19.34				26.55		
Middle	TX0	19.56	22.55	29.93	4.0	26.55	36.0	Pass
	TX1	19.52				26.29		
Highest	TX0	19.10	22.29	29.67	4.0	26.29	36.0	Pass
	TX1	19.46				26.18		
802.11n-HT40(MIMO)								
Lowest	TX0	18.76	21.68	29.67	4.0	25.68	36.0	Pass
	TX1	18.58				26.70		
Middle	TX0	19.77	22.70	29.67	4.0	26.70	36.0	Pass
	TX1	19.60				26.18		
Highest	TX0	19.23	22.18	29.67	4.0	26.18	36.0	Pass
	TX1	19.10				26.18		

**Remark:**

- Because transmit signals are correlated, Directional gain =  $G_{ANT} + 10 \log(N_{ANT})$  dBi.
- So Ceramic Antenna: The Directional gain=  $2.09 + 10 \log(2) = 5.09$  dBi, The directional Gain of antenna is not exceed 6 dBi, so the limit of Power is 30 dBm(for 802.11n).
- Flex Antenna: The Directional gain=  $3.2 + 10 \log(2) = 6.2$  dBi, The directional Gain of antenna is greater than 6 dBi, so the limit of Power is 29.93 dBm (for 802.11n).
- Whip Antenna: The Directional gain=  $4 + 10 \log(2) = 7.0$  dBi, The directional Gain of antenna is greater than 6 dBi, so the limit of Power is 29.67dBm (for 802.11n).

**Test plot as follows:**

**TX 0:**

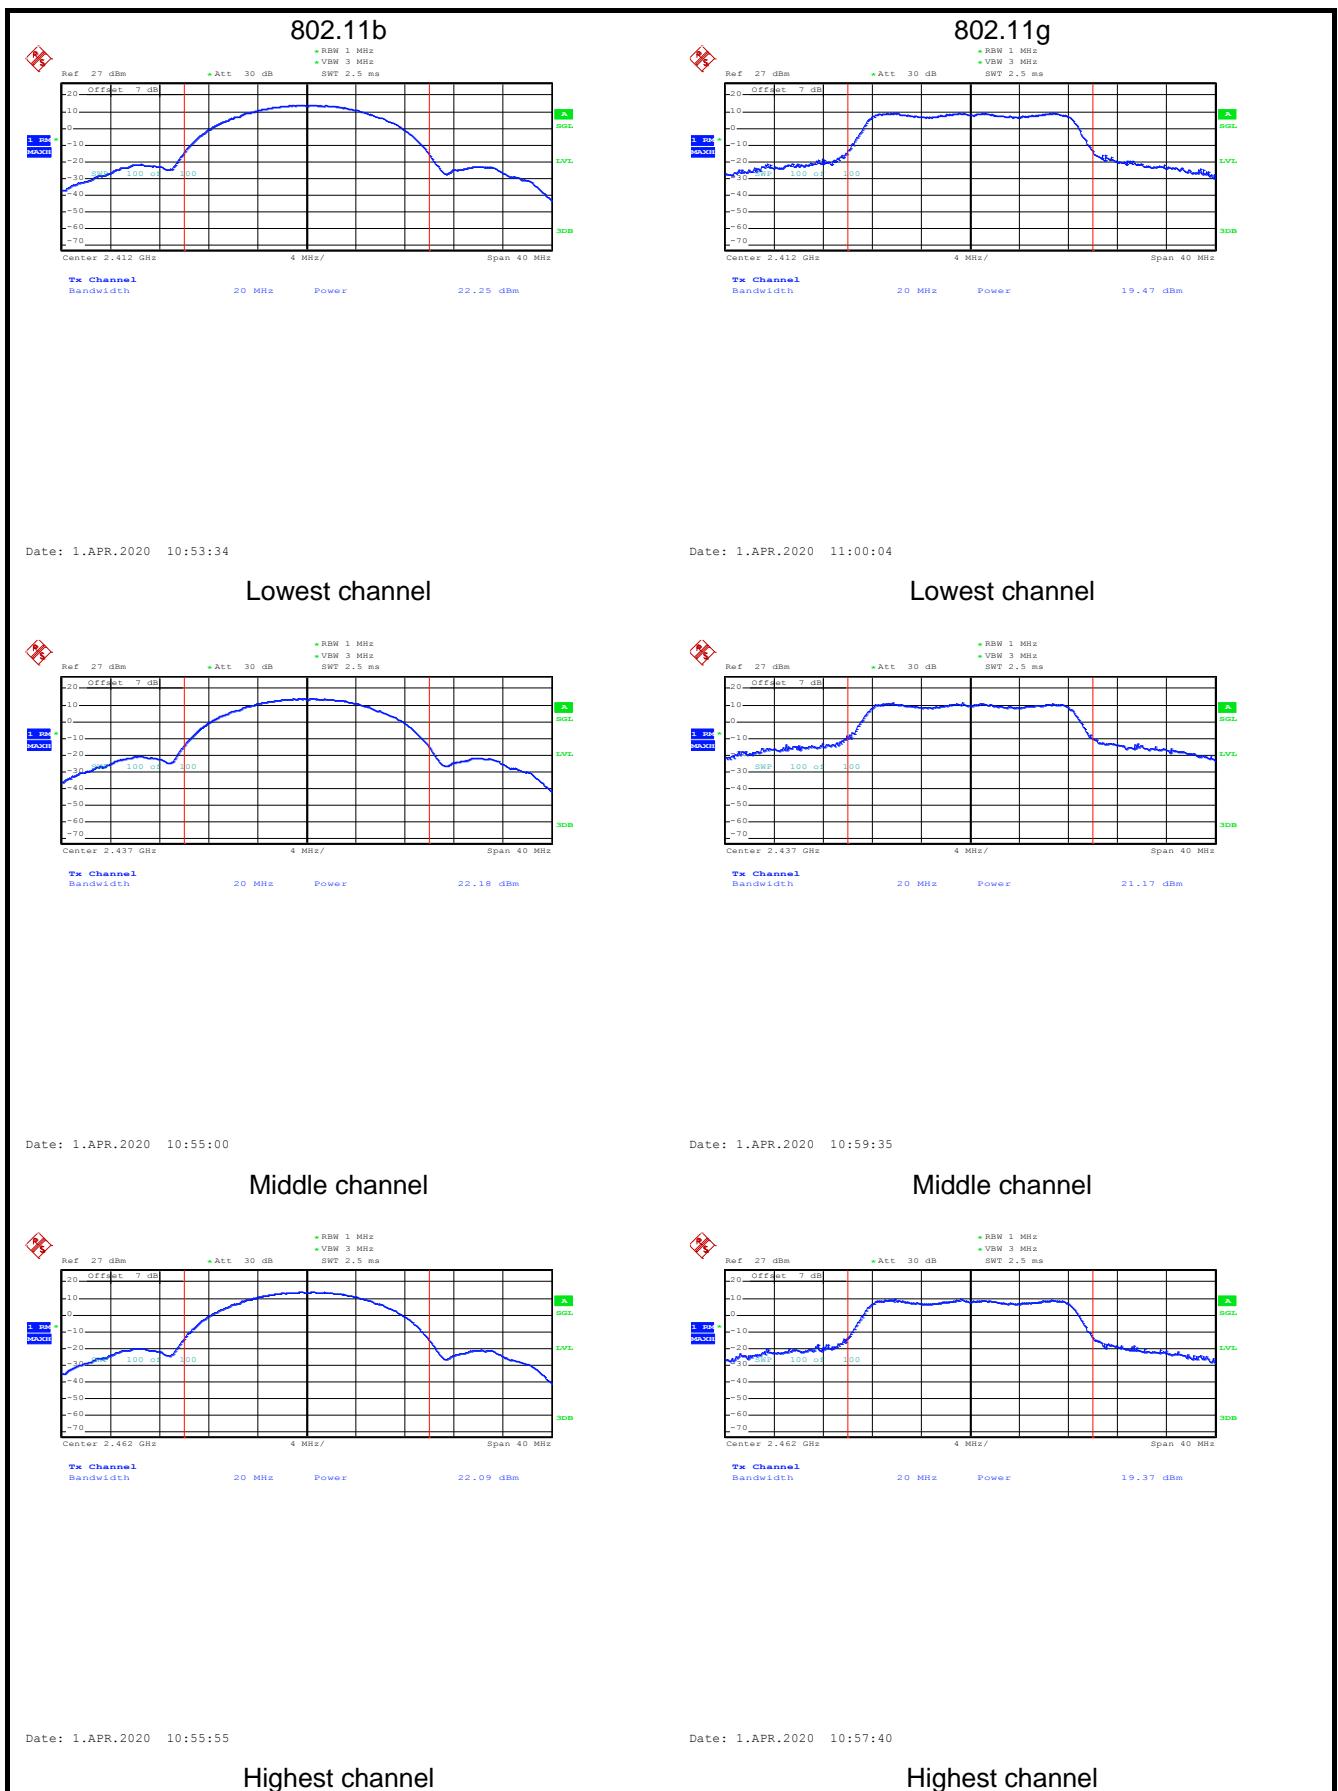


## 802.11n(HT20)



Date: 1.APR.2020 11:00:50


## Lowest channel

## 802.11n(HT40)

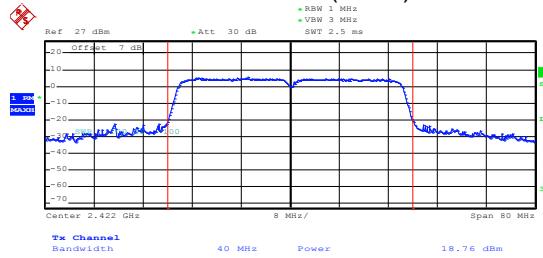


Date: 1.APR.2020 11:06:17

## Lowest channel

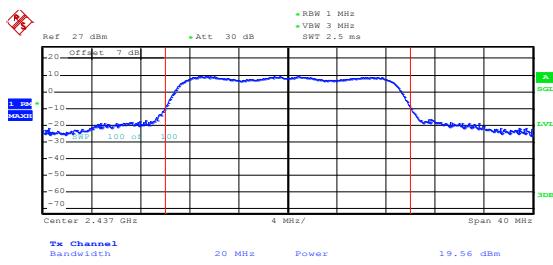



Date: 1.APR.2020 11:02:47

## Middle channel

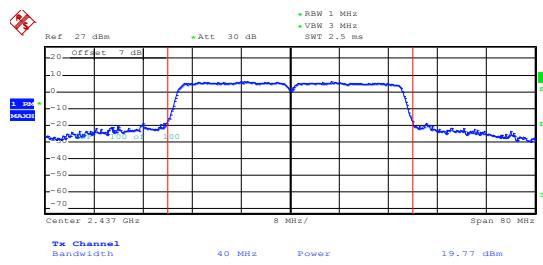

Date: 1.APR.2020 11:08:21

## Middle channel

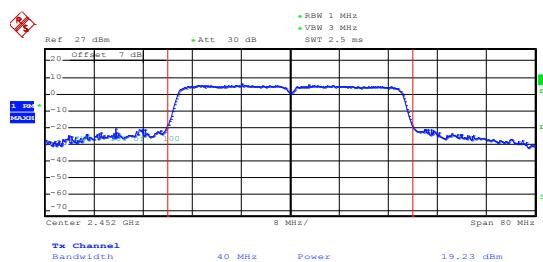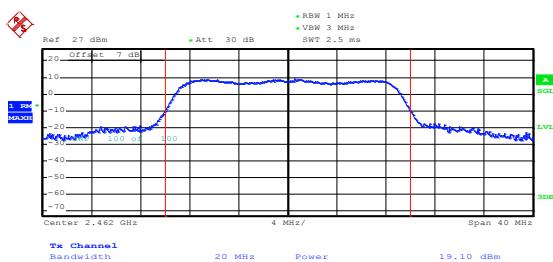


Date: 1.APR.2020 11:03:26

Date: 1.APR.2020 11:07:54


## Highest channel

## TX 1:

802.11b

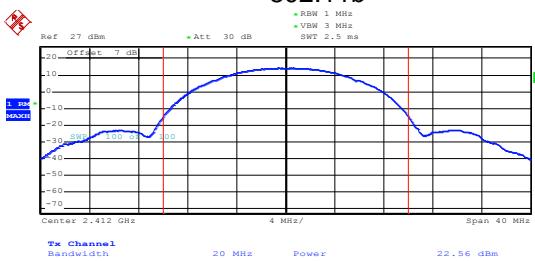

802.11g

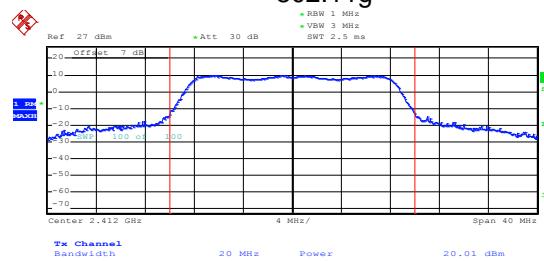


Date: 1.APR.2020 11:12:06

## Lowest channel




Date: 1.APR.2020 11:14:24

## Lowest channel

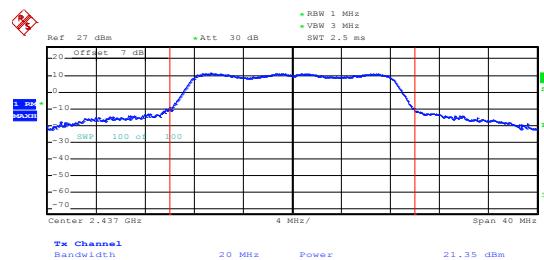


Date: 1.APR.2020 11:12:29

## Middle channel

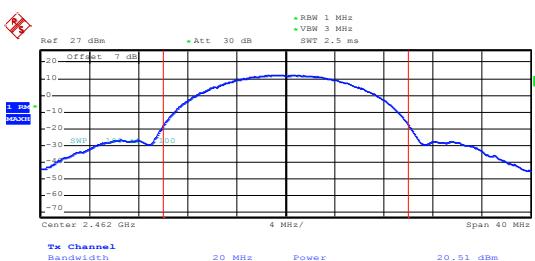

Date: 1.APR.2020 11:15:45

## Middle channel

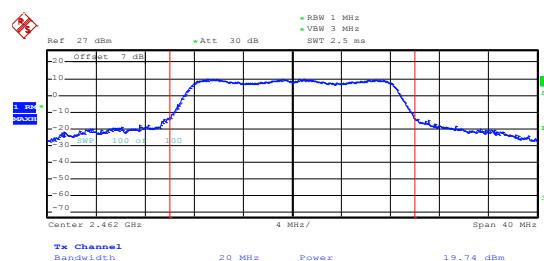


Date: 15.APR.2020 10:27:19


## Highest channel

Date: 1.APR.2020 11:16:15

## Highest channel

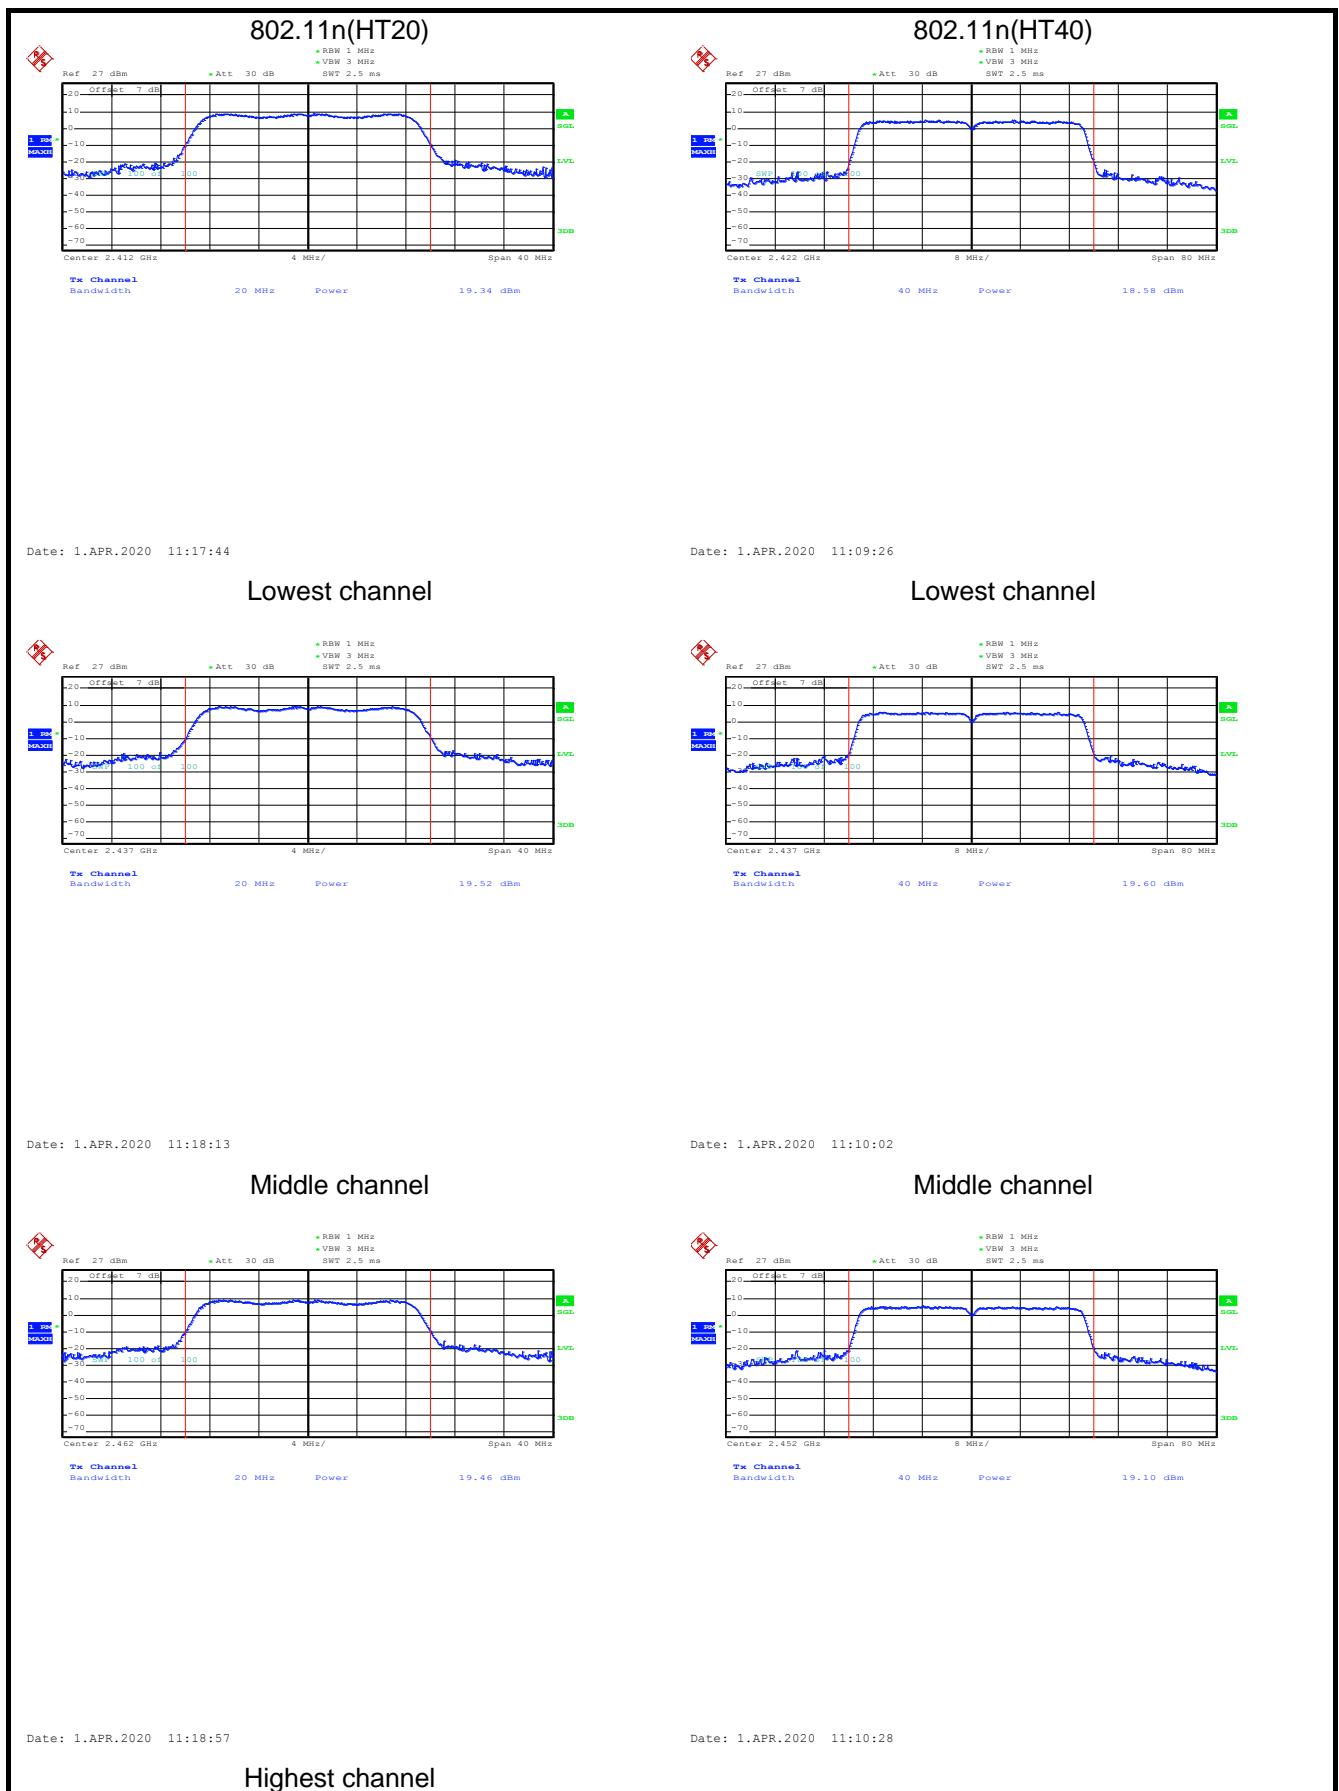

### 6.3 Occupy Bandwidth

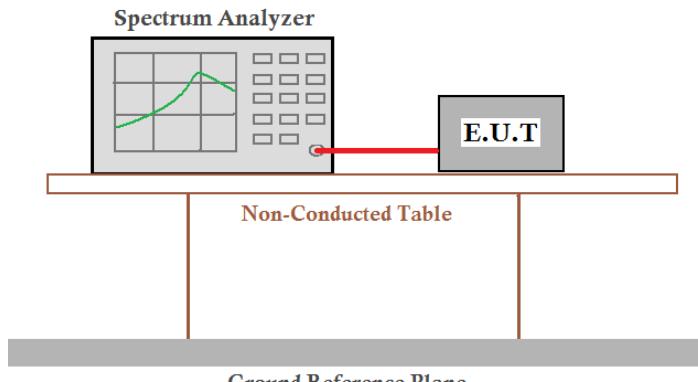Test Requirement:	RSS-247 section 5.2(a)
Limit:	>500kHz
Test setup:	 <p>The diagram illustrates the test setup for measuring occupy bandwidth. A Spectrum Analyzer is connected to the E.U.T. through a coaxial cable. The entire assembly is positioned on a Non-Conducted Table, which is situated above a solid Ground Reference Plane.</p>
Test Instruments:	Refer to section 5.9 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

#### Measurement Data:

##### TX 0:


Test CH	6dB Emission Bandwidth (MHz)				Limit(kHz)	Result
	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)		
Lowest	10.24	16.64	17.76	36.80	>500	Pass
Middle	10.24	16.64	17.76	36.80		
Highest	10.24	16.64	17.76	36.80		
Test CH	99% Occupy Bandwidth (MHz)				Limit(kHz)	Result
	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)		
Lowest	15.04	16.80	17.60	36.32	N/A	N/A
Middle	15.12	17.04	17.68	36.48		
Highest	15.20	16.80	17.68	36.48		


##### TX 1:


Test CH	6dB Emission Bandwidth (MHz)				Limit(kHz)	Result
	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)		
Lowest	10.24	16.64	17.76	36.80	>500	Pass
Middle	10.24	16.64	17.76	36.80		
Highest	10.24	16.64	17.76	36.80		
Test CH	99% Occupy Bandwidth (MHz)				Limit(kHz)	Result
	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)		
Lowest	15.04	16.72	17.60	36.32	N/A	N/A
Middle	15.04	16.88	17.60	36.48		
Highest	15.04	16.80	17.60	36.48		


Test plot as follows:

TX 0:

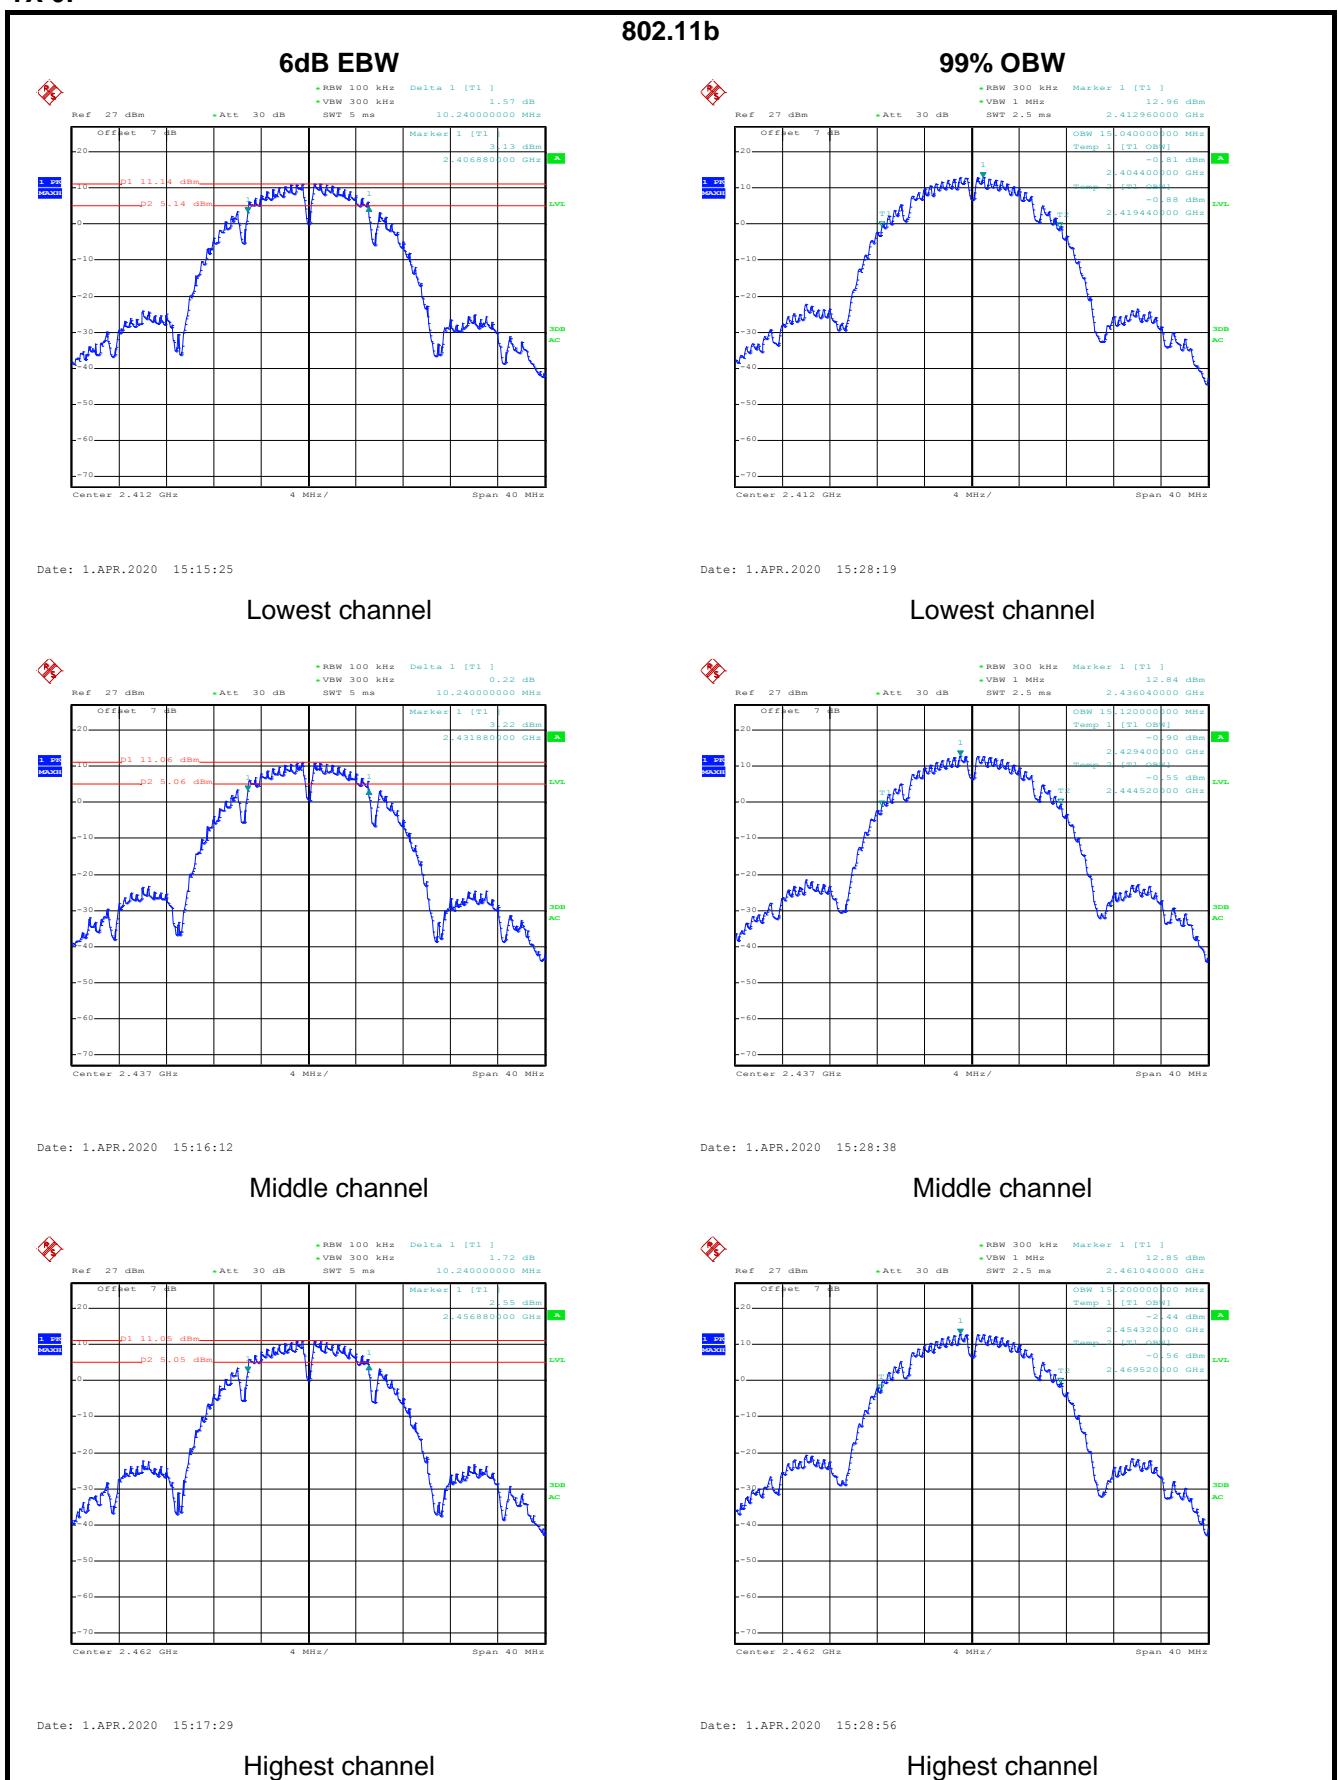


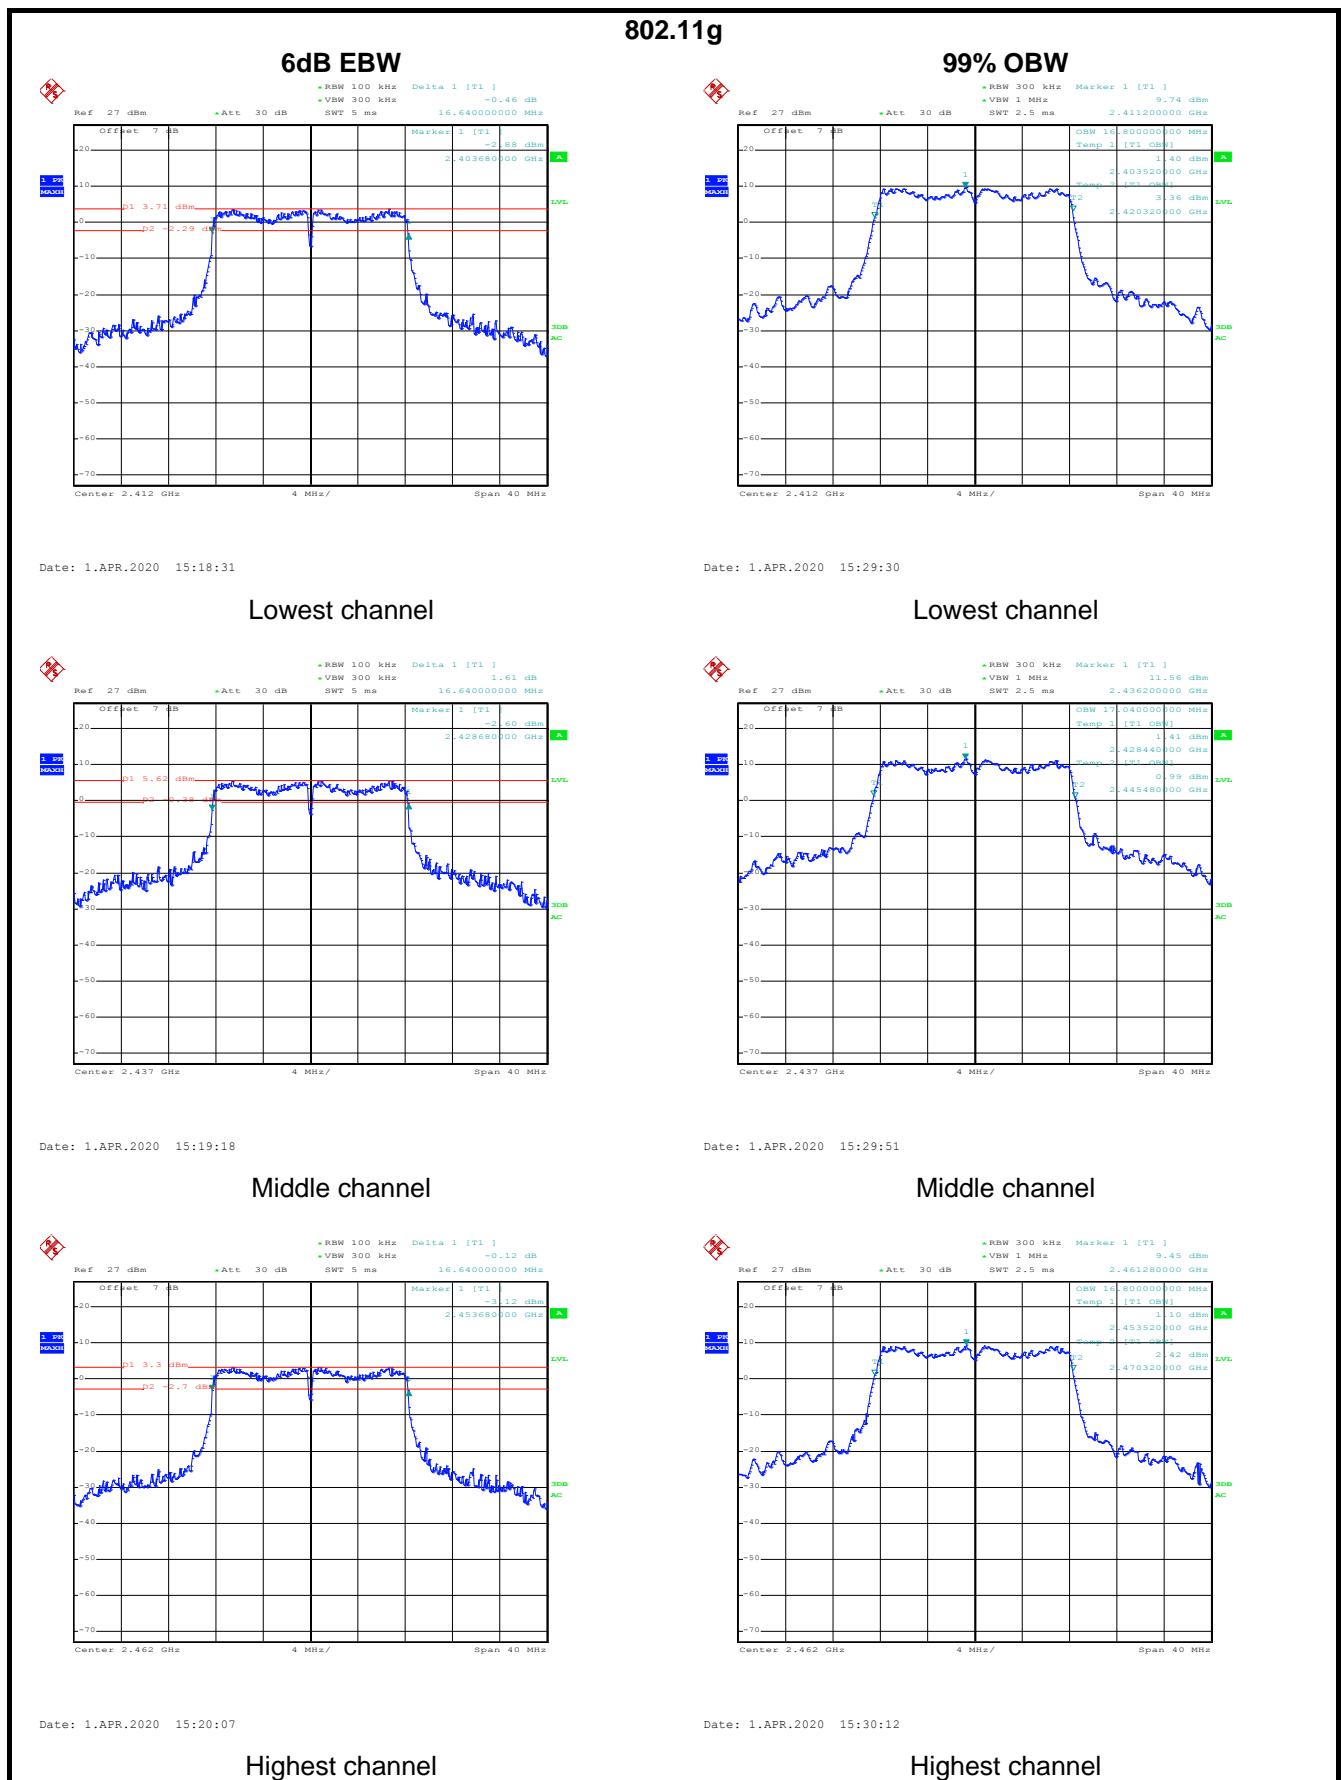


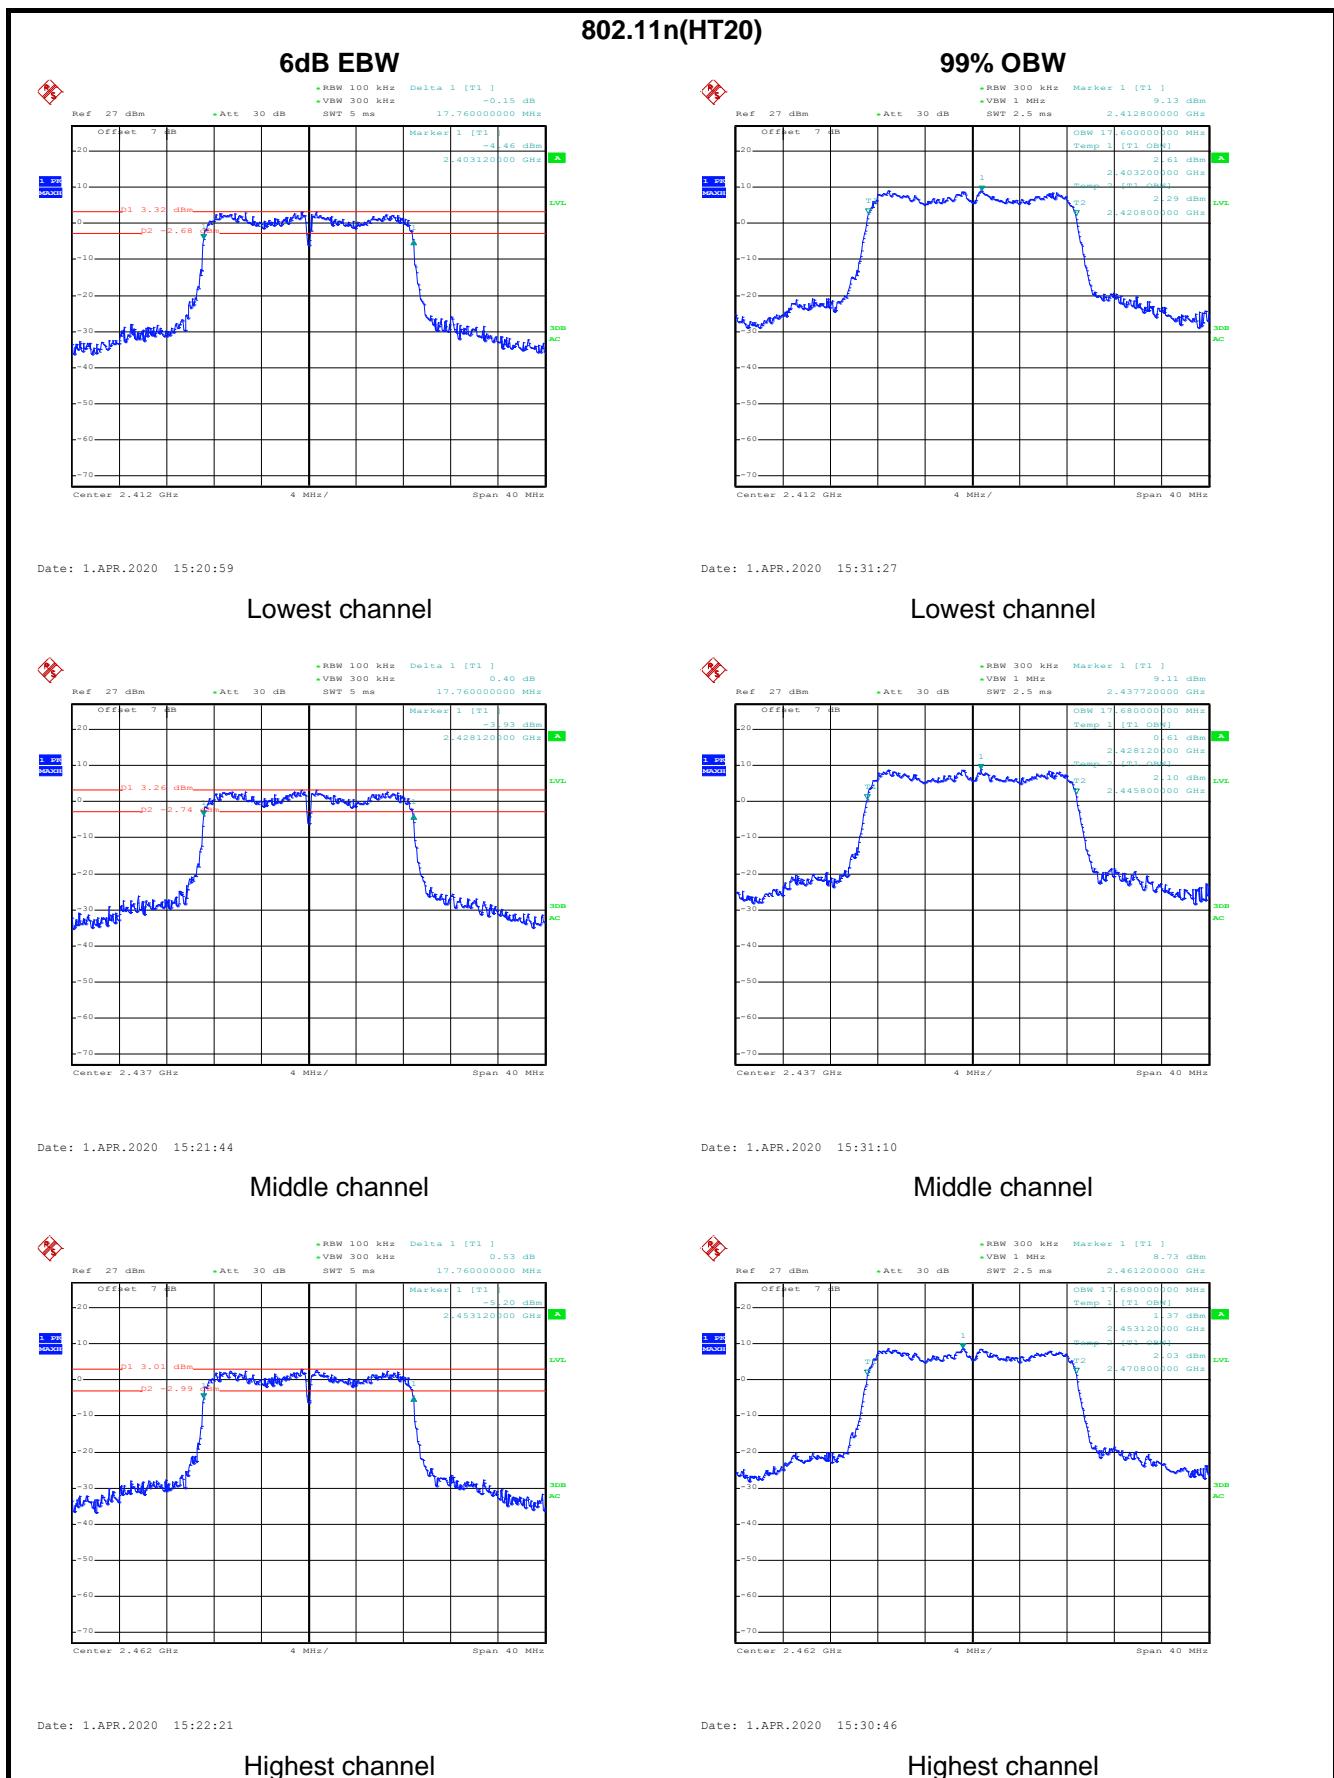


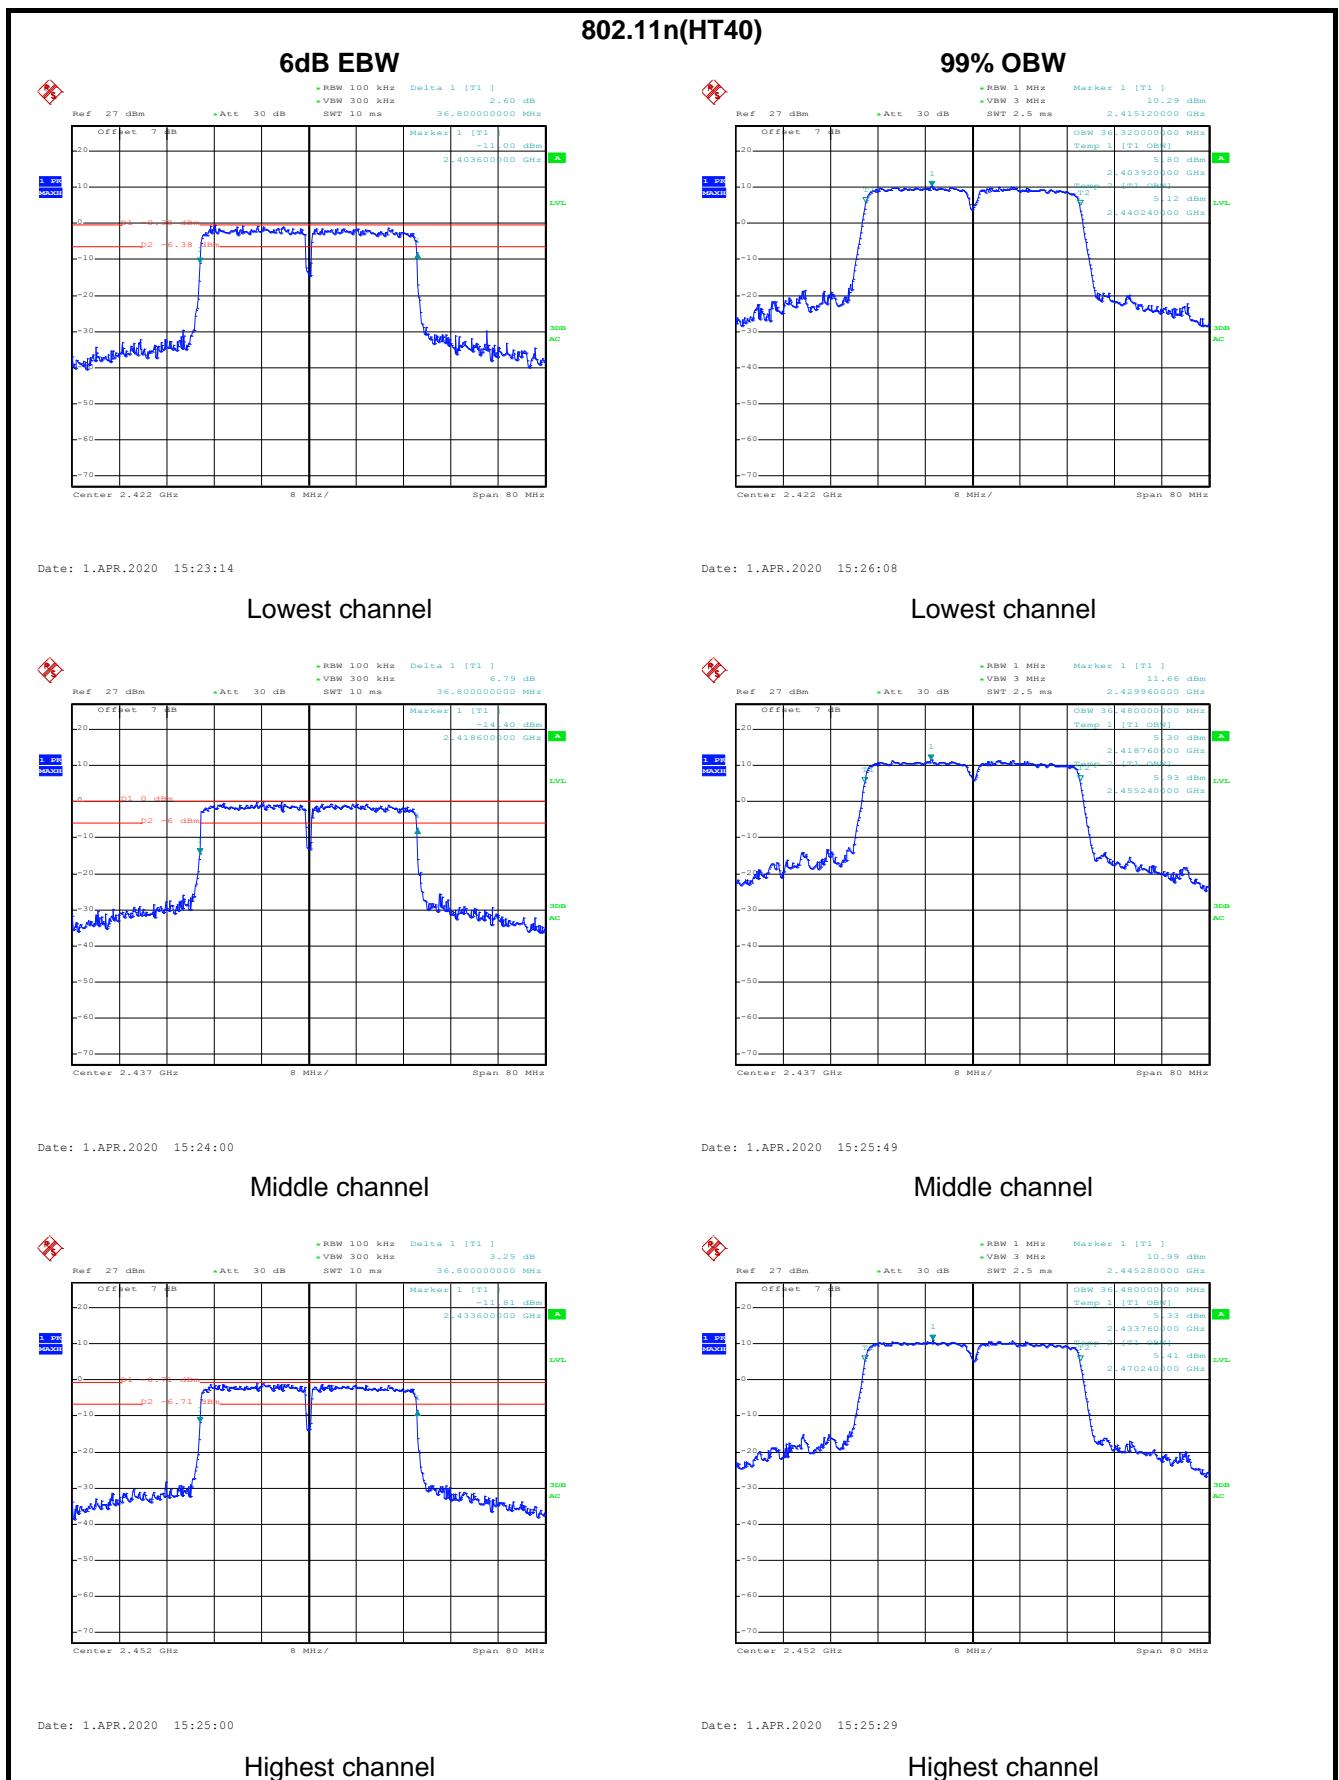


## TX 1:

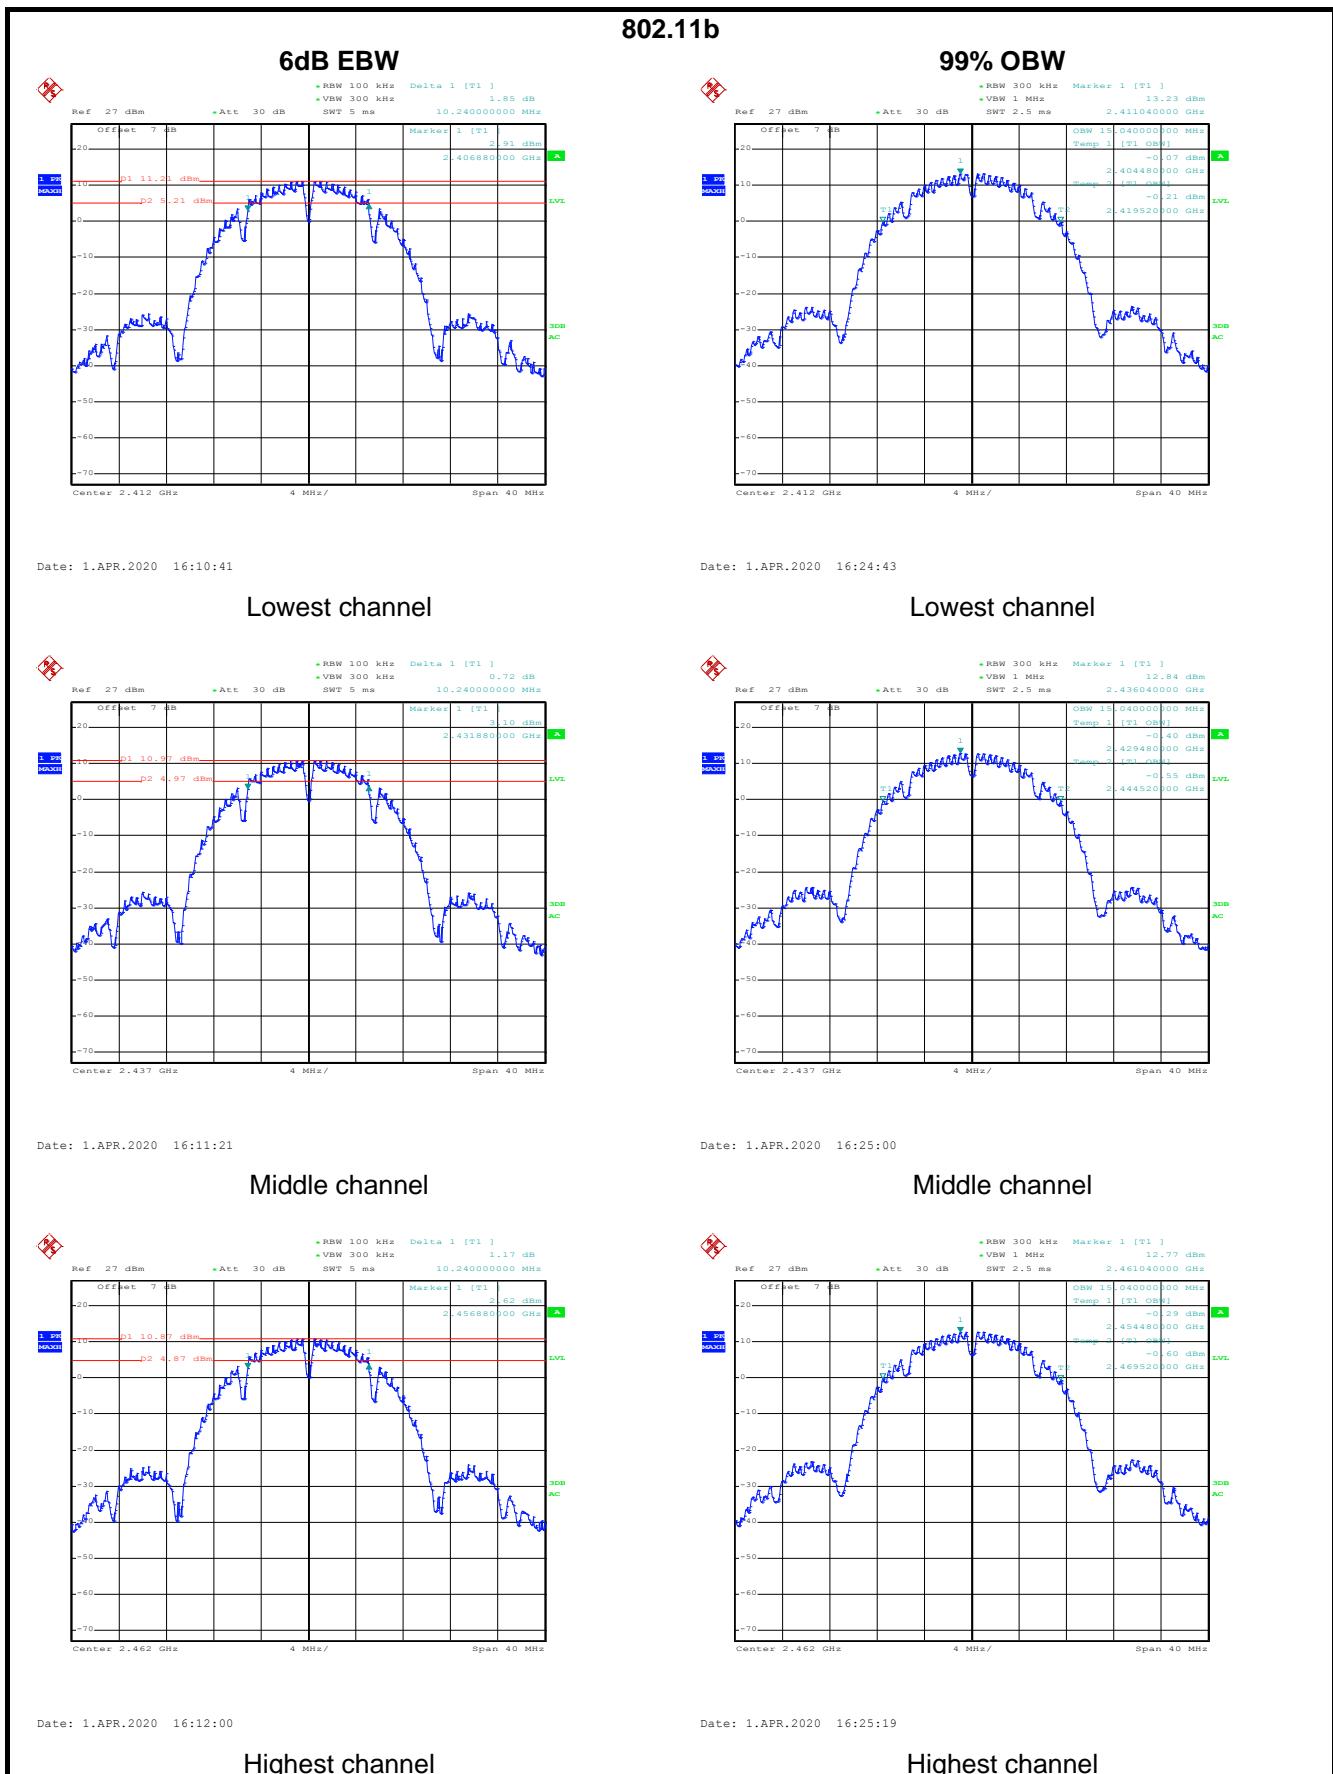


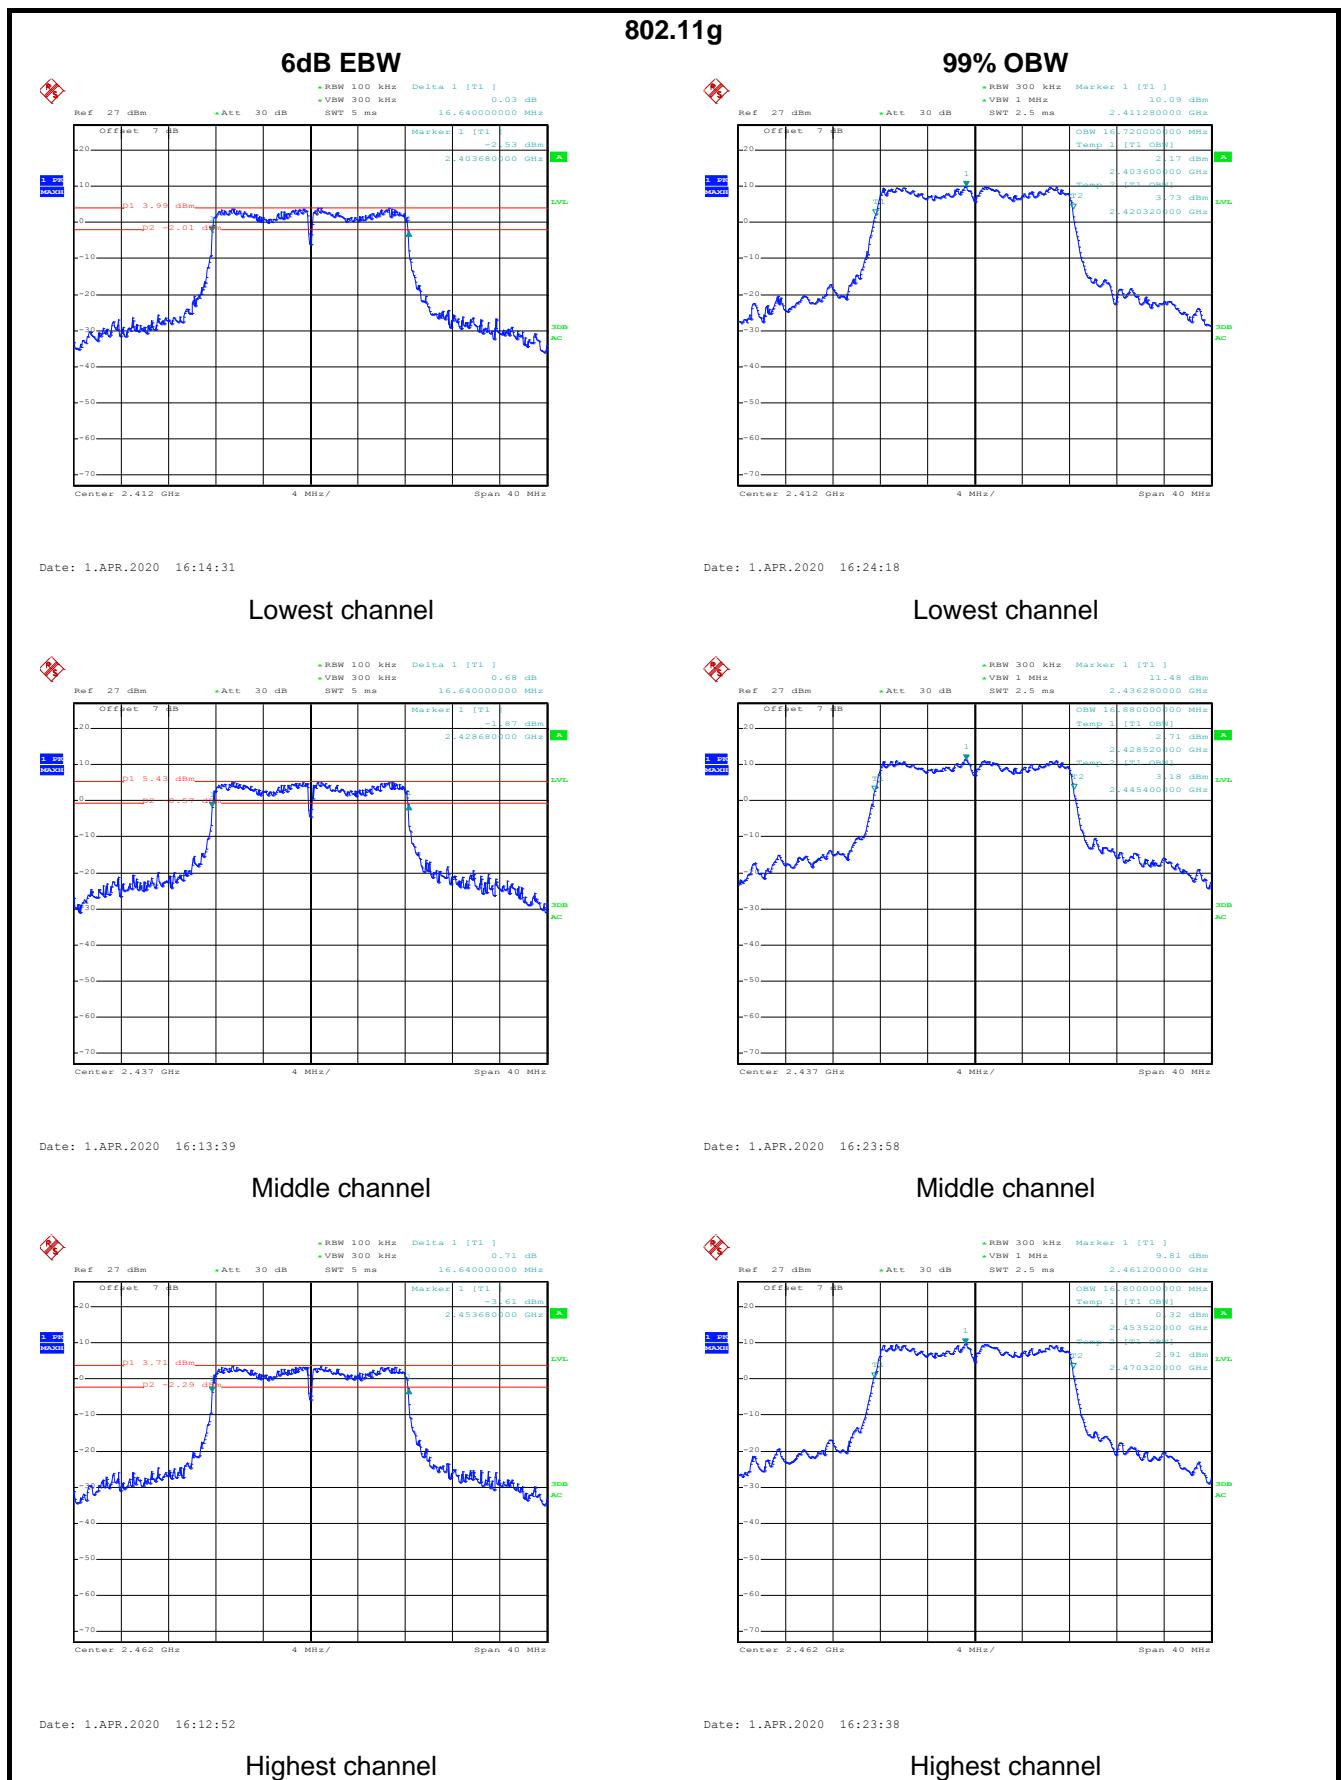

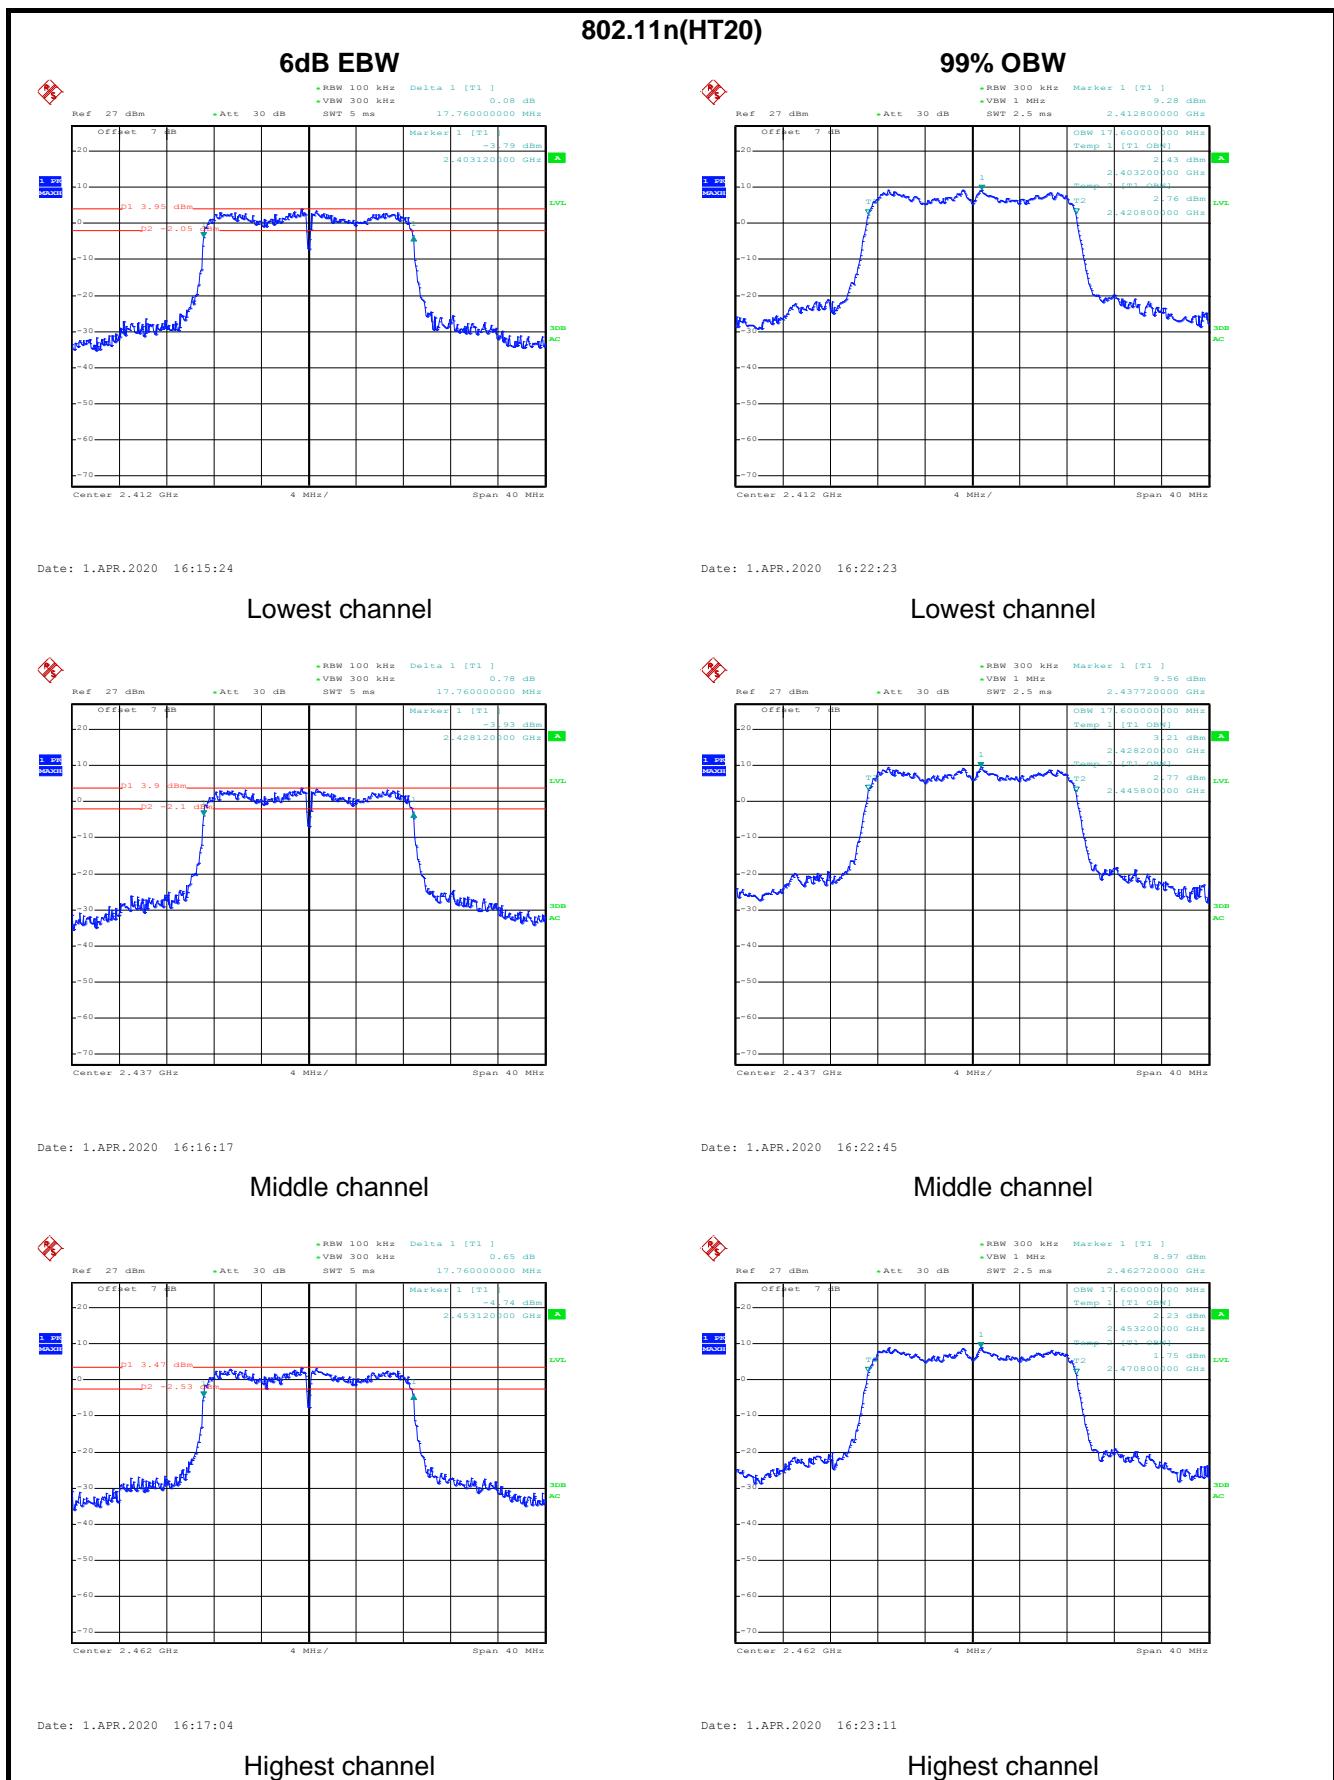

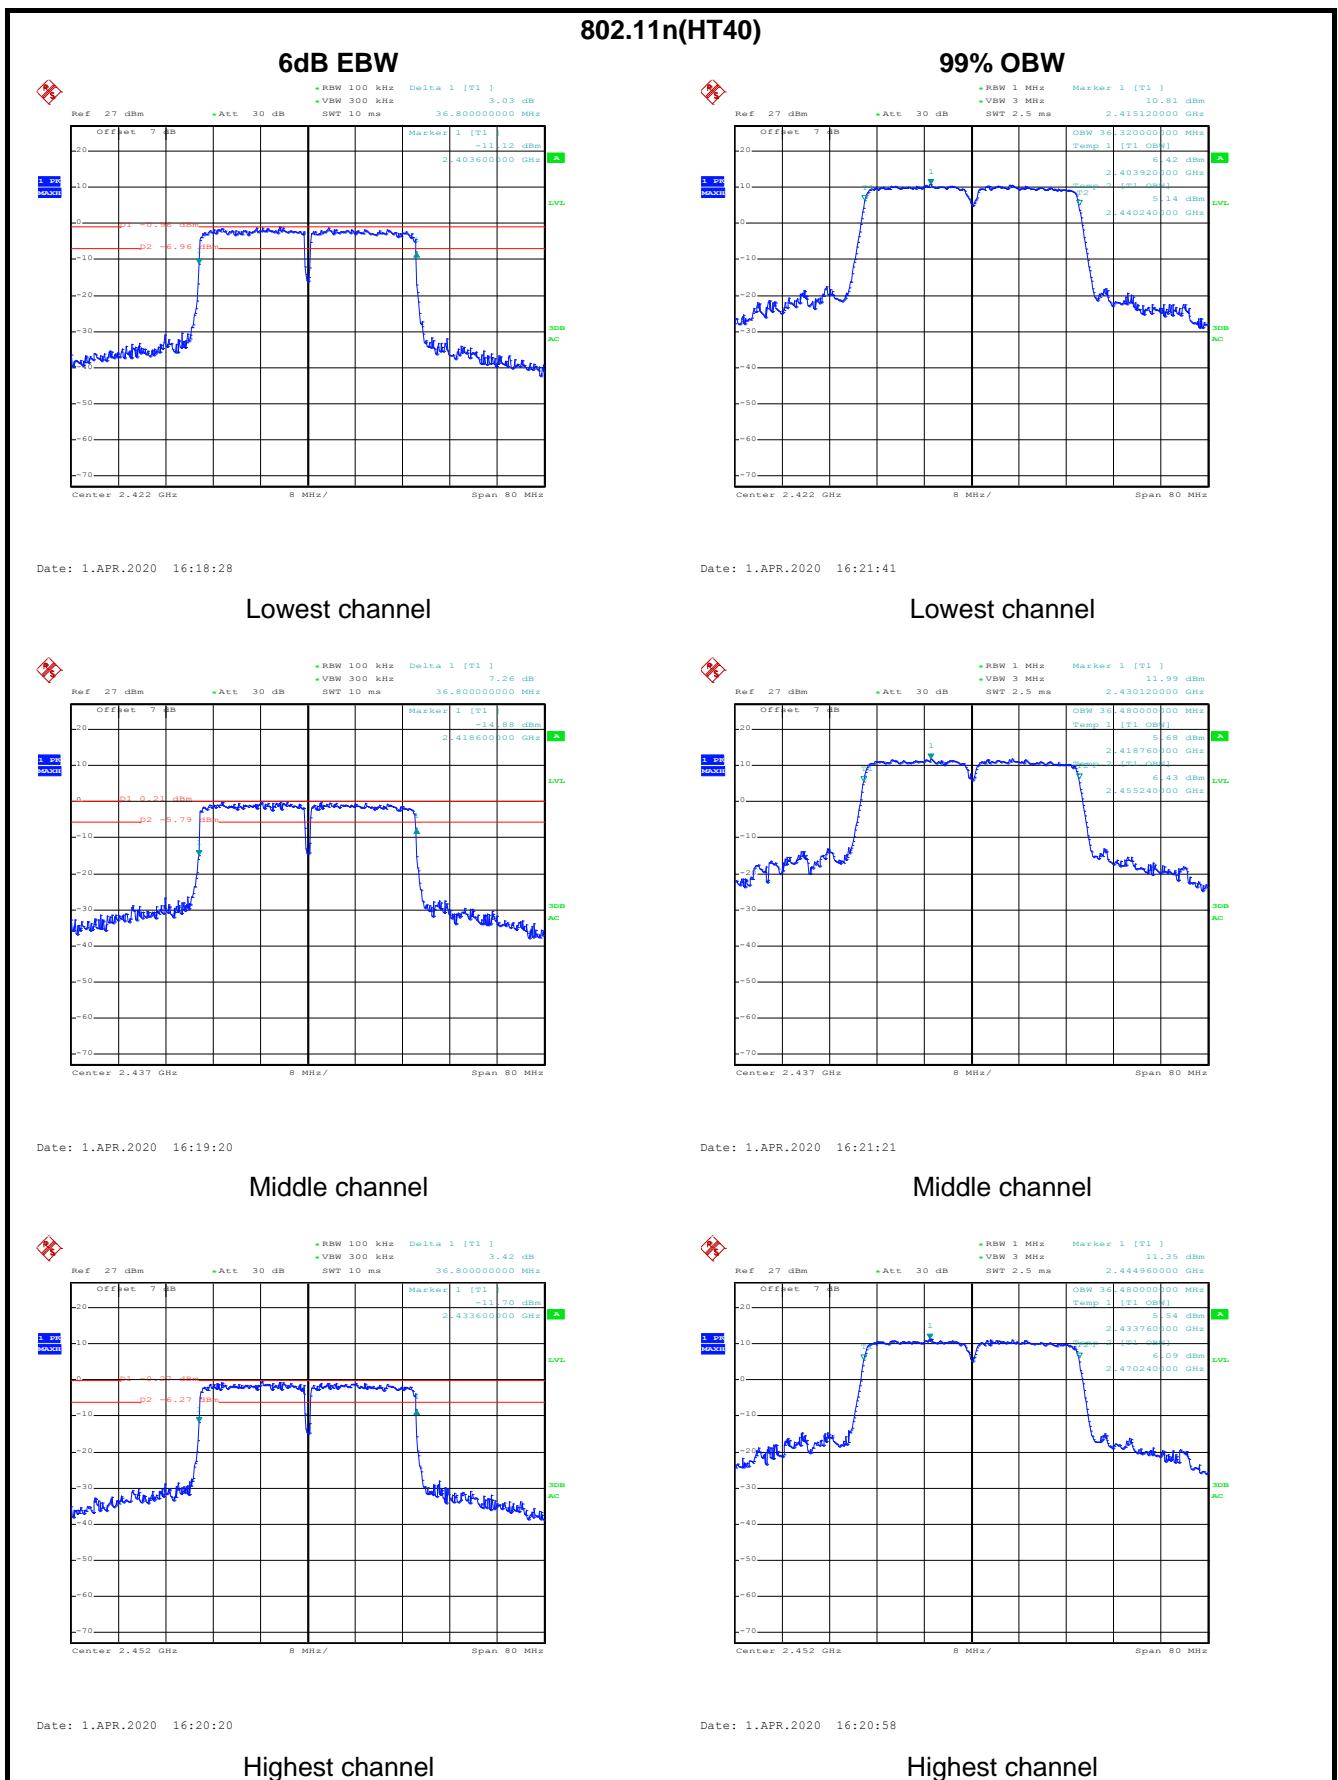

## 6.4 Power Spectral Density

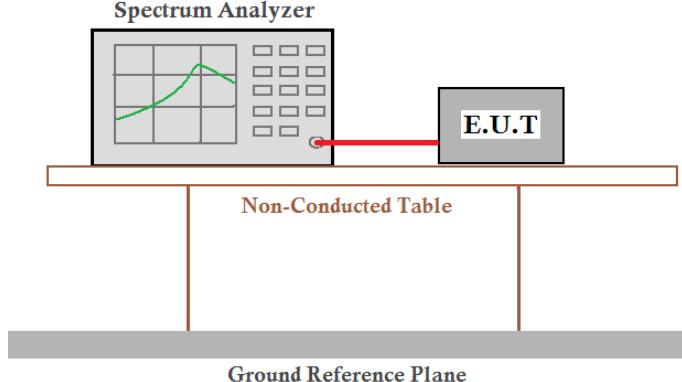Test Requirement:	RSS-247 section 5.2(b)
Limit:	8 dBm/3kHz
Test setup:	
Test Instruments:	Refer to section 5.9 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

**Measurement Data:**


Mode	Test CH	Ant. Port	Conducted P.S.D(dBm/3KHz)	Total P.S.D (dBm/3KHz)	Limit (dBm/3KHz)	Result		
802.11b (SISO)	Lowest	TX0		/	8.0	Pass		
		TX1	-9.18					
	Middle	TX0	-9.43					
		TX1	-9.45					
	Highest	TX0	-9.43					
		TX1	-9.50					
802.11g (SISO)	Lowest	TX0	-10.73	/	8.0	Pass		
		TX1	-9.93					
	Middle	TX0	-8.68					
		TX1	-8.66					
	Highest	TX0	-10.61					
		TX1	-10.18					
802.11n(HT20) (MIMO)	Lowest	TX0	-10.16	-6.84	Ceramic Antenna:8.0 Flex Antenna:7.93 Whip Antenna:7.67	Pass		
		TX1	-9.57					
	Middle	TX0	-11.30	-7.83				
		TX1	-10.42					
	Highest	TX0	-10.63	-7.50				
		TX1	-10.40					
802.11n(HT40) (MIMO)	Lowest	TX0	-14.46	-10.59	Ceramic Antenna:8.0 Flex Antenna:7.93 Whip Antenna:7.67	Pass		
		TX1	-12.88					
	Middle	TX0	-13.70	-11.29				
		TX1	-14.99					
	Highest	TX0	-13.99	-10.86				
		TX1	-13.76					

**Remark:**


- Because transmit signals are correlated, Directional gain =  $G_{ANT} + 10 \log(N_{ANT})$  dB.
- So Ceramic Antenna: The Directional gain=  $2.09 + 10 \log(2) = 5.09$  dB, The directional Gain of antenna is not exceed 6 dB, so the limit of P.S.D is 8 dBm/3KHz (for 802.11n).
- Flex Antenna: The Directional gain=  $3.2 + 10 \log(2) = 6.2$  dB, The directional Gain of antenna is greater than 6 dB, so the limit of P.S.D is 7.93 dBm/3KHz (for 802.11n).
- Whip Antenna: The Directional gain=  $4 + 10 \log(2) = 7.0$  dB, The directional Gain of antenna is greater than 6 dB, so the limit of P.S.D is 7.67 dBm/3KHz (for 802.11n).

**Test plot as follows:**

**TX 0:**

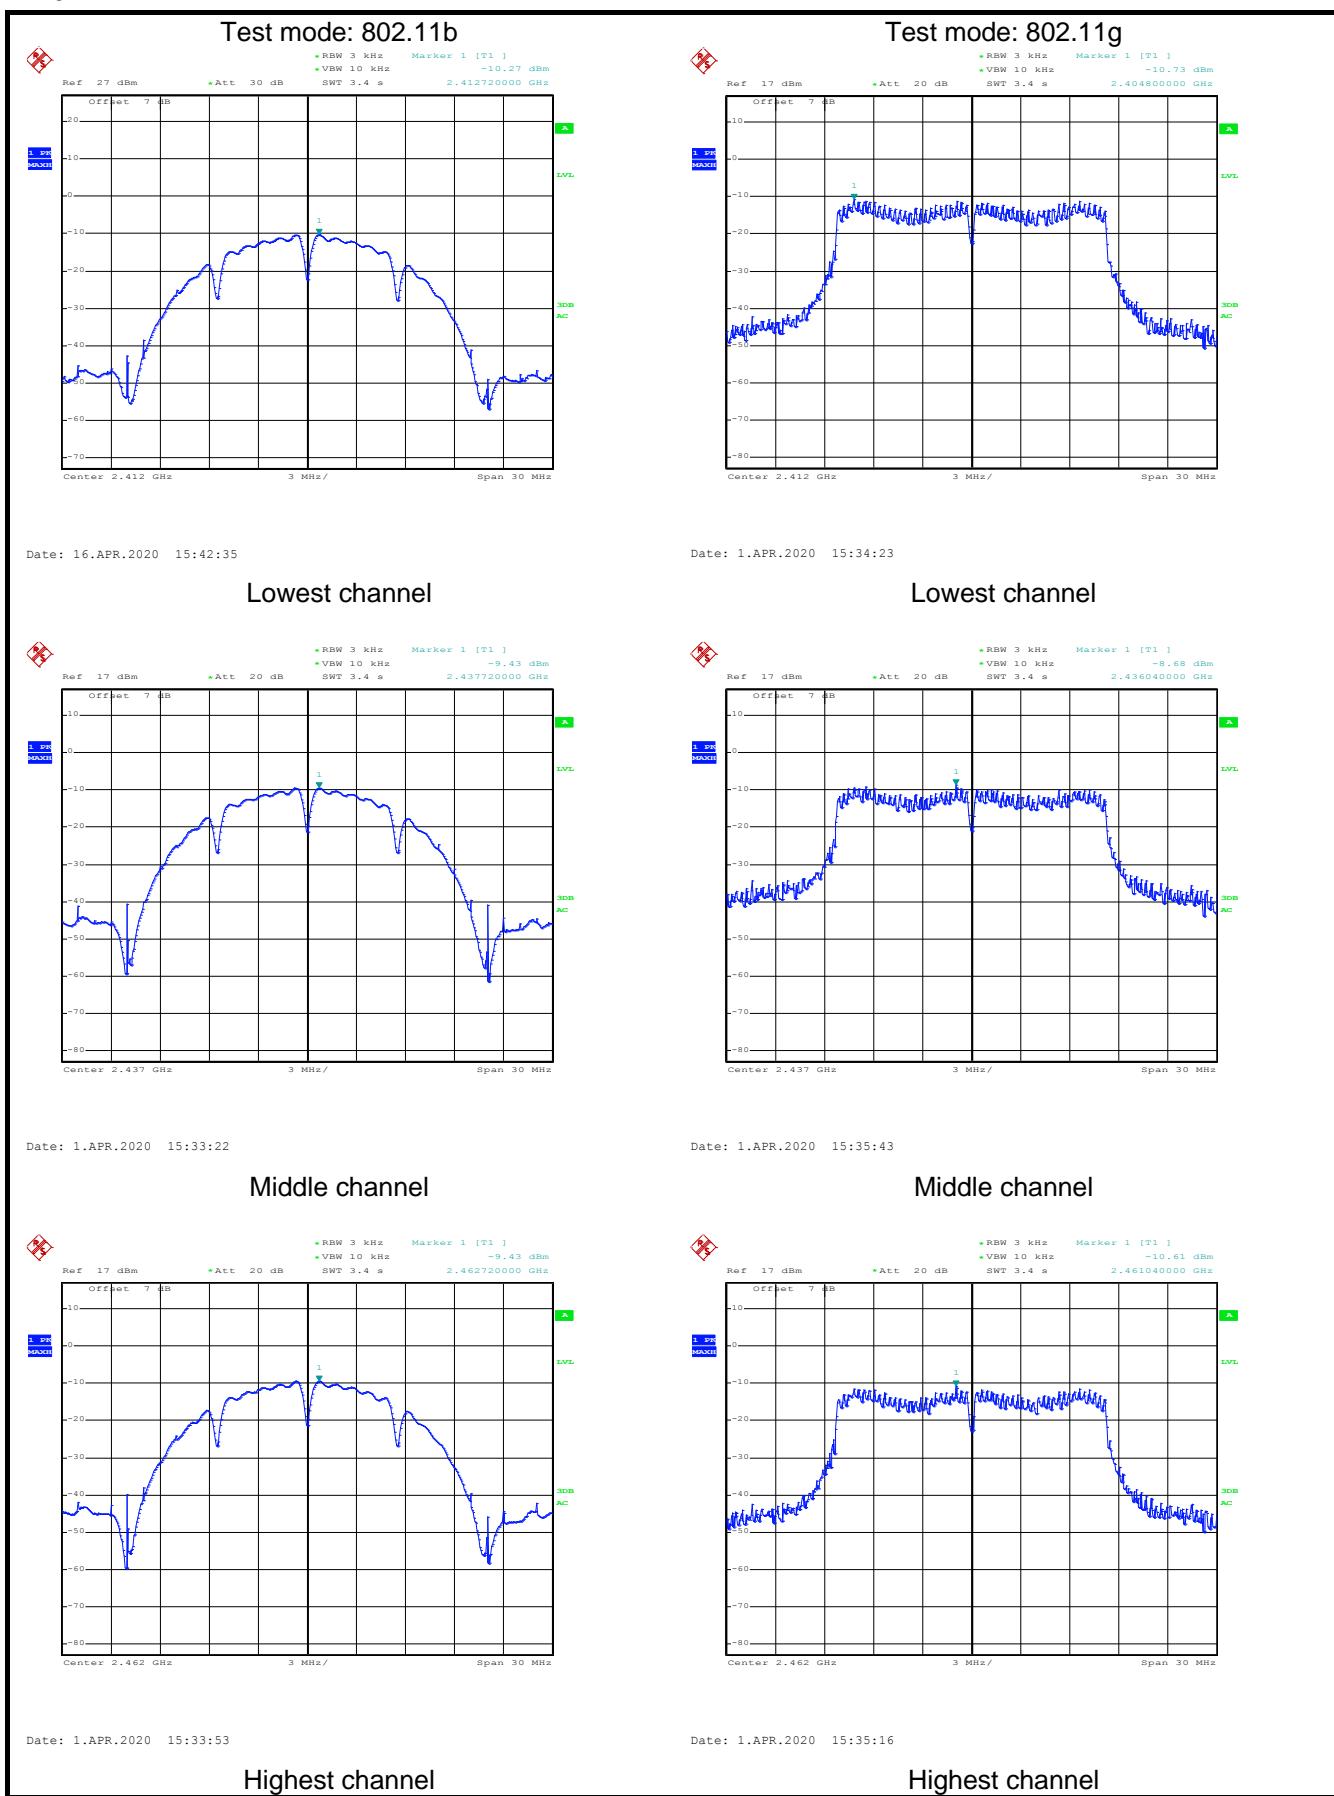


## Test mode: 802.11n(HT20)

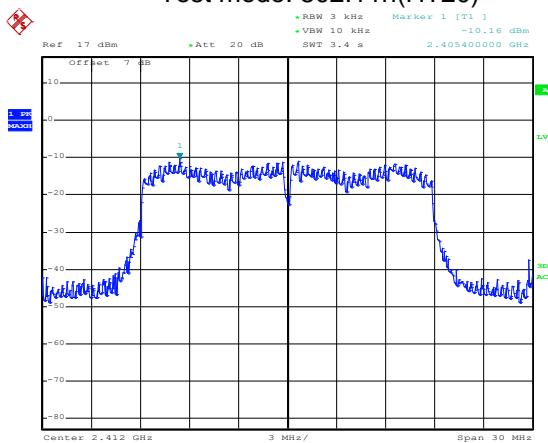


Date: 1.APR.2020 15:36:34

## Lowest channel

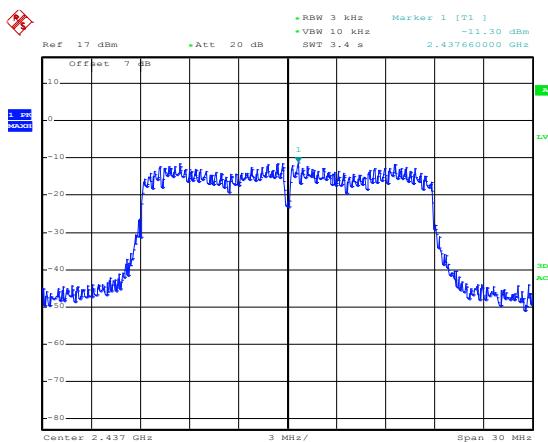

Date: 1.APR.2020 15:37:04


## Middle channel

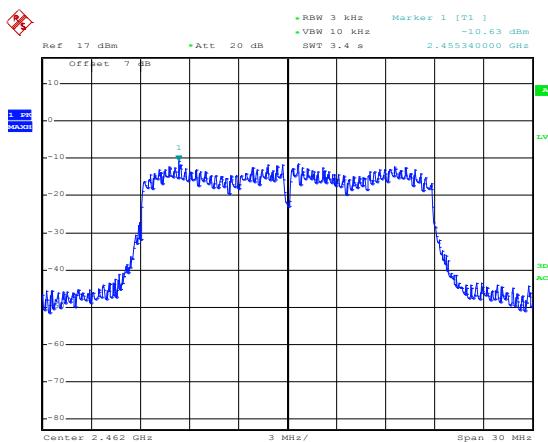

Date: 1.APR.2020 15:37:25


## Highest channel

## Test mode: 802.11n(HT40)

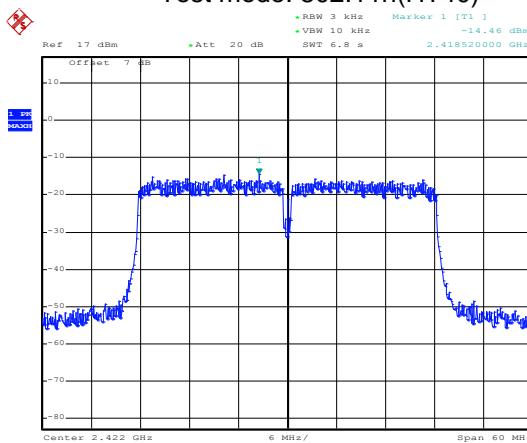


Date: 1.APR.2020 15:41:40

## Lowest channel

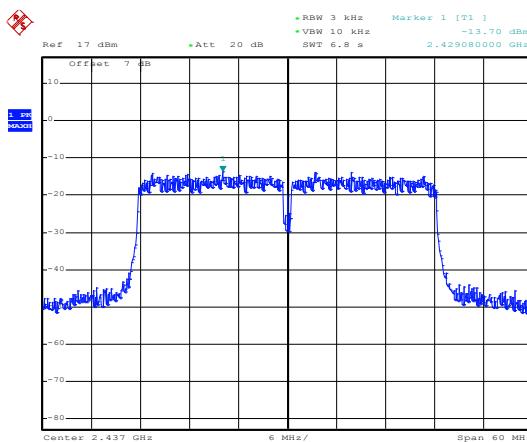

Date: 1.APR.2020 15:41:05

## Middle channel

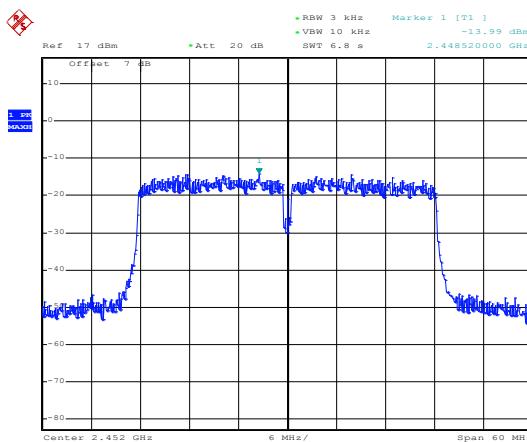

Date: 1.APR.2020 15:40:10


## Highest channel

## TX 1:

Test mode: 802.11b



Test mode: 802.11g

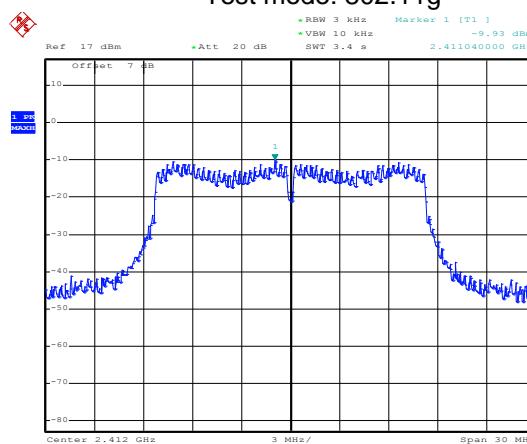


Date: 1.APR.2020 16:26:46

## Lowest channel



## Lowest channel

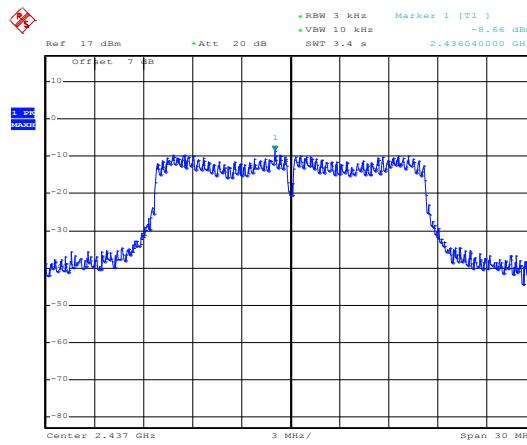


Date: 1.APR.2020 16:27:06

## Middle channel




## Middle channel

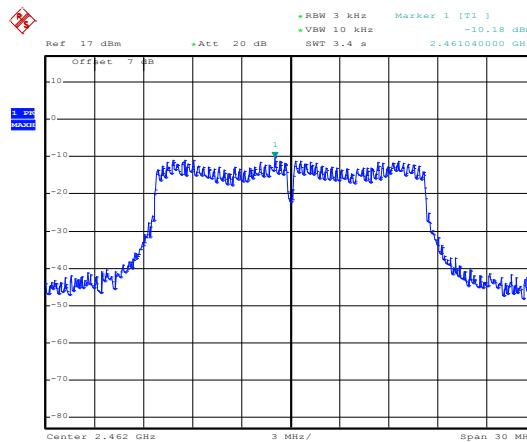

Date: 1.APR.2020 16:26:21

## Highest channel


## Test mode: 802.11n(HT20)

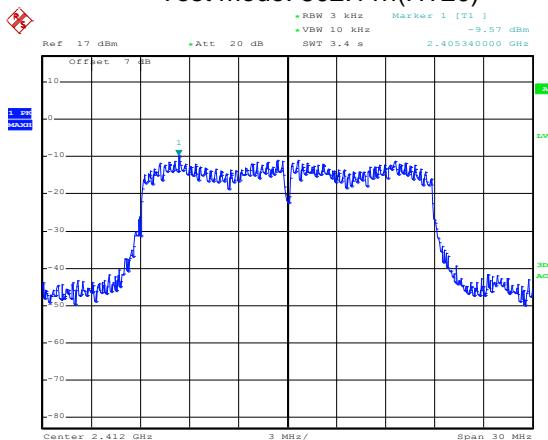

Date: 1.APR.2020 15:45:22


## Lowest channel

## Test mode: 802.11n(HT40)

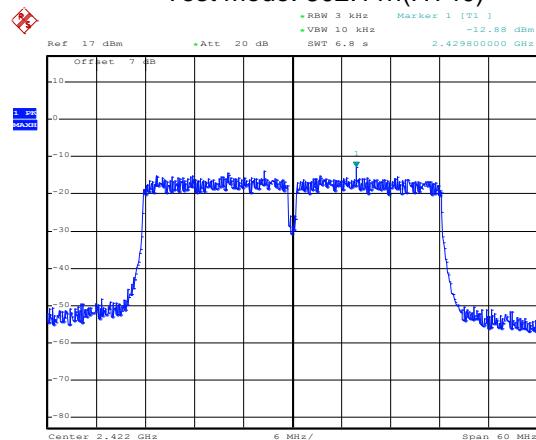


Date: 1.APR.2020 15:42:37

## Lowest channel

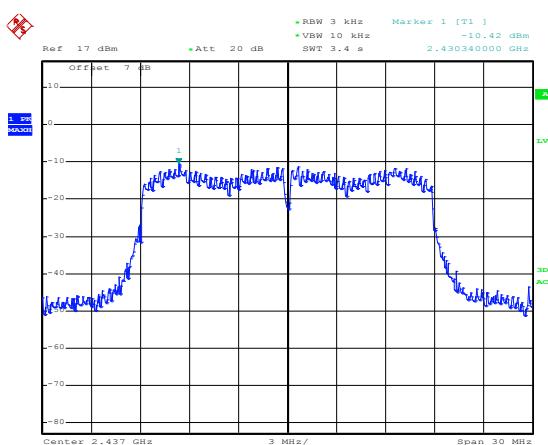


Date: 1.APR.2020 15:46:58

## Middle channel

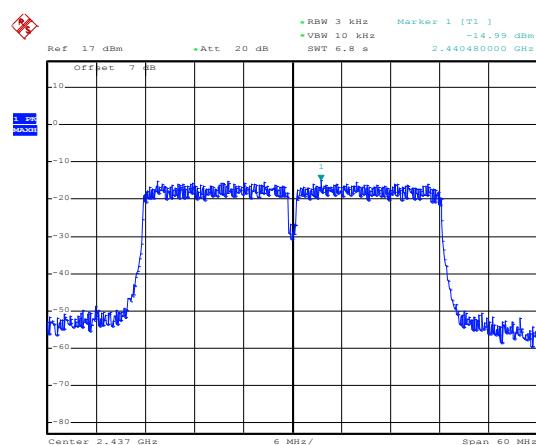


Date: 1.APR.2020 15:43:13

## Middle channel

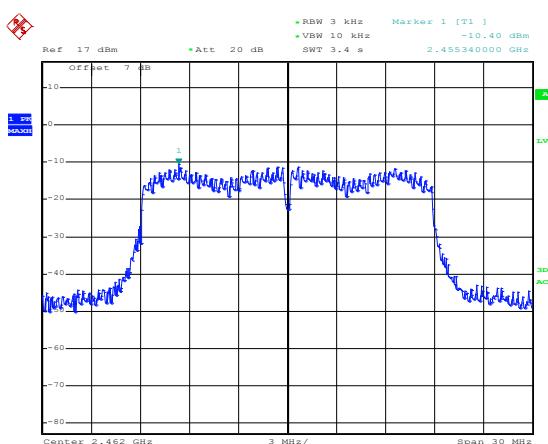

Date: 1.APR.2020 15:47:37

## Highest channel

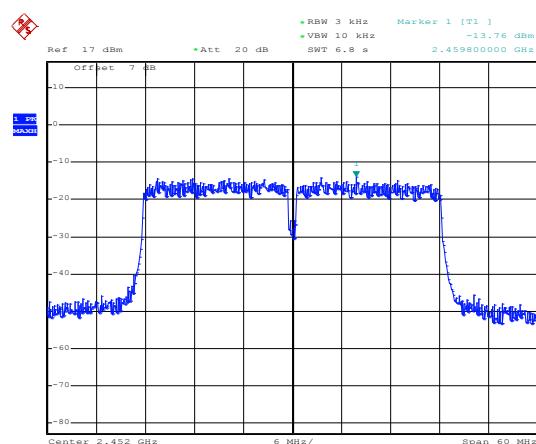


Date: 1.APR.2020 15:44:07

## Highest channel


## 6.5 Band Edge


### 6.5.1 Conducted Emission Method

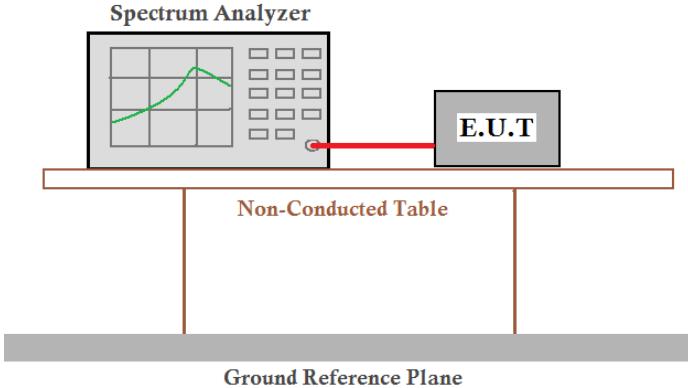Test Requirement:	RSS-247 section 5.5
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.
Test setup:	 <p>The diagram illustrates the test setup for the Conducted Emission Method. A Spectrum Analyzer is connected to the E.U.T (Equipment Under Test) via a coaxial cable. The E.U.T is placed on a Non-Conducted Table. The entire setup is positioned above a Ground Reference Plane.</p>
Test Instruments:	Refer to section 5.9 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed


**Test plot as follows:**


**TX 0:**

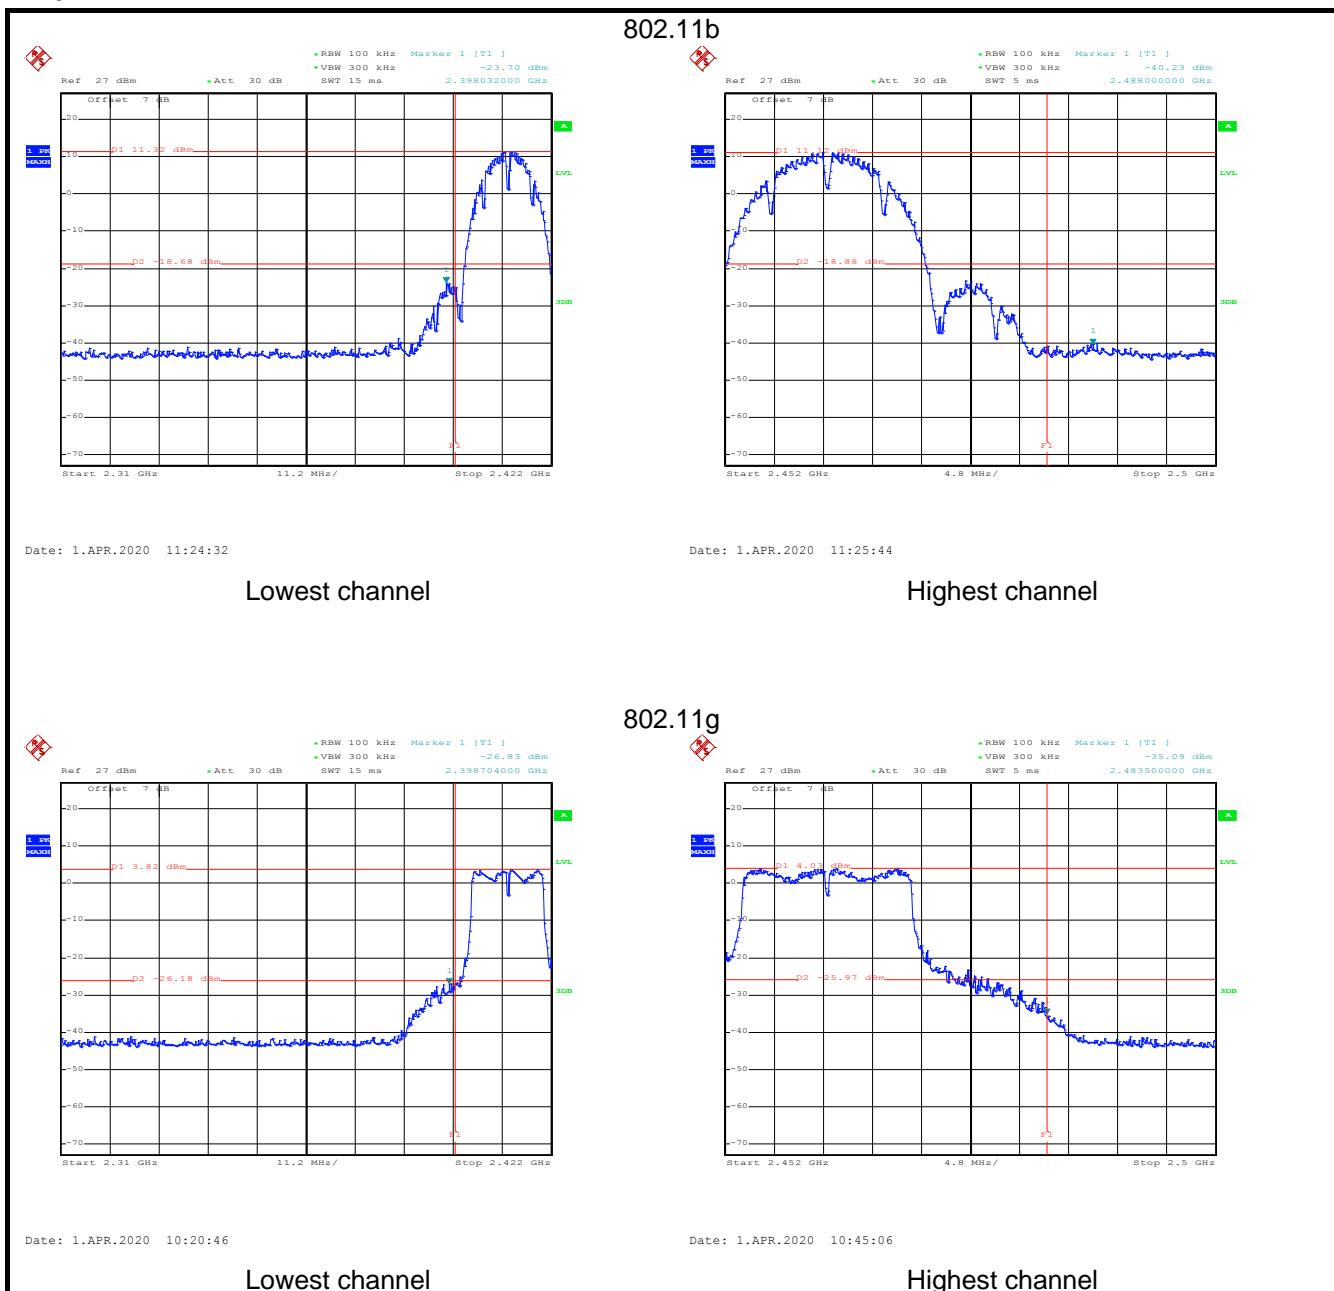

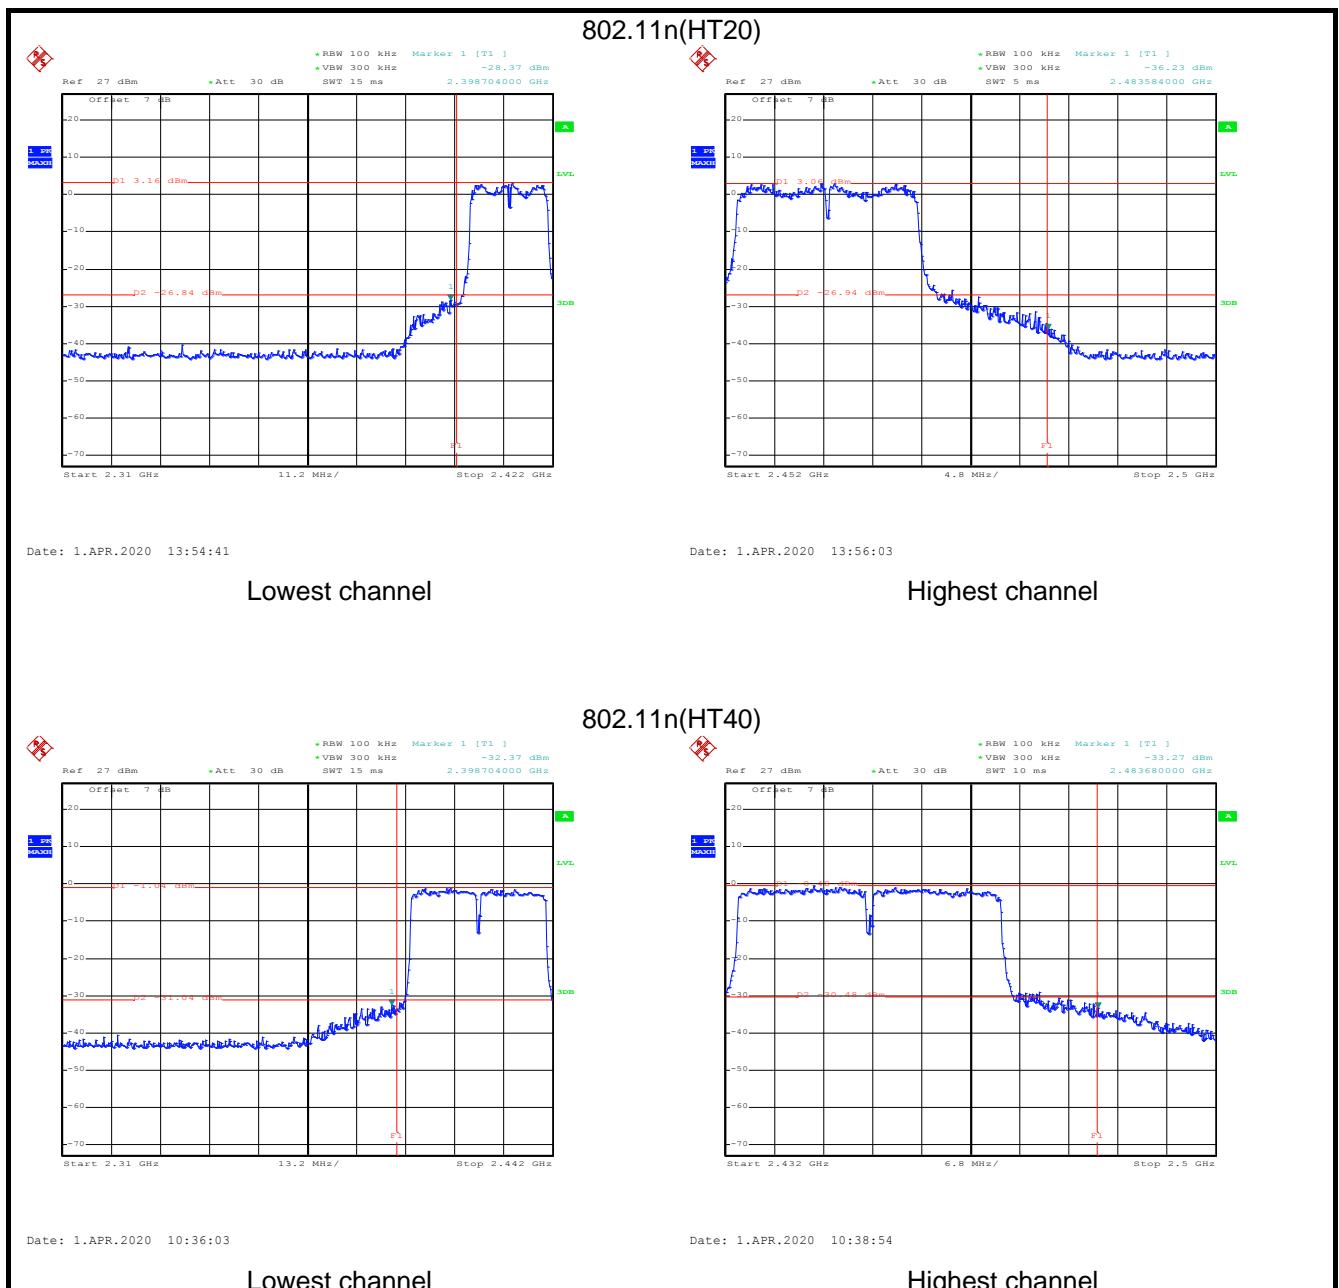

## TX 1:

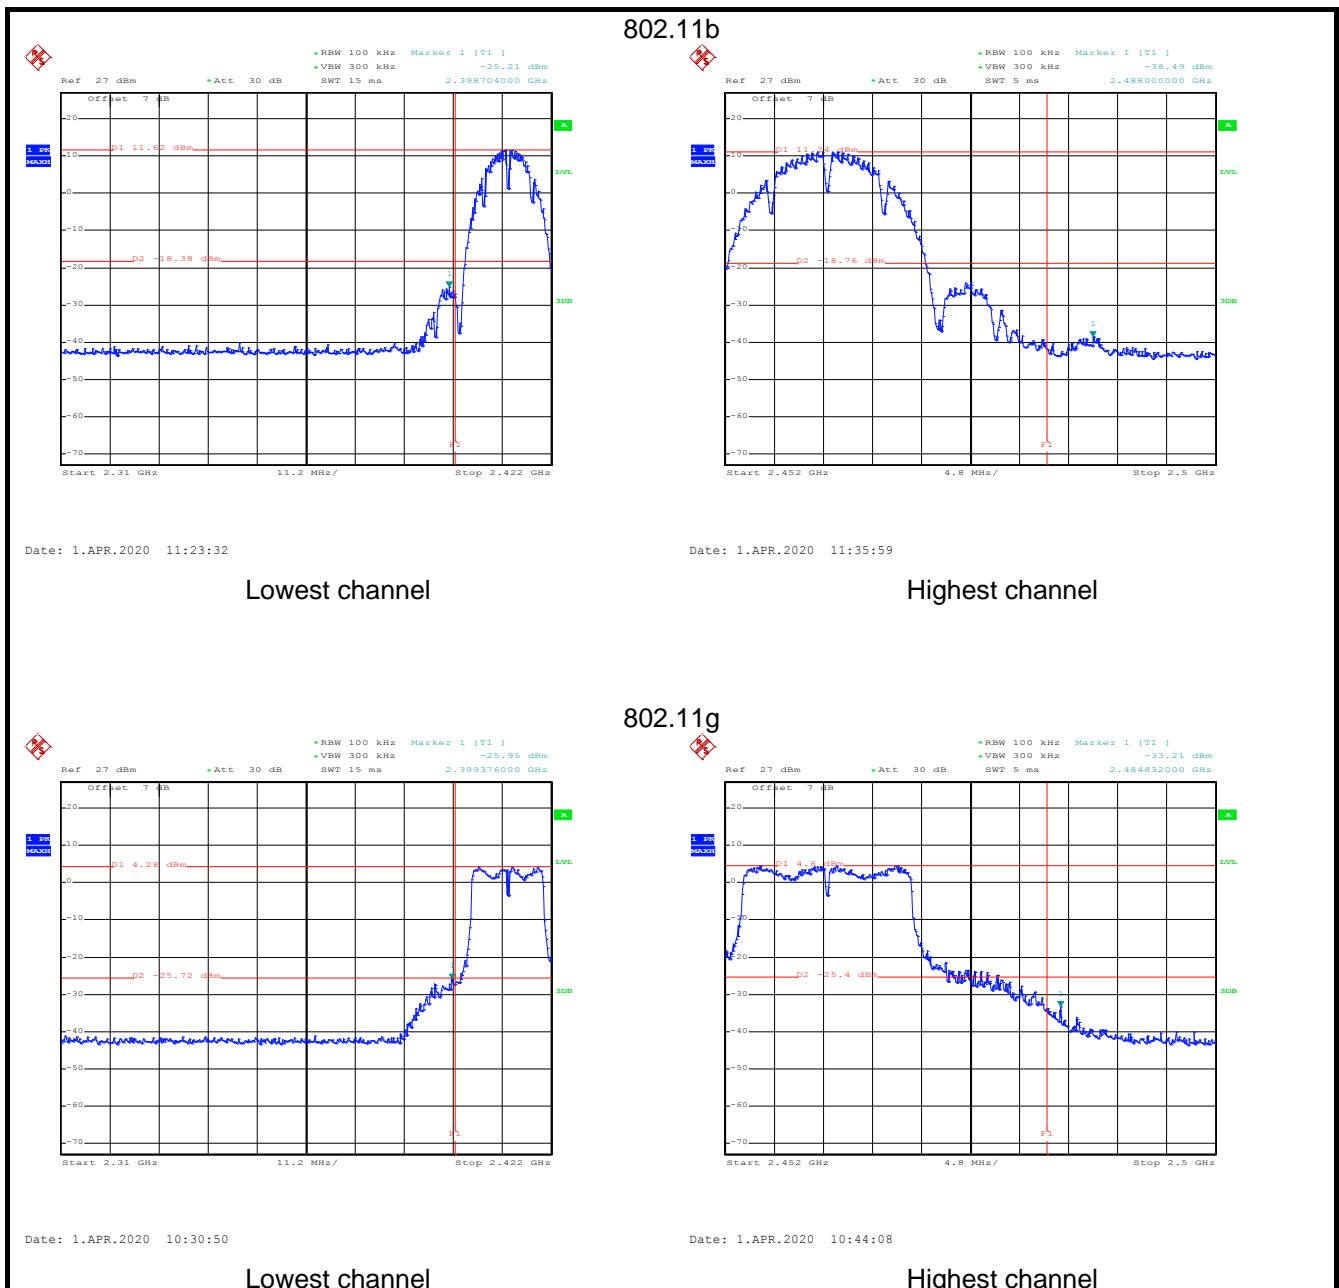

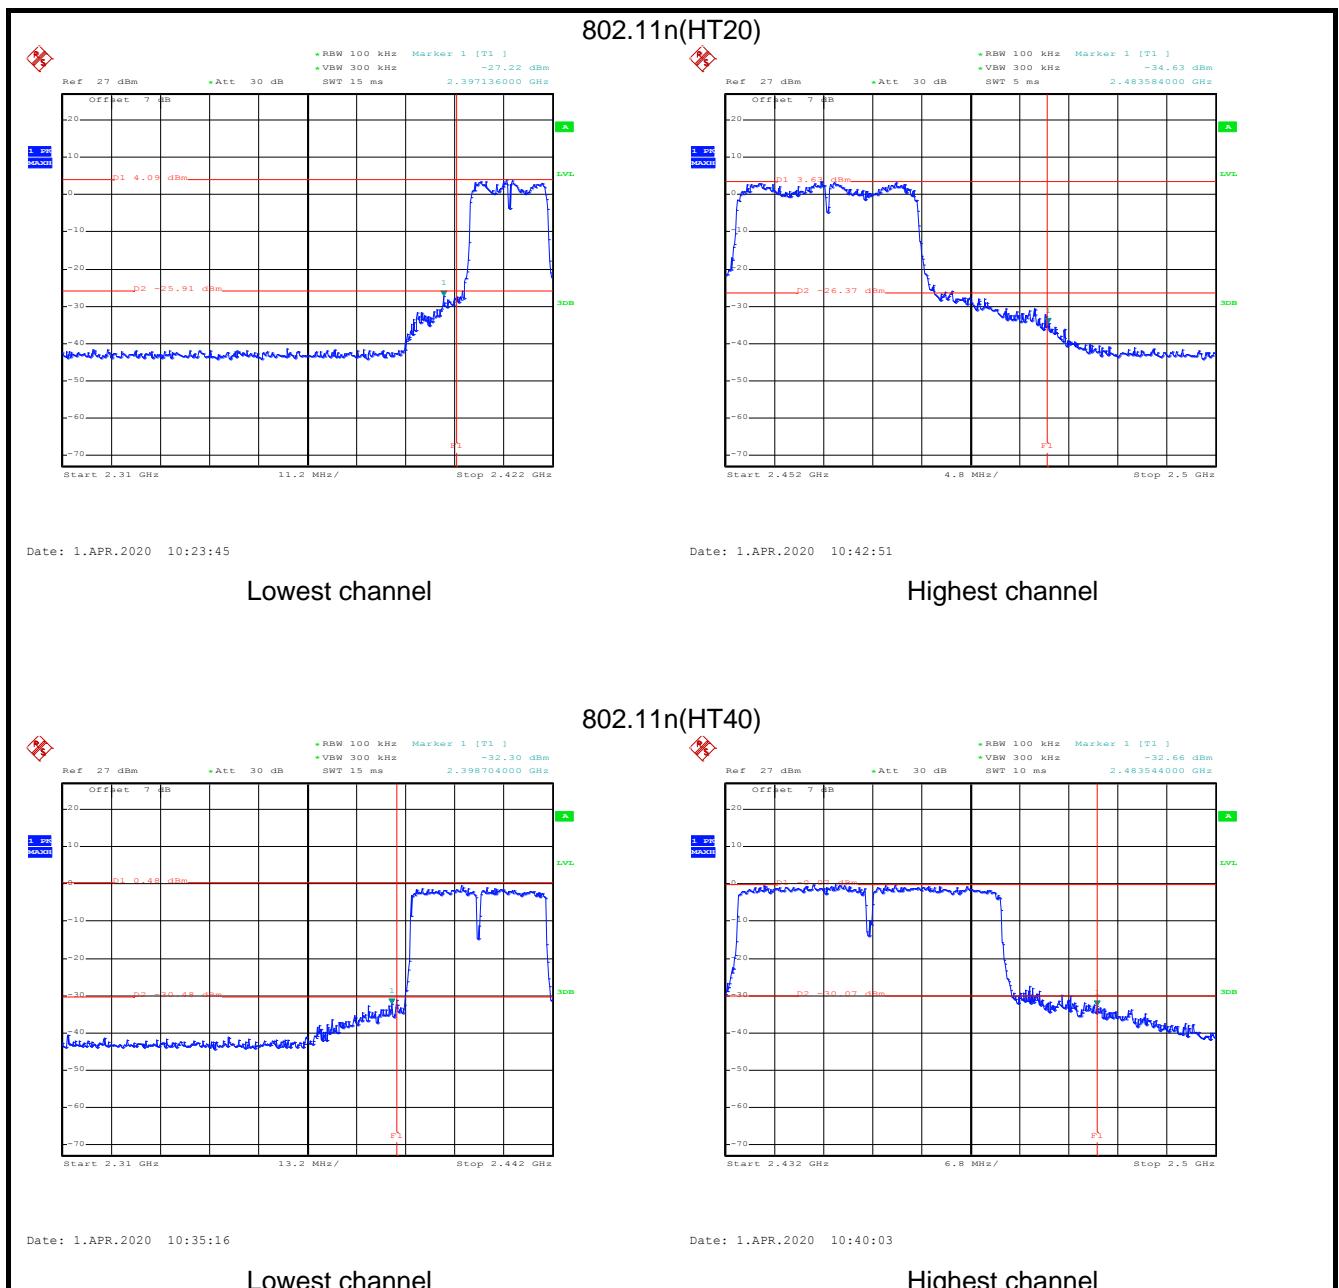


### 6.5.2 Radiated Emission Method

Test Requirement:	RSS-GEN section 8.10										
Test Frequency Range:	2310 MHz to 2390 MHz and 2483.5 MHz to 2500 MHz										
Test Distance:	3m										
Receiver setup:	Frequency	Detector	RBW	VBW	Remark						
	Above 1GHz	Peak	1MHz	3MHz	Peak Value						
Limit:	Frequency	Limit (dBuV/m @3m)		Remark							
	Above 1GHz	54.00		Average Value							
Test Procedure:		<ol style="list-style-type: none"> <li>The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</li> </ol>									
Test setup:											
Test Instruments:	Refer to section 5.9 for details										
Test mode:	Refer to section 5.3 for details										
Test results:	Passed										

**Ceramic Antenna:****TX0:****802.11b mode:**

<b>Product Name:</b>	Komikan	<b>Product Model:</b>	Komikan
<b>Test By:</b>	Mike	<b>Test mode:</b>	802.11b Tx mode
<b>Test Channel:</b>	Lowest channel	<b>Polarization:</b>	Vertical
<b>Test Voltage:</b>	AC 120/60Hz	<b>Environment:</b>	Temp: 24°C Huni: 57%

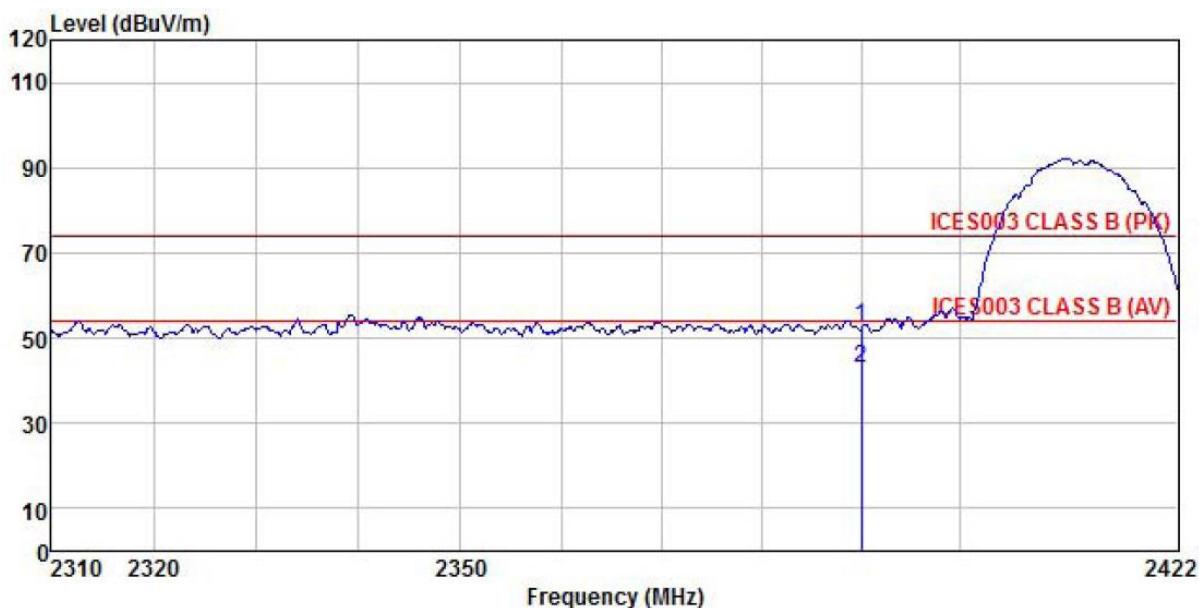


Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Line	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	dB	
1	2390.000	21.03	27.07	4.69	0.00	52.79	74.00	-21.21	Peak
2	2390.000	11.40	27.07	4.69	0.00	43.16	54.00	-10.84	Average

**Remark:**

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	Komikan	<b>Product Model:</b>	Komikan
<b>Test By:</b>	Mike	<b>Test mode:</b>	802.11b Tx mode
<b>Test Channel:</b>	Lowest channel	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	AC 120/60Hz	<b>Environment:</b>	Temp: 24°C Huni: 57%

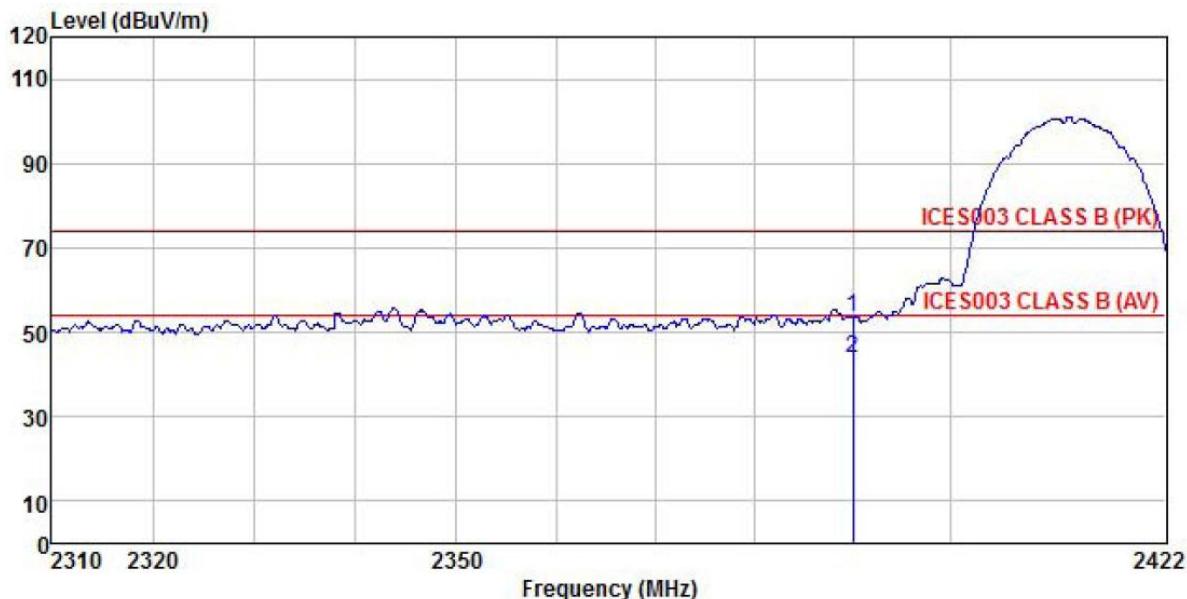


	Read	Antenna	Cable	Preamp	Limit	Over		
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	2390.000	21.69	27.08	4.69	0.00	53.46	74.00	-20.54 Peak
2	2390.000	12.25	27.08	4.69	0.00	44.02	54.00	-9.98 Average

**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	Komikan	<b>Product Model:</b>	Komikan
<b>Test By:</b>	Mike	<b>Test mode:</b>	802.11b Tx mode
<b>Test Channel:</b>	Highest channel	<b>Polarization:</b>	Vertical
<b>Test Voltage:</b>	AC 120/60Hz	<b>Environment:</b>	Temp: 24°C Huni: 57%

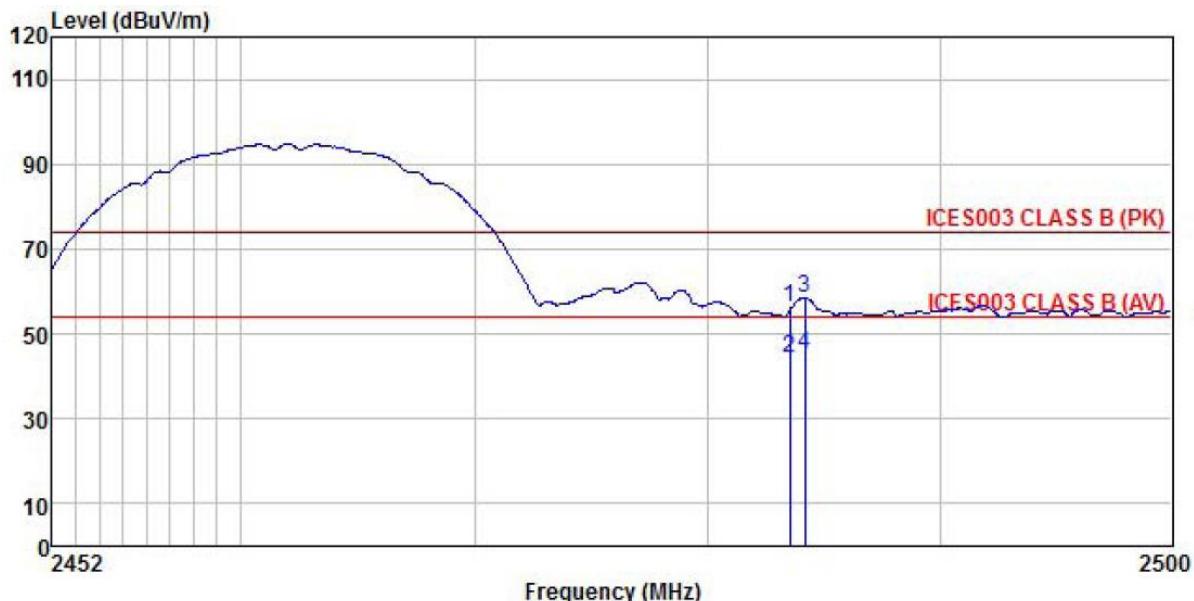


Freq	Read Antenna		Cable Preamp		Limit Line	Over Limit	Remark
	Freq MHz	Level dBuV	Antenna Factor	Cable Loss Factor			
	MHz	dBuV	dB/m	dB	dBuV/m	dBuV/m	dB
1	2483.500	23.85	27.36	4.81	0.00	56.02	74.00 -17.98 Peak
2	2483.500	12.07	27.36	4.81	0.00	44.24	54.00 -9.76 Average
3	2484.153	26.40	27.36	4.81	0.00	58.57	74.00 -15.43 Peak
4	2484.153	12.82	27.36	4.81	0.00	44.99	54.00 -9.01 Average

**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	Komikan	<b>Product Model:</b>	Komikan
<b>Test By:</b>	Mike	<b>Test mode:</b>	802.11b Tx mode
<b>Test Channel:</b>	Highest channel	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	AC 120/60Hz	<b>Environment:</b>	Temp: 24°C Huni: 57%

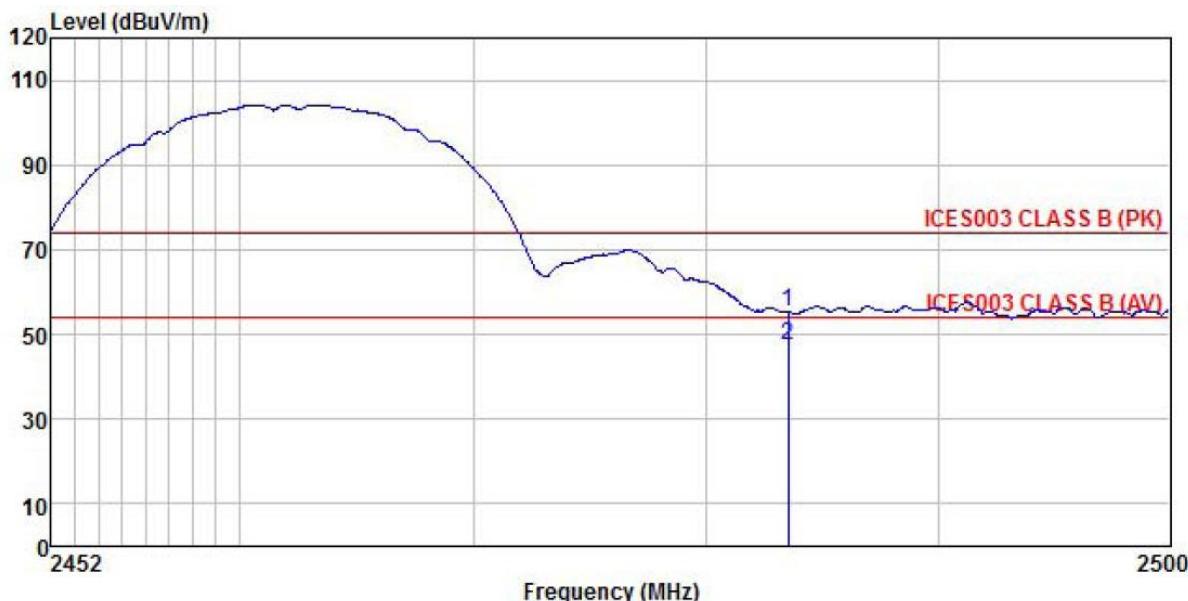

Freq	Read	Antenna	Cable	Preamp	Limit	Over	Line	Limit	Remark
	Freq	Level	Factor	Loss					
MHz	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	23.19	27.35	4.81	0.00	55.35	74.00	-18.65	Peak
2	2483.500	15.19	27.35	4.81	0.00	47.35	54.00	-6.65	Average


**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

TX1:

802.11b mode:

<b>Product Name:</b>	Komikan	<b>Product Model:</b>	Komikan
<b>Test By:</b>	Mike	<b>Test mode:</b>	802.11b Tx mode
<b>Test Channel:</b>	Lowest channel	<b>Polarization:</b>	Vertical
<b>Test Voltage:</b>	AC 120/60Hz	<b>Environment:</b>	Temp: 24°C Huni: 57%

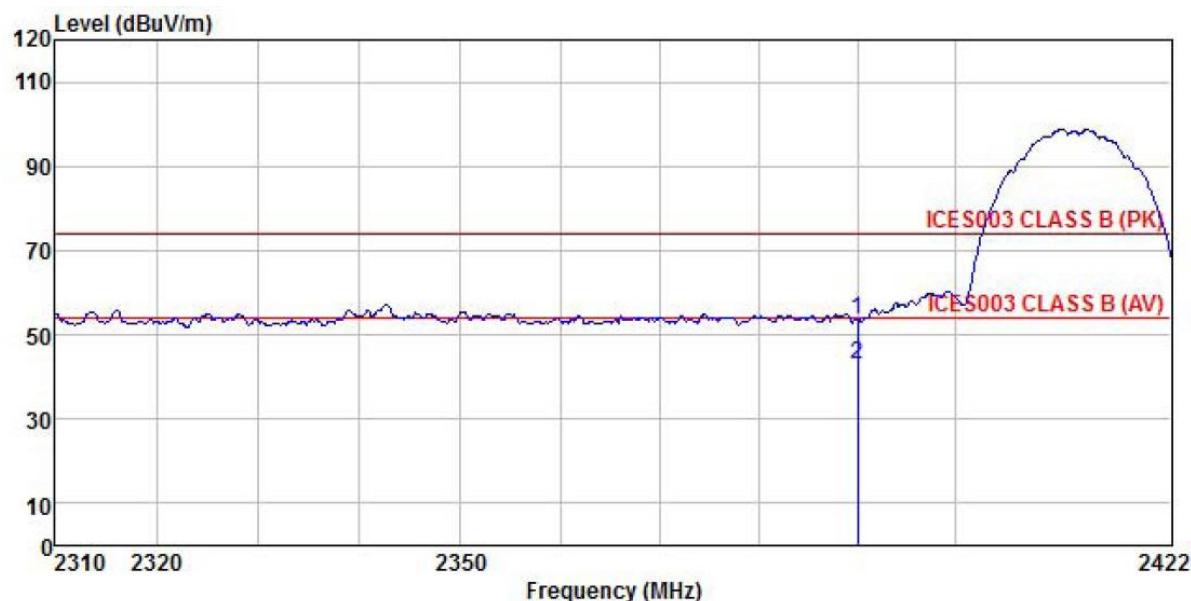


Freq	ReadAntenna Level	Cable Loss	Preamp Factor	Level	Limit Line	Over Line	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	2390.000	21.93	27.07	4.69	0.00	53.69	74.00 -20.31 Peak
2	2390.000	11.05	27.07	4.69	0.00	42.81	54.00 -11.19 Average

## Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	Komikan	<b>Product Model:</b>	Komikan
<b>Test By:</b>	Mike	<b>Test mode:</b>	802.11b Tx mode
<b>Test Channel:</b>	Lowest channel	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	AC 120/60Hz	<b>Environment:</b>	Temp: 24°C Huni: 57%

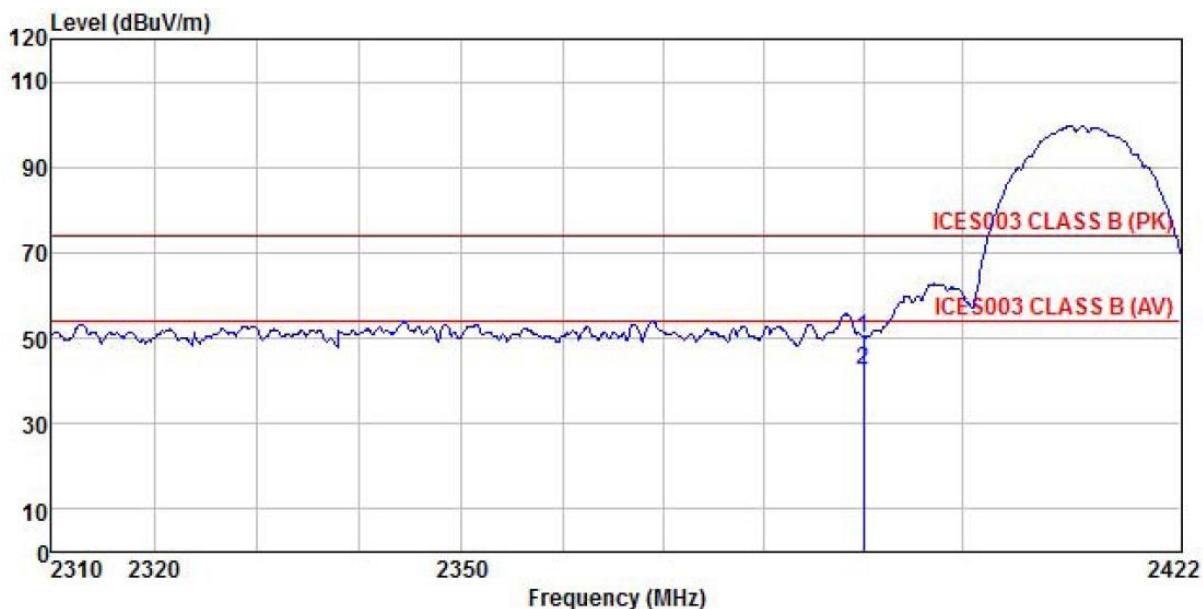


Freq MHz	Read Level dBuV	Antenna Factor dB/m	Cable Loss Factor dB	Preamp Level dB	Limit Line dBuV/m	Over Line dBuV/m	Over Line dB	Remark
1 2390.000	18.48	27.08	4.69	0.00	50.25	74.00	-23.75	Peak
2 2390.000	10.76	27.08	4.69	0.00	42.53	54.00	-11.47	Average

**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	Komikan	<b>Product Model:</b>	Komikan
<b>Test By:</b>	Mike	<b>Test mode:</b>	802.11b Tx mode
<b>Test Channel:</b>	Highest channel	<b>Polarization:</b>	Vertical
<b>Test Voltage:</b>	AC 120/60Hz	<b>Environment:</b>	Temp: 24°C Huni: 57%

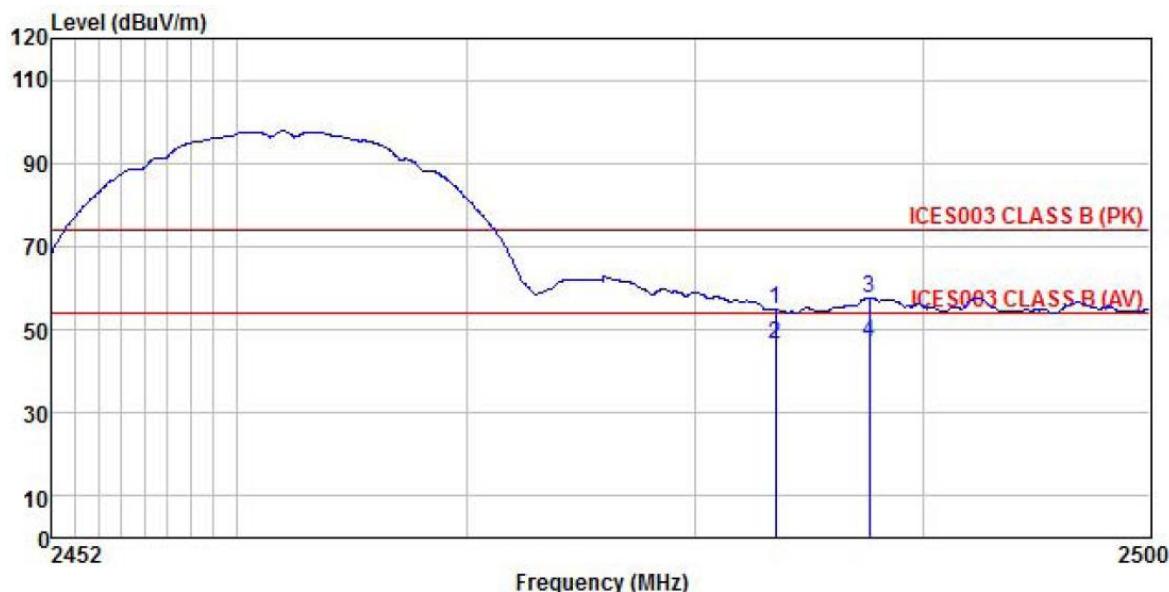


Freq MHz	Read Level dBuV	Antenna Factor dB/m	Cable Loss dB	Preamp Factor dB	Line Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Remark
1 2483.500	22.65	27.36	4.81	0.00	54.82	74.00	-19.18	Peak
2 2483.500	14.29	27.36	4.81	0.00	46.46	54.00	-7.54	Average
3 2487.623	25.48	27.36	4.81	0.00	57.65	74.00	-16.35	Peak
4 2487.623	14.61	27.36	4.81	0.00	46.78	54.00	-7.22	Average

**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	Komikan	<b>Product Model:</b>	Komikan
<b>Test By:</b>	Mike	<b>Test mode:</b>	802.11b Tx mode
<b>Test Channel:</b>	Highest channel	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	AC 120/60Hz	<b>Environment:</b>	Temp: 24°C Huni: 57%

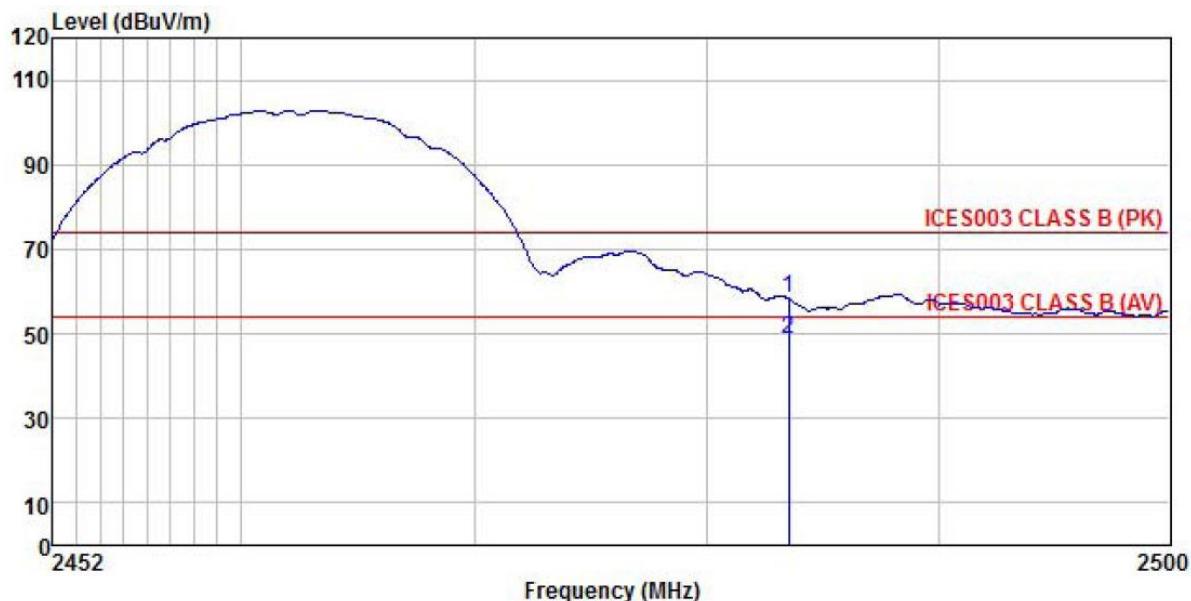

Freq	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Line Level	Limit Line	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	26.07	27.35	4.81	0.00	58.23	74.00	-15.77 Peak
2	2483.500	16.45	27.35	4.81	0.00	48.61	54.00	-5.39 Average


**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

TX0:

802.11g mode:

<b>Product Name:</b>	Komikan	<b>Product Model:</b>	Komikan
<b>Test By:</b>	Mike	<b>Test mode:</b>	802.11g Tx mode
<b>Test Channel:</b>	Lowest channel	<b>Polarization:</b>	Vertical
<b>Test Voltage:</b>	AC 120/60Hz	<b>Environment:</b>	Temp: 24°C Huni: 57%

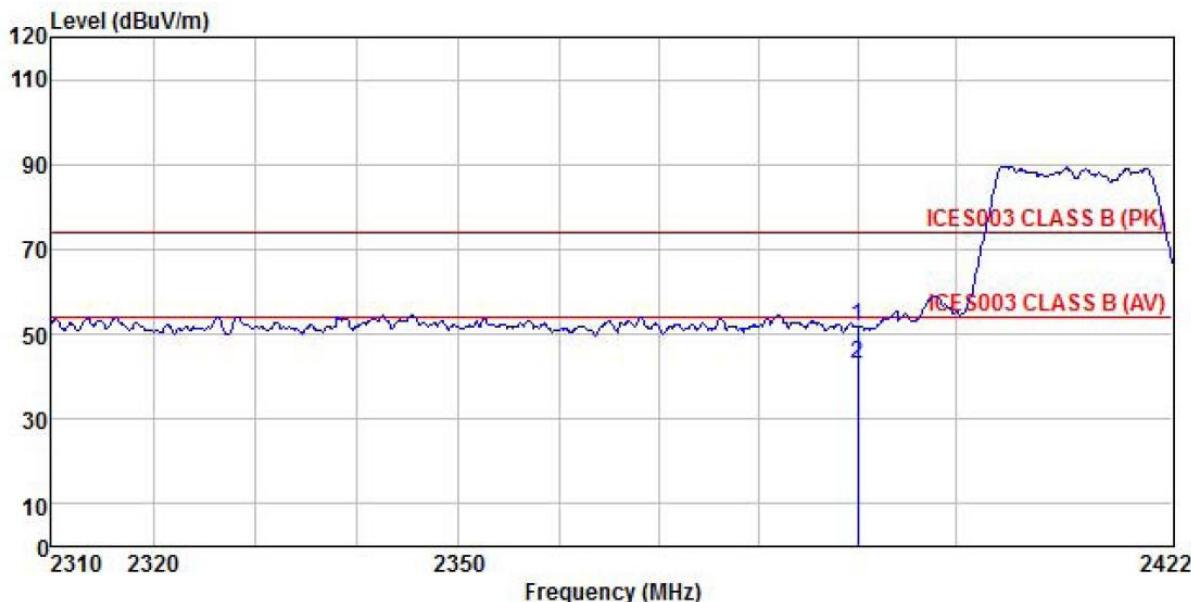


Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Line Level	Limit Line	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.000	20.23	27.07	4.69	0.00	51.99	74.00	-22.01 Peak
2	2390.000	11.29	27.07	4.69	0.00	43.05	54.00	-10.95 Average

## Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	Komikan	<b>Product Model:</b>	Komikan
<b>Test By:</b>	Mike	<b>Test mode:</b>	802.11g Tx mode
<b>Test Channel:</b>	Lowest channel	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	AC 120/60Hz	<b>Environment:</b>	Temp: 24°C Huni: 57%

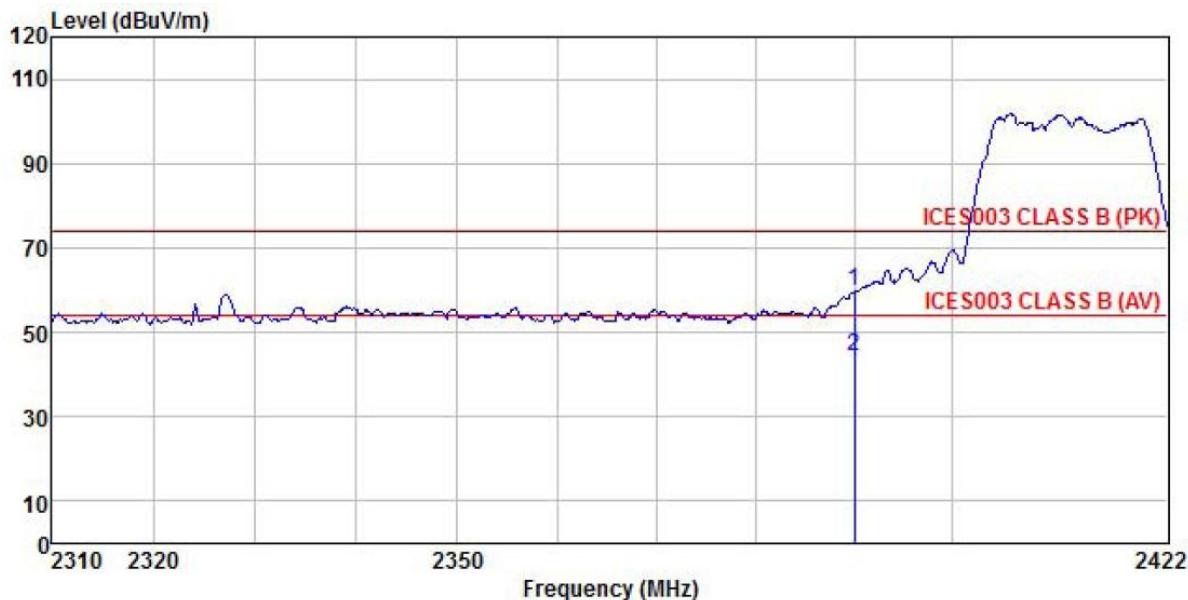


Freq	Read Antenna Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.000	28.09	27.08	4.69	0.00	59.86	74.00	-14.14 Peak
2	2390.000	12.72	27.08	4.69	0.00	44.49	54.00	-9.51 Average

**Remark:**

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	Komikan	<b>Product Model:</b>	Komikan
<b>Test By:</b>	Mike	<b>Test mode:</b>	802.11g Tx mode
<b>Test Channel:</b>	Highest channel	<b>Polarization:</b>	Vertical
<b>Test Voltage:</b>	AC 120/60Hz	<b>Environment:</b>	Temp: 24°C Huni: 57%

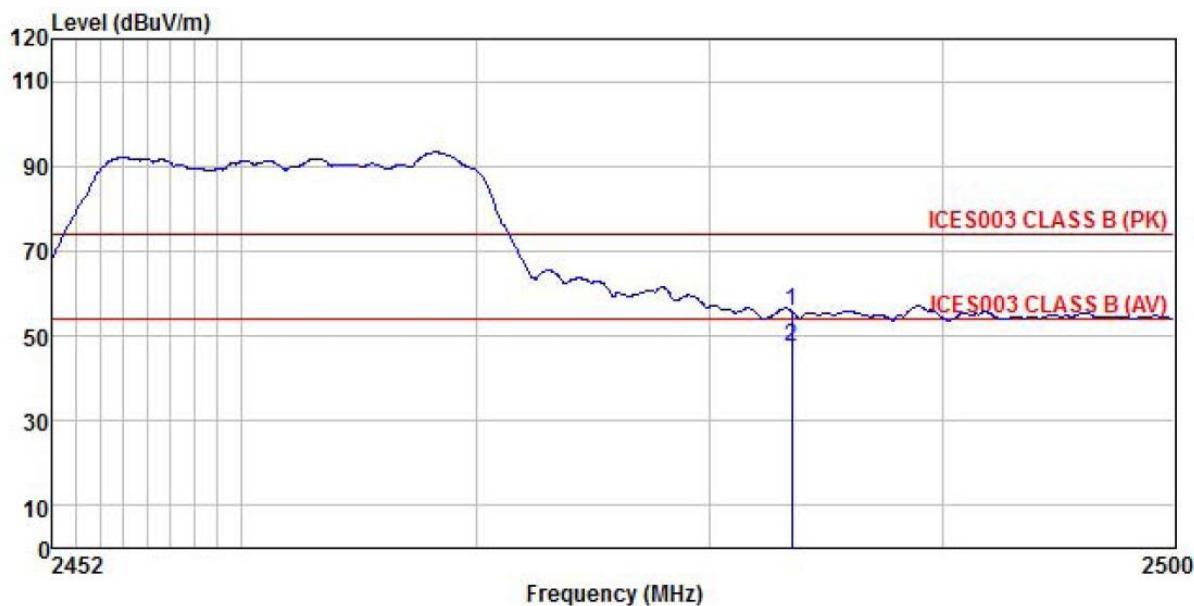


	Read	Antenna	Cable	Preamp	Limit	Over		
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	23.41	27.36	4.81	0.00	55.58	74.00	-18.42 Peak
2	2483.500	15.17	27.36	4.81	0.00	47.34	54.00	-6.66 Average

**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	Komikan	<b>Product Model:</b>	Komikan
<b>Test By:</b>	Mike	<b>Test mode:</b>	802.11g Tx mode
<b>Test Channel:</b>	Highest channel	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	AC 120/60Hz	<b>Environment:</b>	Temp: 24°C Huni: 57%

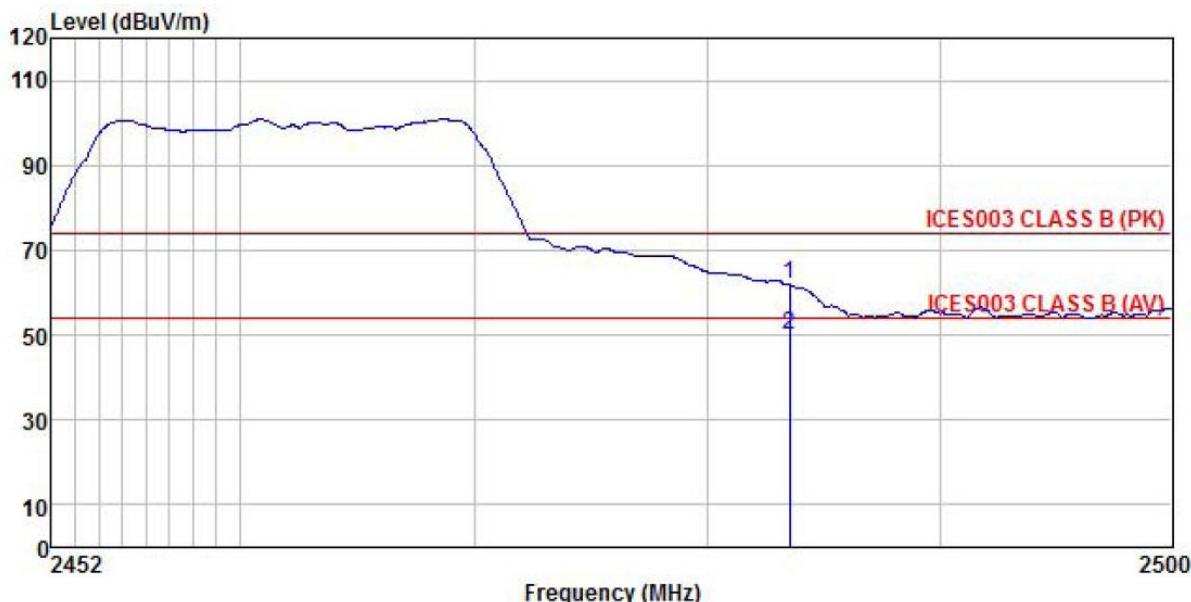

Freq	Read	Antenna	Cable	Preamp	Limit	Over	Remark	
	Freq	Level	Factor	Loss	Level	Line	Line	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	2483.500	29.63	27.35	4.81	0.00	61.79	74.00	-12.21 Peak
2	2483.500	18.07	27.35	4.81	0.00	50.23	54.00	-3.77 Average


**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

TX1:

802.11g mode:

<b>Product Name:</b>	Komikan	<b>Product Model:</b>	Komikan
<b>Test By:</b>	Mike	<b>Test mode:</b>	802.11g Tx mode
<b>Test Channel:</b>	Lowest channel	<b>Polarization:</b>	Vertical
<b>Test Voltage:</b>	AC 120/60Hz	<b>Environment:</b>	Temp: 24°C Huni: 57%

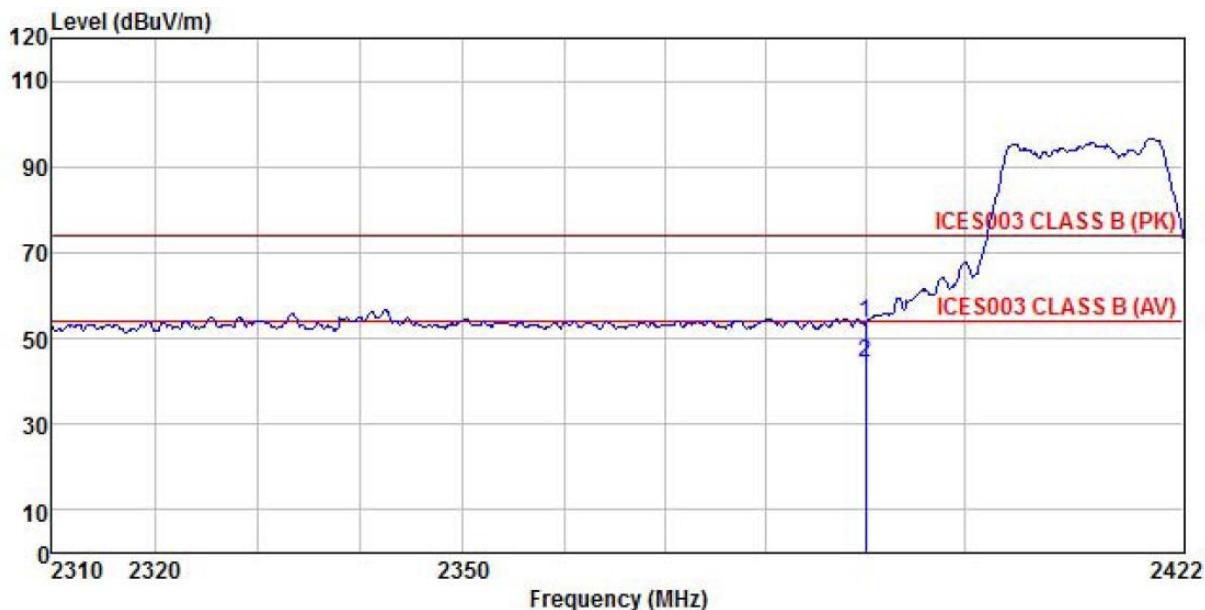


Freq	ReadAntenna Level	Cable Loss	Preamp Factor	Limit Level	Line Limit	Over Line Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	2390.000	21.85	27.07	4.69	0.00	53.61	74.00 -20.39 Peak
2	2390.000	12.73	27.07	4.69	0.00	44.49	54.00 -9.51 Average

## Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	Komikan	<b>Product Model:</b>	Komikan
<b>Test By:</b>	Mike	<b>Test mode:</b>	802.11g Tx mode
<b>Test Channel:</b>	Lowest channel	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	AC 120/60Hz	<b>Environment:</b>	Temp: 24°C Huni: 57%

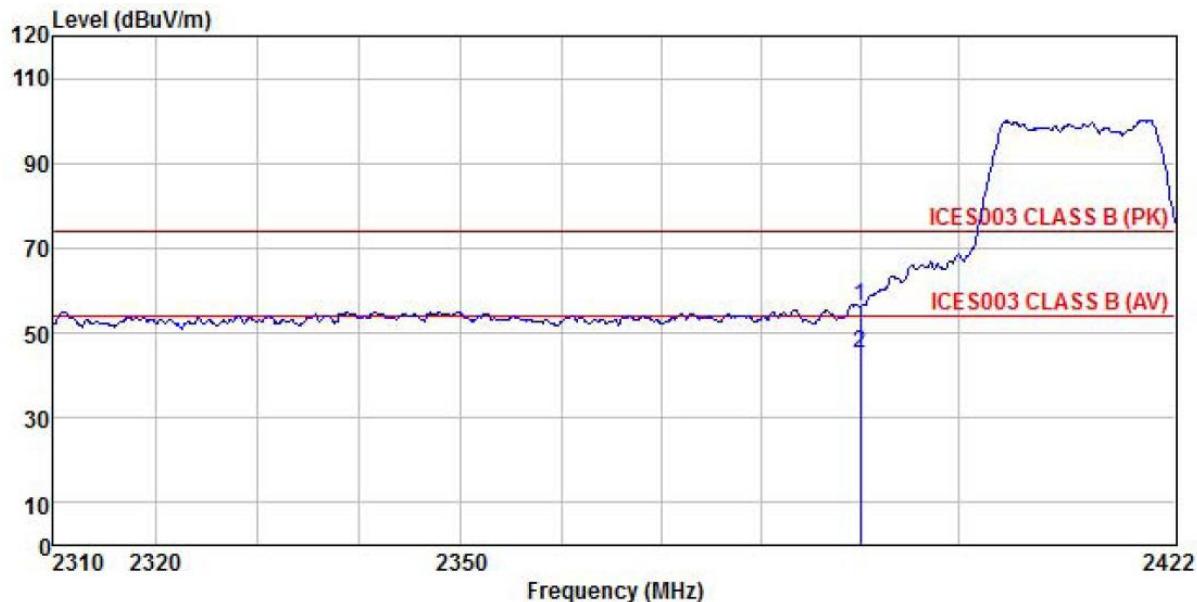


Freq	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Line Level	Limit Line	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.000	24.43	27.08	4.69	0.00	56.20	74.00	-17.80 Peak
2	2390.000	13.31	27.08	4.69	0.00	45.08	54.00	-8.92 Average

**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	Komikan	<b>Product Model:</b>	Komikan
<b>Test By:</b>	Mike	<b>Test mode:</b>	802.11g Tx mode
<b>Test Channel:</b>	Highest channel	<b>Polarization:</b>	Vertical
<b>Test Voltage:</b>	AC 120/60Hz	<b>Environment:</b>	Temp: 24°C Huni: 57%

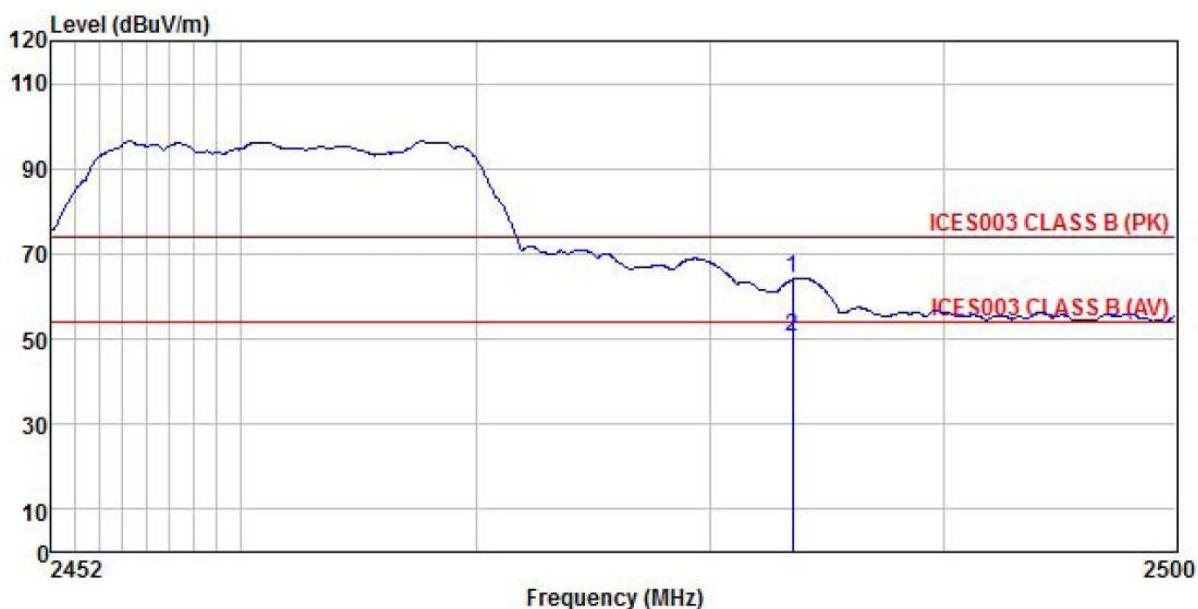


Freq	Read	Antenna	Cable	Preamp	Limit	Over	Line	Limit	Remark
	Freq	Level	Factor	Loss					
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	dB	
1	2483.500	31.95	27.36	4.81	0.00	64.12	74.00	-9.88	Peak
2	2483.500	18.13	27.36	4.81	0.00	50.30	54.00	-3.70	Average

**Remark:**

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	Komikan	<b>Product Model:</b>	Komikan
<b>Test By:</b>	Mike	<b>Test mode:</b>	802.11g Tx mode
<b>Test Channel:</b>	Highest channel	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	AC 120/60Hz	<b>Environment:</b>	Temp: 24°C Huni: 57%

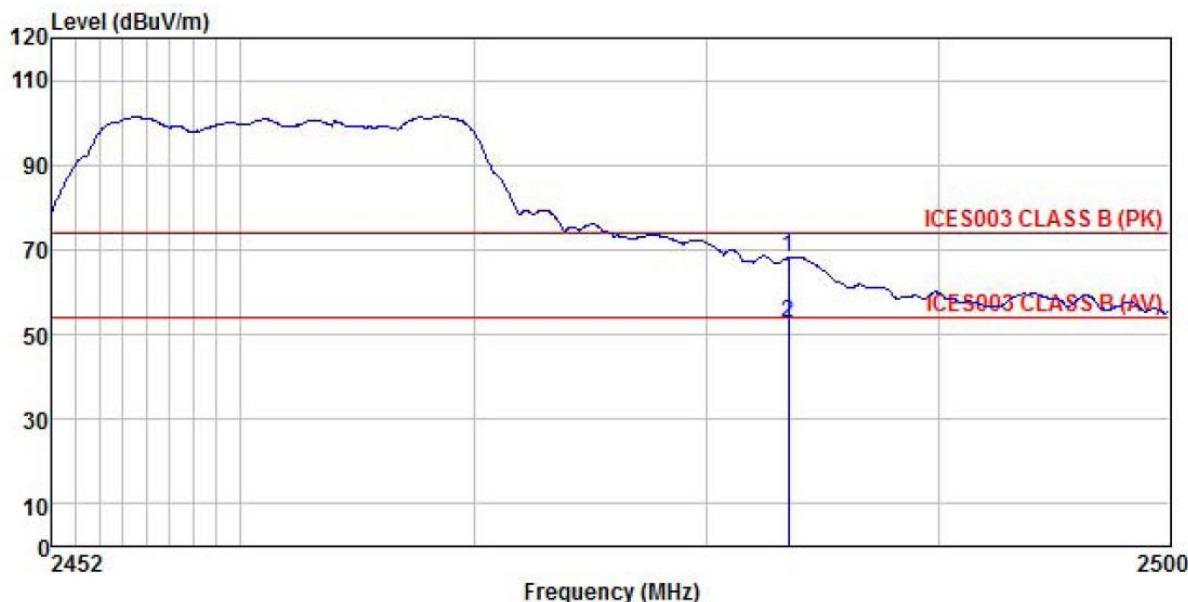


Freq	Read	Antenna	Cable	Preamp	Limit	Over	Limit	Remark
	Freq	Level	Factor	Loss				
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	2483.500	36.07	27.35	4.81	0.00	68.23	74.00	-5.77 Peak
2	2483.500	20.63	27.35	4.81	0.00	52.79	54.00	-1.21 Average

**Remark:**

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

## 802.11n-HT20(MIMO):

<b>Product Name:</b>	Komikan	<b>Product Model:</b>	Komikan
<b>Test By:</b>	Mike	<b>Test mode:</b>	802.11n(HT20) Tx mode
<b>Test Channel:</b>	Lowest channel	<b>Polarization:</b>	Vertical
<b>Test Voltage:</b>	AC 120/60Hz	<b>Environment:</b>	Temp: 24°C Huni: 57%

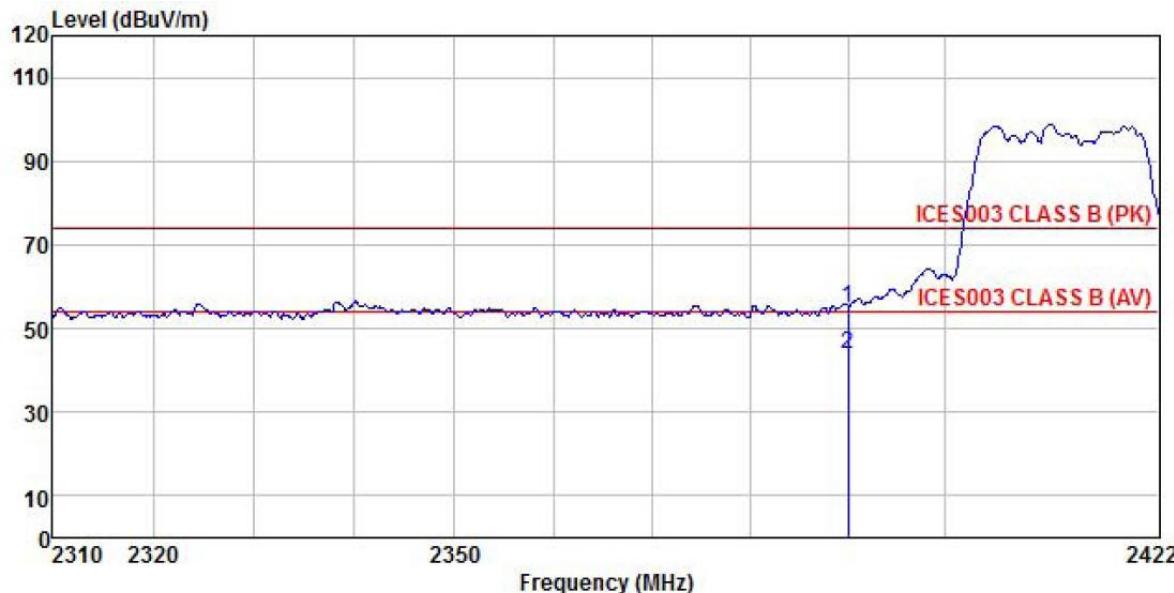


Freq MHz	ReadAntenna Level Factor		Cable Loss Factor		Preamp Level dB	Limit Line dBuV/m	Over Line dBuV/m	Over Limit dB	Remark
	MHz	dBuV	dB/m	dB					
1	2390.000	23.33	27.07	4.69	0.00	55.09	74.00	-18.91	Peak
2	2390.000	12.20	27.07	4.69	0.00	43.96	54.00	-10.04	Average

## Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	Komikan	<b>Product Model:</b>	Komikan
<b>Test By:</b>	Mike	<b>Test mode:</b>	802.11n(HT20) Tx mode
<b>Test Channel:</b>	Lowest channel	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	AC 120/60Hz	<b>Environment:</b>	Temp: 24°C Huni: 57%

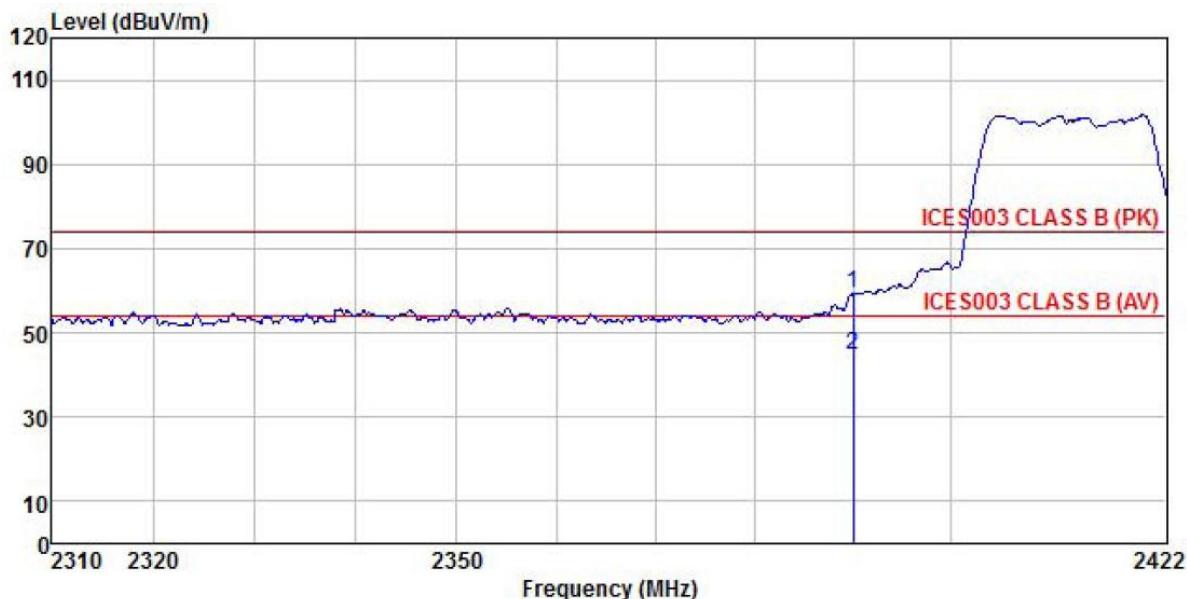


Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.000	27.54	27.08	4.69	0.00	59.31	74.00	-14.69 Peak
2	2390.000	13.07	27.08	4.69	0.00	44.84	54.00	-9.16 Average

**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	Komikan	<b>Product Model:</b>	Komikan
<b>Test By:</b>	Mike	<b>Test mode:</b>	802.11n(HT20) Tx mode
<b>Test Channel:</b>	Highest channel	<b>Polarization:</b>	Vertical
<b>Test Voltage:</b>	AC 120/60Hz	<b>Environment:</b>	Temp: 24°C Huni: 57%

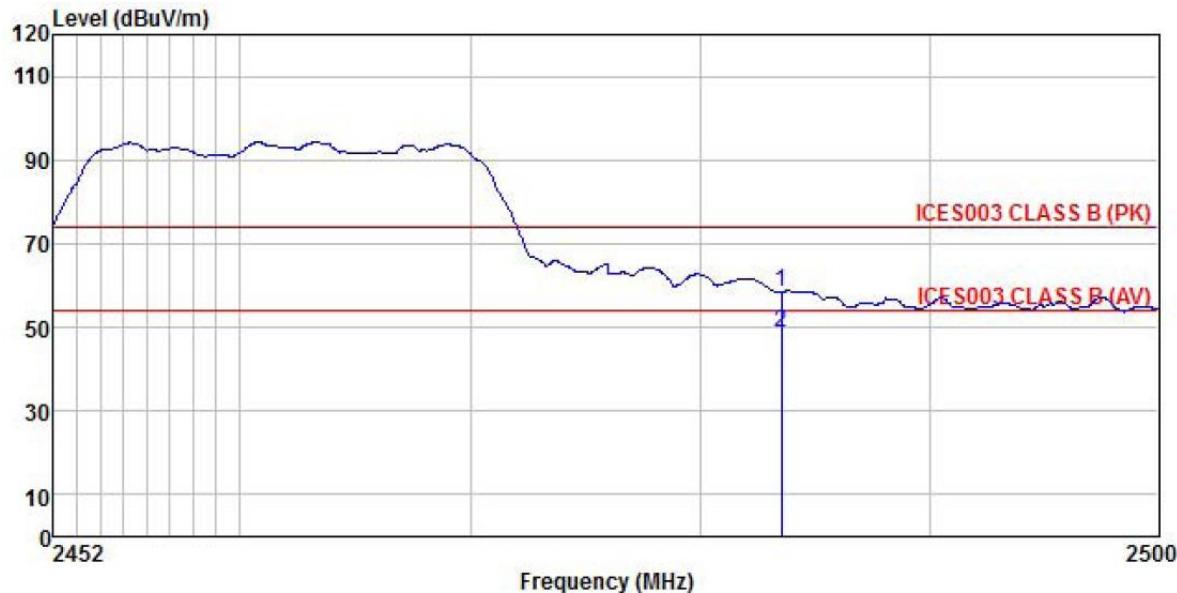


Freq	Read Freq MHz	Antenna Level dBuV	Cable Loss dB	Preamp Factor dB	Line Level dB	Limit Line dBuV/m	Over Line dBuV/m	Over Line dB	Remark
1	2483.500	26.28	27.36	4.81	0.00	58.45	74.00	-15.55	Peak
2	2483.500	16.60	27.36	4.81	0.00	48.77	54.00	-5.23	Average

**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	Komikan	<b>Product Model:</b>	Komikan
<b>Test By:</b>	Mike	<b>Test mode:</b>	802.11n(HT20) Tx mode
<b>Test Channel:</b>	Highest channel	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	AC 120/60Hz	<b>Environment:</b>	Temp: 24°C Huni: 57%

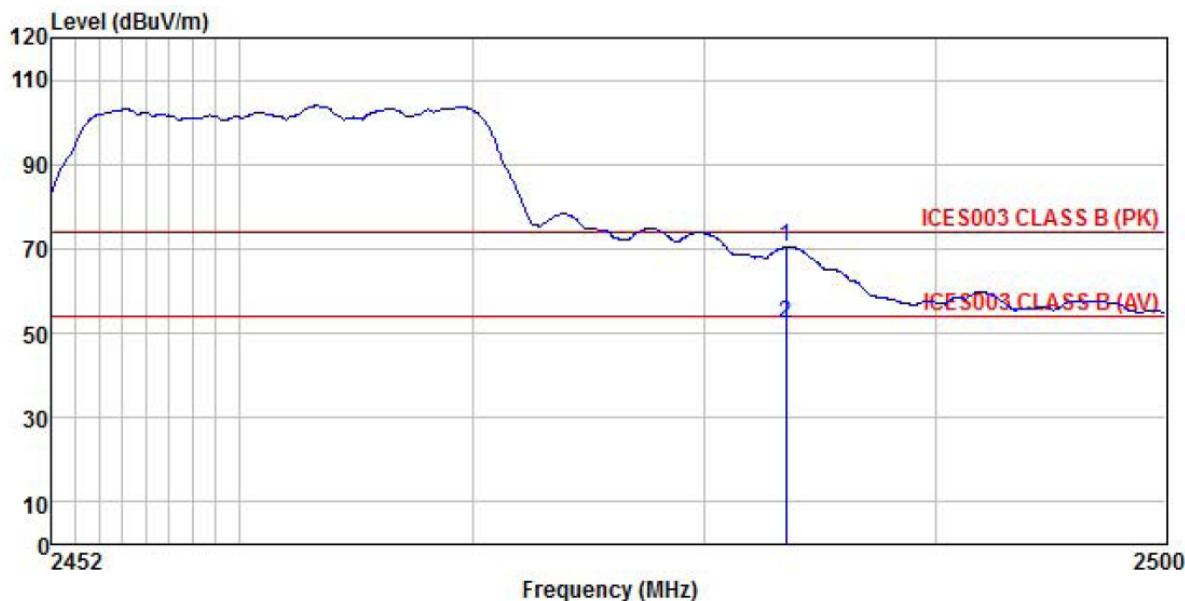


Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Line	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dBuV/m	dB	
1	2483.500	38.22	27.35	4.81	0.00	70.38	74.00	-3.62	Peak
2	2483.500	20.14	27.35	4.81	0.00	52.30	54.00	-1.70	Average

**Remark:**

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

## 802.11n-HT40(MIMO):

<b>Product Name:</b>	Komikan	<b>Product Model:</b>	Komikan
<b>Test By:</b>	Mike	<b>Test mode:</b>	802.11n(HT40) Tx mode
<b>Test Channel:</b>	Lowest channel	<b>Polarization:</b>	Vertical
<b>Test Voltage:</b>	AC 120/60Hz	<b>Environment:</b>	Temp: 24°C Huni: 57%

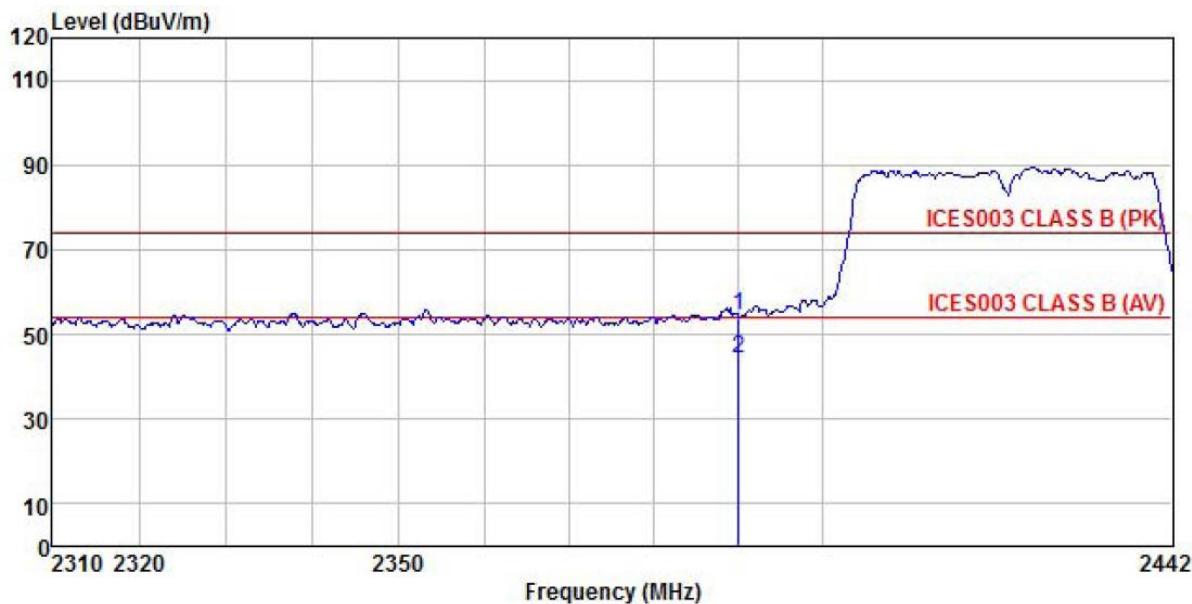


Freq	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Line Level	Limit Line	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.000	22.54	27.07	4.69	0.00	54.30	74.00	-19.70 Peak
2	2390.000	12.48	27.07	4.69	0.00	44.24	54.00	-9.76 Average

## Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	Komikan	<b>Product Model:</b>	Komikan
<b>Test By:</b>	Mike	<b>Test mode:</b>	802.11n(HT40) Tx mode
<b>Test Channel:</b>	Lowest channel	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	AC 120/60Hz	<b>Environment:</b>	Temp: 24°C Huni: 57%

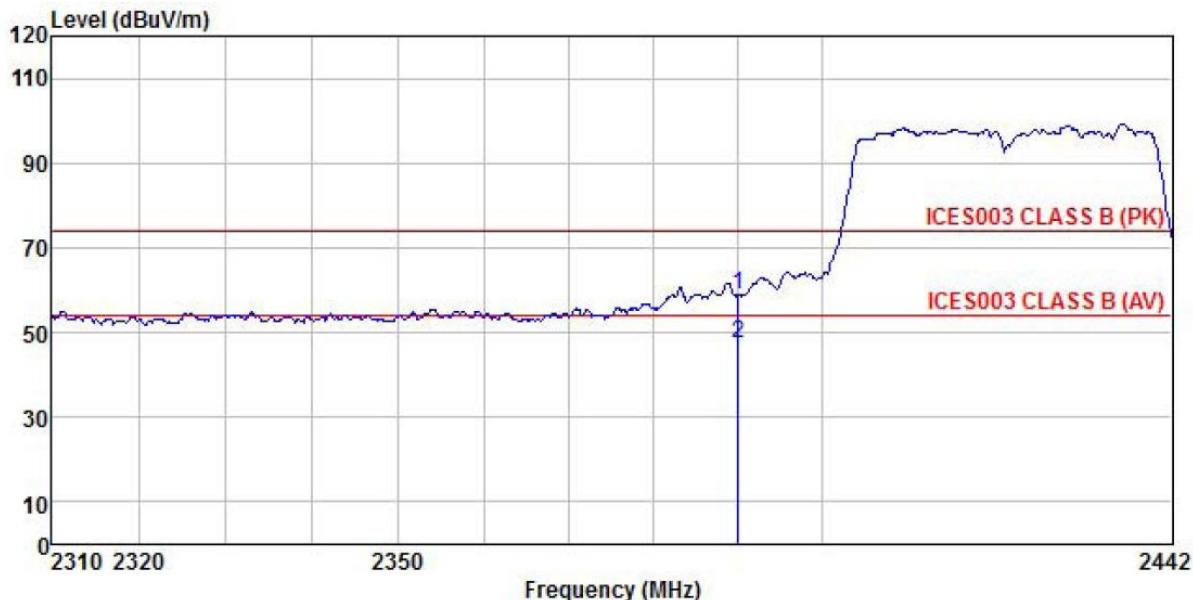


Freq	Read Level MHz	Antenna Factor	Cable Loss dB	Preamp Factor	Level dB	Limit Line dBuV/m	Over Line dBuV/m	Over Limit dB	Remark
1	2390.000	27.25	27.08	4.69	0.00	59.02	74.00	-14.98	Peak
2	2390.000	15.48	27.08	4.69	0.00	47.25	54.00	-6.75	Average

**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	Komikan	<b>Product Model:</b>	Komikan
<b>Test By:</b>	Mike	<b>Test mode:</b>	802.11n(HT40) Tx mode
<b>Test Channel:</b>	Highest channel	<b>Polarization:</b>	Vertical
<b>Test Voltage:</b>	AC 120/60Hz	<b>Environment:</b>	Temp: 24°C Huni: 57%

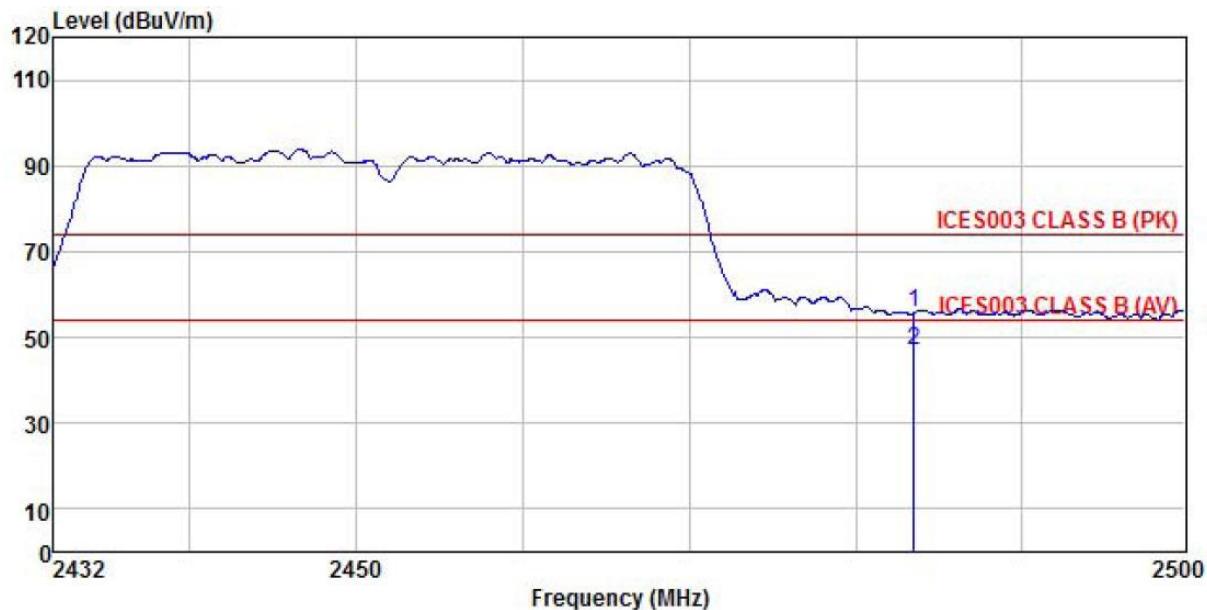


Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	23.80	27.36	4.81	0.00	55.97	74.00	-18.03 Peak
2	2483.500	14.61	27.36	4.81	0.00	46.78	54.00	-7.22 Average

**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	Komikan	<b>Product Model:</b>	Komikan
<b>Test By:</b>	Mike	<b>Test mode:</b>	802.11n(HT40) Tx mode
<b>Test Channel:</b>	Highest channel	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	AC 120/60Hz	<b>Environment:</b>	Temp: 24°C Huni: 57%

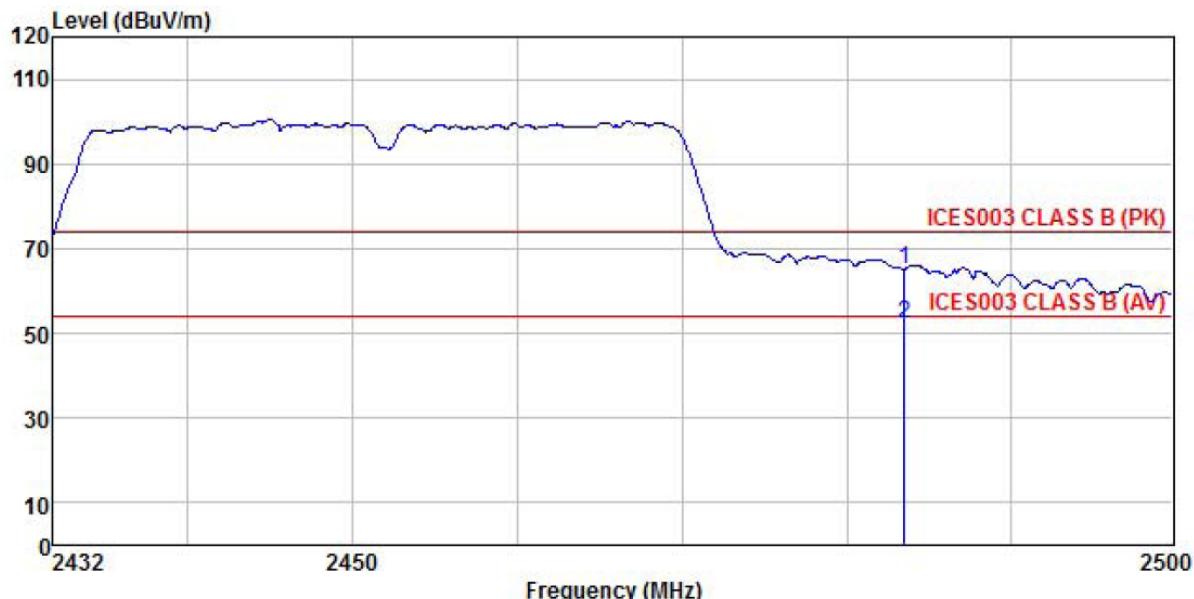


Freq	Read Antenna Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	32.92	27.35	4.81	0.00	65.08	74.00	-8.92 Peak
2	2483.500	19.97	27.35	4.81	0.00	52.13	54.00	-1.87 Average

**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

**Flex Antenna:****TX0:****802.11b mode:**

<b>Product Name:</b>	Komikan	<b>Product Model:</b>	Komikan
<b>Test By:</b>	Mike	<b>Test mode:</b>	802.11b Tx mode
<b>Test Channel:</b>	Lowest channel	<b>Polarization:</b>	Vertical
<b>Test Voltage:</b>	AC 120/60Hz	<b>Environment:</b>	Temp: 24°C Huni: 57%

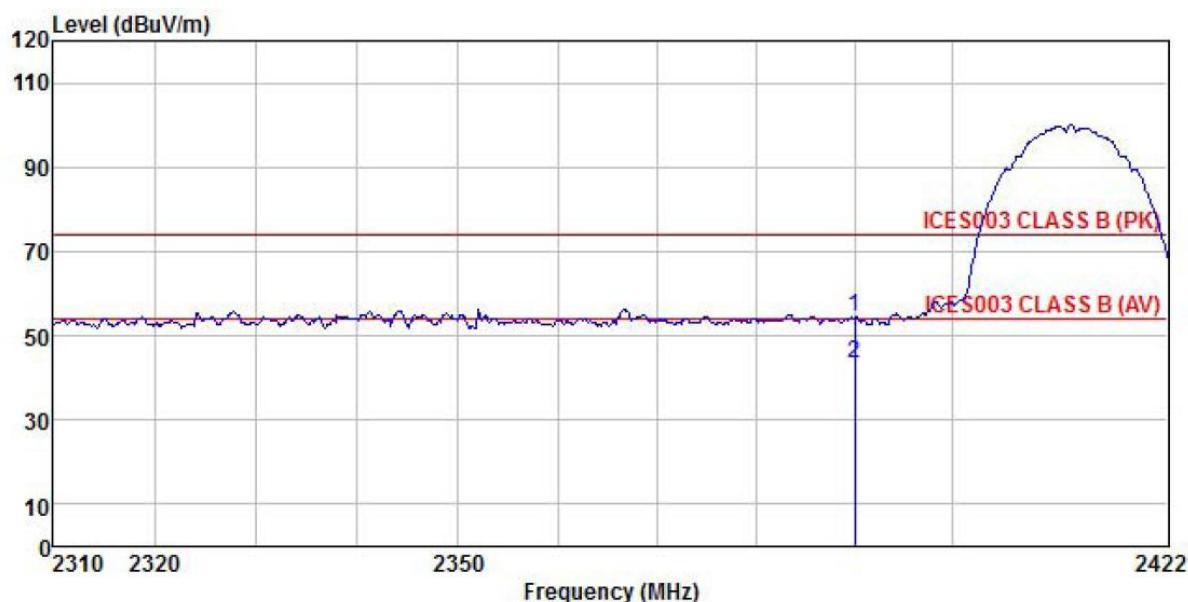


Freq	ReadAntenna Level	Cable Loss	Preamp Factor	Limit Level	Line Limit	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	2390.000	22.60	27.07	4.69	0.00	54.36	74.00 -19.64 Peak
2	2390.000	11.50	27.07	4.69	0.00	43.26	54.00 -10.74 Average

**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	Komikan	<b>Product Model:</b>	Komikan
<b>Test By:</b>	Mike	<b>Test mode:</b>	802.11b Tx mode
<b>Test Channel:</b>	Lowest channel	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	AC 120/60Hz	<b>Environment:</b>	Temp: 24°C Huni: 57%

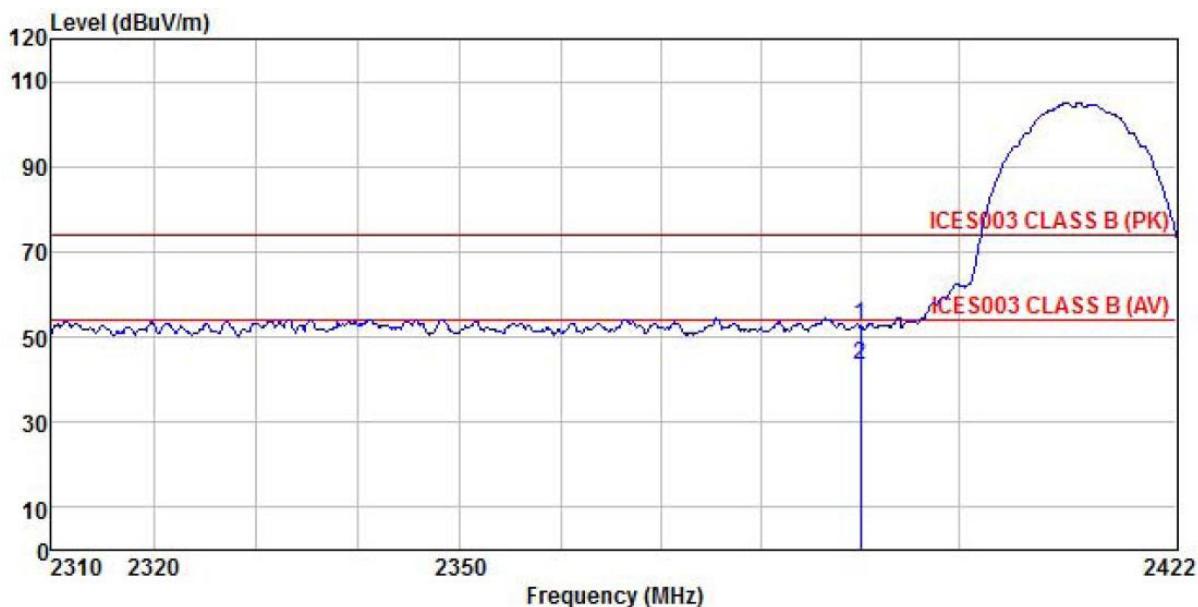


	Read	Antenna	Cable	Preamp	Limit	Over		
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.000	20.80	27.08	4.69	0.00	52.57	74.00	-21.43 Peak
2	2390.000	11.70	27.08	4.69	0.00	43.47	54.00	-10.53 Average

**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	Komikan	<b>Product Model:</b>	Komikan
<b>Test By:</b>	Mike	<b>Test mode:</b>	802.11b Tx mode
<b>Test Channel:</b>	Highest channel	<b>Polarization:</b>	Vertical
<b>Test Voltage:</b>	AC 120/60Hz	<b>Environment:</b>	Temp: 24°C Huni: 57%

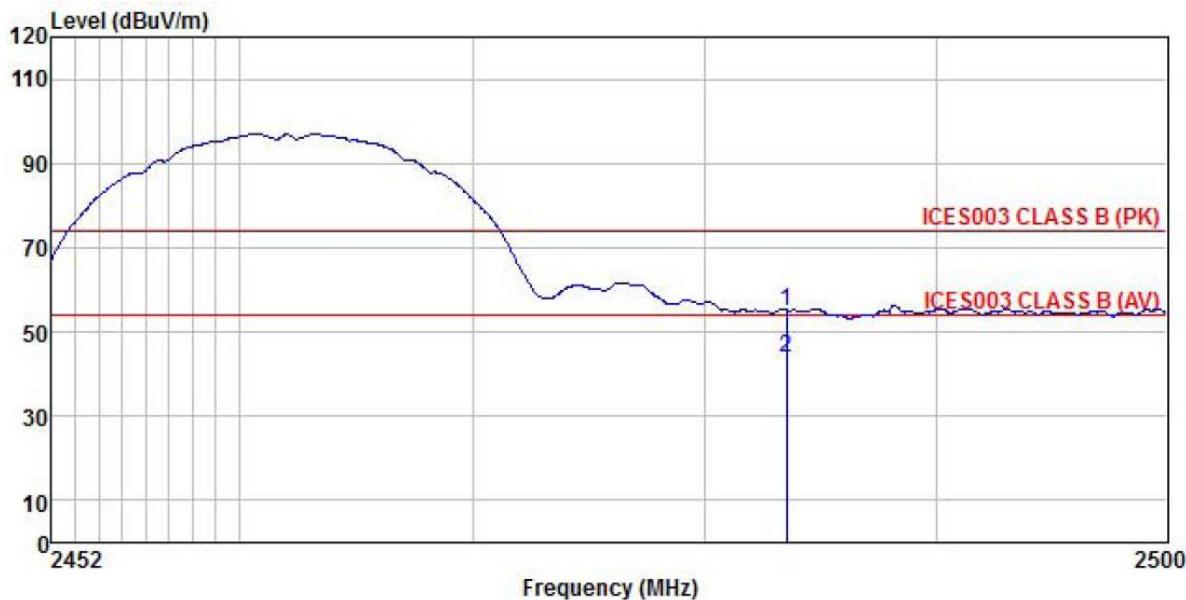


Freq	Read		Antenna		Cable		Preamp	Limit	Over	Line	Limit	Remark
	Level	Factor	Loss	Factor	dB	dB	dBuV/m					
MHz	dBuV	dB/m	dB	dB	dB	dB	dBuV/m	dBuV/m	dB	dB	dB	dB
1	2483.500	22.87	27.36	4.81	0.00	55.04	74.00	-18.96	Peak			
2	2483.500	11.82	27.36	4.81	0.00	43.99	54.00	-10.01	Average			

**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	Komikan	<b>Product Model:</b>	Komikan
<b>Test By:</b>	Mike	<b>Test mode:</b>	802.11b Tx mode
<b>Test Channel:</b>	Highest channel	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	AC 120/60Hz	<b>Environment:</b>	Temp: 24°C Huni: 57%

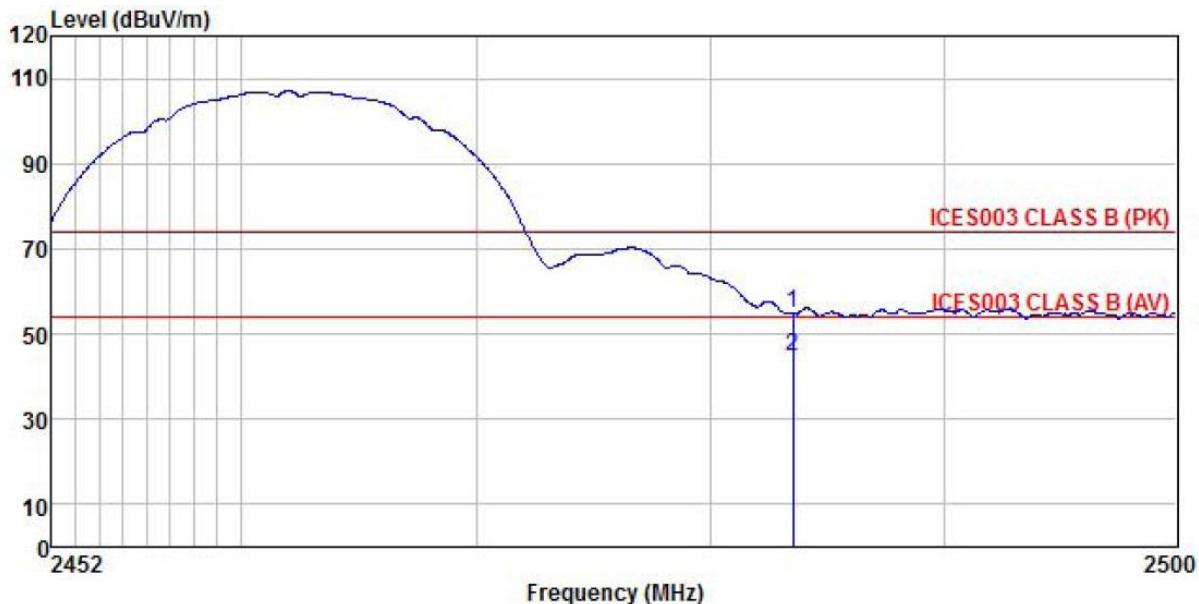

Freq	Read	Antenna	Cable	Preamp	Limit	Over	Line	Limit	Remark
	Freq	Level	Factor	Loss					
MHz	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	22.67	27.35	4.81	0.00	54.83	74.00	-19.17	Peak
2	2483.500	12.43	27.35	4.81	0.00	44.59	54.00	-9.41	Average


**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

TX1:

802.11b mode:

<b>Product Name:</b>	Komikan	<b>Product Model:</b>	Komikan
<b>Test By:</b>	Mike	<b>Test mode:</b>	802.11b Tx mode
<b>Test Channel:</b>	Lowest channel	<b>Polarization:</b>	Vertical
<b>Test Voltage:</b>	AC 120/60Hz	<b>Environment:</b>	Temp: 24°C Huni: 57%

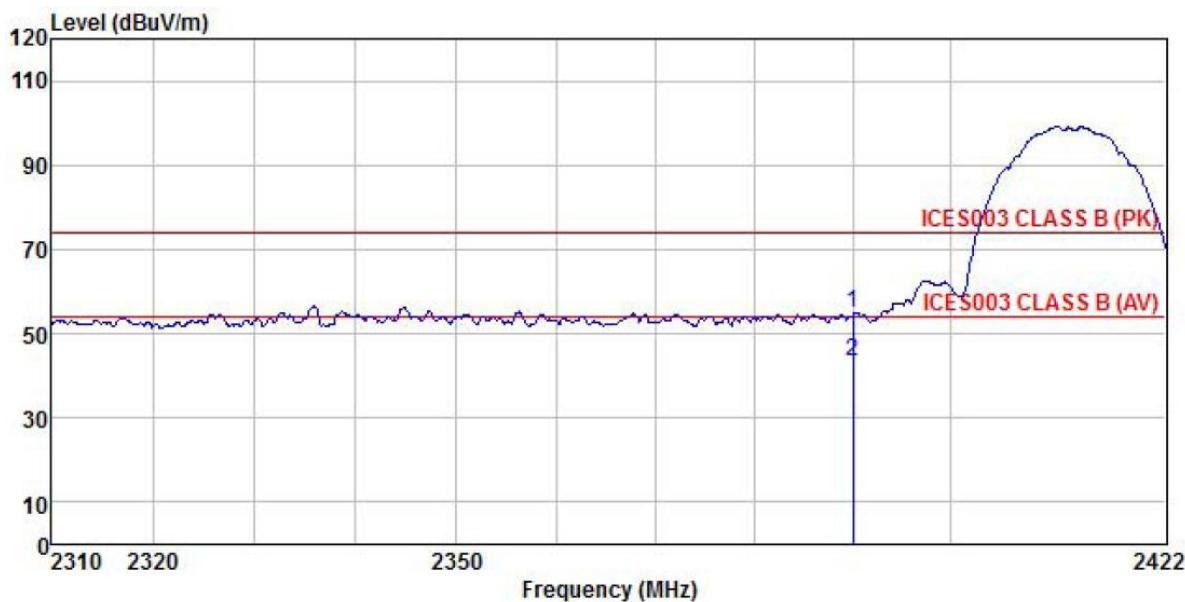


	Read	Antenna	Cable	Preamp	Limit	Over		
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.000	23.24	27.07	4.69	0.00	55.00	74.00	-19.00 Peak
2	2390.000	11.74	27.07	4.69	0.00	43.50	54.00	-10.50 Average

## Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	Komikan	<b>Product Model:</b>	Komikan
<b>Test By:</b>	Mike	<b>Test mode:</b>	802.11b Tx mode
<b>Test Channel:</b>	Lowest channel	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	AC 120/60Hz	<b>Environment:</b>	Temp: 24°C Huni: 57%

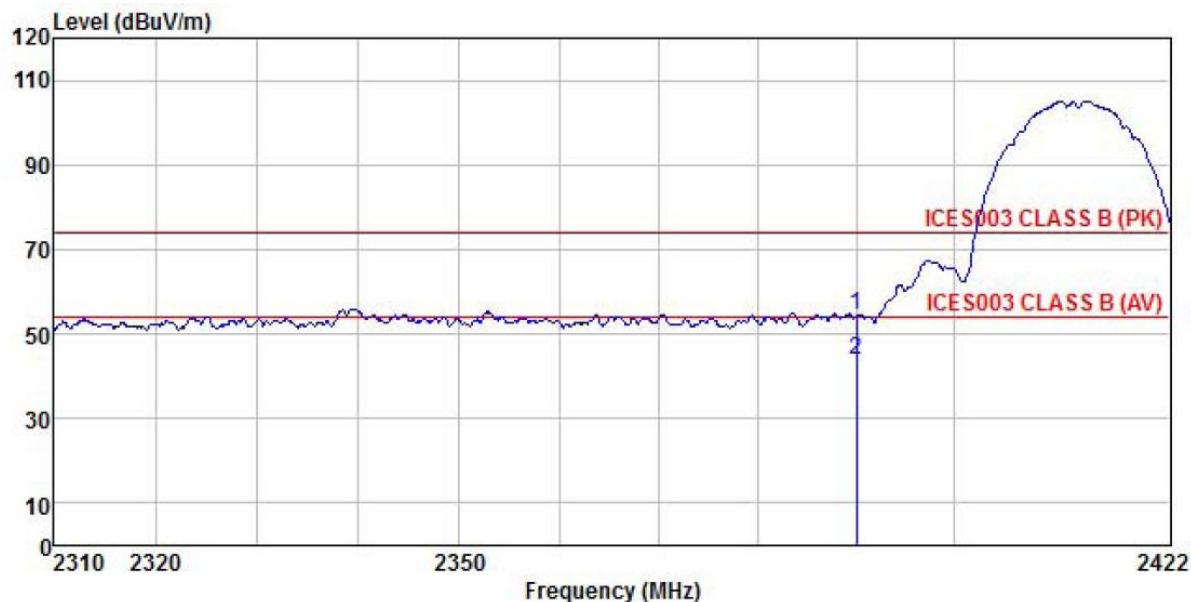


	Read	Antenna	Cable	Preamp	Limit	Over		
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	2390.000	22.73	27.08	4.69	0.00	54.50	74.00	-19.50 Peak
2	2390.000	12.22	27.08	4.69	0.00	43.99	54.00	-10.01 Average

**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	Komikan	<b>Product Model:</b>	Komikan
<b>Test By:</b>	Mike	<b>Test mode:</b>	802.11b Tx mode
<b>Test Channel:</b>	Highest channel	<b>Polarization:</b>	Vertical
<b>Test Voltage:</b>	AC 120/60Hz	<b>Environment:</b>	Temp: 24°C Huni: 57%

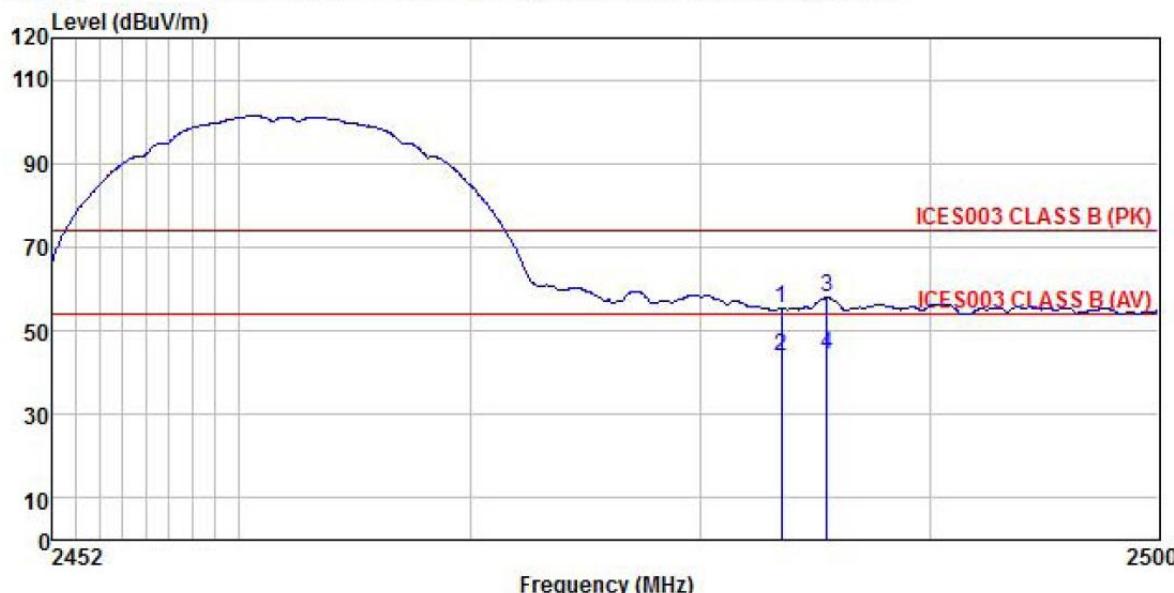


Freq	Read	Antenna	Cable	Preamp	Limit	Over	Remark
	Level	Factor	Loss	Factor			
MHz	dBuV	dB/m		dB	dBuV/m	dBuV/m	dB
1 2483.500	23.17	27.36	4.81	0.00	55.34	74.00	-18.66 Peak
2 2483.500	11.75	27.36	4.81	0.00	43.92	54.00	-10.08 Average
3 2485.502	25.70	27.36	4.81	0.00	57.87	74.00	-16.13 Peak
4 2485.502	12.10	27.36	4.81	0.00	44.27	54.00	-9.73 Average

**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	Komikan	<b>Product Model:</b>	Komikan
<b>Test By:</b>	Mike	<b>Test mode:</b>	802.11b Tx mode
<b>Test Channel:</b>	Highest channel	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	AC 120/60Hz	<b>Environment:</b>	Temp: 24°C Huni: 57%

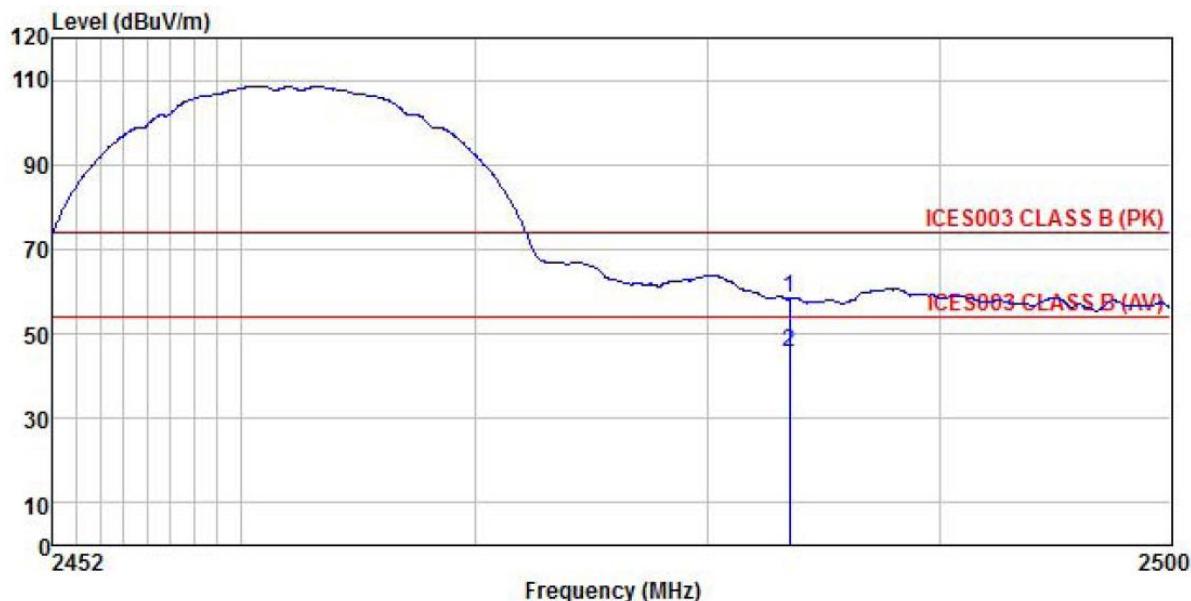


	Read	Antenna	Cable	Preamp	Limit	Over		
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	2483.500	26.23	27.35	4.81	0.00	58.39	74.00	-15.61 Peak
2	2483.500	13.49	27.35	4.81	0.00	45.65	54.00	-8.35 Average

**Remark:**


1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

TX0:

802.11g mode:

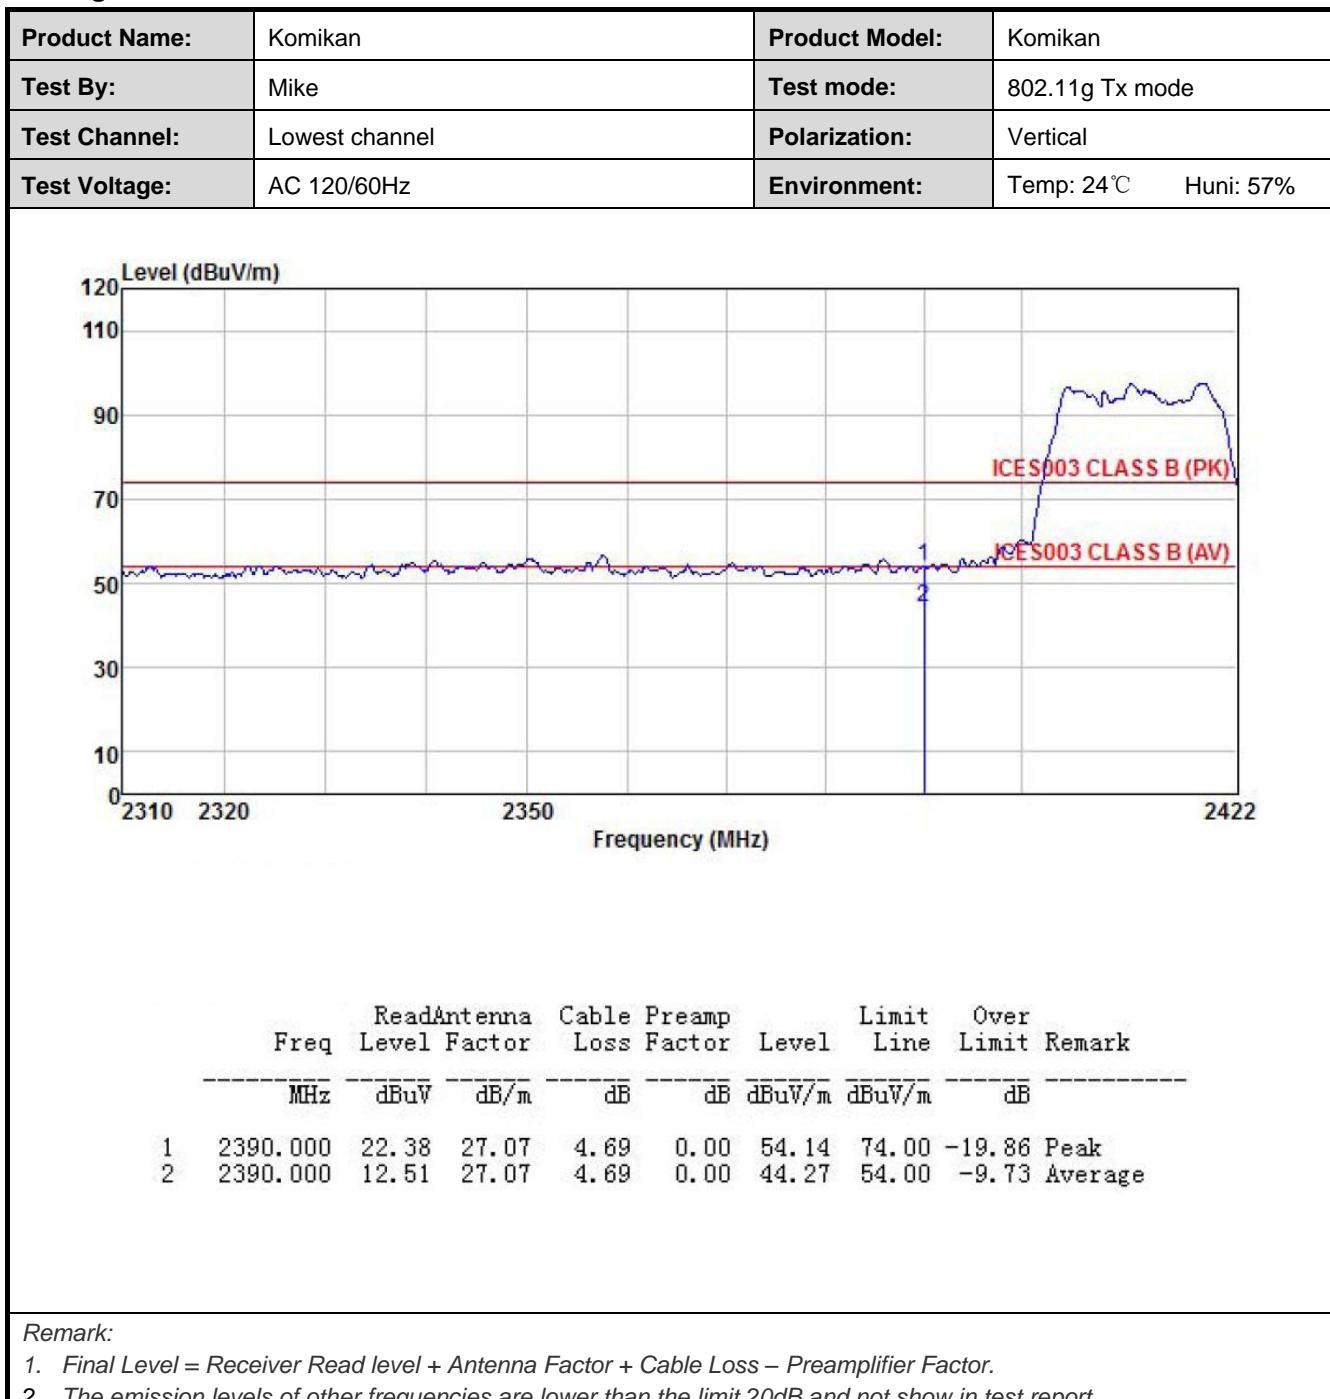

<b>Product Name:</b>	Komikan	<b>Product Model:</b>	Komikan
<b>Test By:</b>	Mike	<b>Test mode:</b>	802.11g Tx mode
<b>Test Channel:</b>	Lowest channel	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	AC 120/60Hz	<b>Environment:</b>	Temp: 24°C Huni: 57%

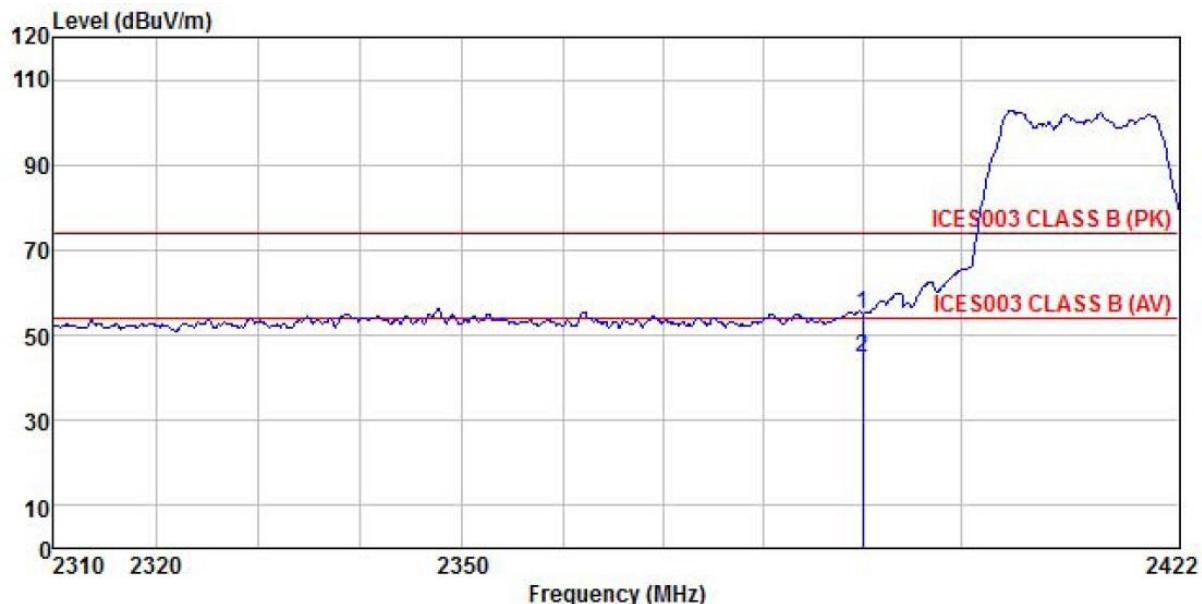


Freq	Read	Antenna	Cable	Preamp	Limit	Over	Remark	
	Freq	Level	Factor	Loss				
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	2390.000	23.27	27.08	4.69	0.00	55.04	74.00	-18.96 Peak
2	2390.000	12.97	27.08	4.69	0.00	44.74	54.00	-9.26 Average

**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	Komikan	<b>Product Model:</b>	Komikan
<b>Test By:</b>	Mike	<b>Test mode:</b>	802.11g Tx mode
<b>Test Channel:</b>	Highest channel	<b>Polarization:</b>	Vertical
<b>Test Voltage:</b>	AC 120/60Hz	<b>Environment:</b>	Temp: 24°C Huni: 57%

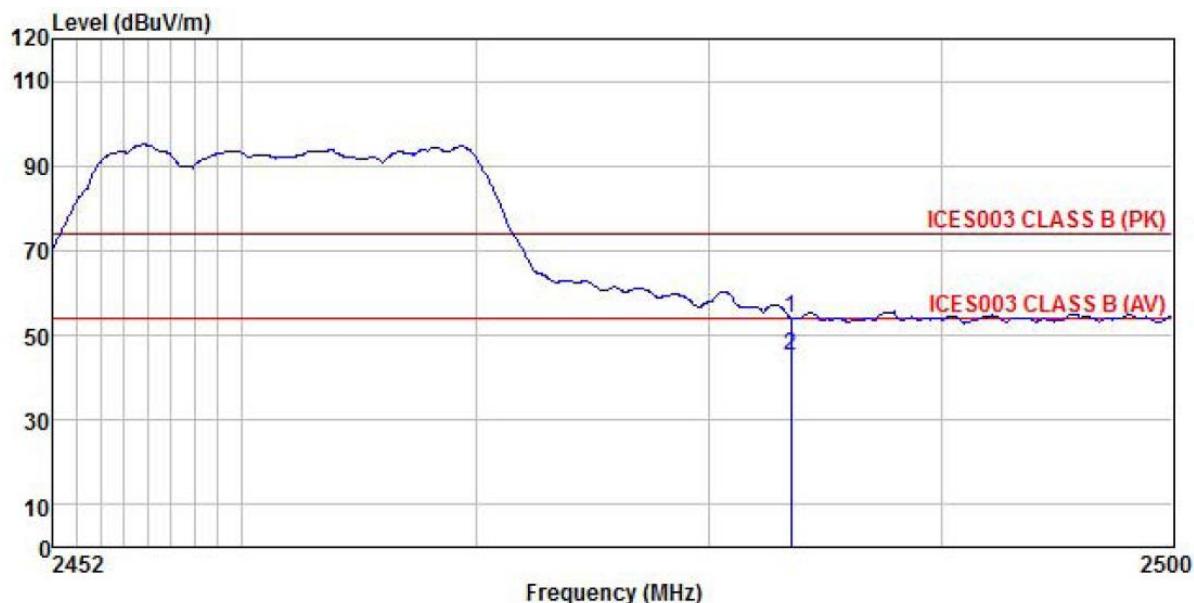


Freq	Read Antenna Level	Antenna Factor	Cable Loss	Preamp Factor	Line Level	Limit Line	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	21.89	27.36	4.81	0.00	54.06	74.00	-19.94 Peak
2	2483.500	13.16	27.36	4.81	0.00	45.33	54.00	-8.67 Average

**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	Komikan	<b>Product Model:</b>	Komikan
<b>Test By:</b>	Mike	<b>Test mode:</b>	802.11g Tx mode
<b>Test Channel:</b>	Highest channel	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	AC 120/60Hz	<b>Environment:</b>	Temp: 24°C Huni: 57%

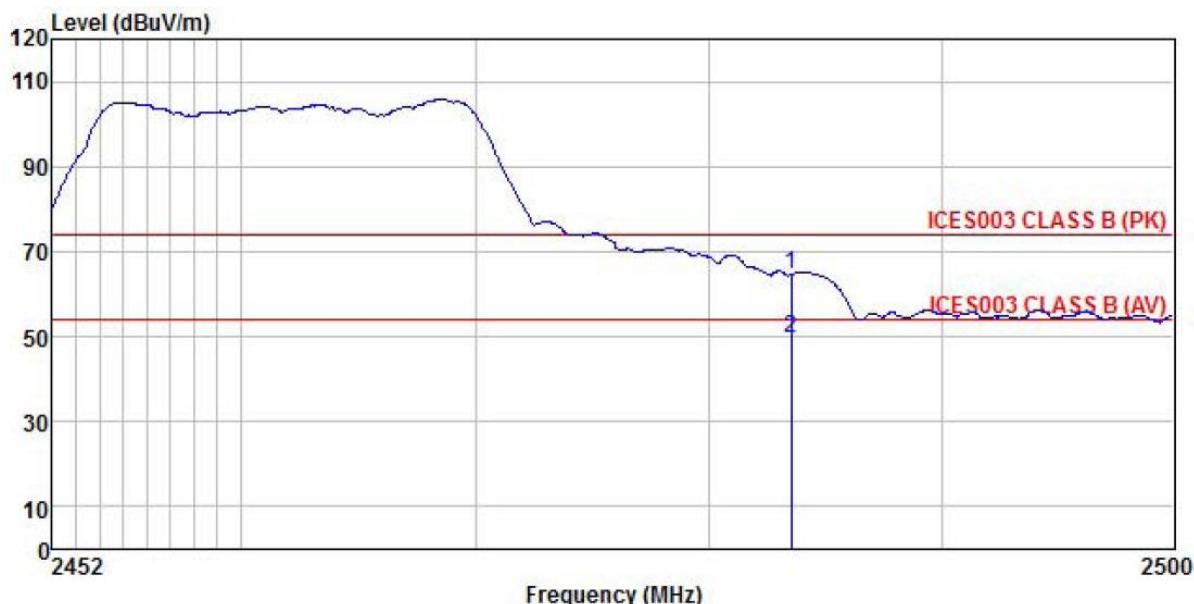

Freq	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB
1	2483.500	32.62	27.35	4.81	0.00	64.78	74.00	-9.22 Peak
2	2483.500	17.29	27.35	4.81	0.00	49.45	54.00	-4.55 Average


**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

TX1:

802.11g mode:

<b>Product Name:</b>	Komikan	<b>Product Model:</b>	Komikan
<b>Test By:</b>	Mike	<b>Test mode:</b>	802.11g Tx mode
<b>Test Channel:</b>	Lowest channel	<b>Polarization:</b>	Vertical
<b>Test Voltage:</b>	AC 120/60Hz	<b>Environment:</b>	Temp: 24°C Huni: 57%

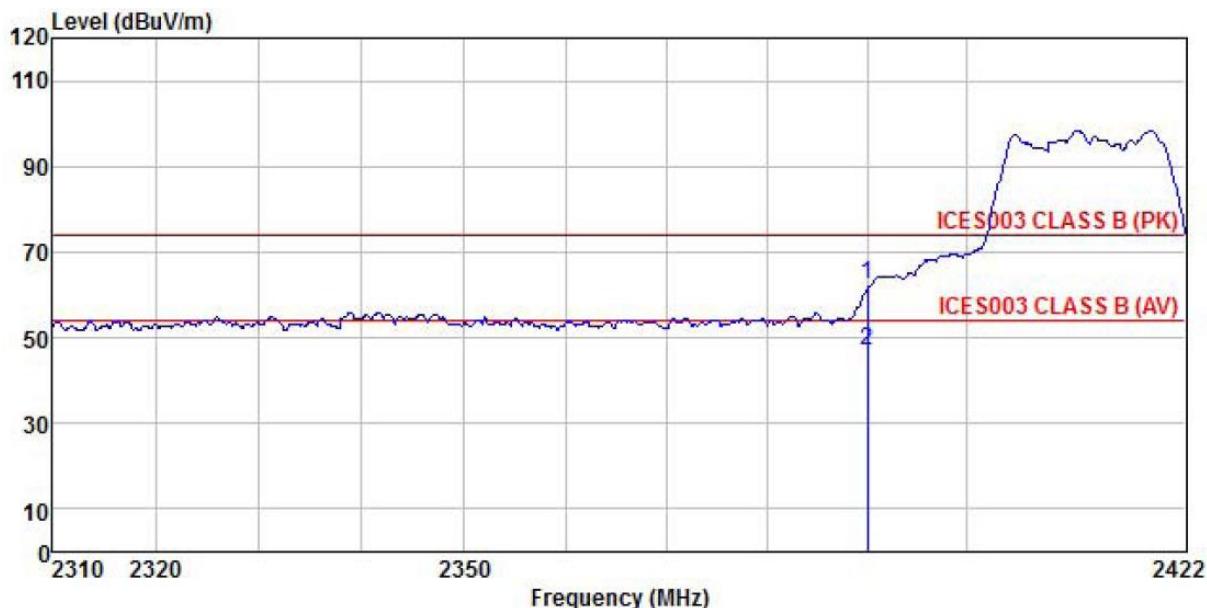


Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Line Level	Limit Line	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.000	30.74	27.07	4.69	0.00	62.50	74.00	-11.50 Peak
2	2390.000	15.39	27.07	4.69	0.00	47.15	54.00	-6.85 Average

## Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	Komikan	<b>Product Model:</b>	Komikan
<b>Test By:</b>	Mike	<b>Test mode:</b>	802.11g Tx mode
<b>Test Channel:</b>	Lowest channel	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	AC 120/60Hz	<b>Environment:</b>	Temp: 24°C Huni: 57%

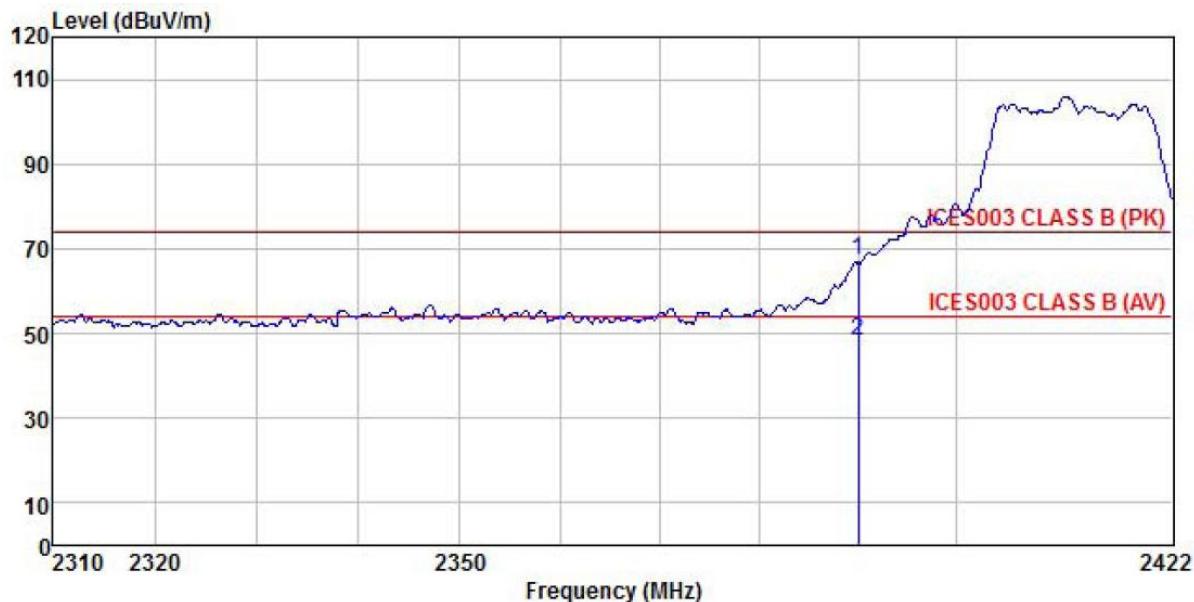


Freq	ReadAntenna		Cable Preamp		Limit Line	Over Limit	Remark
	Freq	Level Factor	Cable Loss	Preamp Factor			
	MHz	dBuV	dB/m	dB	dBuV/m	dBuV/m	dB
1	2390.000	35.36	27.08	4.69	0.00	67.13	74.00
2	2390.000	16.59	27.08	4.69	0.00	48.36	54.00
							-6.87 Peak
							-5.64 Average

**Remark:**

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	Komikan	<b>Product Model:</b>	Komikan
<b>Test By:</b>	Mike	<b>Test mode:</b>	802.11g Tx mode
<b>Test Channel:</b>	Highest channel	<b>Polarization:</b>	Vertical
<b>Test Voltage:</b>	AC 120/60Hz	<b>Environment:</b>	Temp: 24°C Huni: 57%

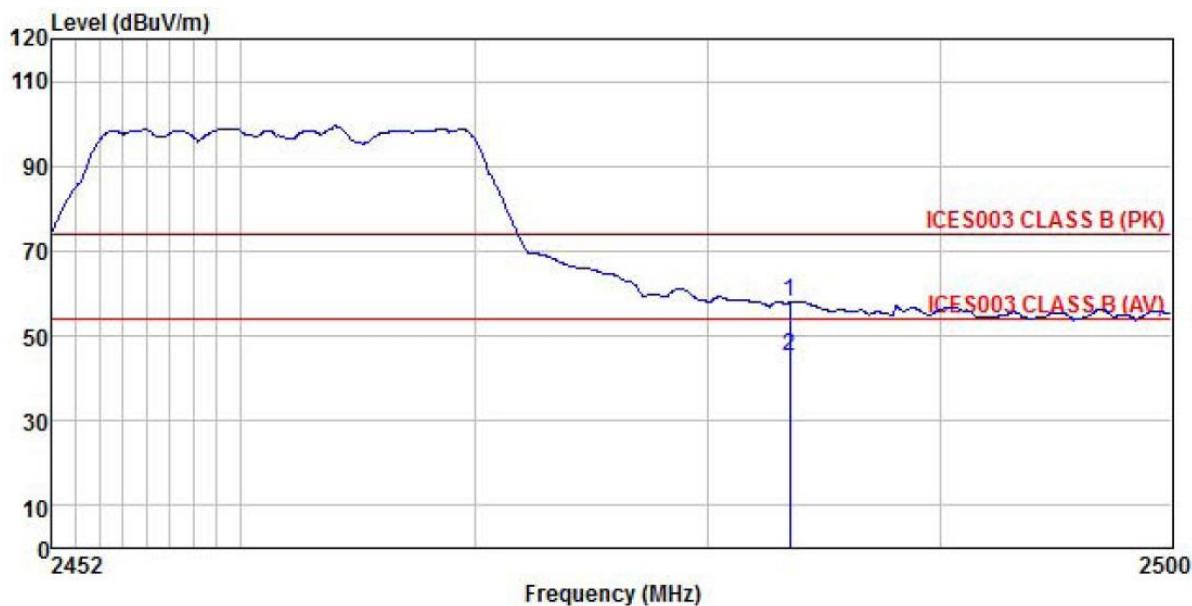


	Read	Antenna	Cable	Preamp		Limit	Over	
Freq	Level	Factor	Loss	Factor	Level	Line	Line	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	25.72	27.36	4.81	0.00	57.89	74.00	-16.11 Peak
2	2483.500	12.97	27.36	4.81	0.00	45.14	54.00	-8.86 Average

**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	Komikan	<b>Product Model:</b>	Komikan
<b>Test By:</b>	Mike	<b>Test mode:</b>	802.11g Tx mode
<b>Test Channel:</b>	Highest channel	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	AC 120/60Hz	<b>Environment:</b>	Temp: 24°C Huni: 57%

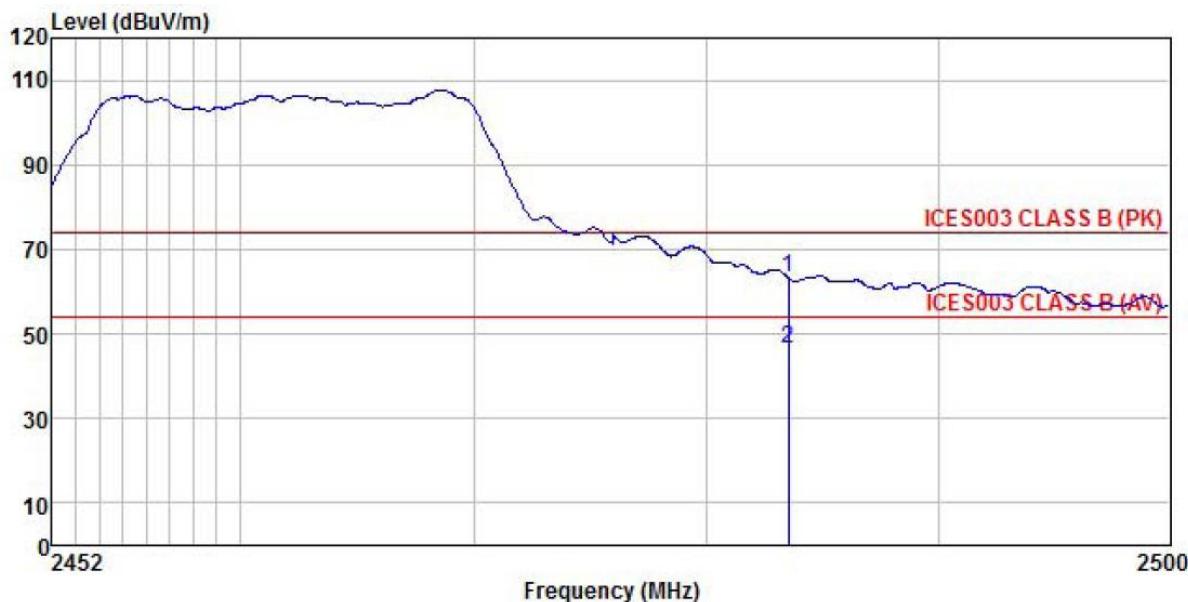


Freq	Read Antenna Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Line	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	31.04	27.35	4.81	0.00	63.20	74.00	-10.80 Peak
2	2483.500	14.25	27.35	4.81	0.00	46.41	54.00	-7.59 Average

**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

## 802.11n-HT20(MIMO):

<b>Product Name:</b>	Komikan	<b>Product Model:</b>	Komikan
<b>Test By:</b>	Mike	<b>Test mode:</b>	802.11n(HT20) Tx mode
<b>Test Channel:</b>	Lowest channel	<b>Polarization:</b>	Vertical
<b>Test Voltage:</b>	AC 120/60Hz	<b>Environment:</b>	Temp: 24°C Huni: 57%

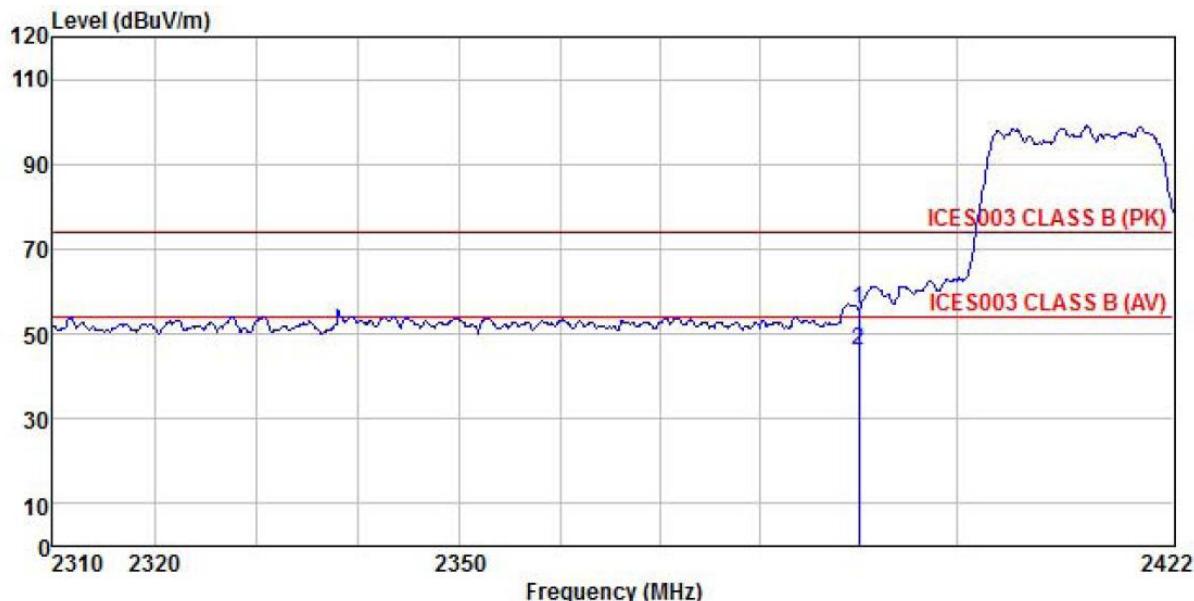


Freq MHz	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Line Level	Limit Line	Over Limit	Over Remark
	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1 2390.000	24.24	27.07	4.69	0.00	56.00	74.00	-18.00	Peak
2 2390.000	14.38	27.07	4.69	0.00	46.14	54.00	-7.86	Average

## Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	Komikan	<b>Product Model:</b>	Komikan
<b>Test By:</b>	Mike	<b>Test mode:</b>	802.11n(HT20) Tx mode
<b>Test Channel:</b>	Lowest channel	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	AC 120/60Hz	<b>Environment:</b>	Temp: 24°C Huni: 57%

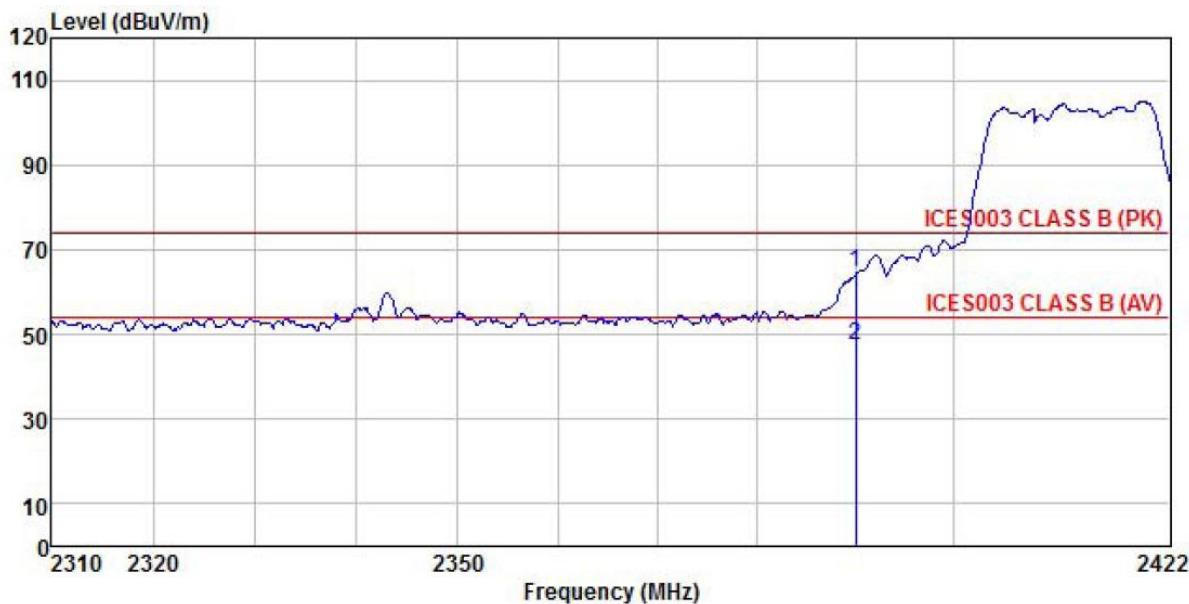


Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Over Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.000	32.70	27.08	4.69	0.00	64.47	74.00	-9.53 Peak
2	2390.000	15.48	27.08	4.69	0.00	47.25	54.00	-6.75 Average

**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	Komikan	<b>Product Model:</b>	Komikan
<b>Test By:</b>	Mike	<b>Test mode:</b>	802.11n(HT20) Tx mode
<b>Test Channel:</b>	Highest channel	<b>Polarization:</b>	Vertical
<b>Test Voltage:</b>	AC 120/60Hz	<b>Environment:</b>	Temp: 24°C Huni: 57%

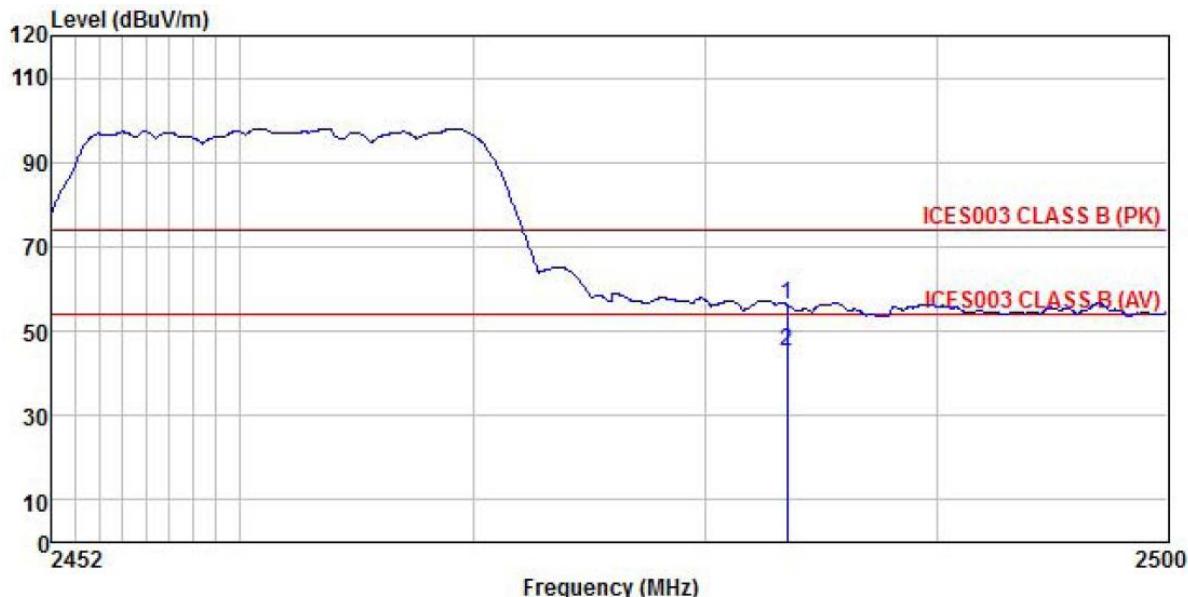


Freq	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Line Level	Limit Line	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	24.12	27.36	4.81	0.00	56.29	74.00	-17.71 Peak
2	2483.500	13.12	27.36	4.81	0.00	45.29	54.00	-8.71 Average

**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	Komikan	<b>Product Model:</b>	Komikan
<b>Test By:</b>	Mike	<b>Test mode:</b>	802.11n(HT20) Tx mode
<b>Test Channel:</b>	Highest channel	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	AC 120/60Hz	<b>Environment:</b>	Temp: 24°C Huni: 57%

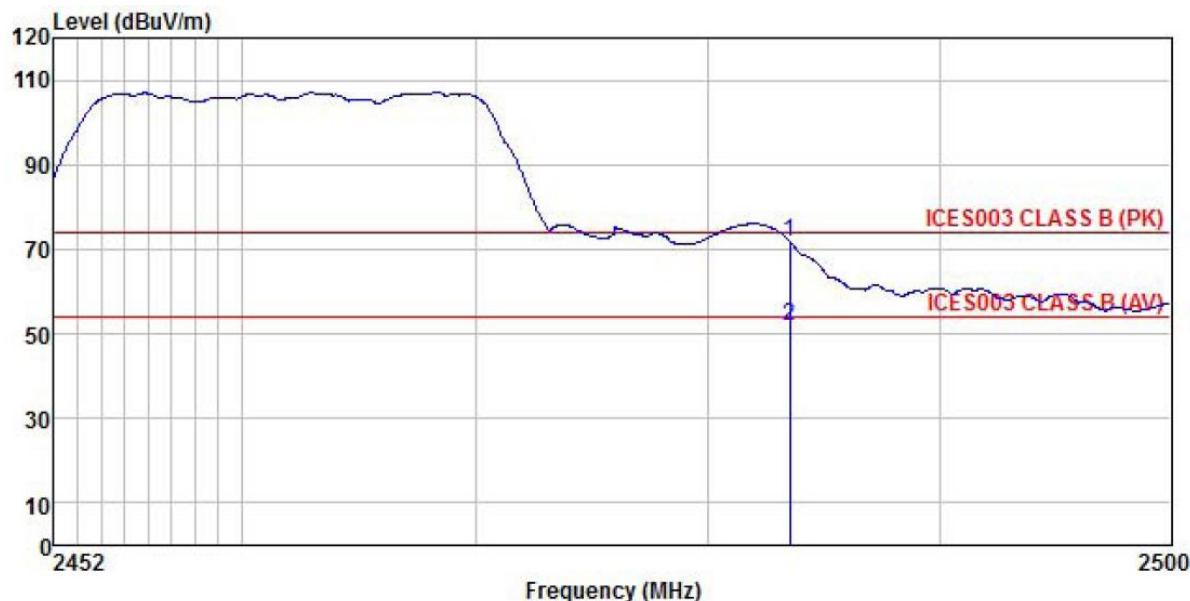


Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Line	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	dB	
1	2483.500	39.61	27.35	4.81	0.00	71.77	74.00	-2.23	Peak
2	2483.500	19.70	27.35	4.81	0.00	51.86	54.00	-2.14	Average

**Remark:**

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

## 802.11n-HT40(MIMO):

<b>Product Name:</b>	Komikan	<b>Product Model:</b>	Komikan
<b>Test By:</b>	Mike	<b>Test mode:</b>	802.11n(HT40) Tx mode
<b>Test Channel:</b>	Lowest channel	<b>Polarization:</b>	Vertical
<b>Test Voltage:</b>	AC 120/60Hz	<b>Environment:</b>	Temp: 24°C Huni: 57%

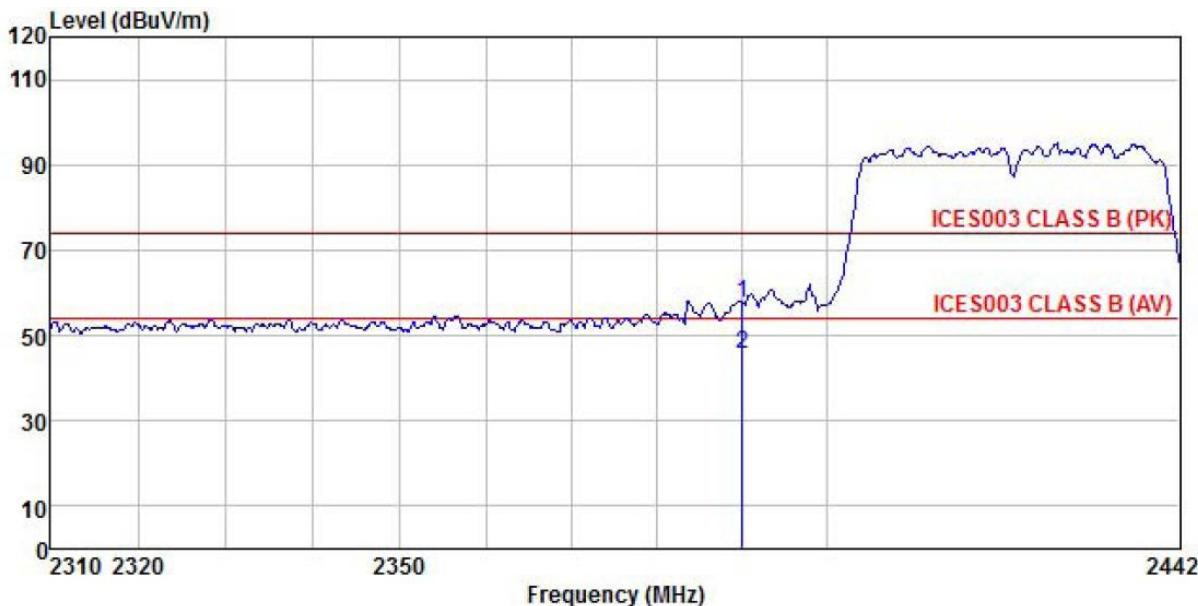


Freq	Read	Antenna	Cable	Preamp	Limit	Over	Remark	
	Freq	Level	Factor	Loss				
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	2390.000	25.71	27.07	4.69	0.00	57.47	74.00	-16.53 Peak
2	2390.000	14.03	27.07	4.69	0.00	45.79	54.00	-8.21 Average

## Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	Komikan	<b>Product Model:</b>	Komikan
<b>Test By:</b>	Mike	<b>Test mode:</b>	802.11n(HT40) Tx mode
<b>Test Channel:</b>	Lowest channel	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	AC 120/60Hz	<b>Environment:</b>	Temp: 24°C Huni: 57%

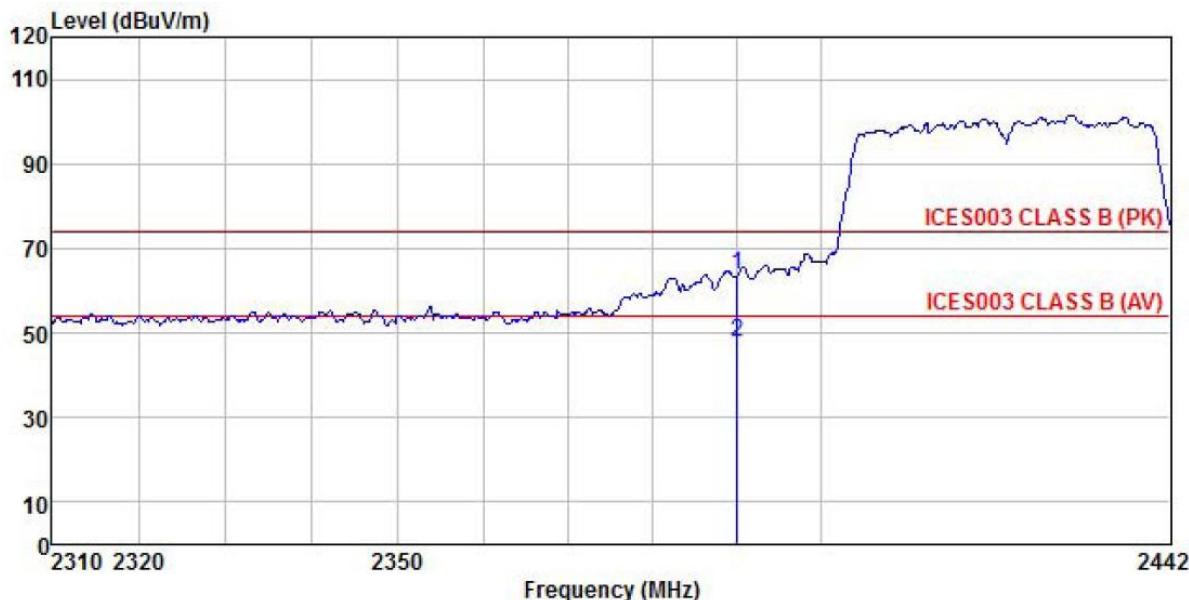


Freq MHz	Read Antenna Level Factor		Cable Loss Factor		Preamp Level dB	Limit Line dBuV/m	Over Line dBuV/m	Over Limit dB	Remark
	MHz	dBuV	dB/m	dB					
1	2390.000	32.17	27.08	4.69	0.00	63.94	74.00	-10.06	Peak
2	2390.000	15.97	27.08	4.69	0.00	47.74	54.00	-6.26	Average

**Remark:**

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	Komikan	<b>Product Model:</b>	Komikan
<b>Test By:</b>	Mike	<b>Test mode:</b>	802.11n(HT40) Tx mode
<b>Test Channel:</b>	Highest channel	<b>Polarization:</b>	Vertical
<b>Test Voltage:</b>	AC 120/60Hz	<b>Environment:</b>	Temp: 24°C Huni: 57%

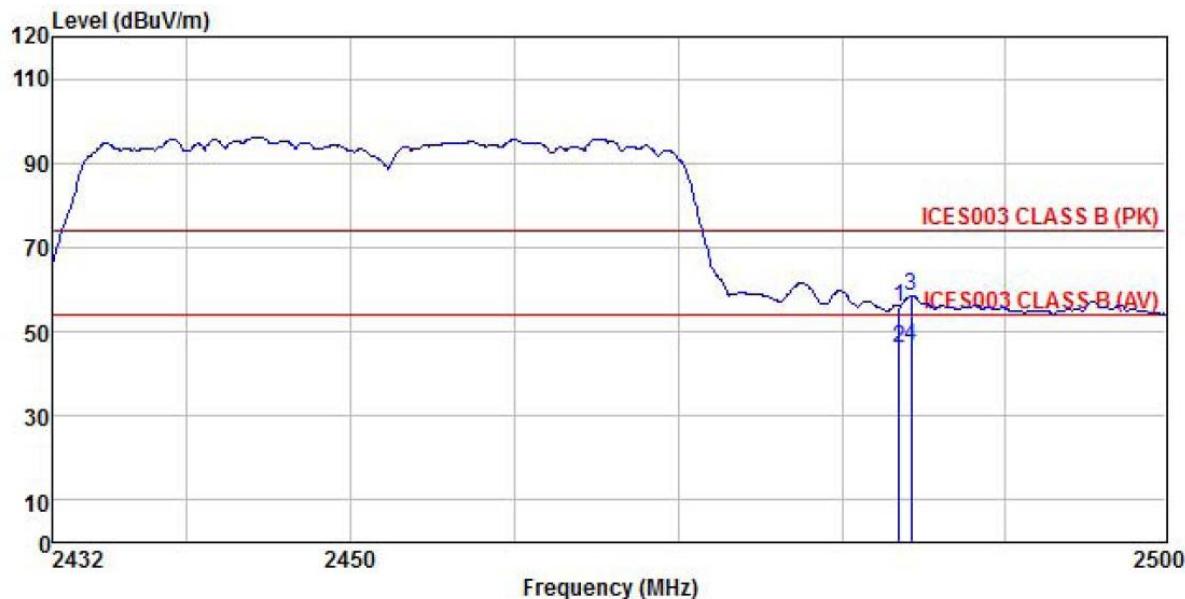


Freq MHz	Read Level dBuV	Antenna Factor dB/m	Cable Loss Factor dB	Preamp Level dB	Limit Line dBuV/m	Over Line dBuV/m	Over Limit dB	Remark
1 2483.500	23.83	27.36	4.81	0.00	56.00	74.00	-18.00	Peak
2 2483.500	14.03	27.36	4.81	0.00	46.20	54.00	-7.80	Average
3 2484.262	26.26	27.36	4.81	0.00	58.43	74.00	-15.57	Peak
4 2484.262	14.52	27.36	4.81	0.00	46.69	54.00	-7.31	Average

**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	Komikan	<b>Product Model:</b>	Komikan
<b>Test By:</b>	Mike	<b>Test mode:</b>	802.11n(HT40) Tx mode
<b>Test Channel:</b>	Highest channel	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	AC 120/60Hz	<b>Environment:</b>	Temp: 24°C Huni: 57%

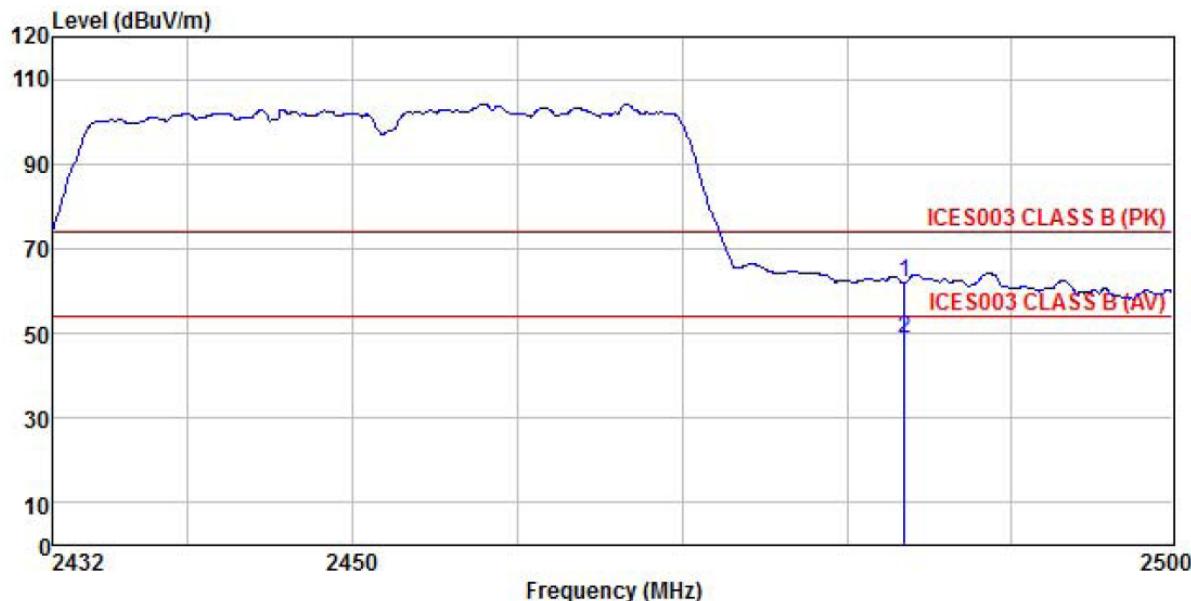


Freq	Read	Antenna	Cable	Preamp	Limit	Over	Remark	
	Freq	Level	Factor	Loss				
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	2483.500	29.65	27.35	4.81	0.00	61.81	74.00	-12.19 Peak
2	2483.500	16.61	27.35	4.81	0.00	48.77	54.00	-5.23 Average

**Remark:**

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

**Whip Antenna:****TX0:****802.11b mode:**

<b>Product Name:</b>	Komikan	<b>Product Model:</b>	Komikan
<b>Test By:</b>	Mike	<b>Test mode:</b>	802.11b Tx mode
<b>Test Channel:</b>	Lowest channel	<b>Polarization:</b>	Vertical
<b>Test Voltage:</b>	AC 120/60Hz	<b>Environment:</b>	Temp: 24°C Huni: 57%

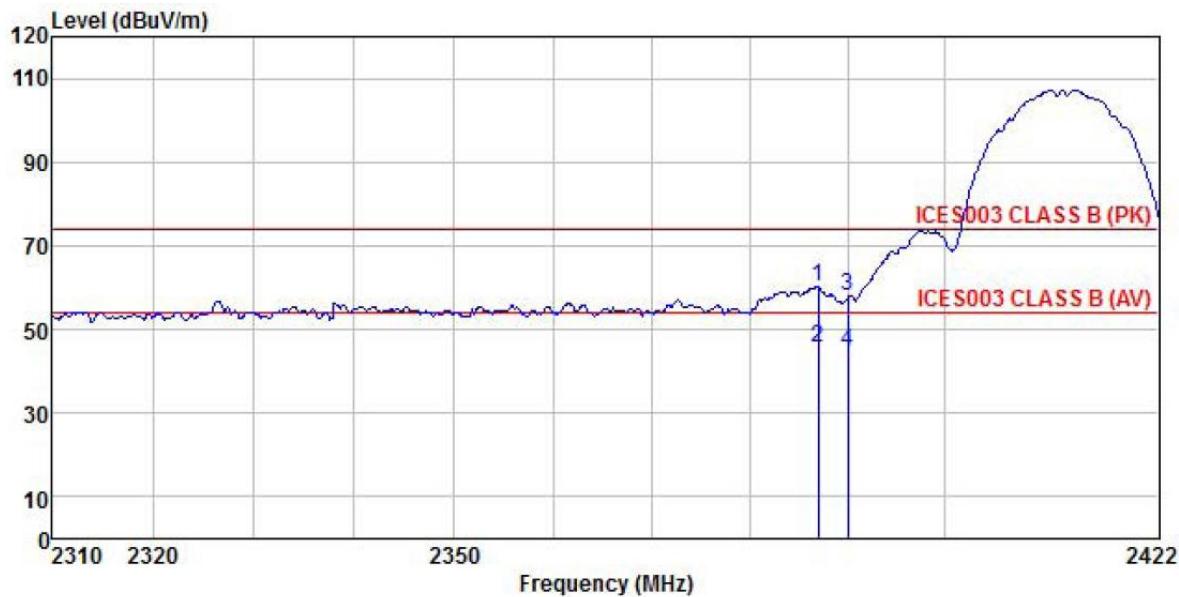


Freq MHz	Read MHz	Antenna Level dBuV	Cable Factor dB	Preamp Loss Factor dB	Line Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Remark
	Freq MHz	Antenna Level dBuV/m	Cable Loss dB	Preamp Level dBuV/m	Line Level dBuV/m	Line Level dBuV/m	Over Limit dB	
1	2386.937	28.55	27.07	4.69	0.00	60.31	74.00	-13.69 Peak
2	2386.937	13.65	27.07	4.69	0.00	45.41	54.00	-8.59 Average
3	2390.000	26.07	27.07	4.69	0.00	57.83	74.00	-16.17 Peak
4	2390.000	13.10	27.07	4.69	0.00	44.86	54.00	-9.14 Average

**Remark:**

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	Komikan	<b>Product Model:</b>	Komikan
<b>Test By:</b>	Mike	<b>Test mode:</b>	802.11b Tx mode
<b>Test Channel:</b>	Lowest channel	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	AC 120/60Hz	<b>Environment:</b>	Temp: 24°C Huni: 57%

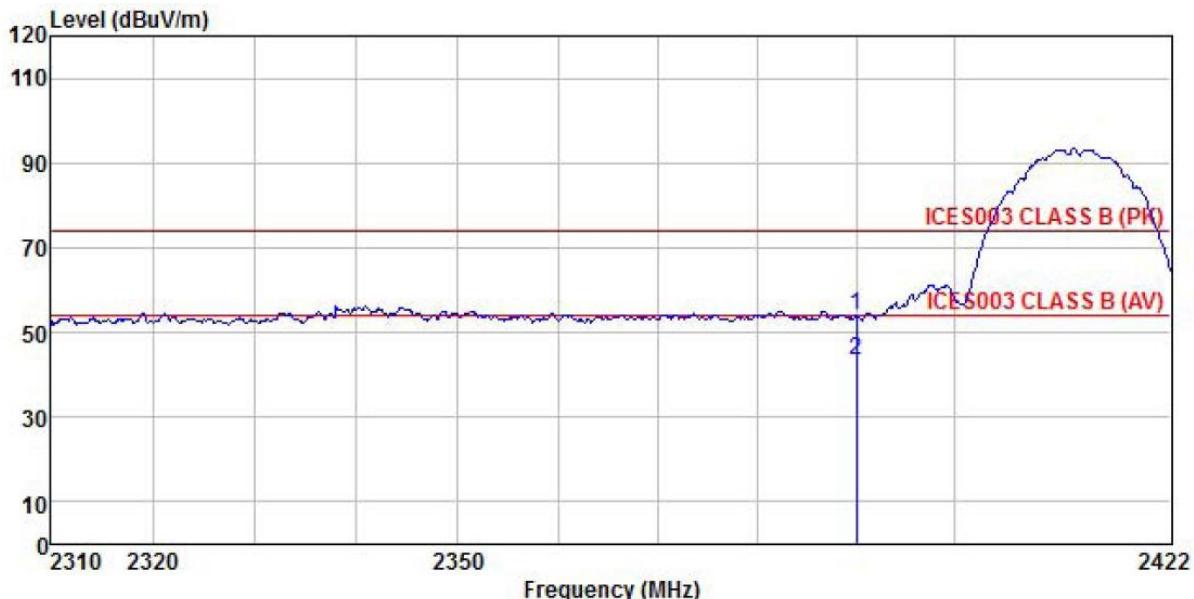


Freq	ReadAntenna Level	Cable Loss	Preamp Factor	Limit Level	Line Limit	Over Line Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	2390.000	22.18	27.08	4.69	0.00	53.95	74.00 -20.05 Peak
2	2390.000	11.77	27.08	4.69	0.00	43.54	54.00 -10.46 Average

**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	Komikan	<b>Product Model:</b>	Komikan
<b>Test By:</b>	Mike	<b>Test mode:</b>	802.11b Tx mode
<b>Test Channel:</b>	Highest channel	<b>Polarization:</b>	Vertical
<b>Test Voltage:</b>	AC 120/60Hz	<b>Environment:</b>	Temp: 24°C Huni: 57%

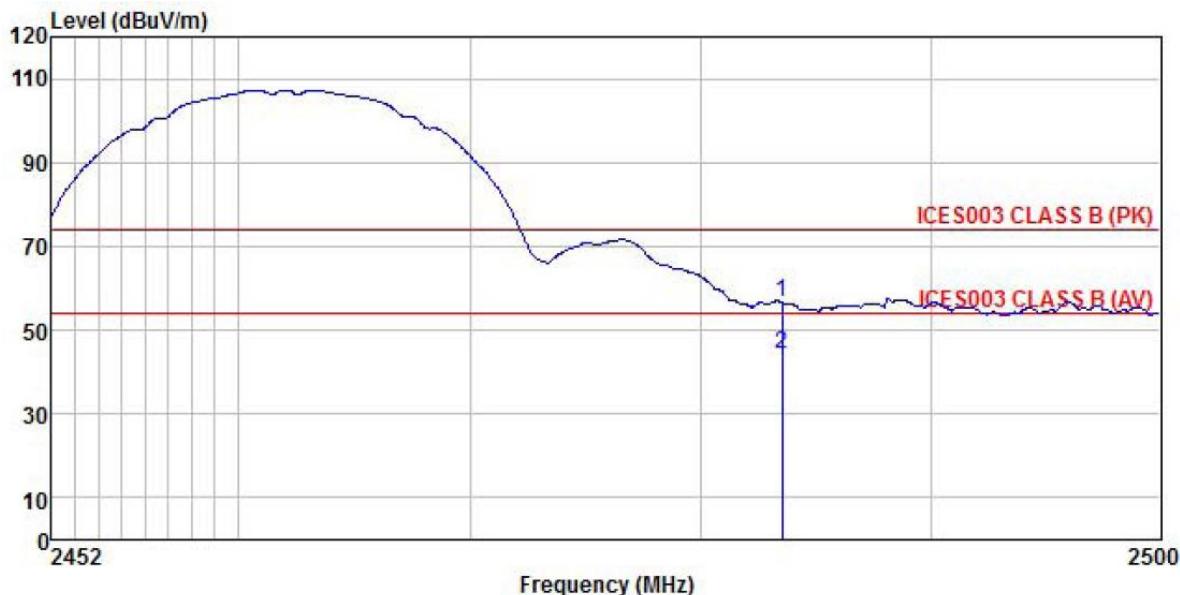


Freq	ReadAntenna	Cable	Preamp	Limit	Over	Remark	
	Freq	Level	Factor				
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	2483.500	24.32	27.36	4.81	0.00	56.49	74.00 -17.51 Peak
2	2483.500	12.14	27.36	4.81	0.00	44.31	54.00 -9.69 Average

**Remark:**

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	Komikan	<b>Product Model:</b>	Komikan
<b>Test By:</b>	Mike	<b>Test mode:</b>	802.11b Tx mode
<b>Test Channel:</b>	Highest channel	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	AC 120/60Hz	<b>Environment:</b>	Temp: 24°C Huni: 57%

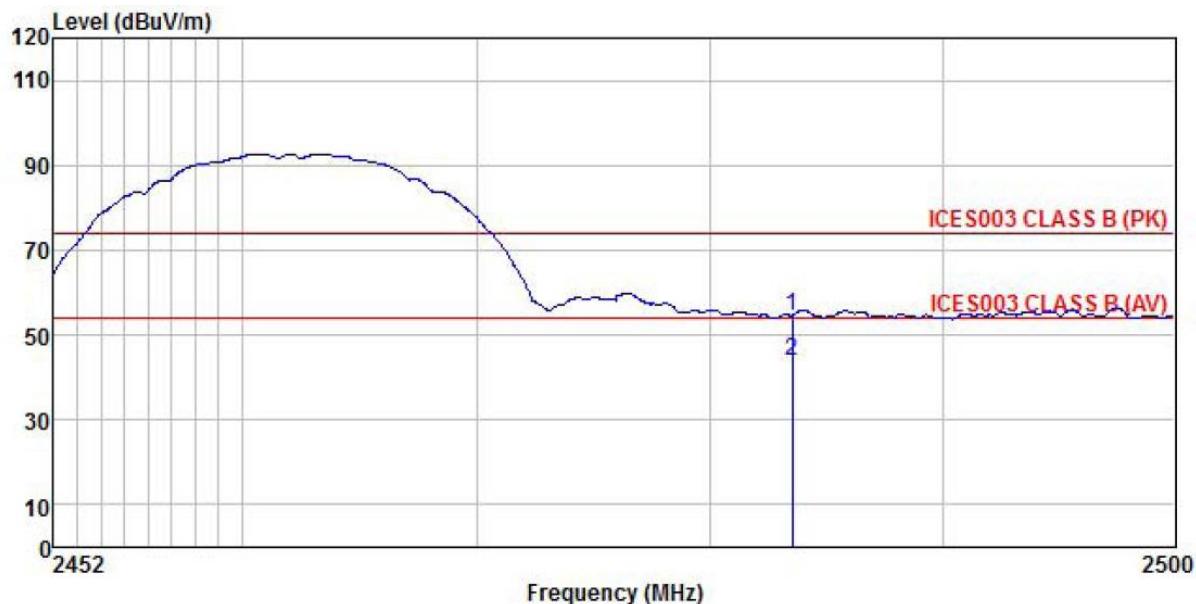

Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Line Level	Limit Line	Over Line Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	22.33	27.35	4.81	0.00	54.49	74.00	-19.51 Peak
2	2483.500	11.79	27.35	4.81	0.00	43.95	54.00	-10.05 Average


**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

TX1:

802.11b mode:

<b>Product Name:</b>	Komikan	<b>Product Model:</b>	Komikan
<b>Test By:</b>	Mike	<b>Test mode:</b>	802.11b Tx mode
<b>Test Channel:</b>	Lowest channel	<b>Polarization:</b>	Vertical
<b>Test Voltage:</b>	AC 120/60Hz	<b>Environment:</b>	Temp: 24°C Huni: 57%

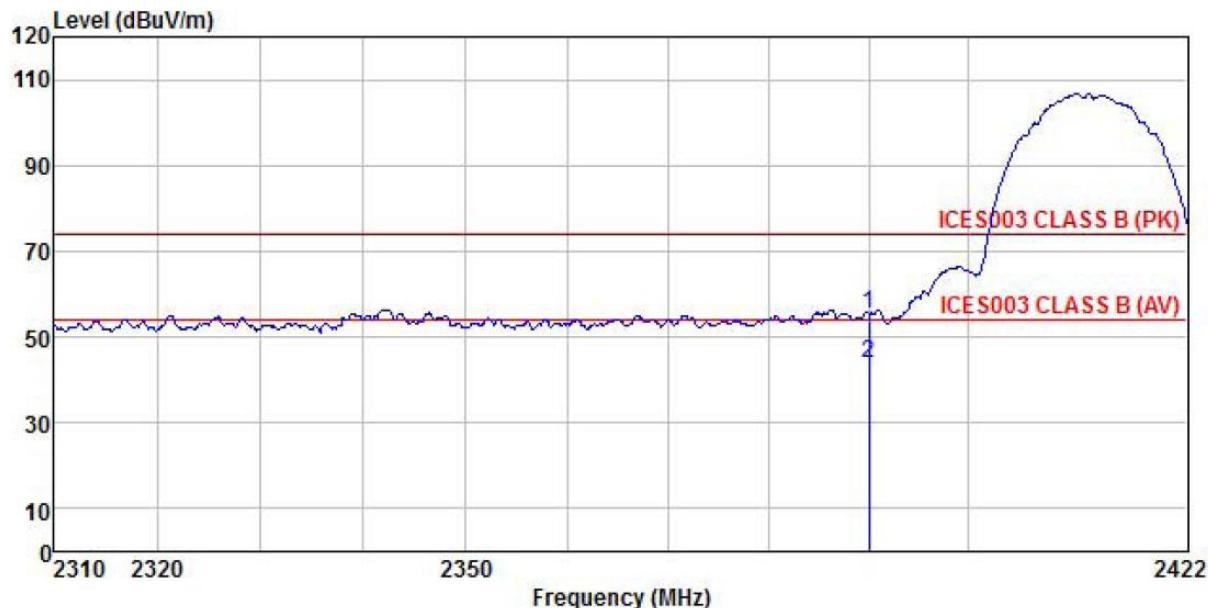


Freq MHz	Read Level dBuV	Antenna Factor	Cable Loss Factor	Preamp Level dB	Limit Line dBuV/m	Over Line dBuV/m	Over Line dB	Remark
	MHz	dBuV	dB/m	dB	dBuV/m	dBuV/m	dB	
1 2390.000	23.71	27.07	4.69	0.00	55.47	74.00	-18.53	Peak
2 2390.000	12.16	27.07	4.69	0.00	43.92	54.00	-10.08	Average

## Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	Komikan	<b>Product Model:</b>	Komikan
<b>Test By:</b>	Mike	<b>Test mode:</b>	802.11b Tx mode
<b>Test Channel:</b>	Lowest channel	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	AC 120/60Hz	<b>Environment:</b>	Temp: 24°C Huni: 57%

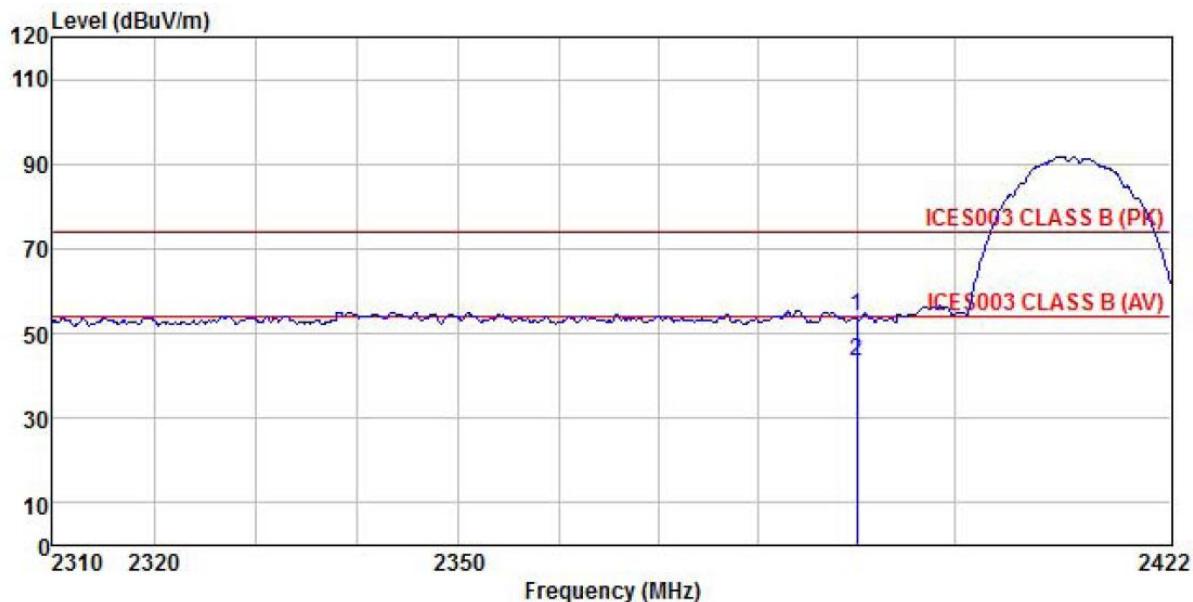


Freq	Read	Antenna	Cable	Preamp	Limit	Over	Line	Limit	Remark
	Freq	Level	Factor	Loss					
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.000	22.38	27.08	4.69	0.00	54.15	74.00	-19.85	Peak
2	2390.000	11.67	27.08	4.69	0.00	43.44	54.00	-10.56	Average

**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	Komikan	<b>Product Model:</b>	Komikan
<b>Test By:</b>	Mike	<b>Test mode:</b>	802.11b Tx mode
<b>Test Channel:</b>	Highest channel	<b>Polarization:</b>	Vertical
<b>Test Voltage:</b>	AC 120/60Hz	<b>Environment:</b>	Temp: 24°C Huni: 57%

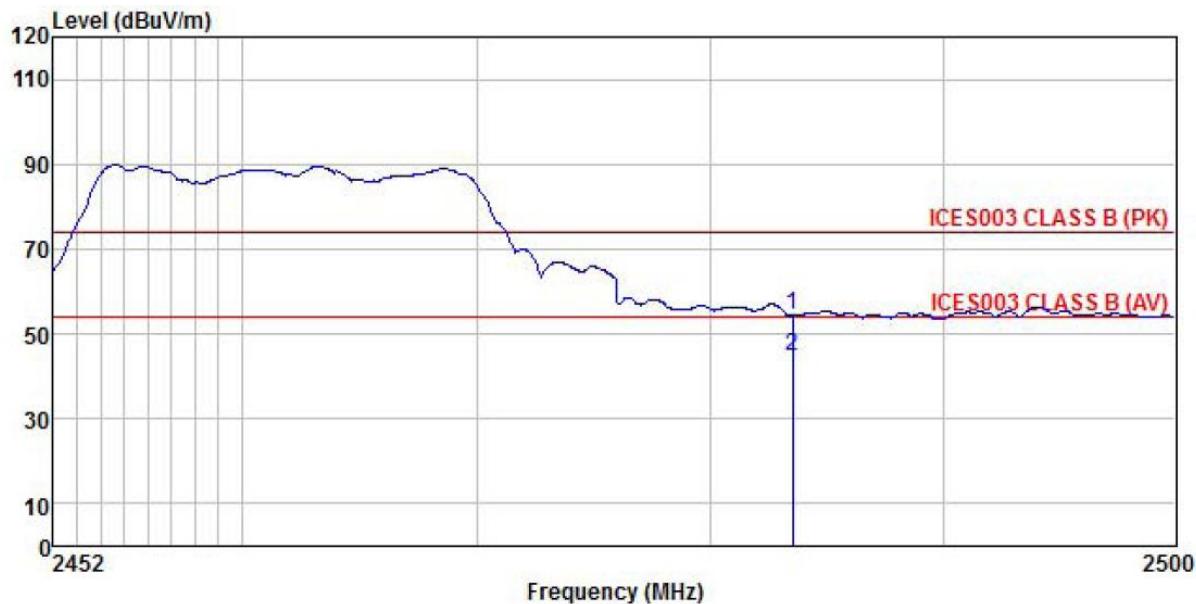


Freq MHz	Read Antenna Level dBrV	Antenna Factor	Cable Loss Factor	Preamp dB	Line Level dB	Limit Line dBuV/m	Over Line dBuV/m	Over Line dB	Remark
	MHz	dBrV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	22.26	27.35	4.81	0.00	54.42	74.00	-19.58	Peak
2	2483.500	12.56	27.35	4.81	0.00	44.72	54.00	-9.28	Average

**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	Komikan	<b>Product Model:</b>	Komikan
<b>Test By:</b>	Mike	<b>Test mode:</b>	802.11b Tx mode
<b>Test Channel:</b>	Highest channel	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	AC 120/60Hz	<b>Environment:</b>	Temp: 24°C Huni: 57%

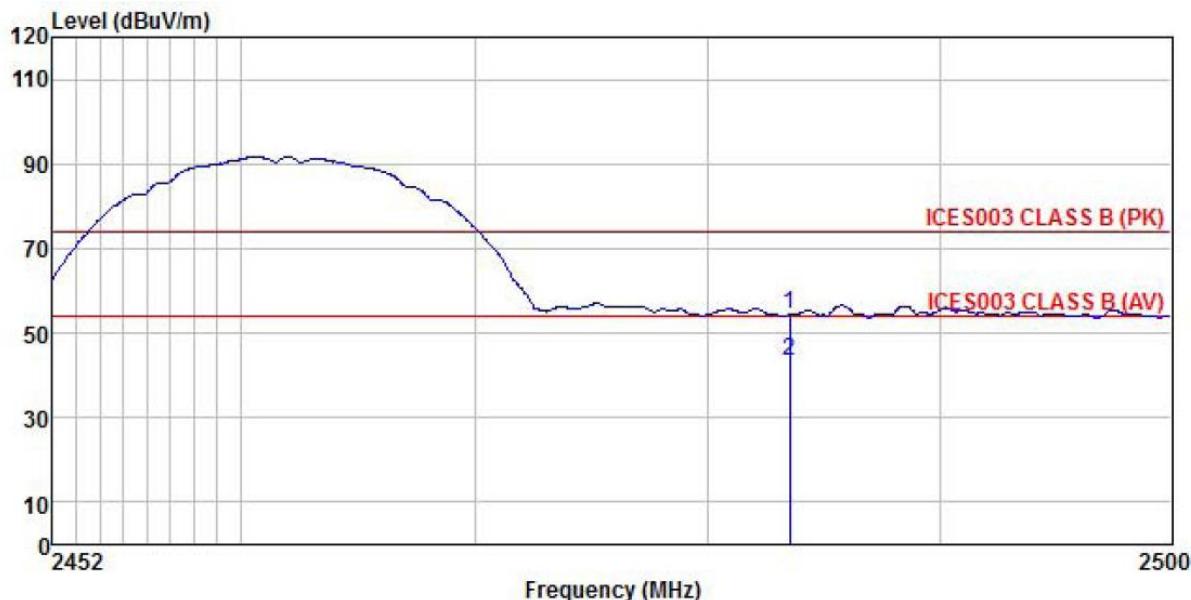


Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Line Limit	Over Line Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	2483.500	22.23	27.35	4.81	0.00	54.39	74.00 -19.61 Peak
2	2483.500	11.26	27.35	4.81	0.00	43.42	54.00 -10.58 Average

**Remark:**


1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

TX0:

802.11g mode:

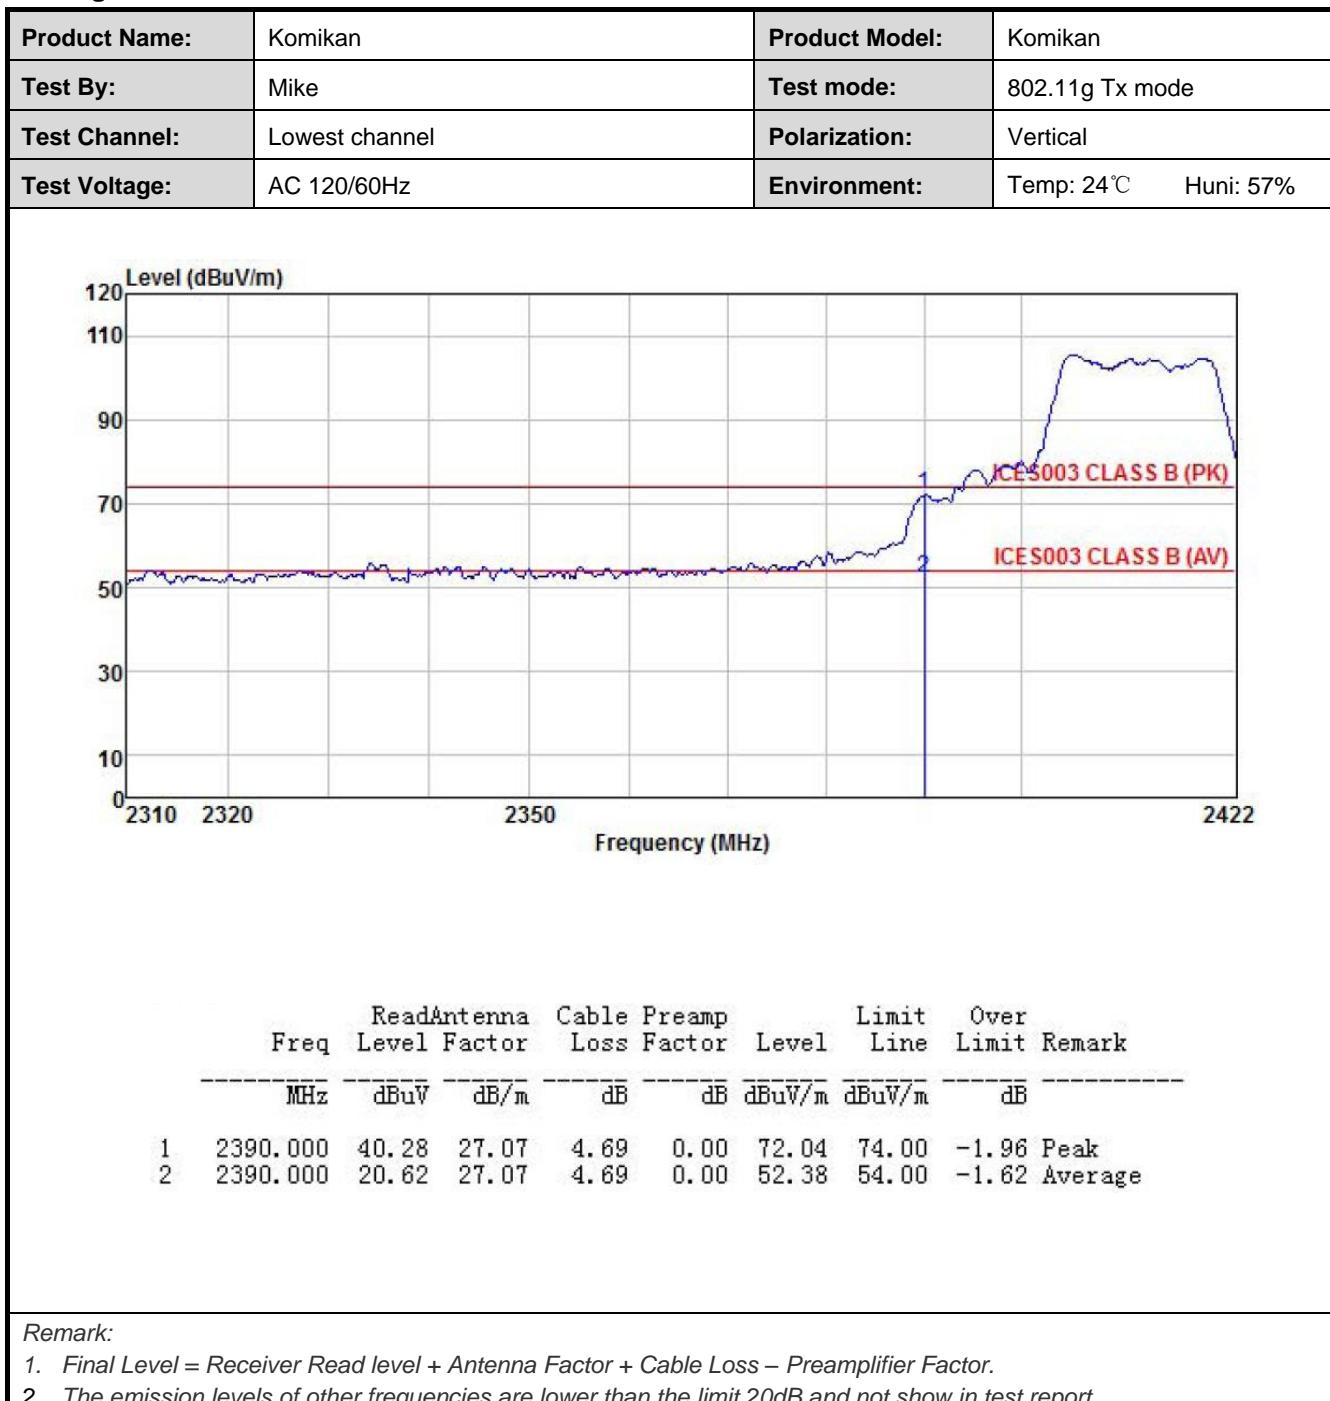

<b>Product Name:</b>	Komikan	<b>Product Model:</b>	Komikan
<b>Test By:</b>	Mike	<b>Test mode:</b>	802.11g Tx mode
<b>Test Channel:</b>	Lowest channel	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	AC 120/60Hz	<b>Environment:</b>	Temp: 24°C Huni: 57%

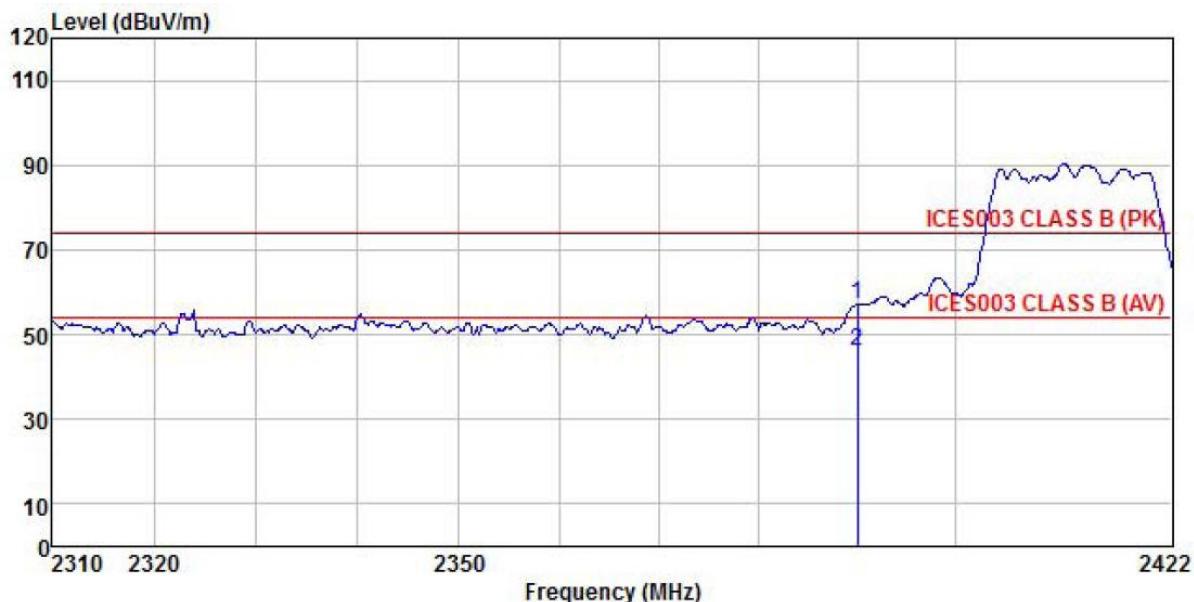


Freq	Read	Antenna	Cable	Preamp	Limit	Over	Remark	
	Freq	Level	Factor	Loss				
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	2390.000	25.39	27.08	4.69	0.00	57.16	74.00	-16.84 Peak
2	2390.000	14.06	27.08	4.69	0.00	45.83	54.00	-8.17 Average

**Remark:**

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	Komikan	<b>Product Model:</b>	Komikan
<b>Test By:</b>	Mike	<b>Test mode:</b>	802.11g Tx mode
<b>Test Channel:</b>	Highest channel	<b>Polarization:</b>	Vertical
<b>Test Voltage:</b>	AC 120/60Hz	<b>Environment:</b>	Temp: 24°C Huni: 57%

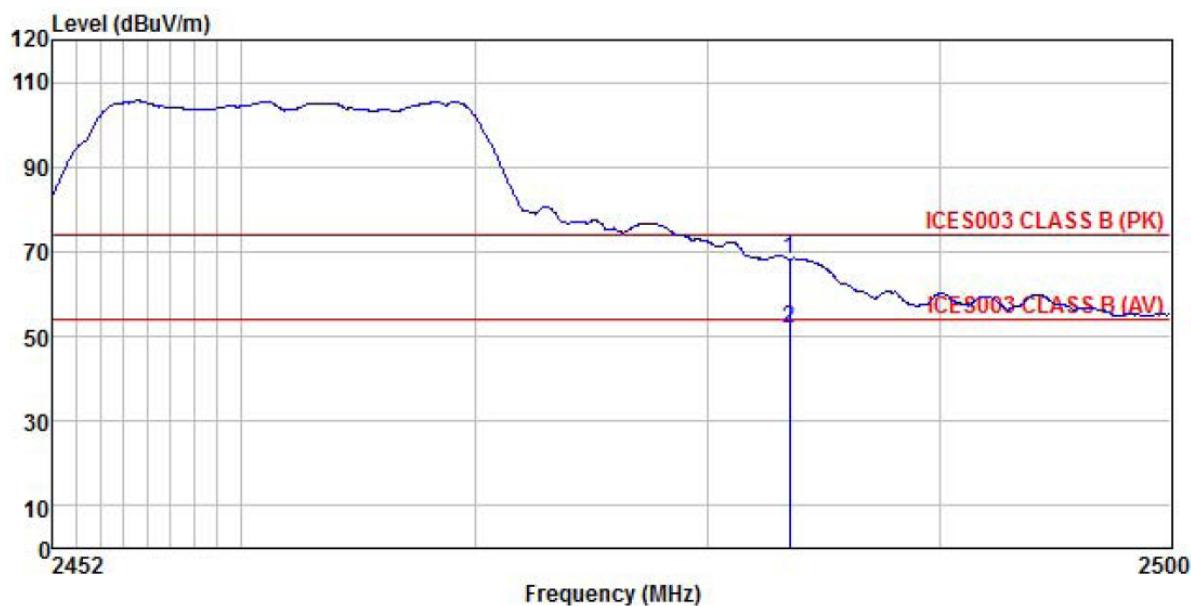


Freq MHz	Read Level dBuV	Antenna Factor dB/m	Cable Loss Factor dB	Preamp Level dB	Line Limit dBuV/m	Over Line Limit dB	Over Line Limit Remark
1 2483.500	36.20	27.36	4.81	0.00	68.37	74.00	-5.63 Peak
2 2483.500	19.55	27.36	4.81	0.00	51.72	54.00	-2.28 Average

**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	Komikan	<b>Product Model:</b>	Komikan
<b>Test By:</b>	Mike	<b>Test mode:</b>	802.11g Tx mode
<b>Test Channel:</b>	Highest channel	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	AC 120/60Hz	<b>Environment:</b>	Temp: 24°C Huni: 57%

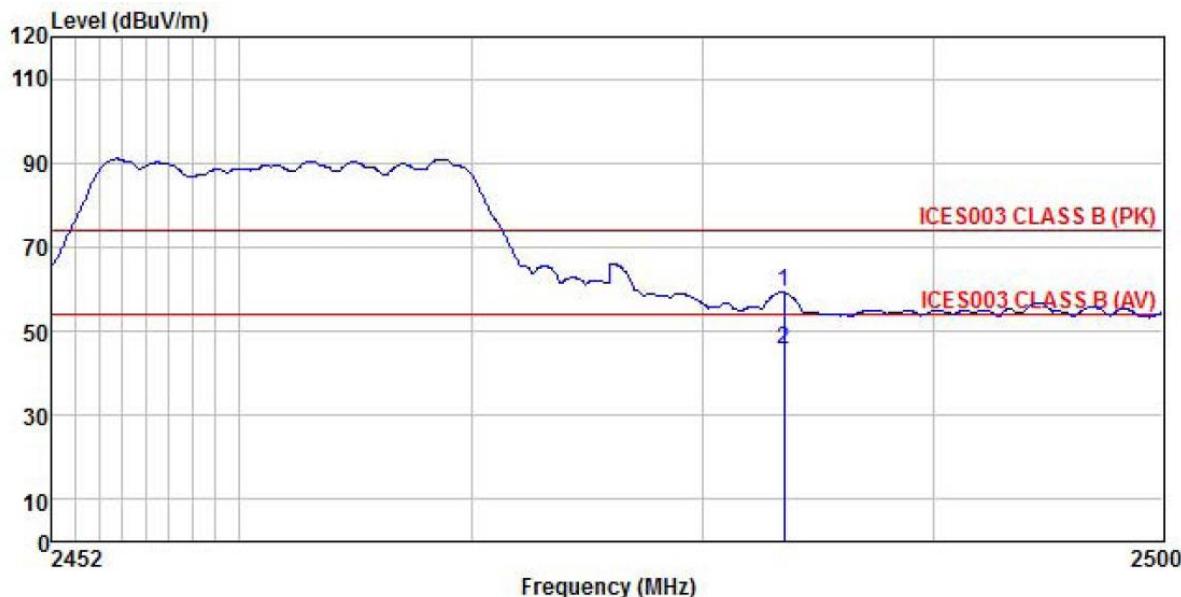

Freq	Read Antenna Level	Antenna Factor	Cable Loss	Preamp Factor	Limit Level	Line Limit	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	26.99	27.35	4.81	0.00	59.15	74.00	-14.85 Peak
2	2483.500	13.60	27.35	4.81	0.00	45.76	54.00	-8.24 Average


**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

TX1:

802.11g mode:

<b>Product Name:</b>	Komikan	<b>Product Model:</b>	Komikan
<b>Test By:</b>	Mike	<b>Test mode:</b>	802.11g Tx mode
<b>Test Channel:</b>	Lowest channel	<b>Polarization:</b>	Vertical
<b>Test Voltage:</b>	AC 120/60Hz	<b>Environment:</b>	Temp: 24°C Huni: 57%

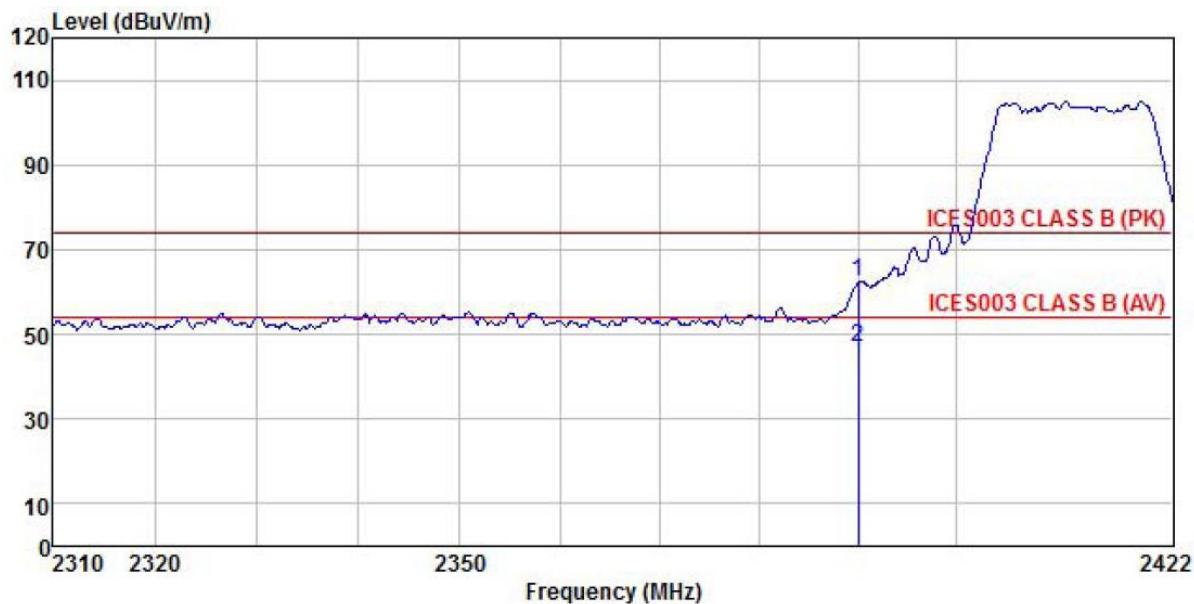


Freq	Read Antenna Level	Antenna Factor	Cable Loss	Preamp Factor	Line Level	Limit Line	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.000	30.67	27.07	4.69	0.00	62.43	74.00	-11.57 Peak
2	2390.000	15.13	27.07	4.69	0.00	46.89	54.00	-7.11 Average

## Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	Komikan	<b>Product Model:</b>	Komikan
<b>Test By:</b>	Mike	<b>Test mode:</b>	802.11g Tx mode
<b>Test Channel:</b>	Lowest channel	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	AC 120/60Hz	<b>Environment:</b>	Temp: 24°C Huni: 57%

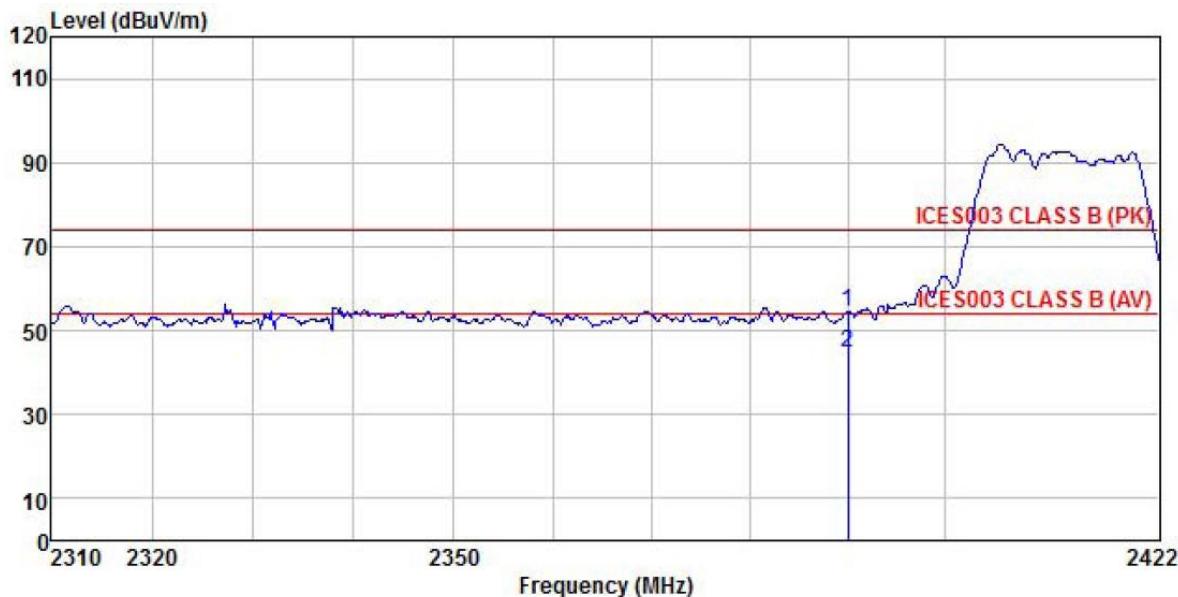


Freq	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.000	22.74	27.08	4.69	0.00	54.51	74.00	-19.49 Peak
2	2390.000	12.94	27.08	4.69	0.00	44.71	54.00	-9.29 Average

**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	Komikan	<b>Product Model:</b>	Komikan
<b>Test By:</b>	Mike	<b>Test mode:</b>	802.11g Tx mode
<b>Test Channel:</b>	Highest channel	<b>Polarization:</b>	Vertical
<b>Test Voltage:</b>	AC 120/60Hz	<b>Environment:</b>	Temp: 24°C Huni: 57%

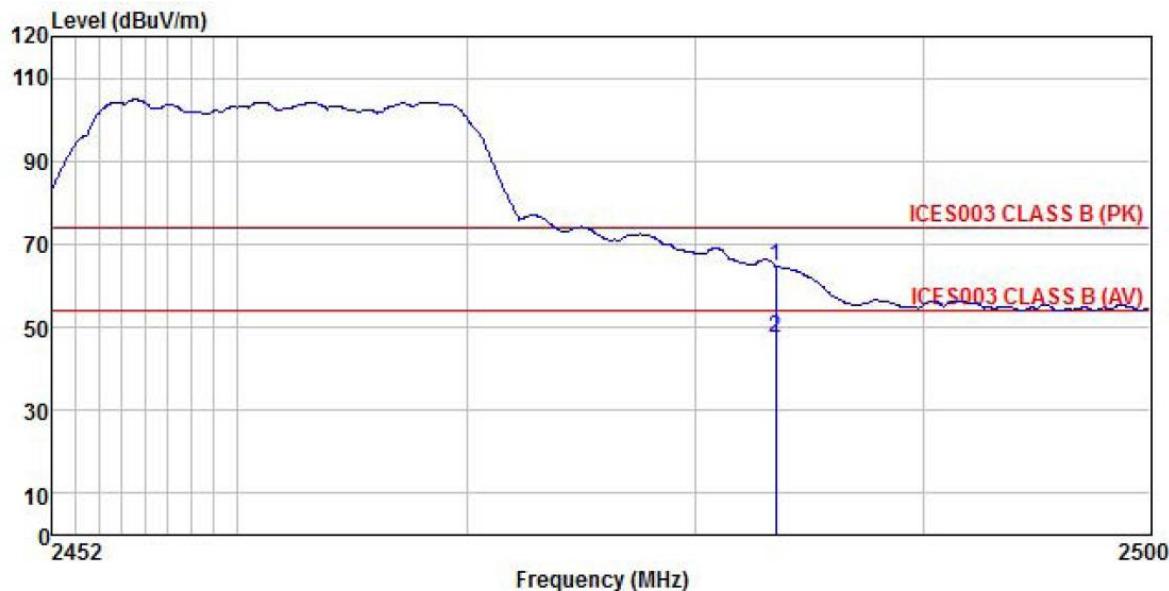


	ReadAntenna Freq	Cable Level Factor	Preamp Loss Factor	Limit Level	Line dBuV/m	Over Line dBuV/m	Over Line dB	Over Line Remark
	MHz	dBuV	dB/m	dB	dBuV/m	dBuV/m	dB	
1	2483.500	32.28	27.36	4.81	0.00	64.45	74.00	-9.55 Peak
2	2483.500	15.28	27.36	4.81	0.00	47.45	54.00	-6.55 Average

**Remark:**

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	Komikan	<b>Product Model:</b>	Komikan
<b>Test By:</b>	Mike	<b>Test mode:</b>	802.11g Tx mode
<b>Test Channel:</b>	Highest channel	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	AC 120/60Hz	<b>Environment:</b>	Temp: 24°C Huni: 57%

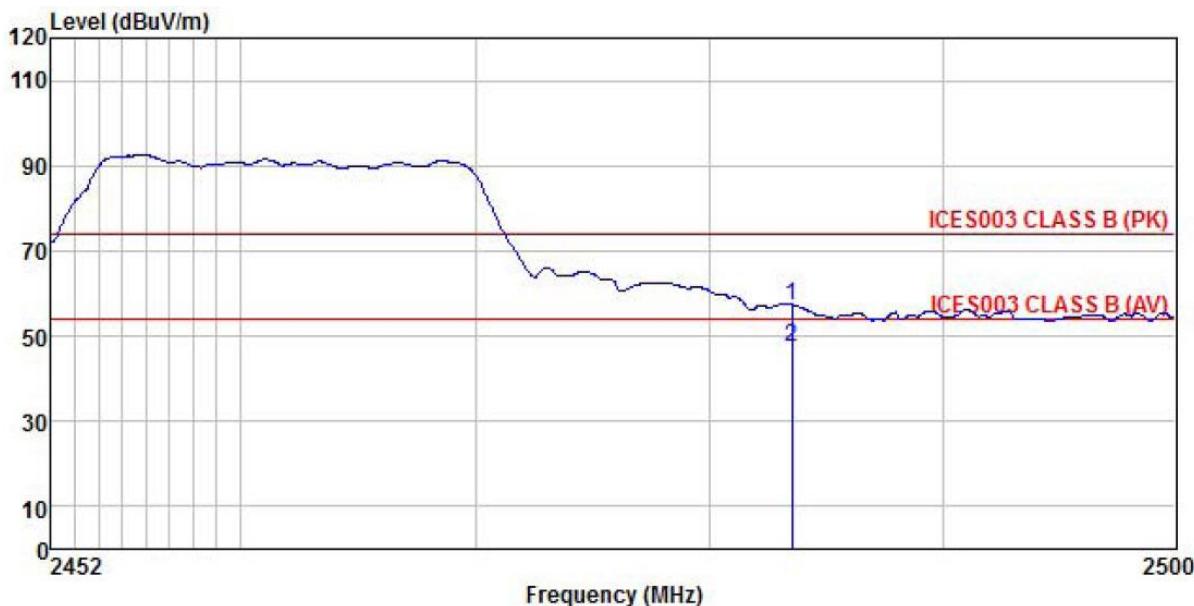


Freq	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	23.47	27.35	4.81	0.00	57.33	74.00	-16.67 Peak
2	2483.500	13.67	27.35	4.81	0.00	47.53	54.00	-6.47 Average

**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

## 802.11n-HT20(MIMO):

<b>Product Name:</b>	Komikan	<b>Product Model:</b>	Komikan
<b>Test By:</b>	Mike	<b>Test mode:</b>	802.11n(HT20) Tx mode
<b>Test Channel:</b>	Lowest channel	<b>Polarization:</b>	Vertical
<b>Test Voltage:</b>	AC 120/60Hz	<b>Environment:</b>	Temp: 24°C Huni: 57%

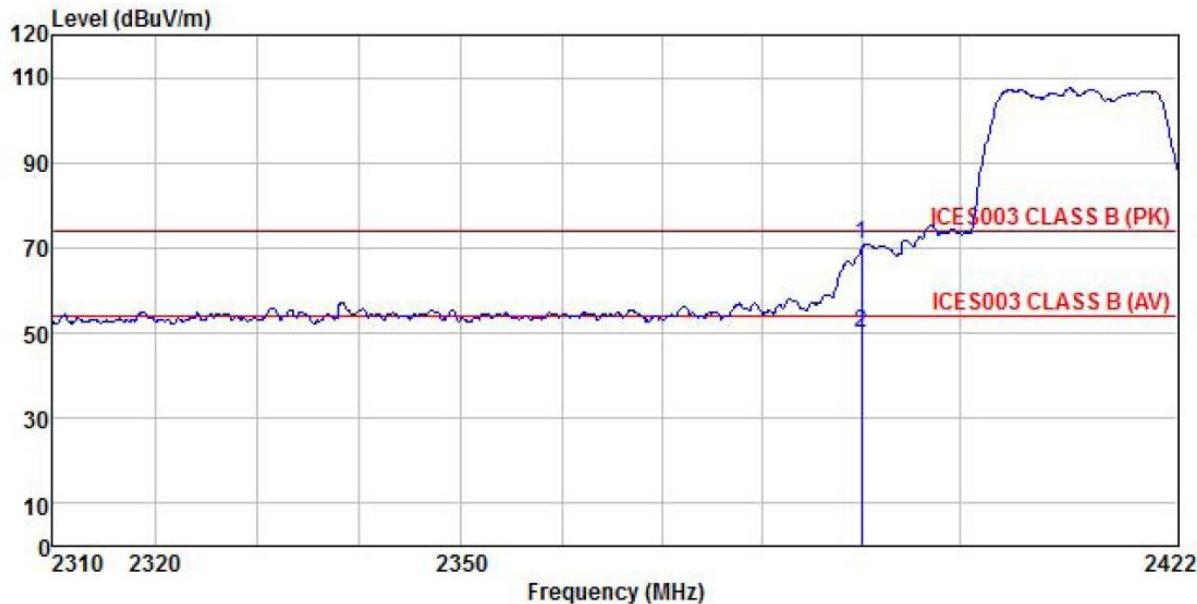


Freq	Read Level MHz	Antenna Factor	Cable Loss dB	Preamp Factor	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Remark
1	2390.000	39.13	27.07	4.69	0.00	70.89	74.00	-3.11 Peak
2	2390.000	18.33	27.07	4.69	0.00	50.09	54.00	-3.91 Average

## Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	Komikan	<b>Product Model:</b>	Komikan
<b>Test By:</b>	Mike	<b>Test mode:</b>	802.11n(HT20) Tx mode
<b>Test Channel:</b>	Lowest channel	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	AC 120/60Hz	<b>Environment:</b>	Temp: 24°C Huni: 57%

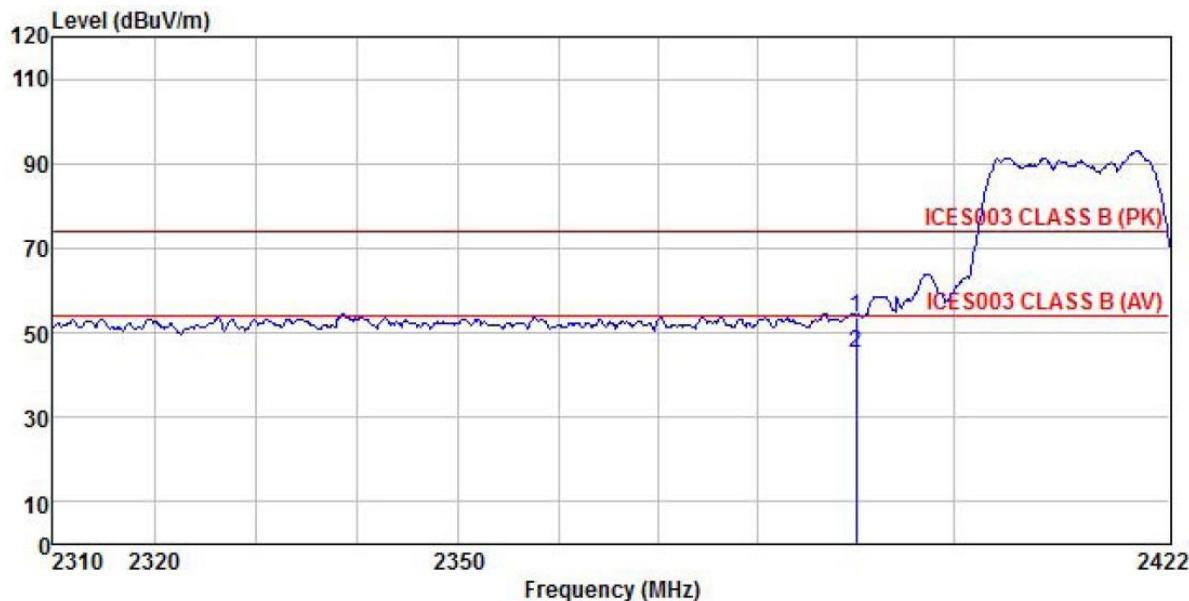


Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.000	21.96	27.08	4.69	0.00	53.73	74.00	-20.27 Peak
2	2390.000	13.53	27.08	4.69	0.00	45.30	54.00	-8.70 Average

**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	Komikan	<b>Product Model:</b>	Komikan
<b>Test By:</b>	Mike	<b>Test mode:</b>	802.11n(HT20) Tx mode
<b>Test Channel:</b>	Highest channel	<b>Polarization:</b>	Vertical
<b>Test Voltage:</b>	AC 120/60Hz	<b>Environment:</b>	Temp: 24°C Huni: 57%

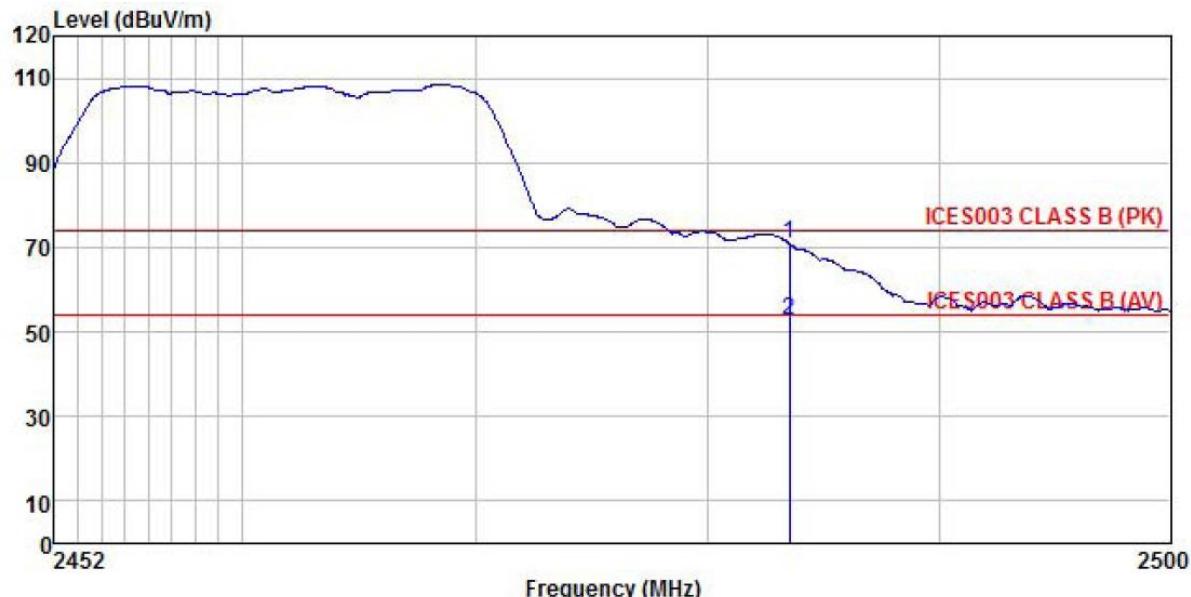


Freq	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	38.70	27.36	4.81	0.00	70.87	74.00	-3.13 Peak
2	2483.500	20.46	27.36	4.81	0.00	52.63	54.00	-1.37 Average

**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	Komikan	<b>Product Model:</b>	Komikan
<b>Test By:</b>	Mike	<b>Test mode:</b>	802.11n(HT20) Tx mode
<b>Test Channel:</b>	Highest channel	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	AC 120/60Hz	<b>Environment:</b>	Temp: 24°C Huni: 57%

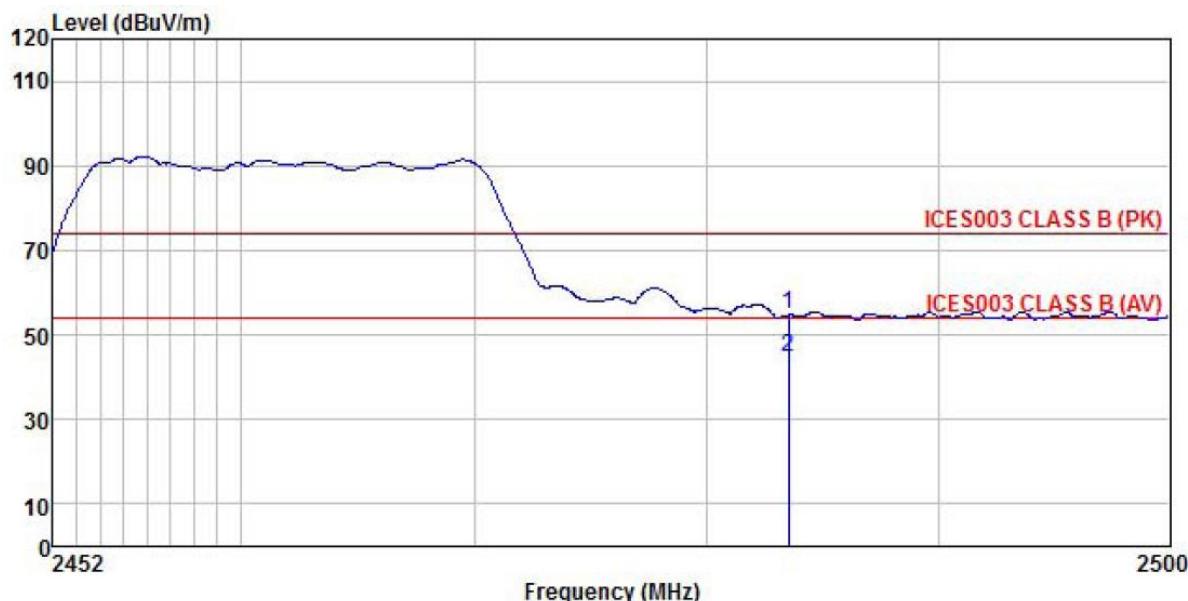


Freq	Read	Antenna	Cable	Preamp	Limit	Over	Remark
MHz	dBuV	Level Factor	Loss Factor	dB	dBuV/m	dBuV/m	dB
1	2483.500	22.55	27.35	4.81	0.00	54.71	74.00 -19.29 Peak
2	2483.500	12.36	27.35	4.81	0.00	44.52	54.00 -9.48 Average

**Remark:**

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

## 802.11n-HT40(MIMO):

<b>Product Name:</b>	Komikan	<b>Product Model:</b>	Komikan
<b>Test By:</b>	Mike	<b>Test mode:</b>	802.11n(HT40) Tx mode
<b>Test Channel:</b>	Lowest channel	<b>Polarization:</b>	Vertical
<b>Test Voltage:</b>	AC 120/60Hz	<b>Environment:</b>	Temp: 24°C Huni: 57%

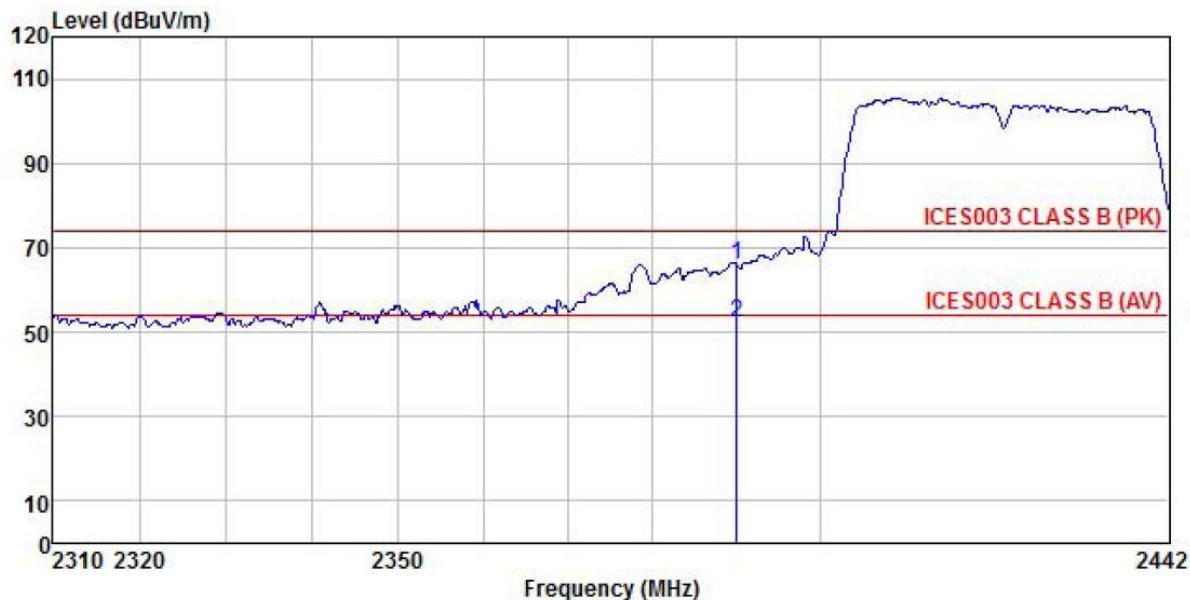


Freq	Read	Antenna	Cable	Preamp	Limit	Over	Remark	
	Level	Factor	Loss	Factor	Level	Line	Limit	
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	2390.000	34.08	27.07	4.69	0.00	65.84	74.00	-8.16 Peak
2	2390.000	20.62	27.07	4.69	0.00	52.38	54.00	-1.62 Average

## Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	Komikan	<b>Product Model:</b>	Komikan
<b>Test By:</b>	Mike	<b>Test mode:</b>	802.11n(HT40) Tx mode
<b>Test Channel:</b>	Lowest channel	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	AC 120/60Hz	<b>Environment:</b>	Temp: 24°C Huni: 57%

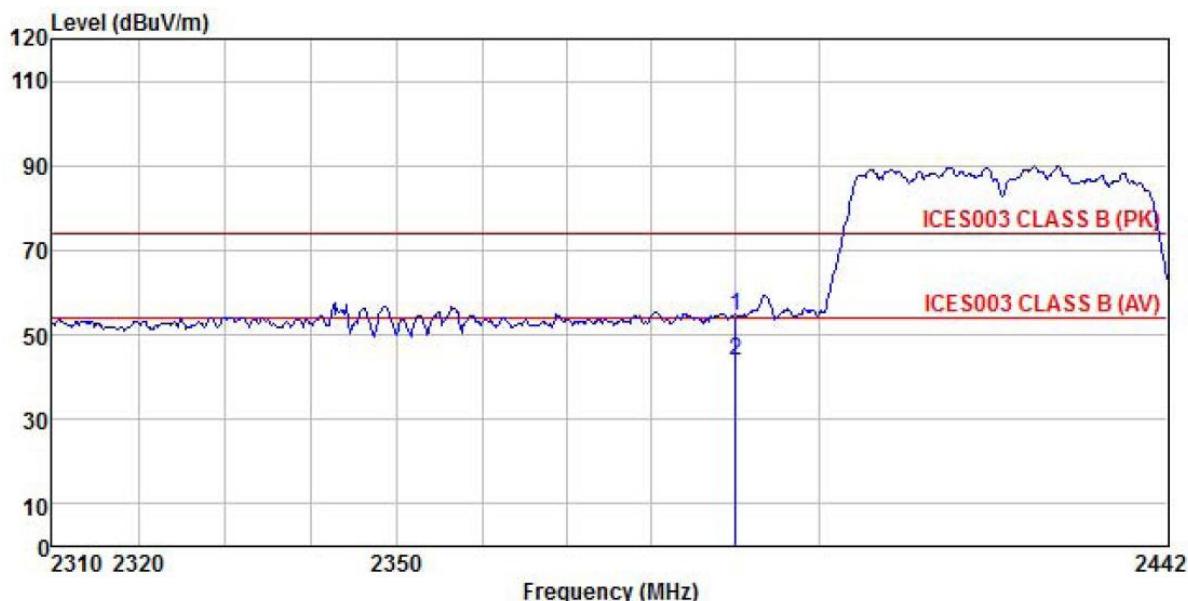


Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.000	22.63	27.08	4.69	0.00	54.40	74.00	-19.60 Peak
2	2390.000	12.21	27.08	4.69	0.00	43.98	54.00	-10.02 Average

**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	Komikan	<b>Product Model:</b>	Komikan
<b>Test By:</b>	Mike	<b>Test mode:</b>	802.11n(HT40) Tx mode
<b>Test Channel:</b>	Highest channel	<b>Polarization:</b>	Vertical
<b>Test Voltage:</b>	AC 120/60Hz	<b>Environment:</b>	Temp: 24°C Huni: 57%

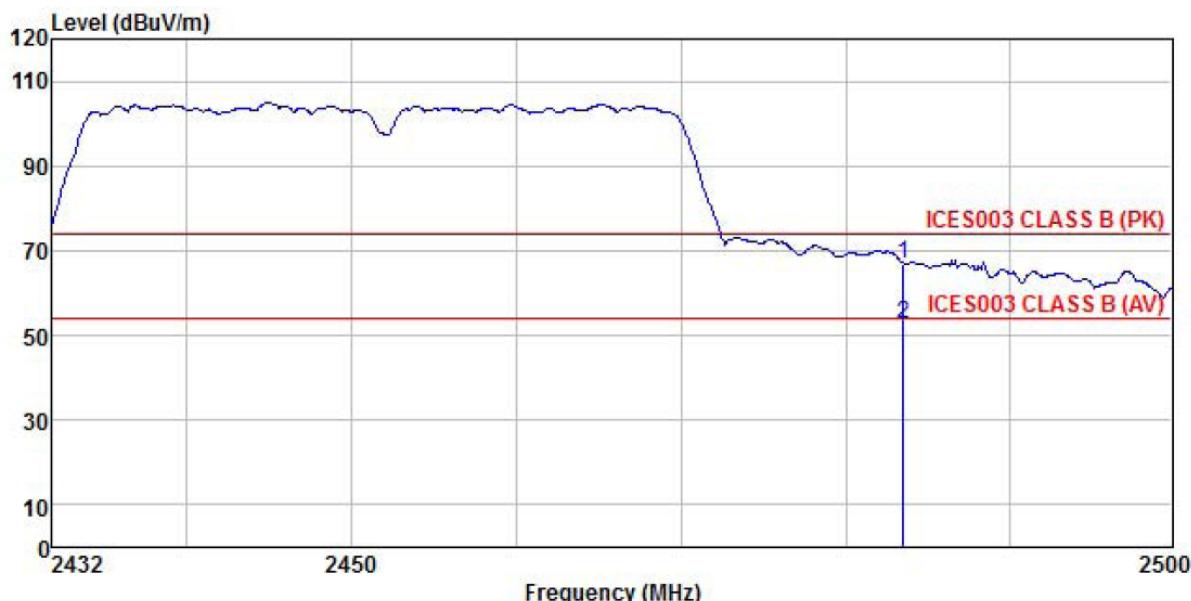


Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Limit Level	Line Limit	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	34.77	27.36	4.81	0.00	66.94	74.00	-7.06 Peak
2	2483.500	20.69	27.36	4.81	0.00	52.86	54.00	-1.14 Average

**Remark:**

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	Komikan	<b>Product Model:</b>	Komikan
<b>Test By:</b>	Mike	<b>Test mode:</b>	802.11n(HT40) Tx mode
<b>Test Channel:</b>	Highest channel	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	AC 120/60Hz	<b>Environment:</b>	Temp: 24°C Huni: 57%

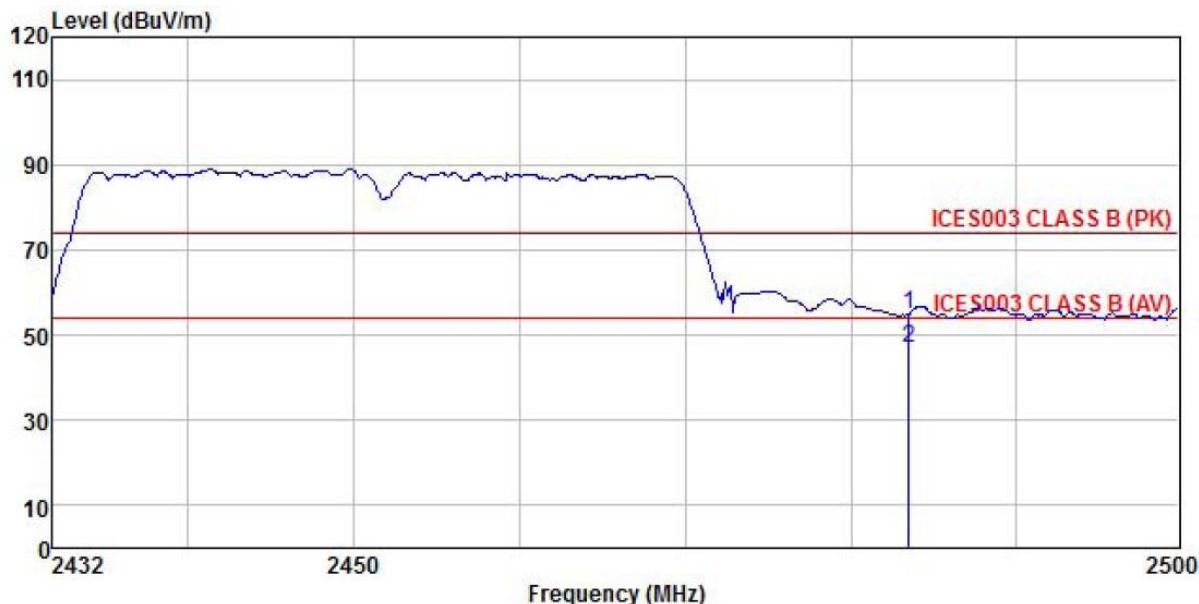


Freq	Read Antenna Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB
1	2483.500	22.80	27.35	4.81	0.00	54.96	74.00	-19.04 Peak
2	2483.500	14.73	27.35	4.81	0.00	46.89	54.00	-7.11 Average

**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.


## 6.6 Spurious Emission


### 6.6.1 Conducted Emission Method

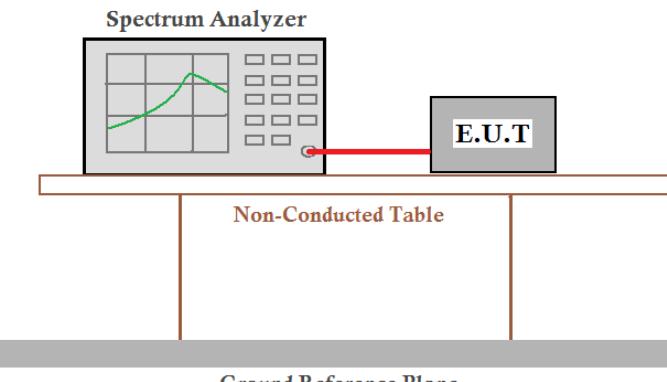Test Requirement:	RSS-247 section 5.5
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.
Test setup:	
Test Instruments:	Refer to section 5.9 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Test plot as follows:

TX 0:

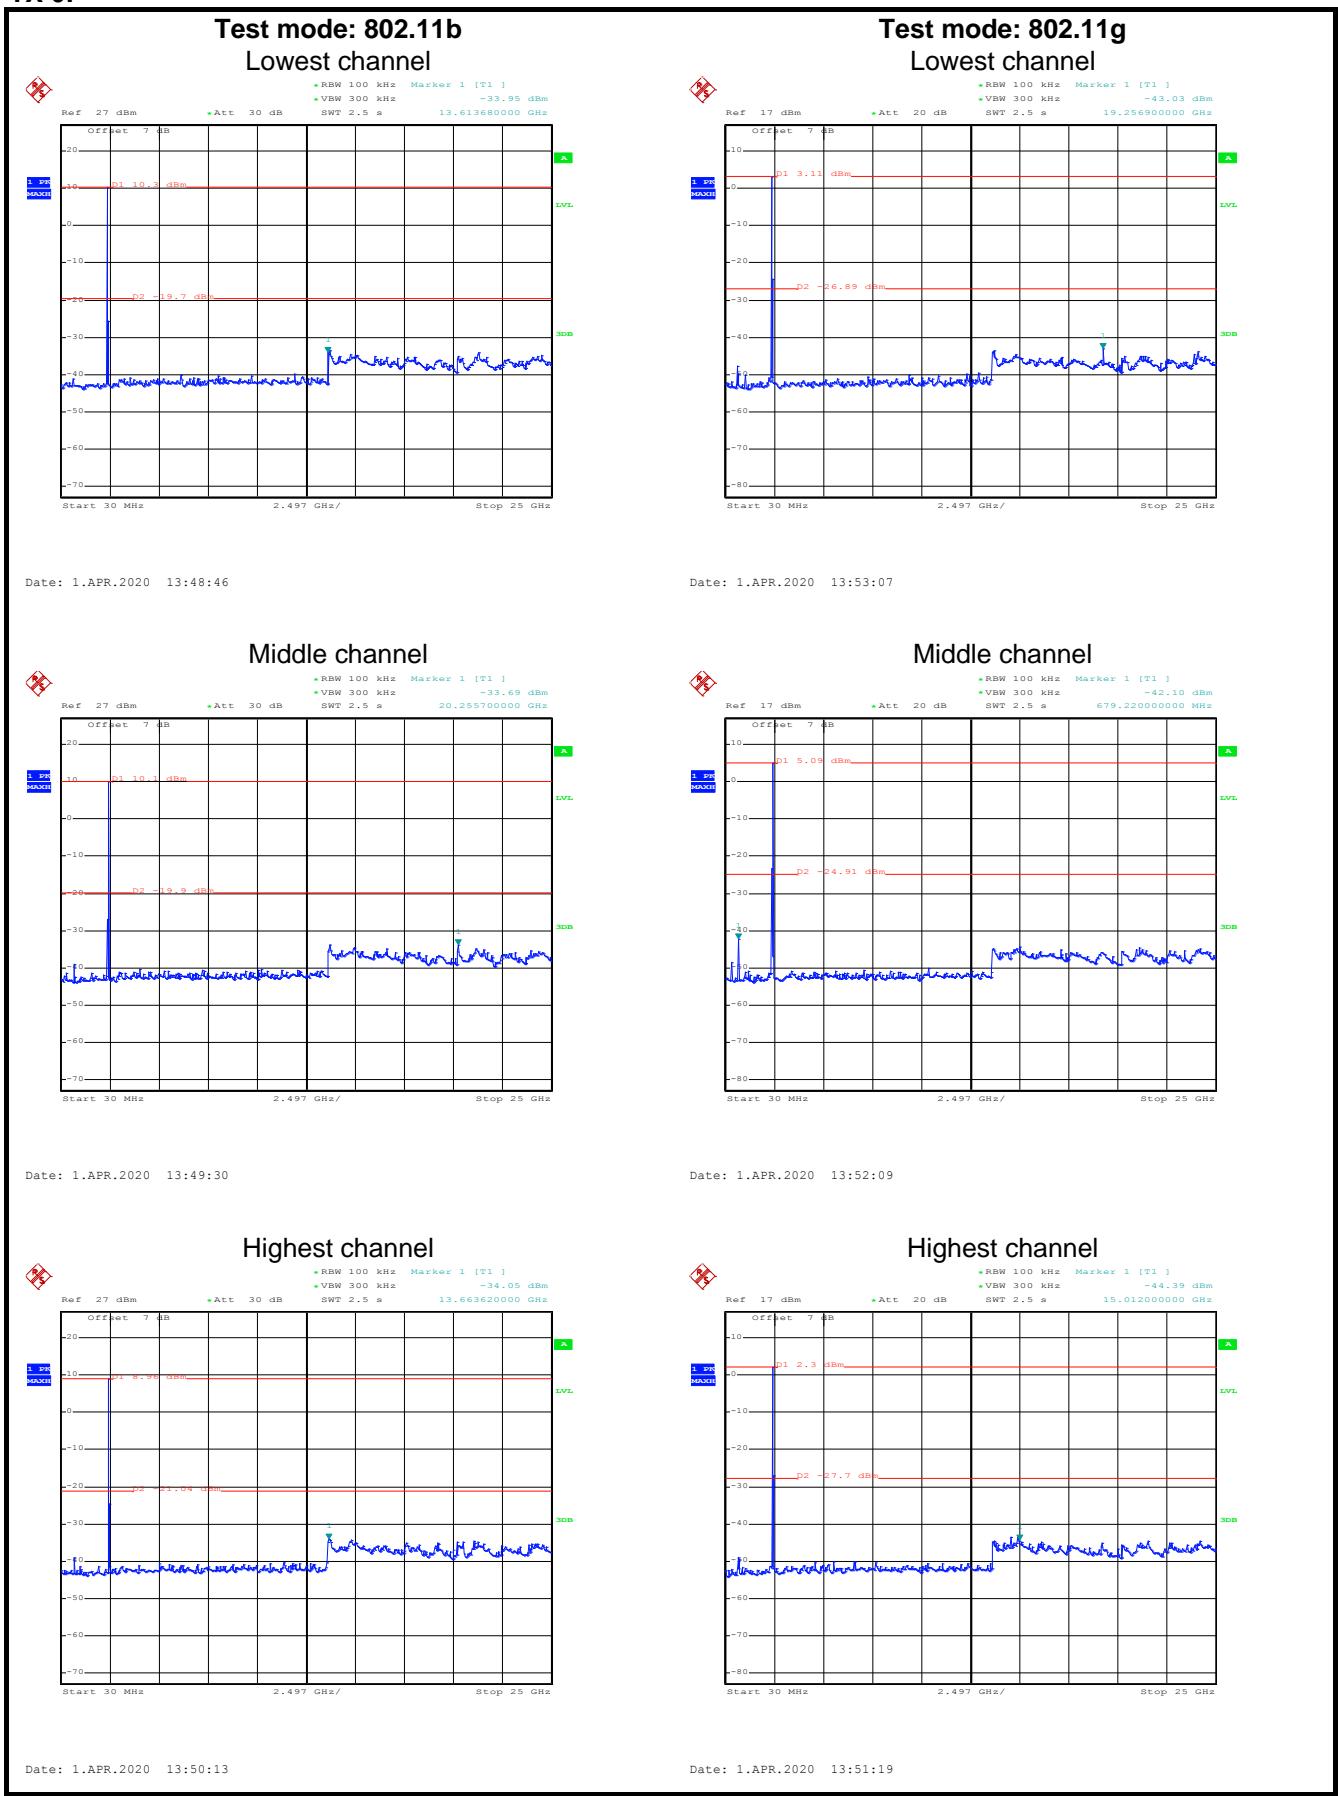


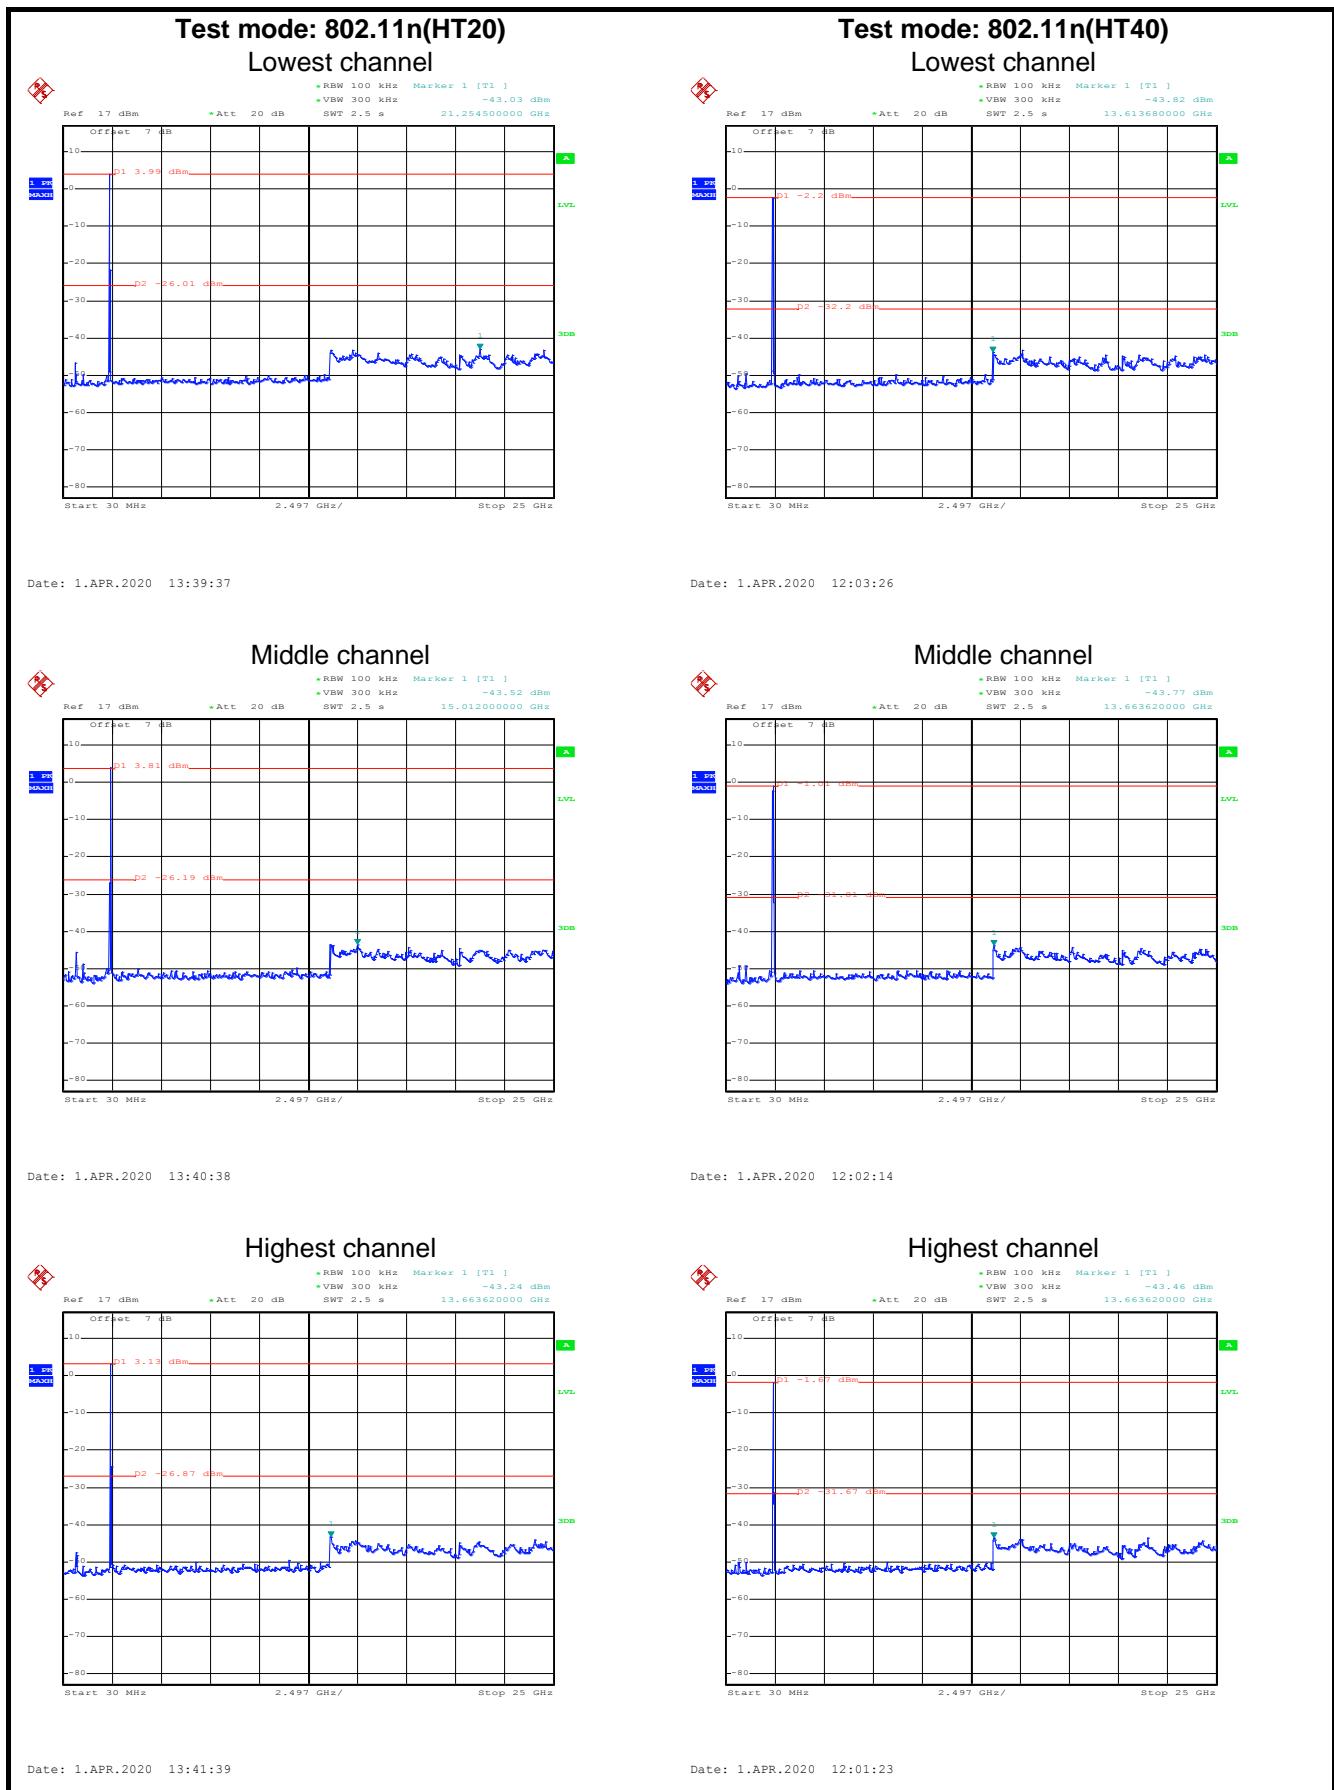

## TX 1:

## Test mode: 802.11b


## Lowest channel

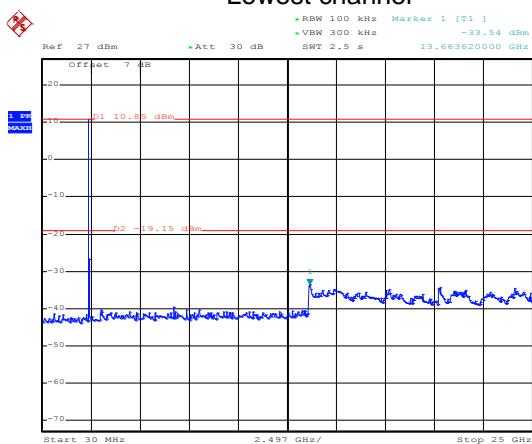

Date: 1.APR.2020 11:47:10


## Test mode: 802.11g

## Lowest channel

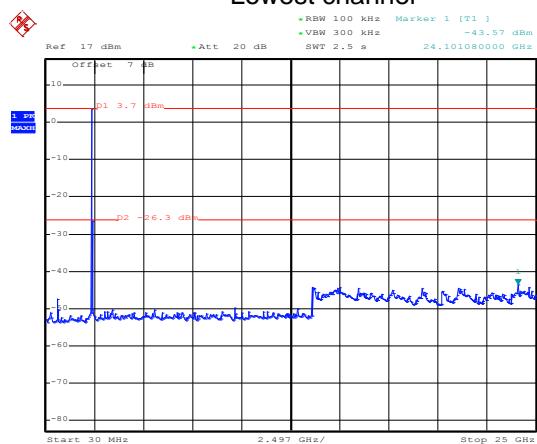


Date: 1.APR.2020 11:52:18

## Middle channel

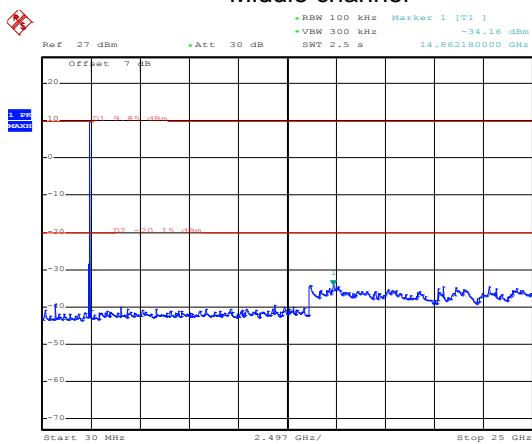


Date: 1.APR.2020 11:47:58

## Middle channel

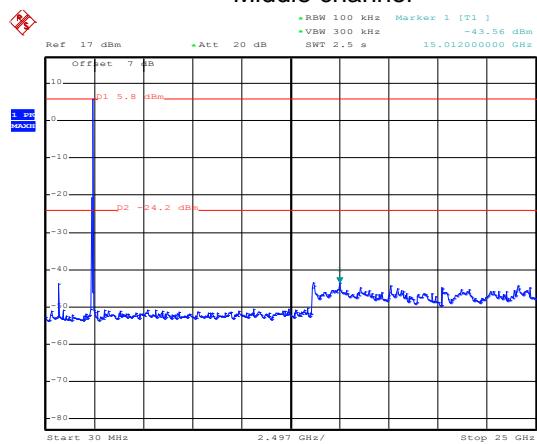


Date: 1.APR.2020 11:51:30

## Highest channel

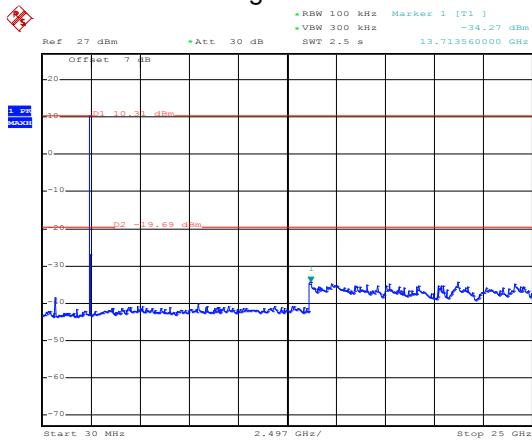


Date: 1.APR.2020 11:49:01


## Highest channel

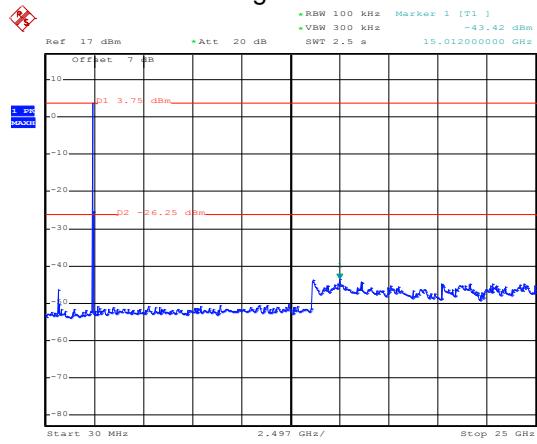


Date: 1.APR.2020 11:50:48

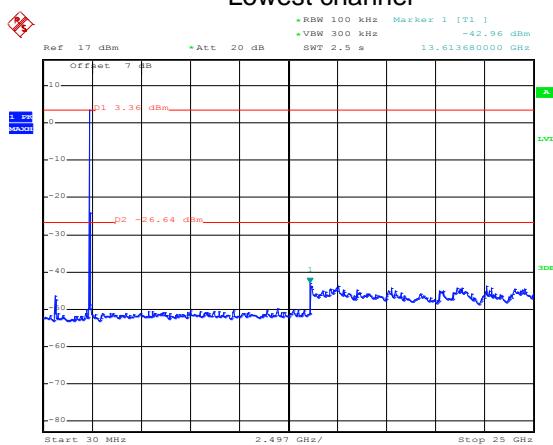**Test mode: 802.11n(HT20)****Lowest channel**


Date: 1.APR.2020 11:54:12

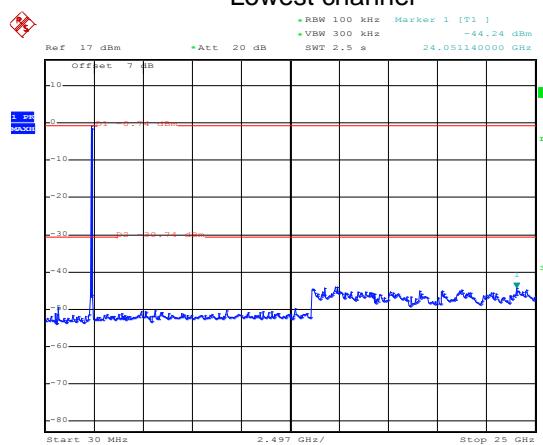**Test mode: 802.11n(HT40)****Lowest channel**


Date: 1.APR.2020 11:57:45

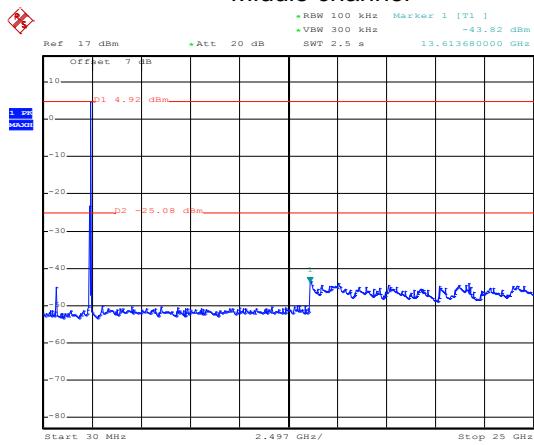**Middle channel**


Date: 1.APR.2020 11:55:36

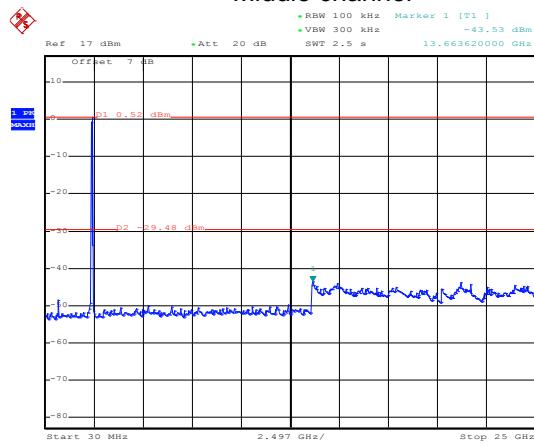**Middle channel**

Date: 1.APR.2020 11:58:53

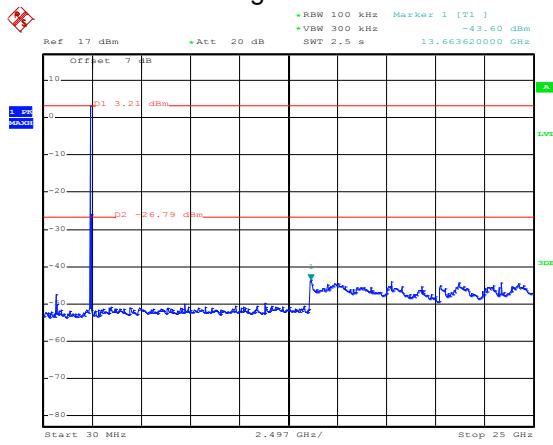**Highest channel**


Date: 1.APR.2020 11:56:42

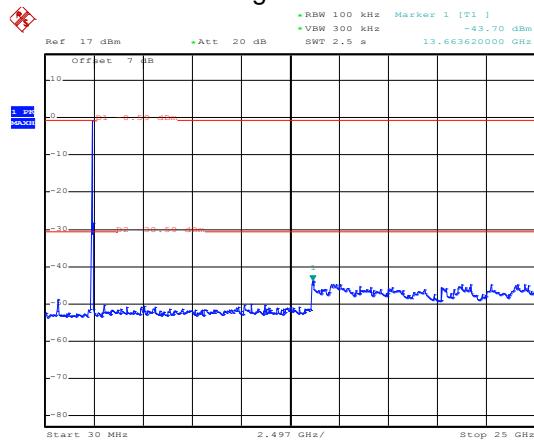**Highest channel**

Date: 1.APR.2020 11:59:41

### 6.6.2 Radiated Emission Method


Test Requirement:	RSS-Gen section 6.13								
Test Frequency Range:	9kHz to 25GHz								
Test Distance:	3m								
Receiver setup:	Frequency	Detector	RBW	VBW	Remark				
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value				
	Above 1GHz	Peak	1MHz	3MHz	Peak Value				
Limit:	RMS	1MHz	3MHz	3MHz	Average Value				
	Frequency	Limit (dBuV/m @3m)		Remark					
	30MHz-88MHz	40.0		Quasi-peak Value					
	88MHz-216MHz	43.5		Quasi-peak Value					
	216MHz-960MHz	46.0		Quasi-peak Value					
	960MHz-1GHz	54.0		Quasi-peak Value					
	Above 1GHz	54.0		Average Value					
		74.0		Peak Value					
Test Procedure:	<ol style="list-style-type: none"> <li>The EUT was placed on the top of a rotating table 0.8m(below 1GHz)/1.5m(above 1GHz) above the ground at a 3 meter chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</li> </ol>								
Test setup:	<p>Below 1GHz</p> <p>Above 1GHz</p>								

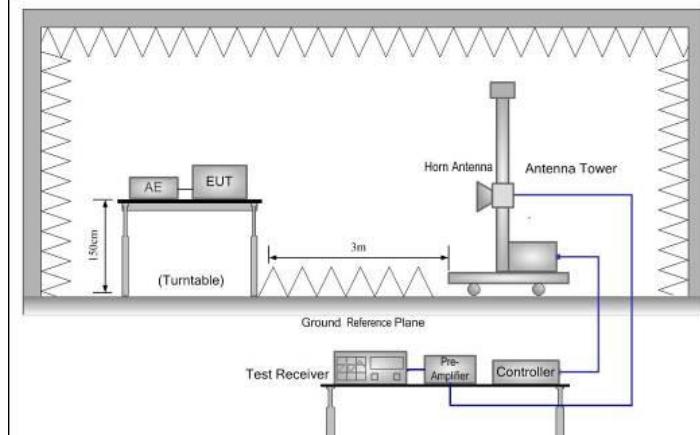

Test Instruments:	Refer to section 5.9 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed
Remark:	<ol style="list-style-type: none"><li>Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis is the worst case.</li><li>9 kHz to 30MHz is too low, so only shows the data of above 30MHz in this report.</li></ol>

**Measurement Data (worst case):****Below 1GHz:**

<b>Product Name:</b>	Komikan		<b>Product Model:</b>	Komikan	
<b>Test By:</b>	Mike		<b>Test mode:</b>	Wi-Fi Tx mode	
<b>Test Frequency:</b>	30 MHz ~ 1 GHz		<b>Polarization:</b>	Vertical	
<b>Test Voltage:</b>	AC 120/60Hz		<b>Environment:</b>	Temp: 24°C Huni: 57%	

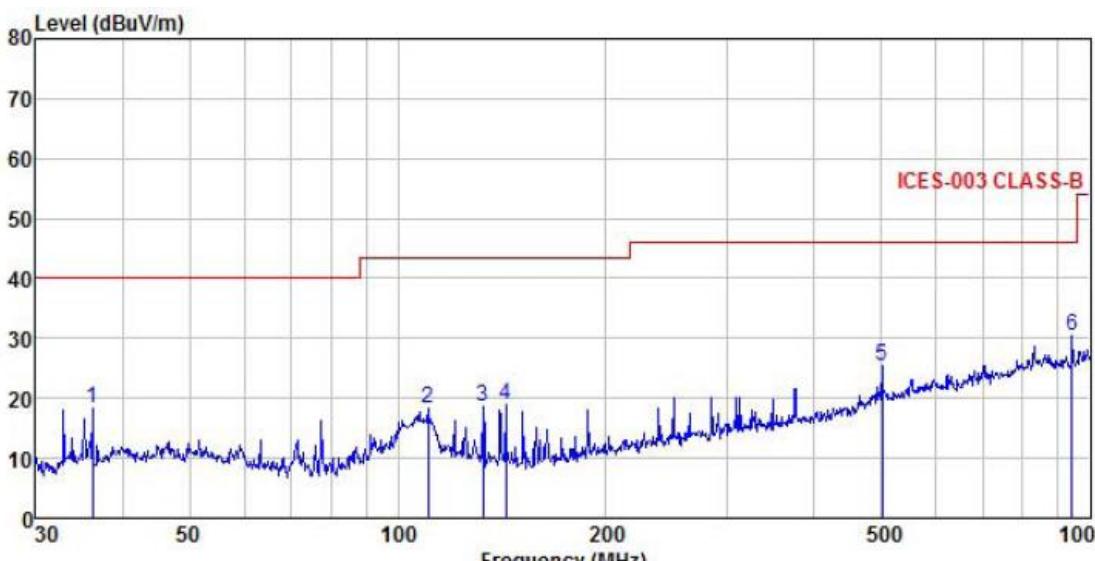
  

  

Freq	Read Level	Antenna Factor	Cable Loss	Aux Factor	Preampl Factor	Limit Level	Line Limit	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	
1	36.254	35.75	11.50	1.11	0.00	29.94	18.42	40.00	-21.58 QP
2	110.569	34.11	11.60	2.05	0.00	29.45	18.31	43.50	-25.19 QP
3	132.685	35.58	9.99	2.32	0.00	29.31	18.58	43.50	-24.92 QP
4	143.326	36.31	9.31	2.44	0.00	29.25	18.81	43.50	-24.69 QP
5	501.179	32.66	18.20	3.63	0.00	28.96	25.53	46.00	-20.47 QP
6	942.131	31.25	22.67	4.13	0.00	27.75	30.30	46.00	-15.70 QP

**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.
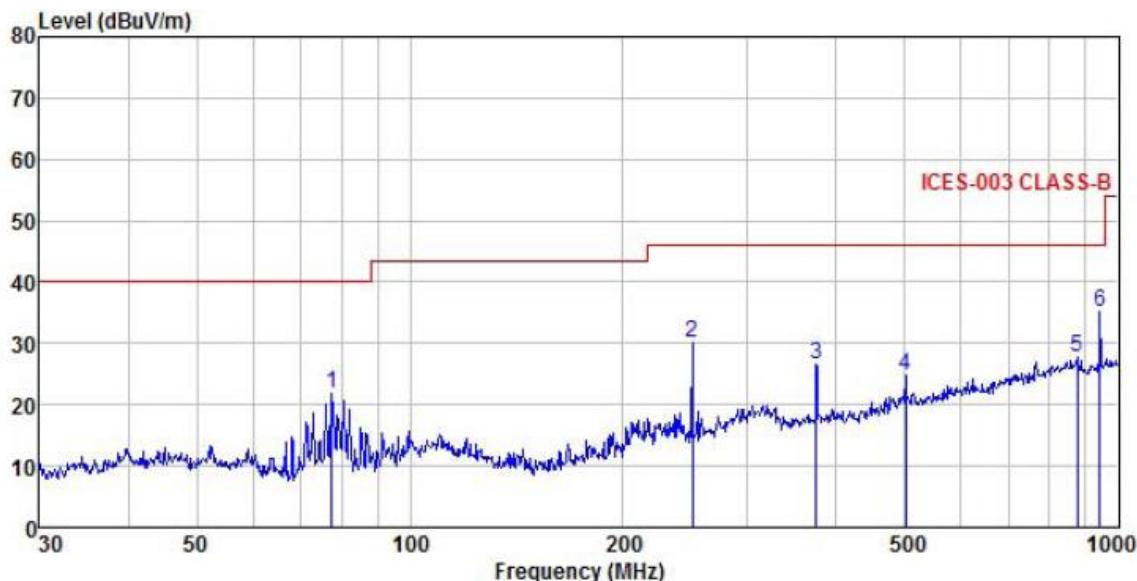
<b>Product Name:</b>	Komikan	<b>Product Model:</b>	Komikan
<b>Test By:</b>	Mike	<b>Test mode:</b>	Wi-Fi Tx mode
<b>Test Frequency:</b>	30 MHz ~ 1 GHz	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	AC 120/60Hz	<b>Environment:</b>	Temp: 24°C Huni: 57%



Freq MHz	Read Freq MHz	Antenna Level dBuV	Aux Loss dB	Cable Factor dB	Preamp Factor dB	Limit Line dBuV/m	Over Line dB	Over Limit Remark
1	77.593	42.29	7.70	1.64	0.00	29.66	21.97	40.00 -18.03 QP
2	250.301	43.10	12.70	2.81	0.00	28.54	30.07	46.00 -15.93 QP
3	374.623	37.25	14.95	3.09	0.00	28.67	26.62	46.00 -19.38 QP
4	501.179	32.01	18.20	3.63	0.00	28.96	24.88	46.00 -21.12 QP
5	875.247	29.33	22.55	3.95	0.00	27.94	27.89	46.00 -18.11 QP
6	942.131	35.95	22.67	4.13	0.00	27.75	35.00	46.00 -11.00 QP

**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

**Ceramic Antenna:****Above 1GHz**

802.11b-TX0									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	47.41	31.06	6.81	2.46	41.82	45.92	74.00	-28.08	Vertical
4824.00	47.31	31.06	6.81	2.46	41.82	45.82	74.00	-28.18	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	38.36	31.06	6.81	2.46	41.82	36.87	54.00	-17.13	Vertical
4824.00	38.68	31.06	6.81	2.46	41.82	37.19	54.00	-16.81	Horizontal
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	47.19	31.16	6.85	2.47	41.84	45.83	74.00	-28.17	Vertical
4874.00	47.07	31.16	6.85	2.47	41.84	45.71	74.00	-28.29	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	38.13	31.16	6.85	2.47	41.84	36.77	54.00	-17.23	Vertical
4874.00	38.89	31.16	6.85	2.47	41.84	37.53	54.00	-16.47	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	47.23	31.25	6.89	2.48	41.86	45.99	74.00	-28.01	Vertical
4924.00	46.74	31.25	6.89	2.48	41.86	45.50	74.00	-28.50	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	43.63	31.25	6.89	2.48	41.86	42.39	54.00	-11.61	Vertical
4924.00	42.98	31.25	6.89	2.48	41.86	41.74	54.00	-12.26	Horizontal

Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

802.11b-TX1									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	54.68	31.06	6.81	2.46	41.82	53.19	74.00	-20.81	Vertical
4824.00	54.63	31.06	6.81	2.46	41.82	53.14	74.00	-20.86	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	52.56	31.06	6.81	2.46	41.82	51.07	54.00	-2.93	Vertical
4824.00	52.67	31.06	6.81	2.46	41.82	51.18	54.00	-2.82	Horizontal
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	53.47	31.16	6.85	2.47	41.84	52.11	74.00	-21.89	Vertical
4874.00	57.43	31.16	6.85	2.47	41.84	56.07	74.00	-17.93	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	50.19	31.16	6.85	2.47	41.84	48.83	54.00	-5.17	Vertical
4874.00	54.84	31.16	6.85	2.47	41.84	53.48	54.00	-0.52	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	53.41	31.25	6.89	2.48	41.86	52.17	74.00	-21.83	Vertical
4924.00	56.66	31.25	6.89	2.48	41.86	55.42	74.00	-18.58	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	51.47	31.25	6.89	2.48	41.86	50.23	54.00	-3.77	Vertical
4924.00	54.74	31.25	6.89	2.48	41.86	53.50	54.00	-0.50	Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

802.11g-TX0									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	46.98	31.06	6.81	2.46	41.82	45.49	74.00	-28.51	Vertical
4824.00	47.36	31.06	6.81	2.46	41.82	45.87	74.00	-28.13	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	38.50	31.06	6.81	2.46	41.82	37.01	54.00	-16.99	Vertical
4824.00	39.14	31.06	6.81	2.46	41.82	37.65	54.00	-16.35	Horizontal
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	46.56	31.16	6.85	2.47	41.84	45.20	74.00	-28.80	Vertical
4874.00	47.34	31.16	6.85	2.47	41.84	45.98	74.00	-28.02	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	38.43	31.16	6.85	2.47	41.84	37.07	54.00	-16.93	Vertical
4874.00	39.14	31.16	6.85	2.47	41.84	37.78	54.00	-16.22	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	46.24	31.25	6.89	2.48	41.86	45.00	74.00	-29.00	Vertical
4924.00	46.86	31.25	6.89	2.48	41.86	45.62	74.00	-28.38	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	38.33	31.25	6.89	2.48	41.86	37.09	54.00	-16.91	Vertical
4924.00	38.72	31.25	6.89	2.48	41.86	37.48	54.00	-16.52	Horizontal

Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

802.11g-TX1									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	51.68	31.06	6.81	2.46	41.82	50.19	74.00	-23.81	Vertical
4824.00	52.34	31.06	6.81	2.46	41.82	50.85	74.00	-23.15	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	48.67	31.06	6.81	2.46	41.82	47.18	54.00	-6.82	Vertical
4824.00	50.89	31.06	6.81	2.46	41.82	49.40	54.00	-4.60	Horizontal
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	51.54	31.16	6.85	2.47	41.84	50.18	74.00	-23.82	Vertical
4874.00	52.17	31.16	6.85	2.47	41.84	50.81	74.00	-23.19	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	48.40	31.16	6.85	2.47	41.84	47.04	54.00	-6.96	Vertical
4874.00	50.59	31.16	6.85	2.47	41.84	49.23	54.00	-4.77	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	51.53	31.25	6.89	2.48	41.86	50.29	74.00	-23.71	Vertical
4924.00	52.05	31.25	6.89	2.48	41.86	50.81	74.00	-23.19	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	48.78	31.25	6.89	2.48	41.86	47.54	54.00	-6.46	Vertical
4924.00	50.62	31.25	6.89	2.48	41.86	49.38	54.00	-4.62	Horizontal

Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

802.11n(HT20)									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	49.52	31.06	6.81	2.46	41.82	48.03	74.00	-25.97	Vertical
4824.00	52.47	31.06	6.81	2.46	41.82	50.98	74.00	-23.02	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	46.44	31.06	6.81	2.46	41.82	44.95	54.00	-9.05	Vertical
4824.00	49.65	31.06	6.81	2.46	41.82	48.16	54.00	-5.84	Horizontal
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	49.63	31.16	6.85	2.47	41.84	48.27	74.00	-25.73	Vertical
4874.00	52.64	31.16	6.85	2.47	41.84	51.28	74.00	-22.72	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	46.35	31.16	6.85	2.47	41.84	44.99	54.00	-9.01	Vertical
4874.00	49.33	31.16	6.85	2.47	41.84	47.97	54.00	-6.03	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	49.10	31.25	6.89	2.48	41.86	47.86	74.00	-26.14	Vertical
4924.00	52.58	31.25	6.89	2.48	41.86	51.34	74.00	-22.66	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	46.37	31.25	6.89	2.48	41.86	45.13	54.00	-8.87	Vertical
4924.00	49.86	31.25	6.89	2.48	41.86	48.62	54.00	-5.38	Horizontal

Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

802.11n(HT40)									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4844.00	49.93	31.10	6.83	2.46	41.83	48.49	74.00	-25.51	Vertical
4844.00	52.94	31.10	6.83	2.46	41.83	51.50	74.00	-22.50	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4844.00	46.76	31.10	6.83	2.46	41.83	45.32	54.00	-8.68	Vertical
4844.00	49.29	31.10	6.83	2.46	41.83	47.85	54.00	-6.15	Horizontal
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	49.63	31.16	6.85	2.47	41.84	48.27	74.00	-25.73	Vertical
4874.00	53.40	31.16	6.85	2.47	41.84	52.04	74.00	-21.96	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	47.24	31.16	6.85	2.47	41.84	45.88	54.00	-8.12	Vertical
4874.00	49.50	31.16	6.85	2.47	41.84	48.14	54.00	-5.86	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4904.00	49.35	31.22	6.87	2.48	41.85	48.07	74.00	-25.93	Vertical
4904.00	53.77	31.22	6.87	2.48	41.85	52.49	74.00	-21.51	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4904.00	47.00	31.22	6.87	2.48	41.85	45.72	54.00	-8.28	Vertical
4904.00	49.92	31.22	6.87	2.48	41.85	48.64	54.00	-5.36	Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

**Flex Antenna:****Above 1GHz**

802.11b-TX0									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	48.85	31.06	6.81	2.46	41.82	47.36	74.00	-26.64	Vertical
4824.00	47.80	31.06	6.81	2.46	41.82	46.31	74.00	-27.69	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	43.65	31.06	6.81	2.46	41.82	42.16	54.00	-11.84	Vertical
4824.00	43.61	31.06	6.81	2.46	41.82	42.12	54.00	-11.88	Horizontal
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	48.93	31.16	6.85	2.47	41.84	47.57	74.00	-26.43	Vertical
4874.00	47.80	31.16	6.85	2.47	41.84	46.44	74.00	-27.56	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	43.99	31.16	6.85	2.47	41.84	42.63	54.00	-11.37	Vertical
4874.00	43.73	31.16	6.85	2.47	41.84	42.37	54.00	-11.63	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	49.09	31.25	6.89	2.48	41.86	47.85	74.00	-26.15	Vertical
4924.00	47.72	31.25	6.89	2.48	41.86	46.48	74.00	-27.52	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	43.53	31.25	6.89	2.48	41.86	42.29	54.00	-11.71	Vertical
4924.00	43.39	31.25	6.89	2.48	41.86	42.15	54.00	-11.85	Horizontal

Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

802.11b-TX1									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	51.21	31.06	6.81	2.46	41.82	49.72	74.00	-24.28	Vertical
4824.00	50.14	31.06	6.81	2.46	41.82	48.65	74.00	-25.35	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	42.05	31.06	6.81	2.46	41.82	40.56	54.00	-13.44	Vertical
4824.00	41.36	31.06	6.81	2.46	41.82	39.87	54.00	-14.13	Horizontal
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	50.43	31.16	6.85	2.47	41.84	49.07	74.00	-24.93	Vertical
4874.00	52.55	31.16	6.85	2.47	41.84	51.19	74.00	-22.81	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	48.15	31.16	6.85	2.47	41.84	46.79	54.00	-7.21	Vertical
4874.00	50.42	31.16	6.85	2.47	41.84	49.06	54.00	-4.94	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	50.87	31.25	6.89	2.48	41.86	49.63	74.00	-24.37	Vertical
4924.00	52.68	31.25	6.89	2.48	41.86	51.44	74.00	-22.56	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	48.41	31.25	6.89	2.48	41.86	47.17	54.00	-6.83	Vertical
4924.00	50.08	31.25	6.89	2.48	41.86	48.84	54.00	-5.16	Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

802.11g-TX0									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	49.03	31.06	6.81	2.46	41.82	47.54	74.00	-26.46	Vertical
4824.00	47.56	31.06	6.81	2.46	41.82	46.07	74.00	-27.93	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	43.51	31.06	6.81	2.46	41.82	42.02	54.00	-11.98	Vertical
4824.00	43.02	31.06	6.81	2.46	41.82	41.53	54.00	-12.47	Horizontal
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	49.11	31.16	6.85	2.47	41.84	47.75	74.00	-26.25	Vertical
4874.00	47.16	31.16	6.85	2.47	41.84	45.80	74.00	-28.20	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	43.93	31.16	6.85	2.47	41.84	42.57	54.00	-11.43	Vertical
4874.00	42.53	31.16	6.85	2.47	41.84	41.17	54.00	-12.83	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	49.57	31.25	6.89	2.48	41.86	48.33	74.00	-25.67	Vertical
4924.00	47.58	31.25	6.89	2.48	41.86	46.34	74.00	-27.66	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	43.67	31.25	6.89	2.48	41.86	42.43	54.00	-11.57	Vertical
4924.00	42.35	31.25	6.89	2.48	41.86	41.11	54.00	-12.89	Horizontal

Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

802.11g-TX1									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	50.25	31.06	6.81	2.46	41.82	48.76	74.00	-25.24	Vertical
4824.00	52.12	31.06	6.81	2.46	41.82	50.63	74.00	-23.37	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	48.56	31.06	6.81	2.46	41.82	47.07	54.00	-6.93	Vertical
4824.00	50.21	31.06	6.81	2.46	41.82	48.72	54.00	-5.28	Horizontal
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	50.28	31.16	6.85	2.47	41.84	48.92	74.00	-25.08	Vertical
4874.00	52.33	31.16	6.85	2.47	41.84	50.97	74.00	-23.03	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	48.82	31.16	6.85	2.47	41.84	47.46	54.00	-6.54	Vertical
4874.00	50.40	31.16	6.85	2.47	41.84	49.04	54.00	-4.96	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	50.74	31.25	6.89	2.48	41.86	49.50	74.00	-24.50	Vertical
4924.00	52.42	31.25	6.89	2.48	41.86	51.18	74.00	-22.82	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	48.46	31.25	6.89	2.48	41.86	47.22	54.00	-6.78	Vertical
4924.00	50.76	31.25	6.89	2.48	41.86	49.52	54.00	-4.48	Horizontal

Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

802.11n(HT20)									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	47.75	31.06	6.81	2.46	41.82	46.26	74.00	-27.74	Vertical
4824.00	47.24	31.06	6.81	2.46	41.82	45.75	74.00	-28.25	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	40.05	31.06	6.81	2.46	41.82	38.56	54.00	-15.44	Vertical
4824.00	39.48	31.06	6.81	2.46	41.82	37.99	54.00	-16.01	Horizontal
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	47.55	31.16	6.85	2.47	41.84	46.19	74.00	-27.81	Vertical
4874.00	47.13	31.16	6.85	2.47	41.84	45.77	74.00	-28.23	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	39.83	31.16	6.85	2.47	41.84	38.47	54.00	-15.53	Vertical
4874.00	39.58	31.16	6.85	2.47	41.84	38.22	54.00	-15.78	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	47.40	31.25	6.89	2.48	41.86	46.16	74.00	-27.84	Vertical
4924.00	46.80	31.25	6.89	2.48	41.86	45.56	74.00	-28.44	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	39.87	31.25	6.89	2.48	41.86	38.63	54.00	-15.37	Vertical
4924.00	39.73	31.25	6.89	2.48	41.86	38.49	54.00	-15.51	Horizontal

Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

802.11n(HT40)									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4844.00	48.18	31.10	6.83	2.46	41.83	46.74	74.00	-27.26	Vertical
4844.00	47.58	31.10	6.83	2.46	41.83	46.14	74.00	-27.86	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4844.00	40.26	31.10	6.83	2.46	41.83	38.82	54.00	-15.18	Vertical
4844.00	39.41	31.10	6.83	2.46	41.83	37.97	54.00	-16.03	Horizontal
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	48.50	31.16	6.85	2.47	41.84	47.14	74.00	-26.86	Vertical
4874.00	47.32	31.16	6.85	2.47	41.84	45.96	74.00	-28.04	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	40.34	31.16	6.85	2.47	41.84	38.98	54.00	-15.02	Vertical
4874.00	39.68	31.16	6.85	2.47	41.84	38.32	54.00	-15.68	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4904.00	48.75	31.22	6.87	2.48	41.85	47.47	74.00	-26.53	Vertical
4904.00	47.10	31.22	6.87	2.48	41.85	45.82	74.00	-28.18	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4904.00	39.94	31.22	6.87	2.48	41.85	38.66	54.00	-15.34	Vertical
4904.00	39.55	31.22	6.87	2.48	41.85	38.27	54.00	-15.73	Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

**Whip Antenna:****Above 1GHz**

802.11b-TX0									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	49.17	31.06	6.81	2.46	41.82	47.68	74.00	-26.32	Vertical
4824.00	47.66	31.06	6.81	2.46	41.82	46.17	74.00	-27.83	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	40.03	31.06	6.81	2.46	41.82	38.54	54.00	-15.46	Vertical
4824.00	38.66	31.06	6.81	2.46	41.82	37.17	54.00	-16.83	Horizontal
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	48.76	31.16	6.85	2.47	41.84	47.40	74.00	-26.60	Vertical
4874.00	48.10	31.16	6.85	2.47	41.84	46.74	74.00	-27.26	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	39.68	31.16	6.85	2.47	41.84	38.32	54.00	-15.68	Vertical
4874.00	38.62	31.16	6.85	2.47	41.84	37.26	54.00	-16.74	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	48.88	31.25	6.89	2.48	41.86	47.64	74.00	-26.36	Vertical
4924.00	48.10	31.25	6.89	2.48	41.86	46.86	74.00	-27.14	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	39.97	31.25	6.89	2.48	41.86	38.73	54.00	-15.27	Vertical
4924.00	38.31	31.25	6.89	2.48	41.86	37.07	54.00	-16.93	Horizontal

Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

802.11b-TX1									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	53.73	31.06	6.81	2.46	41.82	52.24	74.00	-21.76	Vertical
4824.00	48.74	31.06	6.81	2.46	41.82	47.25	74.00	-26.75	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	51.50	31.06	6.81	2.46	41.82	50.01	54.00	-3.99	Vertical
4824.00	45.85	31.06	6.81	2.46	41.82	44.36	54.00	-9.64	Horizontal
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	53.79	31.16	6.85	2.47	41.84	52.43	74.00	-21.57	Vertical
4874.00	48.28	31.16	6.85	2.47	41.84	46.92	74.00	-27.08	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	51.59	31.16	6.85	2.47	41.84	50.23	54.00	-3.77	Vertical
4874.00	45.40	31.16	6.85	2.47	41.84	44.04	54.00	-9.96	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	53.84	31.25	6.89	2.48	41.86	52.60	74.00	-21.40	Vertical
4924.00	48.93	31.25	6.89	2.48	41.86	47.69	74.00	-26.31	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	51.63	31.25	6.89	2.48	41.86	50.39	54.00	-3.61	Vertical
4924.00	46.05	31.25	6.89	2.48	41.86	44.81	54.00	-9.19	Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

802.11g-TX0									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	47.43	31.06	6.81	2.46	41.82	45.94	74.00	-28.06	Vertical
4824.00	47.21	31.06	6.81	2.46	41.82	45.72	74.00	-28.28	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	38.83	31.06	6.81	2.46	41.82	37.34	54.00	-16.66	Vertical
4824.00	39.40	31.06	6.81	2.46	41.82	37.91	54.00	-16.09	Horizontal
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	47.36	31.16	6.85	2.47	41.84	46.00	74.00	-28.00	Vertical
4874.00	46.76	31.16	6.85	2.47	41.84	45.40	74.00	-28.60	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	39.15	31.16	6.85	2.47	41.84	37.79	54.00	-16.21	Vertical
4874.00	39.34	31.16	6.85	2.47	41.84	37.98	54.00	-16.02	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	47.03	31.25	6.89	2.48	41.86	45.79	74.00	-28.21	Vertical
4924.00	47.16	31.25	6.89	2.48	41.86	45.92	74.00	-28.08	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	39.14	31.25	6.89	2.48	41.86	37.90	54.00	-16.10	Vertical
4924.00	39.75	31.25	6.89	2.48	41.86	38.51	54.00	-15.49	Horizontal

Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

802.11g-TX1									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	50.21	31.06	6.81	2.46	41.82	48.72	74.00	-25.28	Vertical
4824.00	48.96	31.06	6.81	2.46	41.82	47.47	74.00	-26.53	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	46.37	31.06	6.81	2.46	41.82	44.88	54.00	-9.12	Vertical
4824.00	39.89	31.06	6.81	2.46	41.82	38.40	54.00	-15.60	Horizontal
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	50.69	31.16	6.85	2.47	41.84	49.33	74.00	-24.67	Vertical
4874.00	48.74	31.16	6.85	2.47	41.84	47.38	74.00	-26.62	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	46.11	31.16	6.85	2.47	41.84	44.75	54.00	-9.25	Vertical
4874.00	40.21	31.16	6.85	2.47	41.84	38.85	54.00	-15.15	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	50.71	31.25	6.89	2.48	41.86	49.47	74.00	-24.53	Vertical
4924.00	48.97	31.25	6.89	2.48	41.86	47.73	74.00	-26.27	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	46.59	31.25	6.89	2.48	41.86	45.35	54.00	-8.65	Vertical
4924.00	40.34	31.25	6.89	2.48	41.86	39.10	54.00	-14.90	Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

802.11n(HT20)									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	47.28	31.06	6.81	2.46	41.82	45.79	74.00	-28.21	Vertical
4824.00	48.29	31.06	6.81	2.46	41.82	46.80	74.00	-27.20	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	38.85	31.06	6.81	2.46	41.82	37.36	54.00	-16.64	Vertical
4824.00	39.19	31.06	6.81	2.46	41.82	37.70	54.00	-16.30	Horizontal
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	47.08	31.16	6.85	2.47	41.84	45.72	74.00	-28.28	Vertical
4874.00	48.45	31.16	6.85	2.47	41.84	47.09	74.00	-26.91	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	38.97	31.16	6.85	2.47	41.84	37.61	54.00	-16.39	Vertical
4874.00	38.89	31.16	6.85	2.47	41.84	37.53	54.00	-16.47	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	47.09	31.25	6.89	2.48	41.86	45.85	74.00	-28.15	Vertical
4924.00	48.48	31.25	6.89	2.48	41.86	47.24	74.00	-26.76	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	39.29	31.25	6.89	2.48	41.86	38.05	54.00	-15.95	Vertical
4924.00	38.93	31.25	6.89	2.48	41.86	37.69	54.00	-16.31	Horizontal

Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

802.11n(HT40)									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4844.00	46.60	31.10	6.83	2.46	41.83	45.16	74.00	-28.84	Vertical
4844.00	48.10	31.10	6.83	2.46	41.83	46.66	74.00	-27.34	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4844.00	39.27	31.10	6.83	2.46	41.83	37.83	54.00	-16.17	Vertical
4844.00	39.09	31.10	6.83	2.46	41.83	37.65	54.00	-16.35	Horizontal
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	46.16	31.16	6.85	2.47	41.84	44.80	74.00	-29.20	Vertical
4874.00	48.28	31.16	6.85	2.47	41.84	46.92	74.00	-27.08	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	38.87	31.16	6.85	2.47	41.84	37.51	54.00	-16.49	Vertical
4874.00	39.14	31.16	6.85	2.47	41.84	37.78	54.00	-16.22	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4904.00	45.72	31.22	6.87	2.48	41.85	44.44	74.00	-29.56	Vertical
4904.00	48.45	31.22	6.87	2.48	41.85	47.17	74.00	-26.83	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4904.00	38.92	31.22	6.87	2.48	41.85	37.64	54.00	-16.36	Vertical
4904.00	38.67	31.22	6.87	2.48	41.85	37.39	54.00	-16.61	Horizontal


Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

## 7 Test Setup Photo

**Radiated Spurious Emission (Ceramic Antenna)**

Below 1GHz

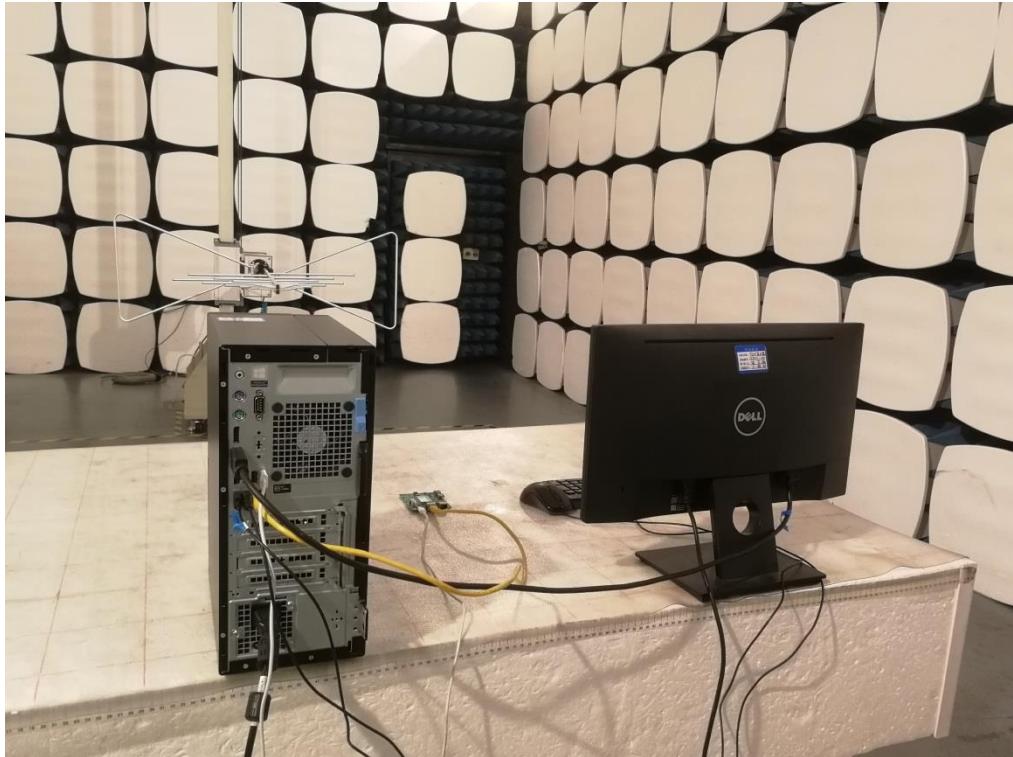


Above 1GHz



**Radiated Spurious Emission (Flex Antenna)**

Below 1GHz

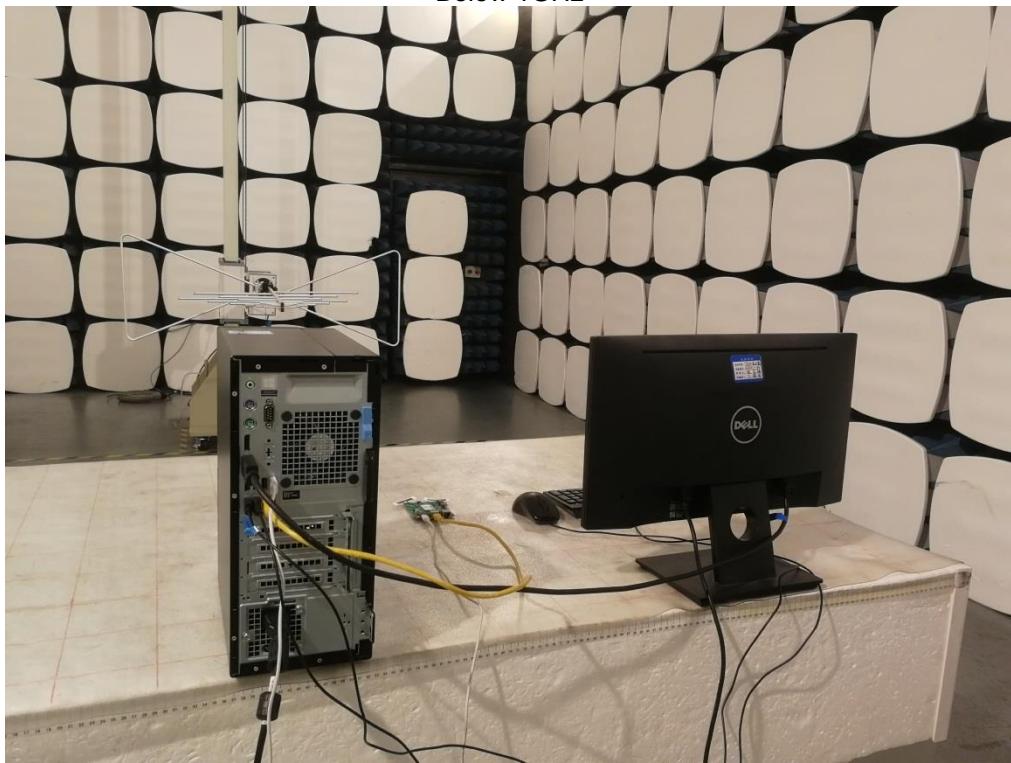


Above 1GHz



**Radiated Spurious Emission (Whip Antenna)**

Below 1GHz

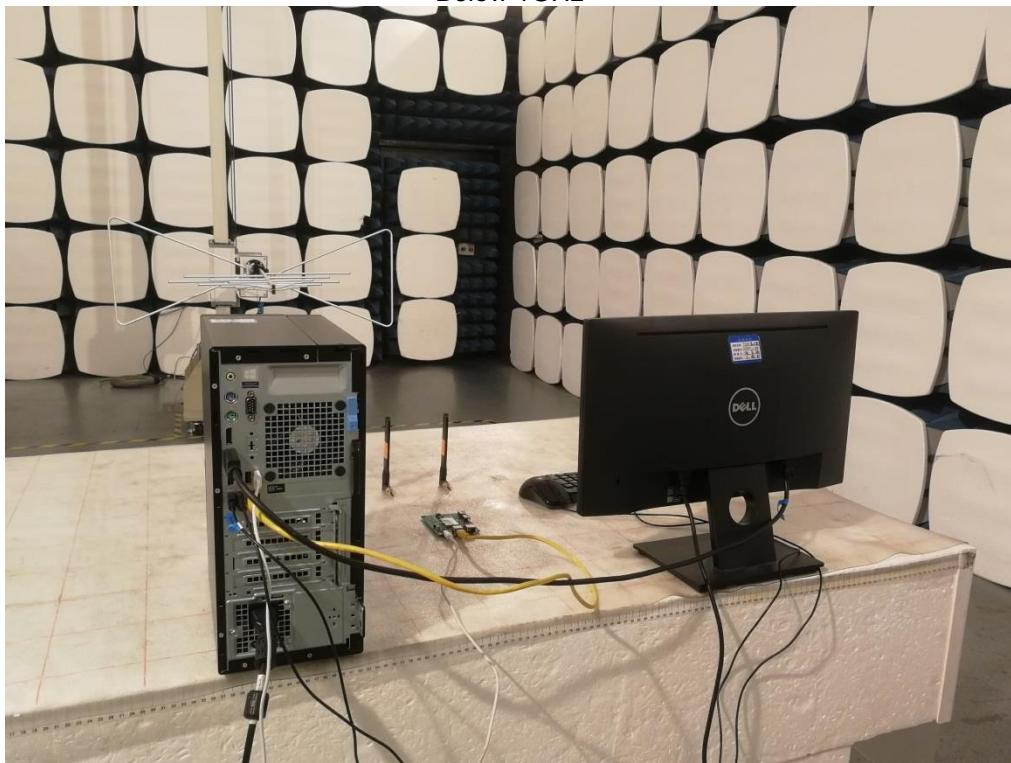

Above 1GHz



**Conducted Emission****8 EUT Constructional Details**

Reference to the test report No.: CCISE200308101

-----End of report-----