


Test Data


5.4.2 Carrier frequencies

Condition	Mode	Frequency (MHz)	Measured Frequency (MHz)	Deviation (ppm)	Limit (ppm)	Verdict
LVHT	802.11a	5180	5180.1	19.31	25	Pass
LVLT	802.11a	5180	5180.08	15.44	25	Pass
NVNT	802.11a	5180	5180.08	15.44	25	Pass
LVHT	802.11ac20	5180	5180.04	7.72	25	Pass
LVLT	802.11ac20	5180	5180.02	3.86	25	Pass
NVNT	802.11ac20	5180	5180.02	3.86	25	Pass
LVHT	802.11ac40	5190	5189.92	15.41	25	Pass
LVLT	802.11ac40	5190	5190	0	25	Pass
NVNT	802.11ac40	5190	5190.04	7.71	25	Pass
LVHT	802.11ac80	5210	5210.08	15.36	25	Pass
LVLT	802.11ac80	5210	5209.92	15.36	25	Pass
NVNT	802.11ac80	5210	5209.92	15.36	25	Pass
LVHT	802.11n(HT20)	5180	5180.08	15.44	25	Pass
LVLT	802.11n(HT20)	5180	5180.08	15.44	25	Pass
NVNT	802.11n(HT20)	5180	5180.04	7.72	25	Pass
LVHT	802.11n(HT40)	5190	5189.96	7.71	25	Pass
LVLT	802.11n(HT40)	5190	5190.08	15.41	25	Pass
NVNT	802.11n(HT40)	5190	5190.08	15.41	25	Pass


Carrier Freq. LVHT 802.11a 5180MHz

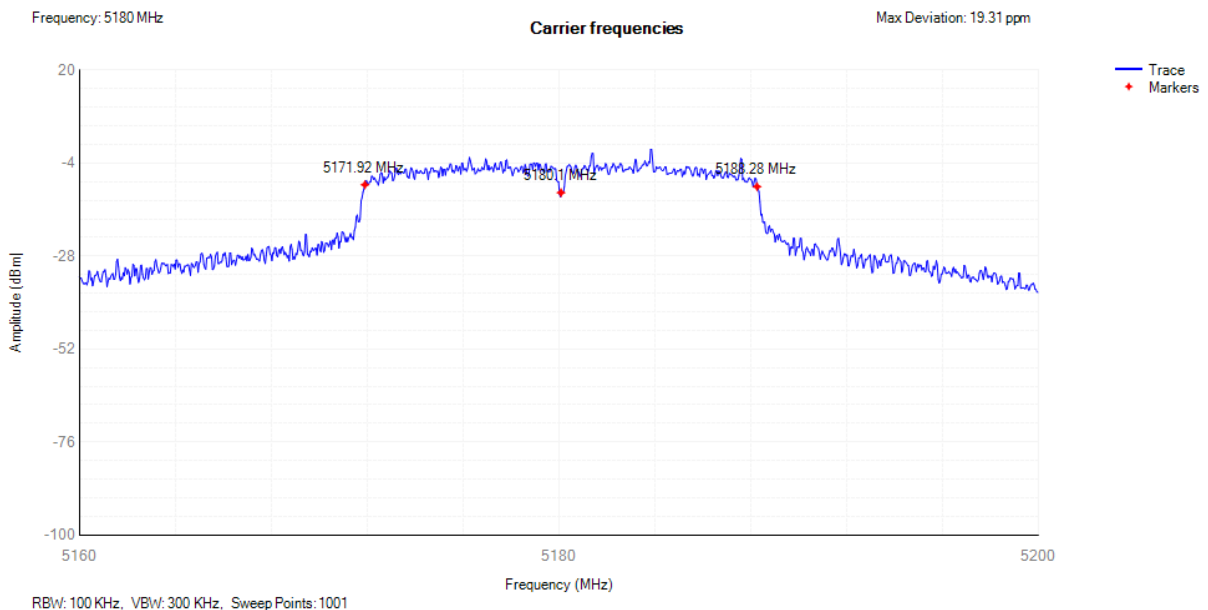


Carrier Freq. LVL 802.11a 5180MHz

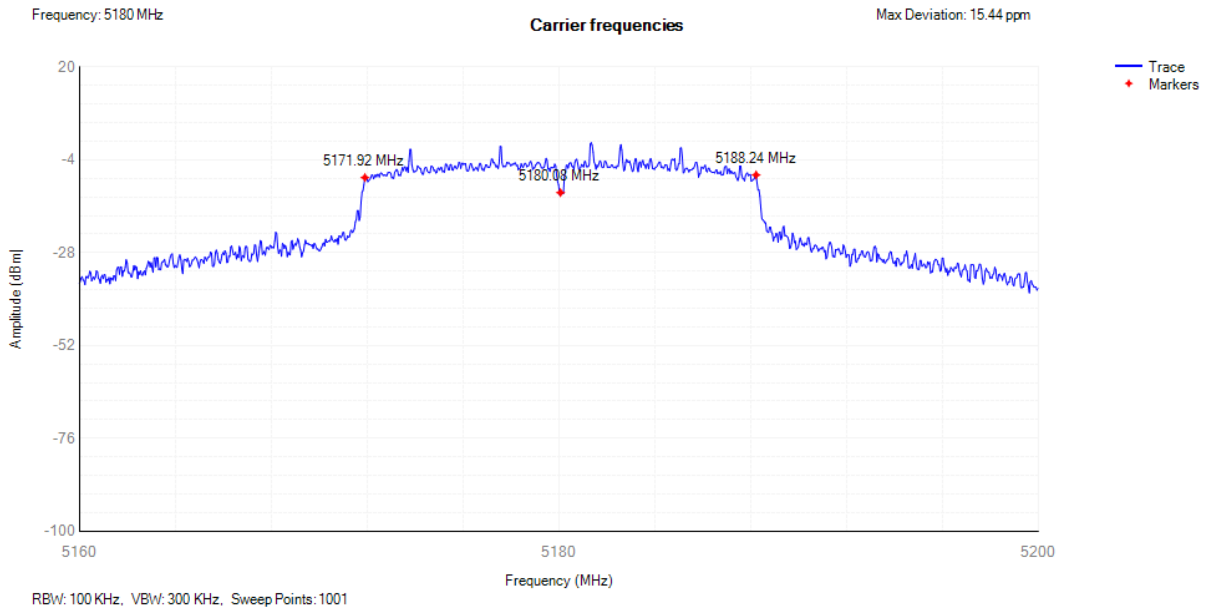


Carrier Freq. NVNT 802.11a 5180MHz

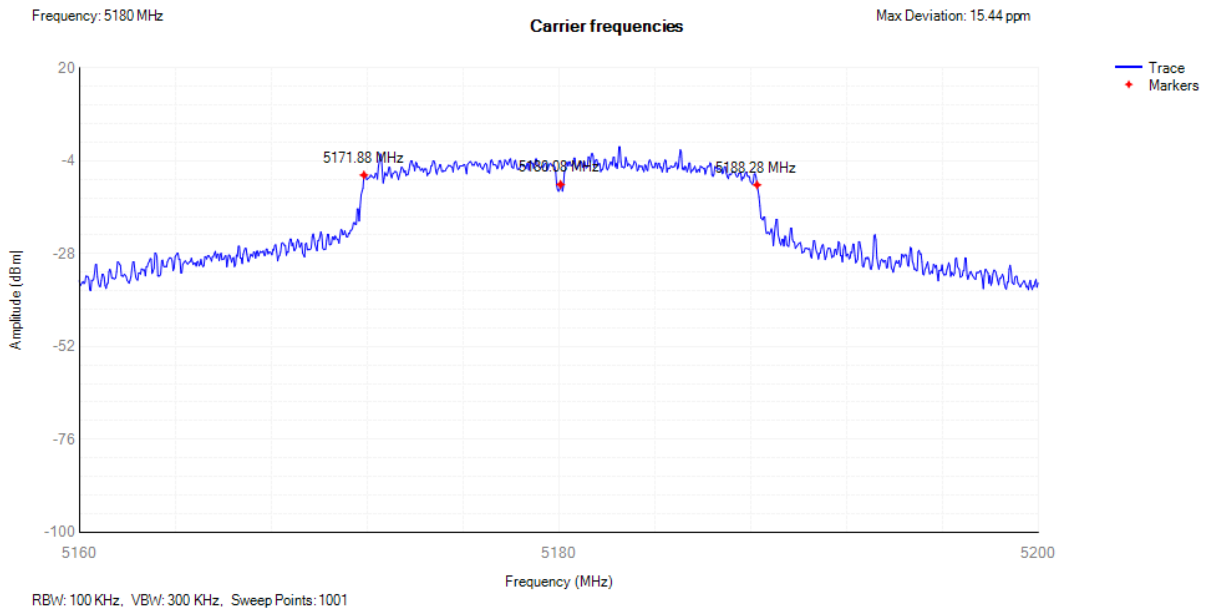


Carrier Freq. LVHT 802.11ac20 5180MHz

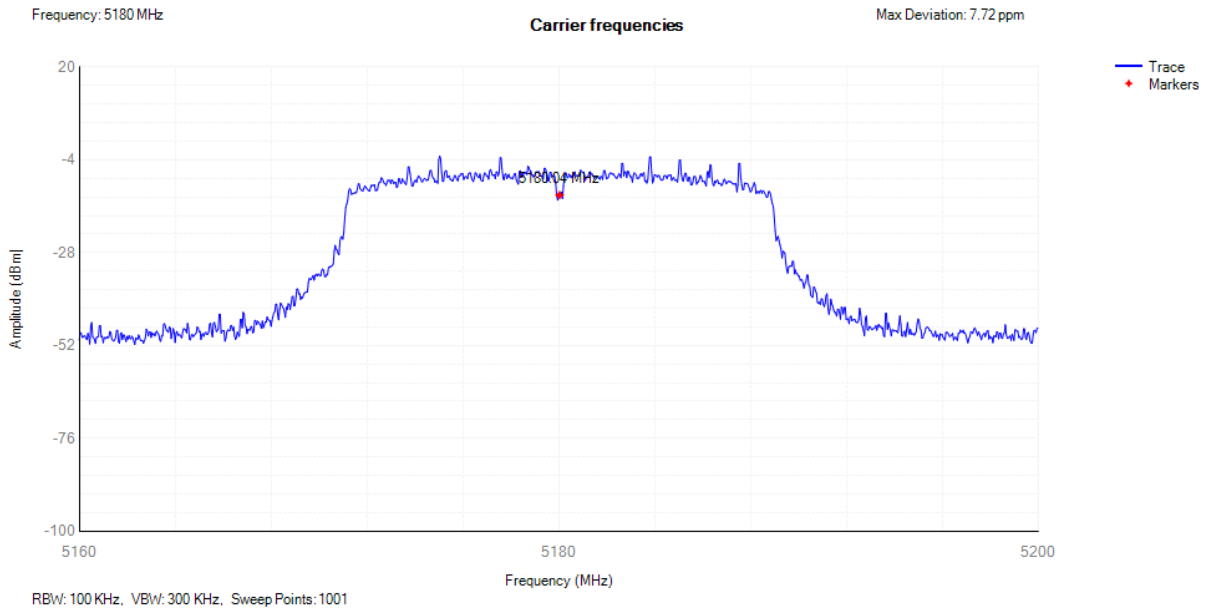


Carrier Freq. LVLT 802.11ac20 5180MHz

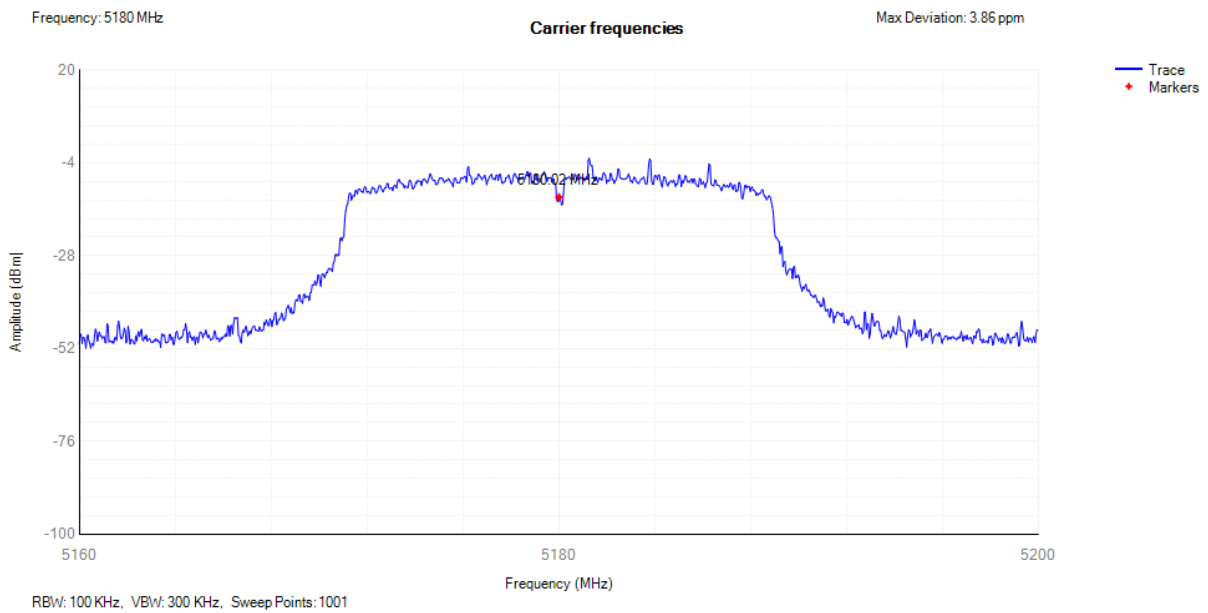


Carrier Freq. NVNT 802.11ac20 5180MHz

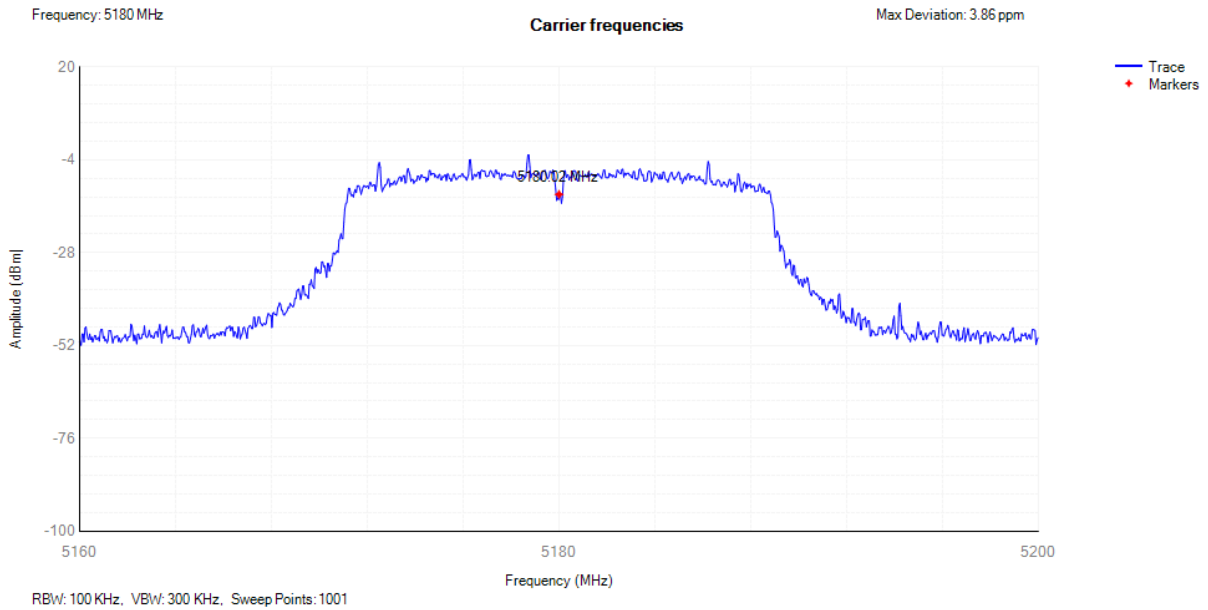


Carrier Freq. LVHT 802.11ac40 5190MHz

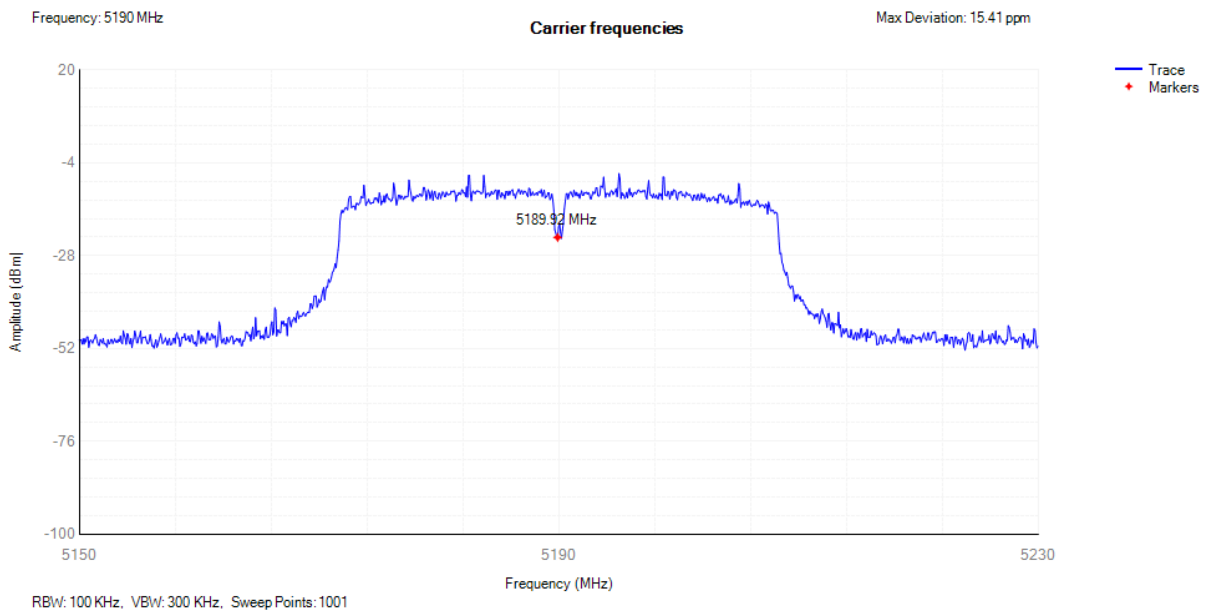


Carrier Freq. LVLT 802.11ac40 5190MHz

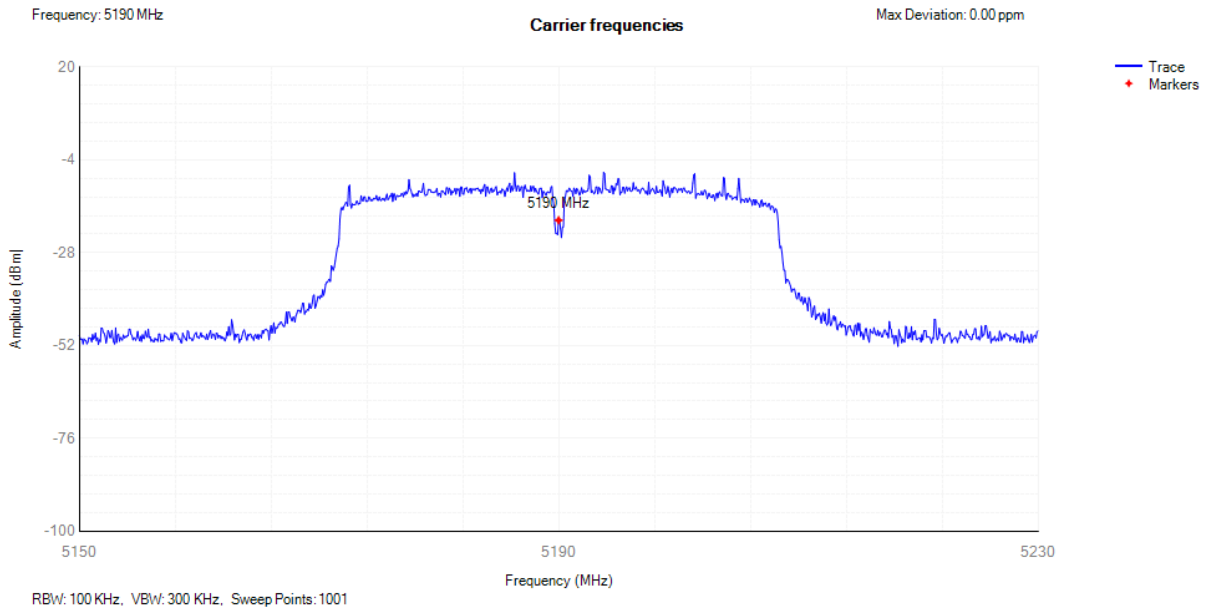


Carrier Freq. NVNT 802.11ac40 5190MHz

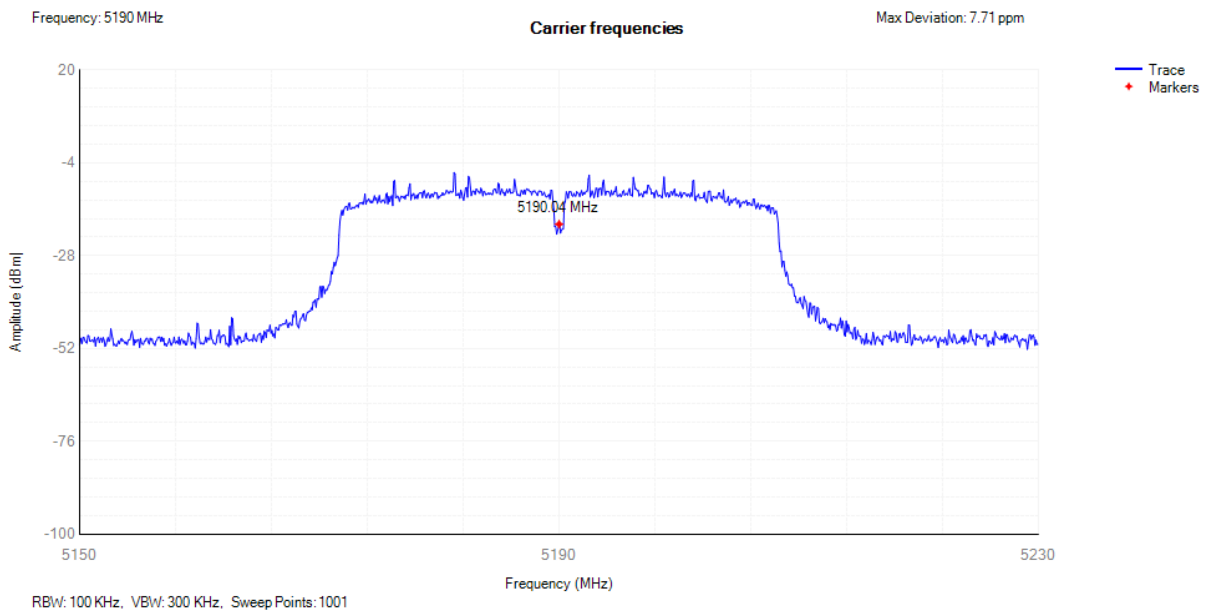


Carrier Freq. LVHT 802.11ac80 5210MHz

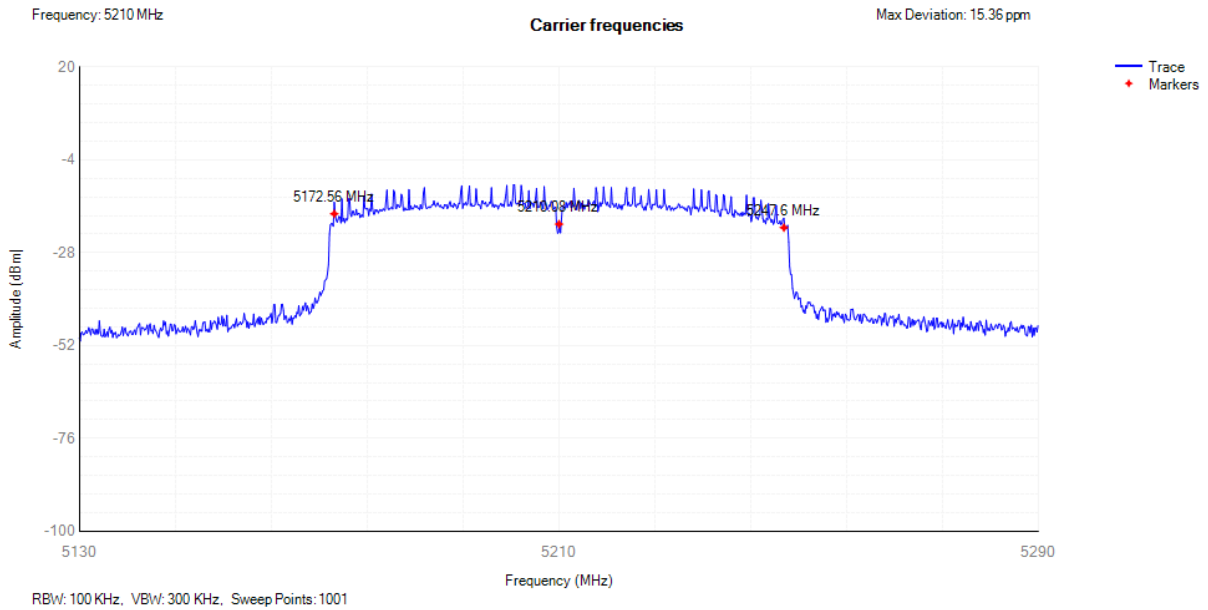


Carrier Freq. LVLT 802.11ac80 5210MHz

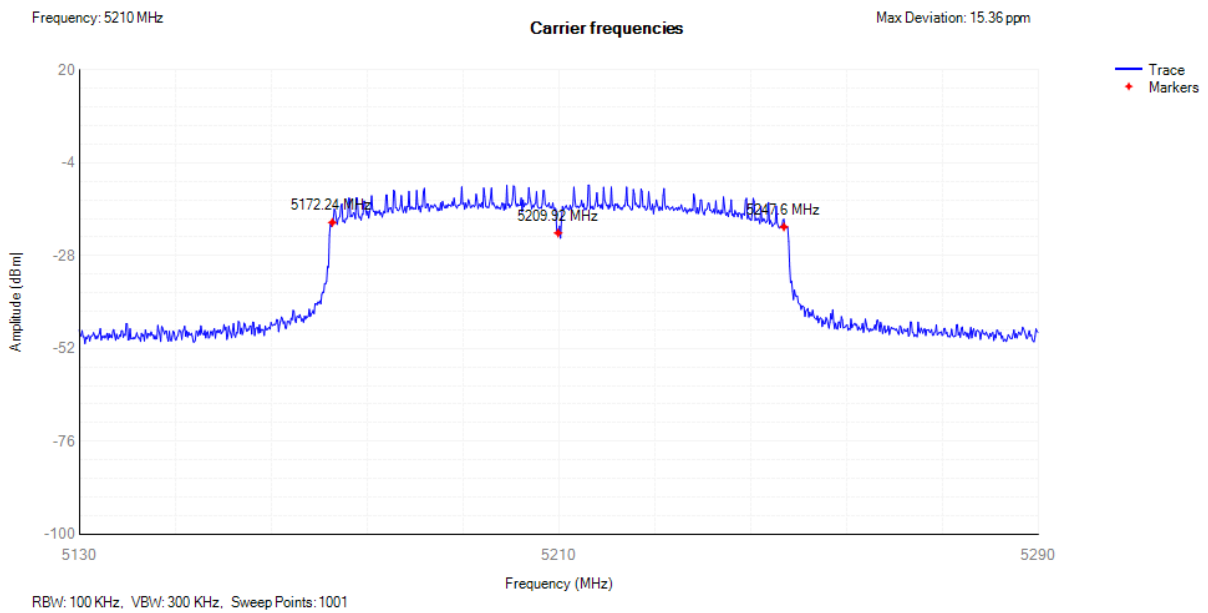


Carrier Freq. NVNT 802.11ac80 5210MHz

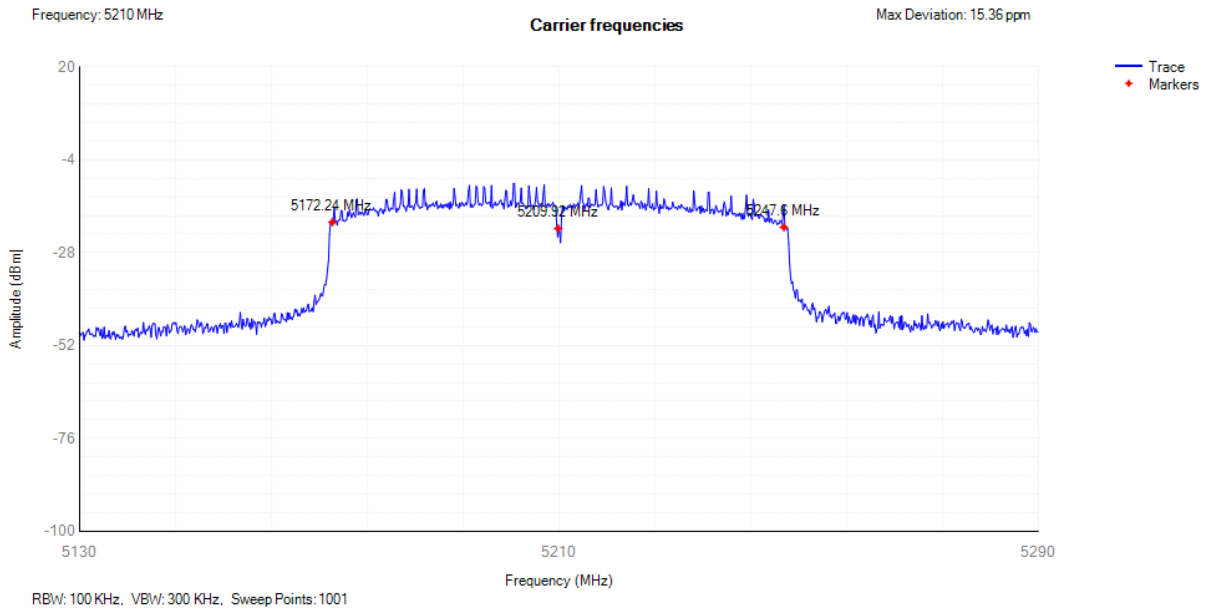


Carrier Freq. LVHT 802.11n(HT20) 5180MHz

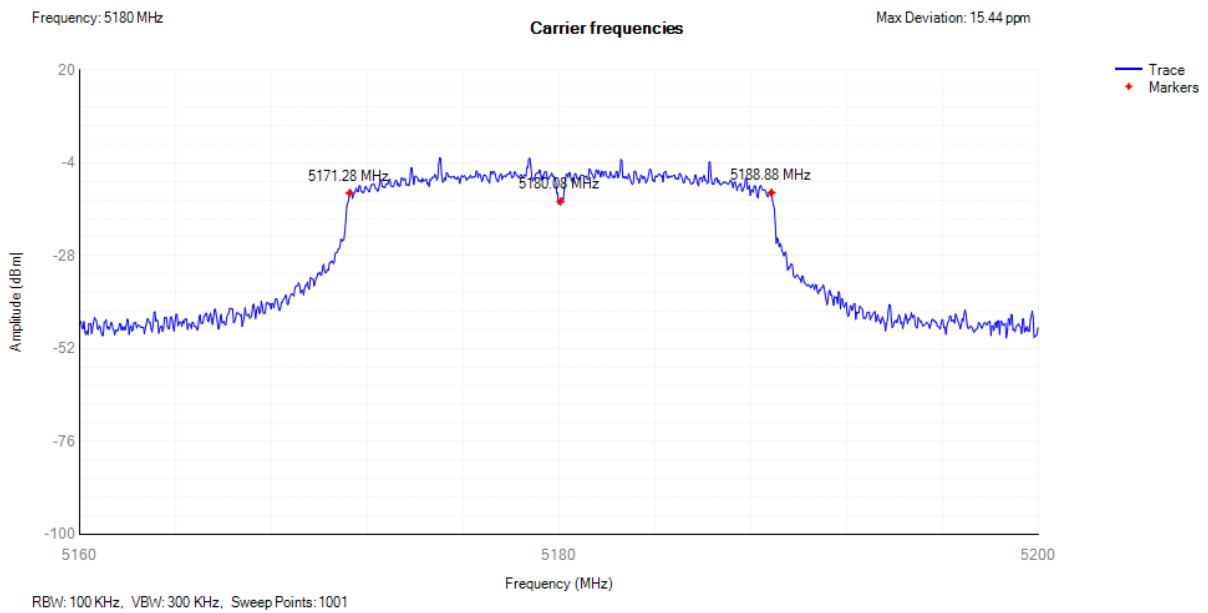


Carrier Freq. LVLT 802.11n(HT20) 5180MHz

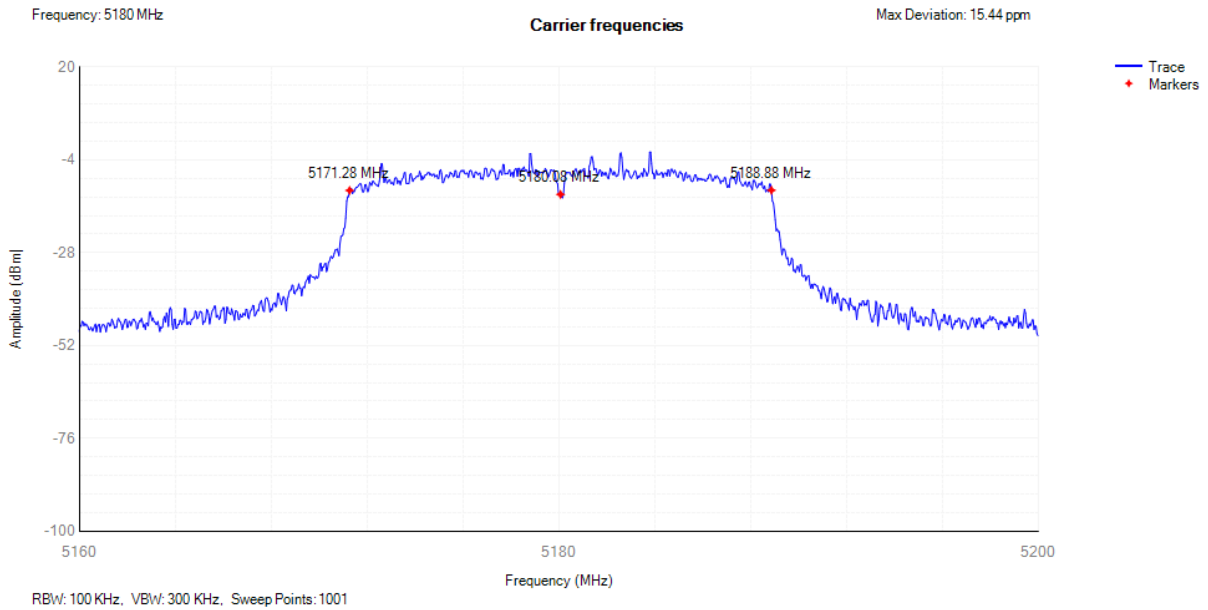


Carrier Freq. NVNT 802.11n(HT20) 5180MHz

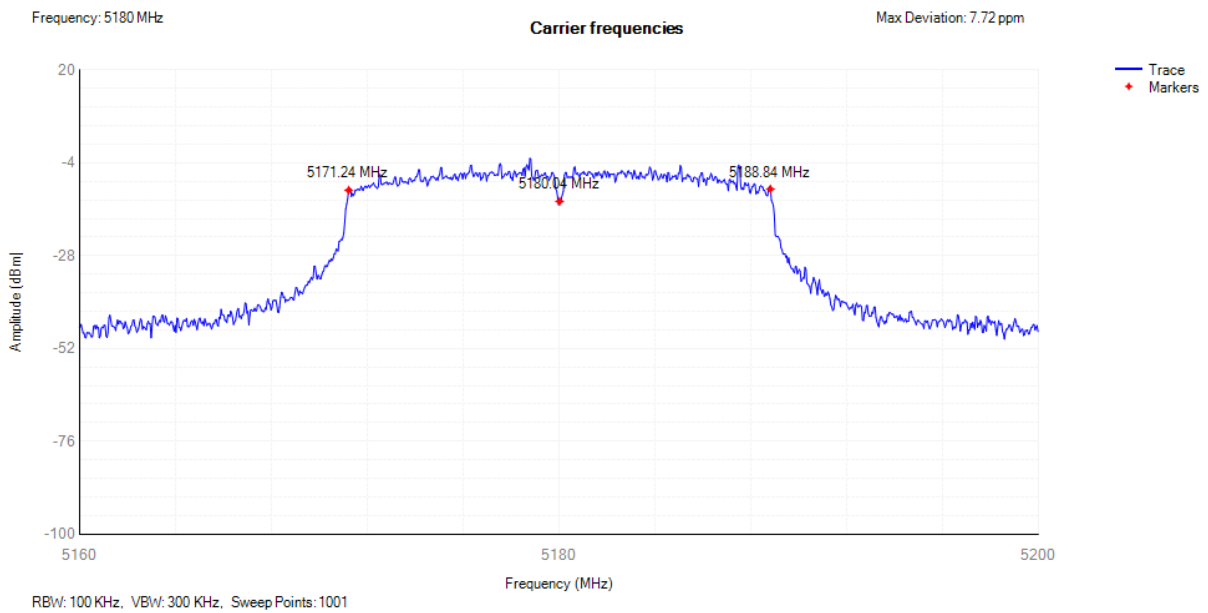


Carrier Freq. LVHT 802.11n(HT40) 5190MHz

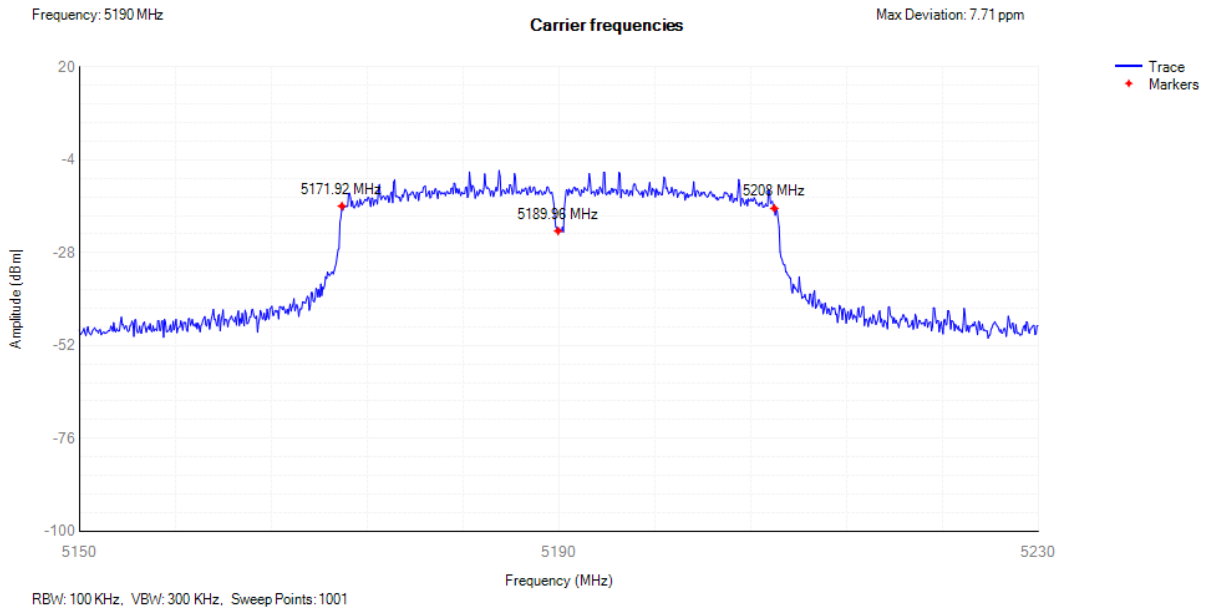

Carrier Freq. LVLT 802.11n(HT40) 5190MHz

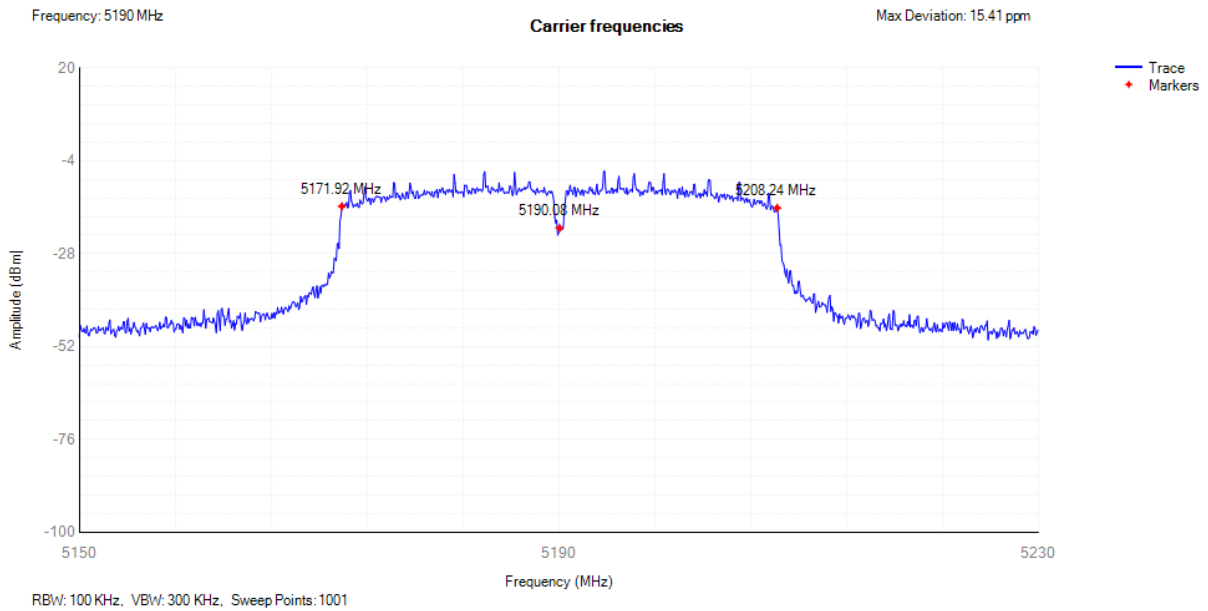


Carrier Freq. NVNT 802.11n(HT40) 5190MHz

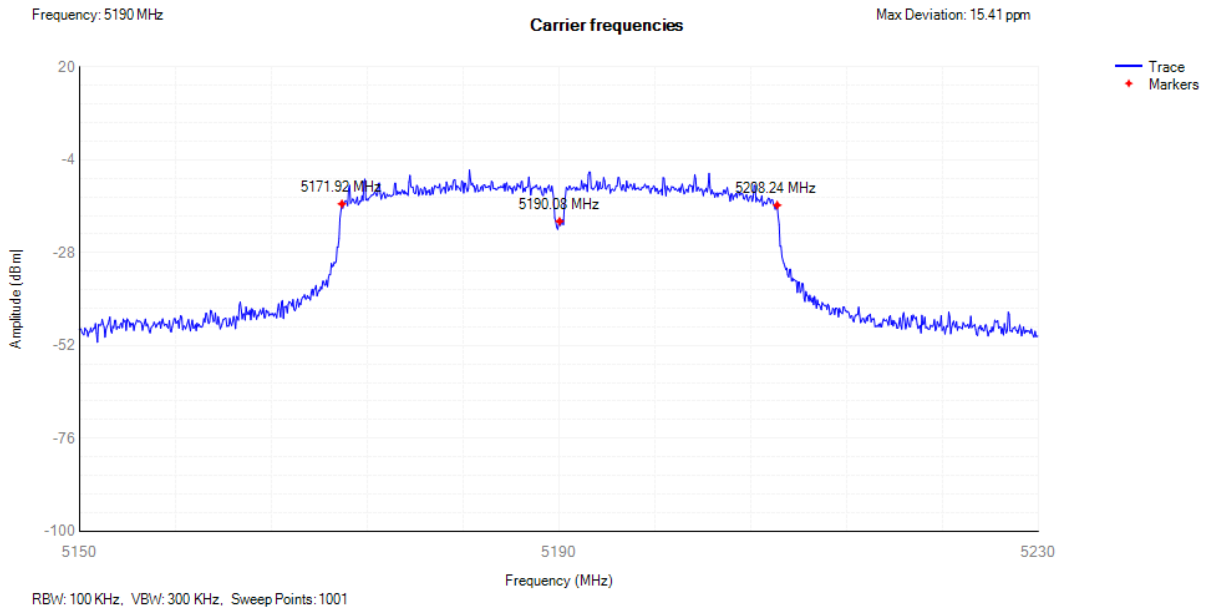


5.4.4 RF Output Power (for External antenna A: 4.5dBi)

Condition	Mode	Frequency (MHz)	Max Burst RMS Power (dBm)	Burst Number	Max EIRP (dBm)	Limit (dBm)	Verdict
LVHT	802.11a	5180	10.68	68	15.18	23	Pass
LVLT	802.11a	5180	10.66	68	15.16	23	Pass
NVNT	802.11a	5180	10.65	67	15.15	23	Pass
LVHT	802.11ac20	5180	8.57	50	13.07	23	Pass
LVLT	802.11ac20	5180	8.57	50	13.07	23	Pass
NVNT	802.11ac20	5180	8.98	50	13.48	23	Pass
LVHT	802.11ac40	5190	7.46	98	11.96	23	Pass
LVLT	802.11ac40	5190	7.48	97	11.98	23	Pass
NVNT	802.11ac40	5190	7.6	98	12.1	23	Pass
LVHT	802.11ac80	5210	7.14	247	11.64	23	Pass
LVLT	802.11ac80	5210	7.23	248	11.73	23	Pass
NVNT	802.11ac80	5210	7.24	247	11.74	23	Pass
LVHT	802.11n(HT20)	5180	9.57	72	14.07	23	Pass
LVLT	802.11n(HT20)	5180	9.62	72	14.12	23	Pass
NVNT	802.11n(HT20)	5180	9.67	72	14.17	23	Pass
LVHT	802.11n(HT40)	5190	8.35	137	12.85	23	Pass
LVLT	802.11n(HT40)	5190	8.3	136	12.8	23	Pass
NVNT	802.11n(HT40)	5190	8.4	137	12.9	23	Pass


Power LVHT 802.11a 5180MHz

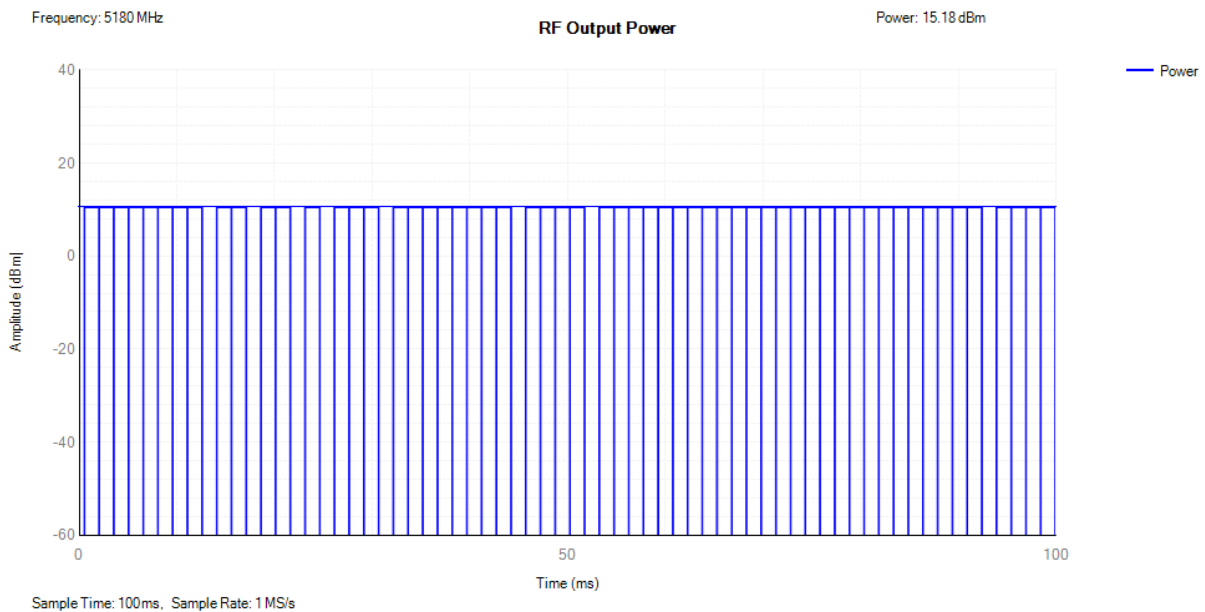


Power LVLT 802.11a 5180MHz

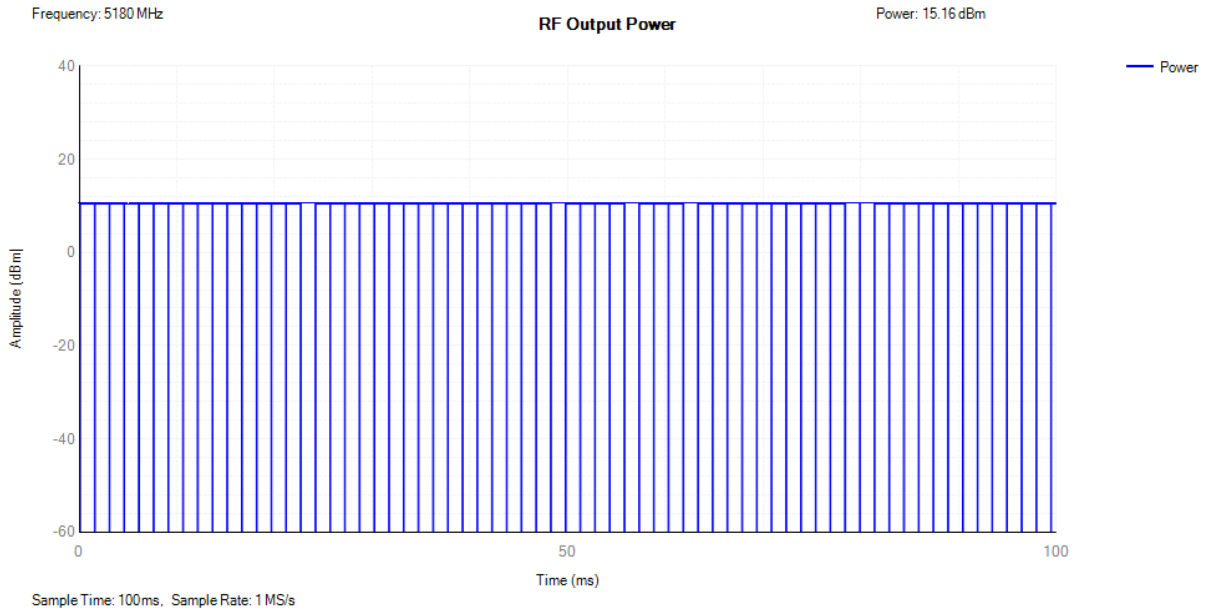


Power NVNT 802.11a 5180MHz

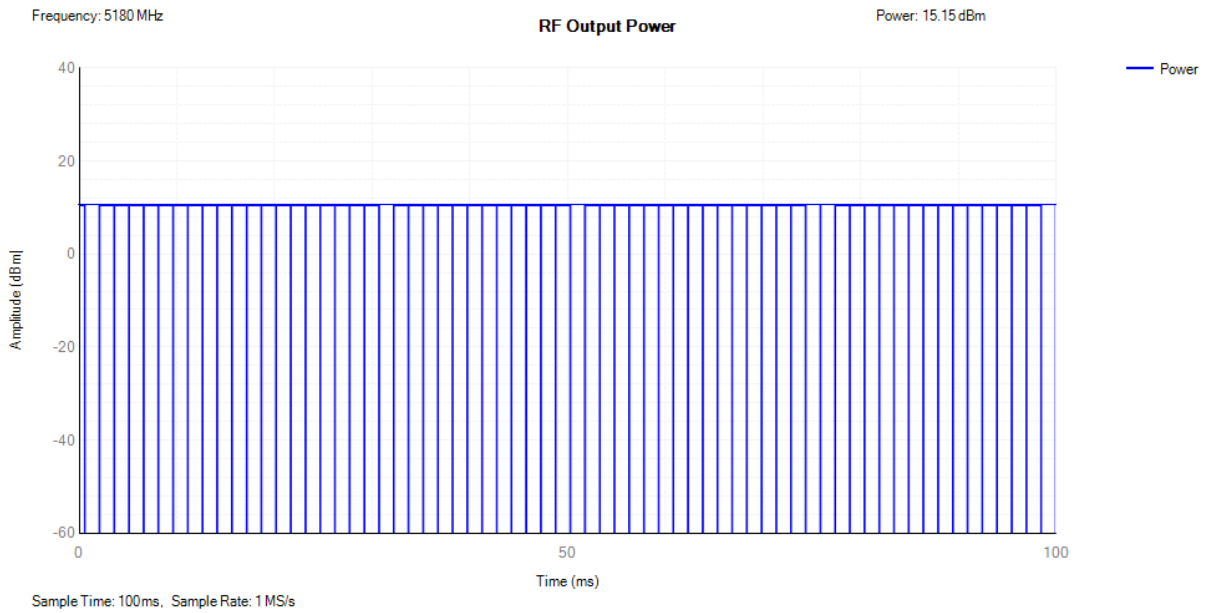


Power LVHT 802.11ac20 5180MHz

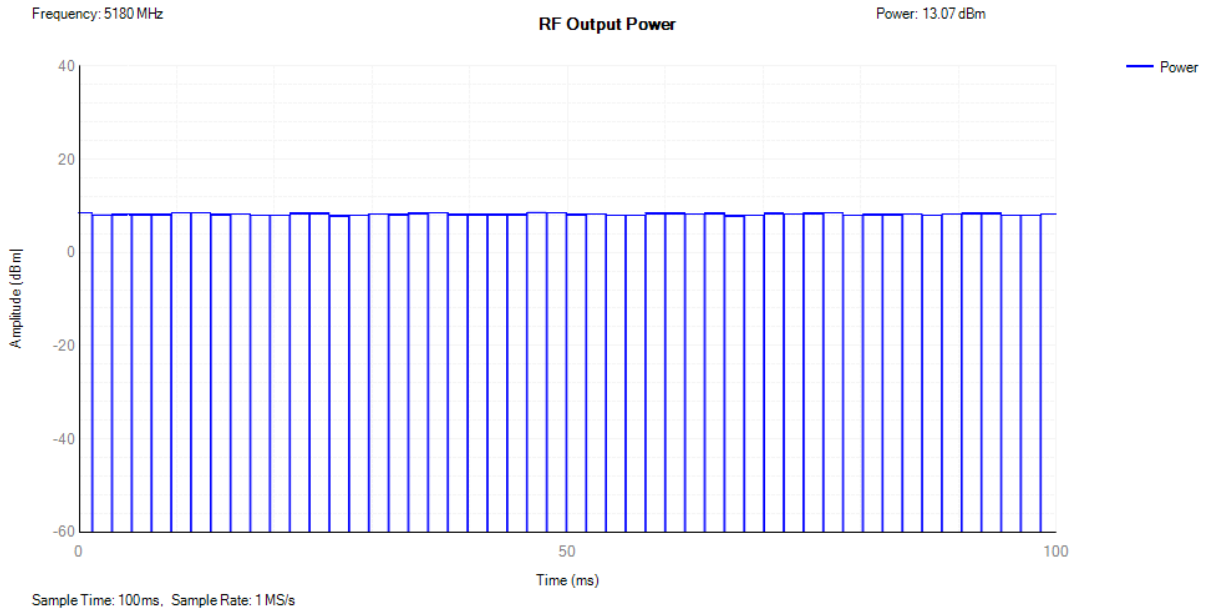


Power LVLT 802.11ac20 5180MHz

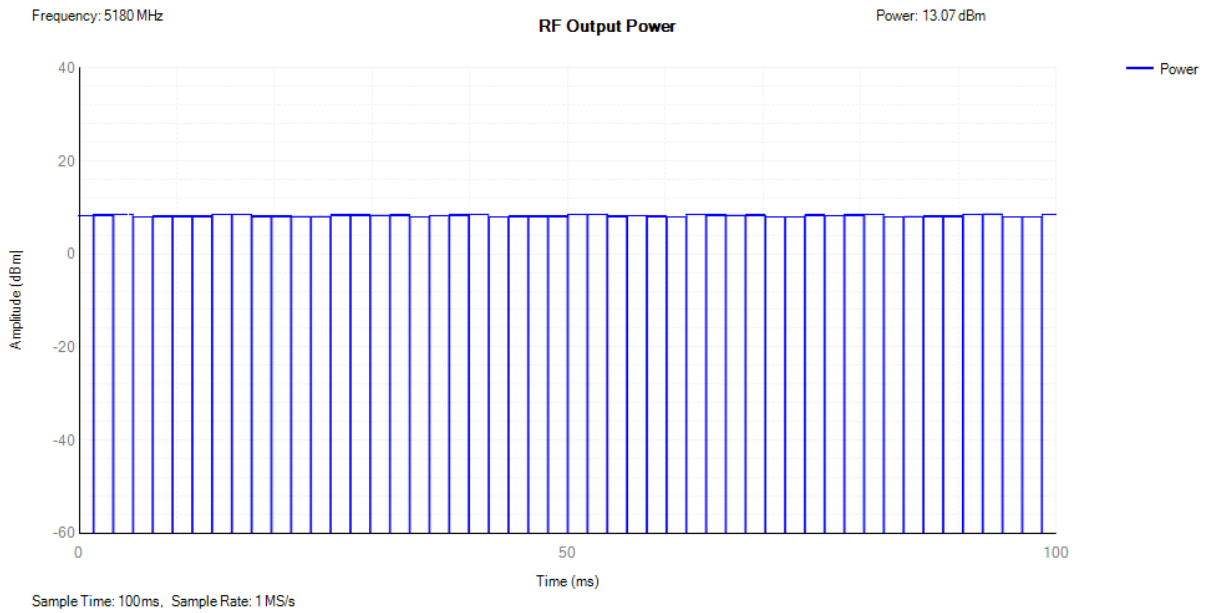


Power NVNT 802.11ac20 5180MHz

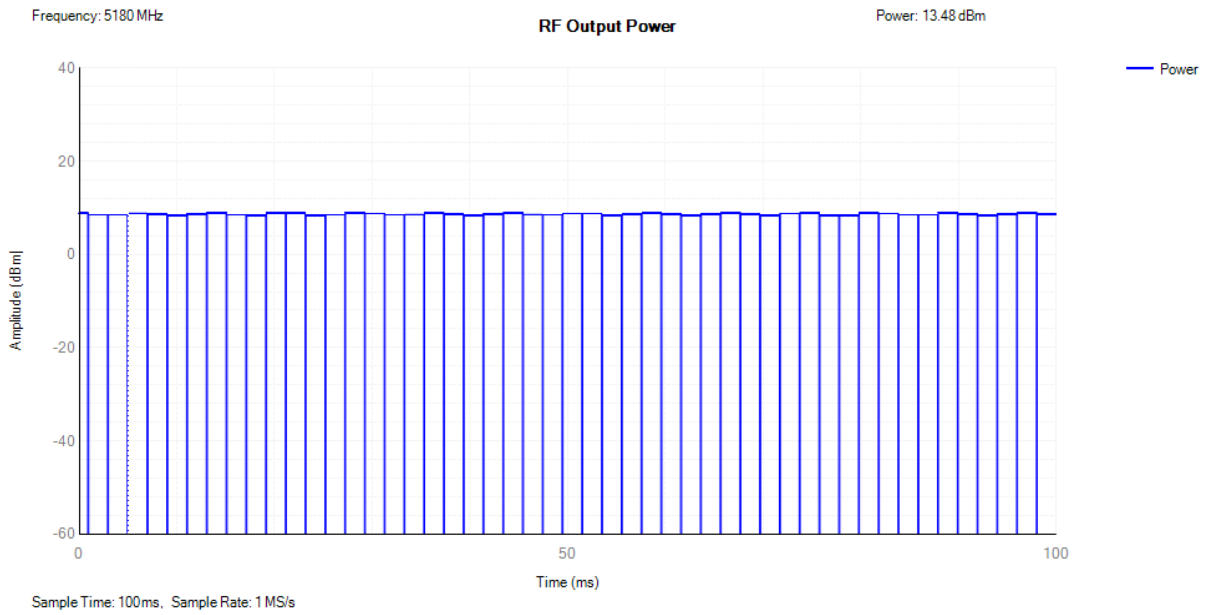


Power LVHT 802.11ac40 5190MHz

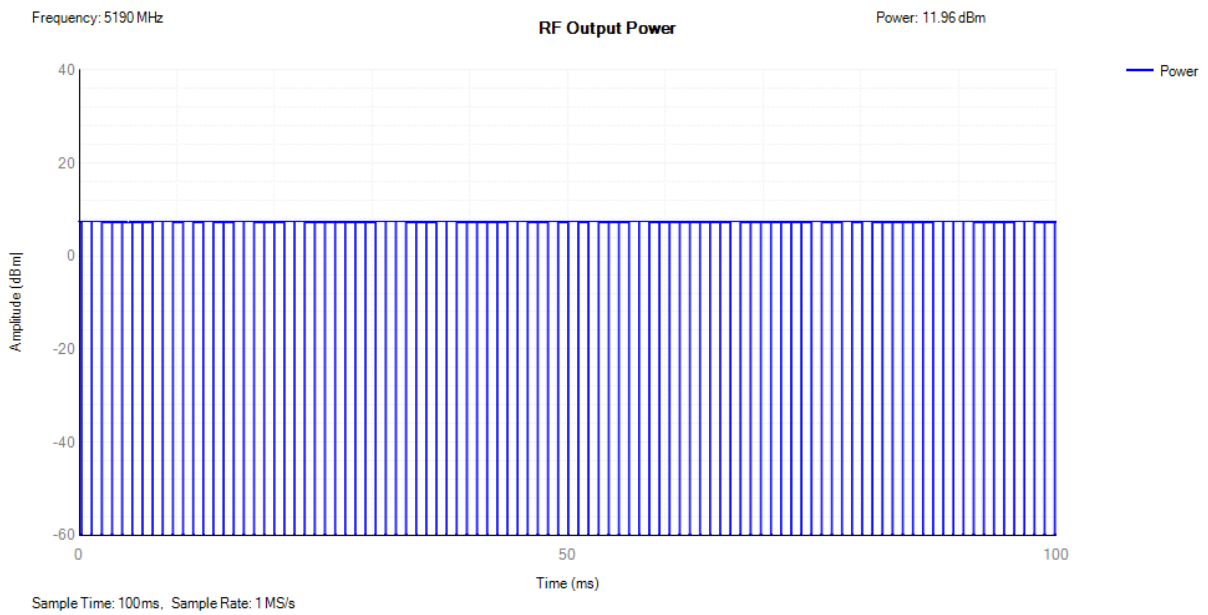


Power LVL 802.11ac40 5190MHz

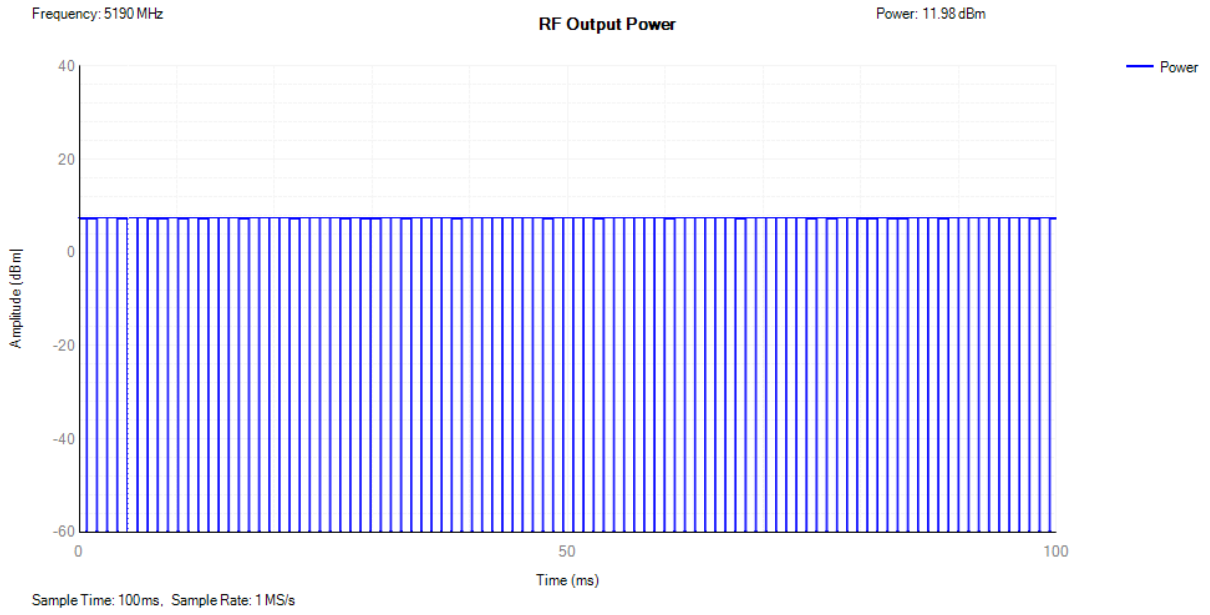


Power NVNT 802.11ac40 5190MHz

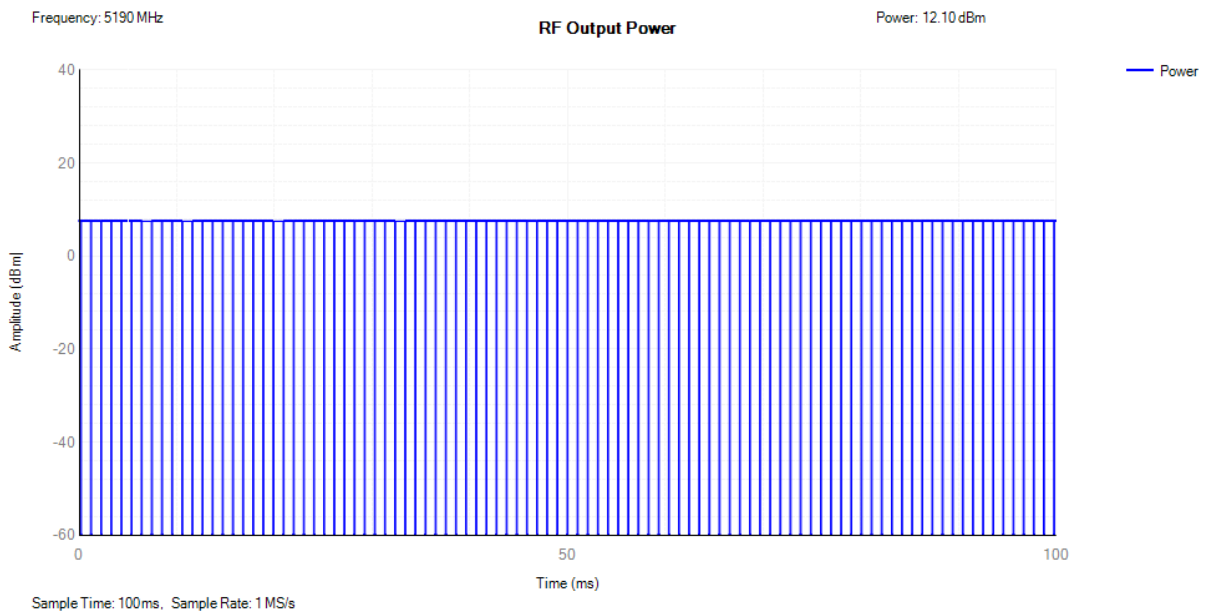


Power LVHT 802.11ac80 5210MHz

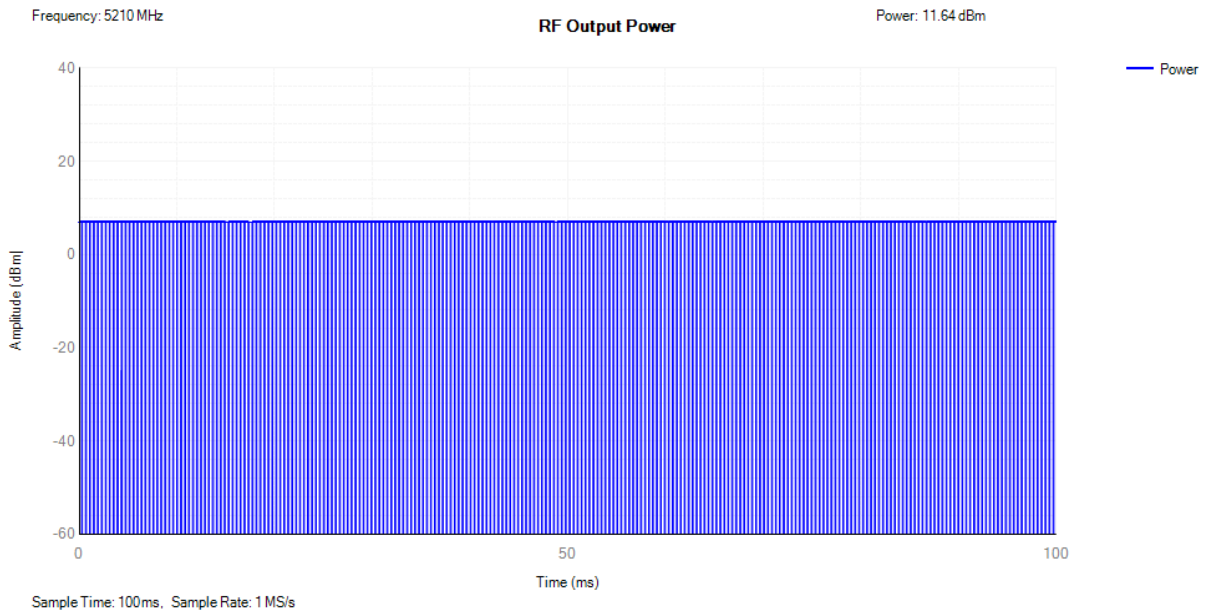


Power LVLT 802.11ac80 5210MHz

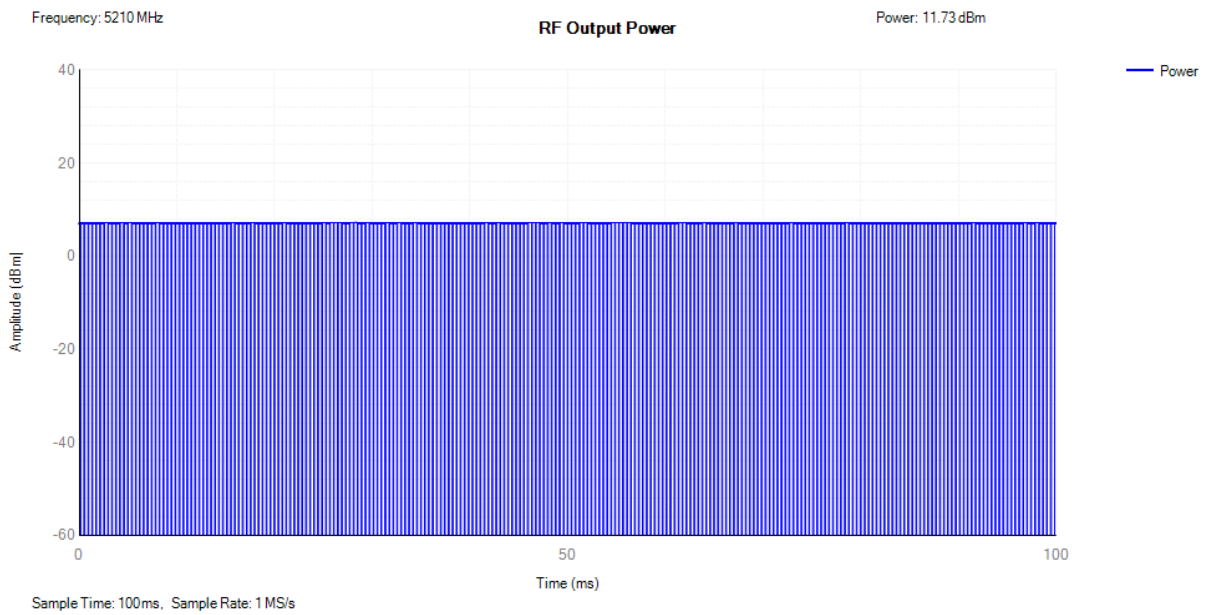


Power NVNT 802.11ac80 5210MHz

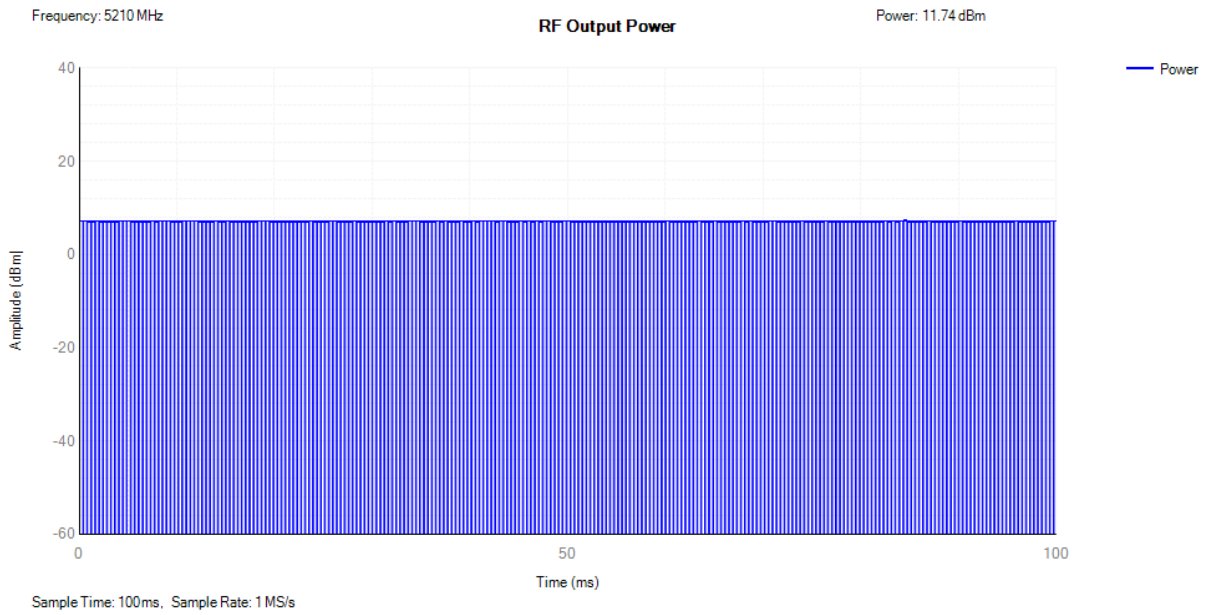


Power LVHT 802.11n(HT20) 5180MHz

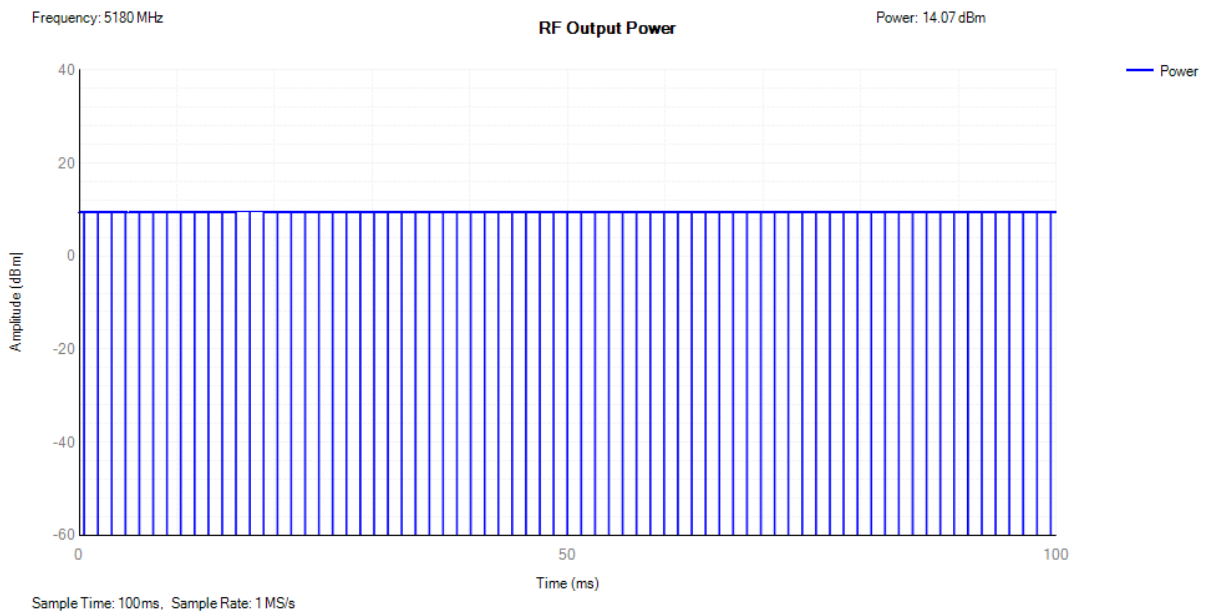


Power LVL 802.11n(HT20) 5180MHz

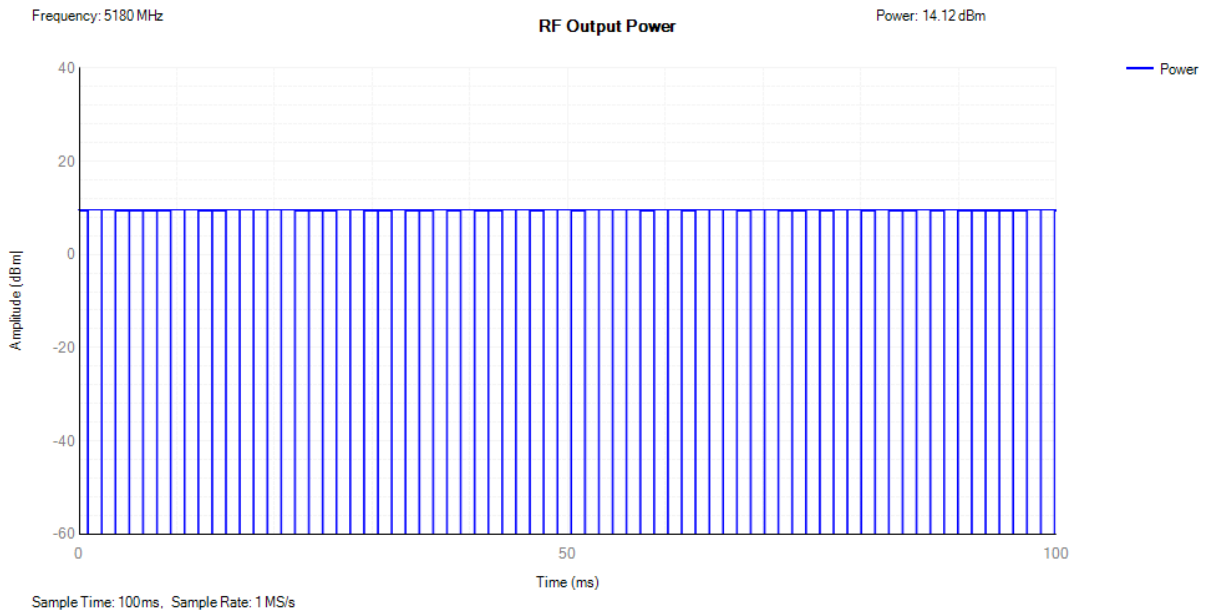


Power NVNT 802.11n(HT20) 5180MHz

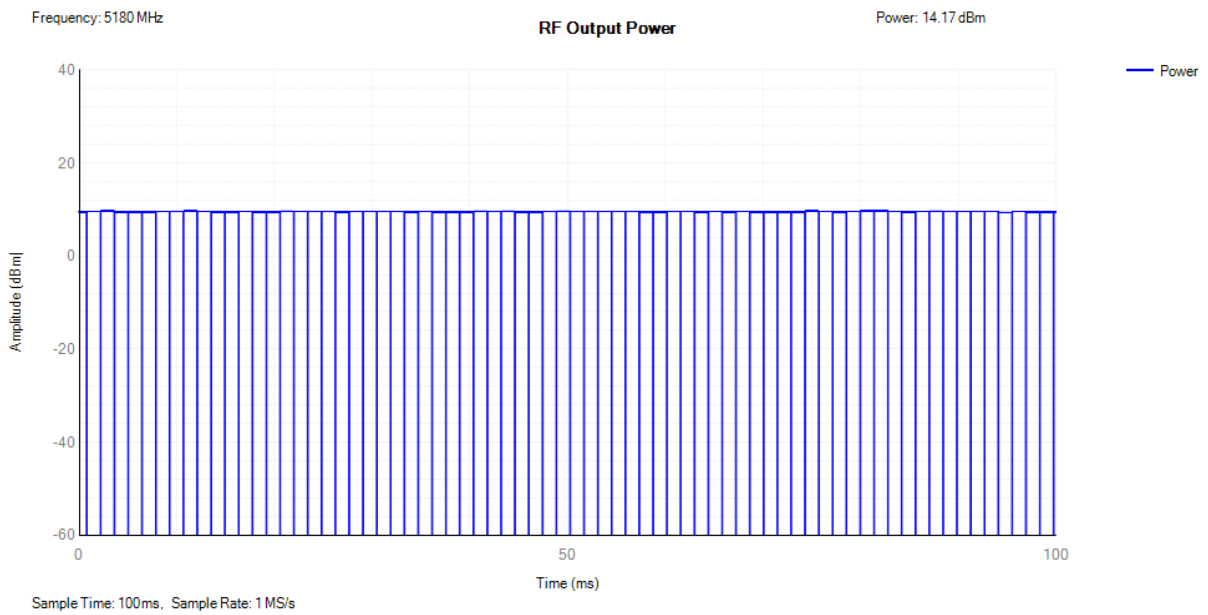


Power LVHT 802.11n(HT40) 5190MHz

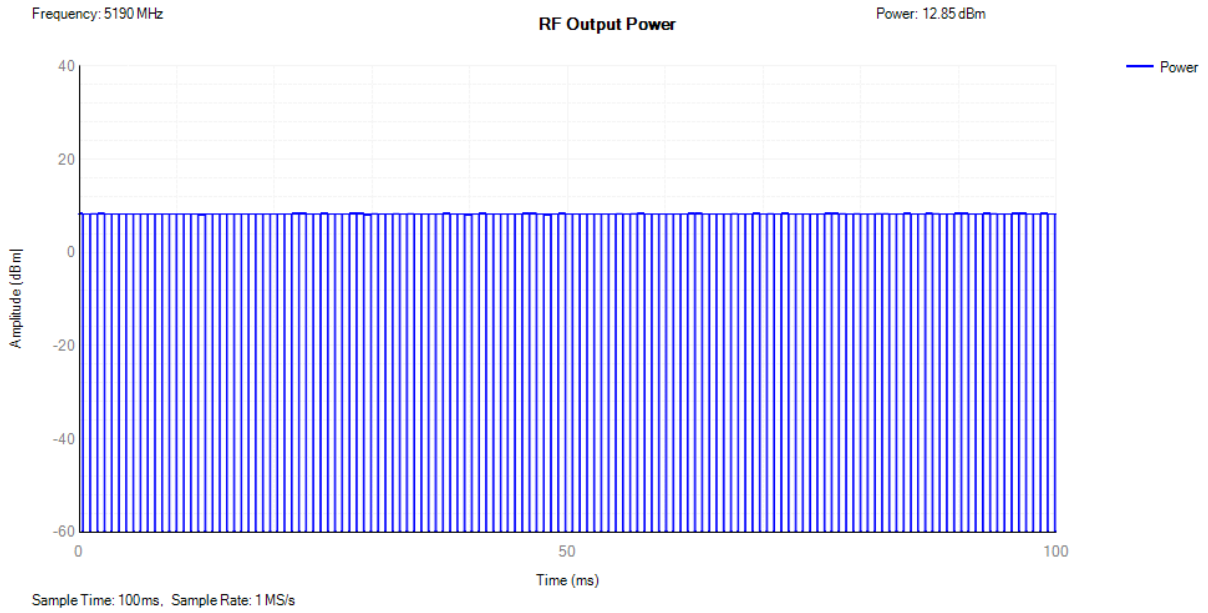

Power LVLT 802.11n(HT40) 5190MHz

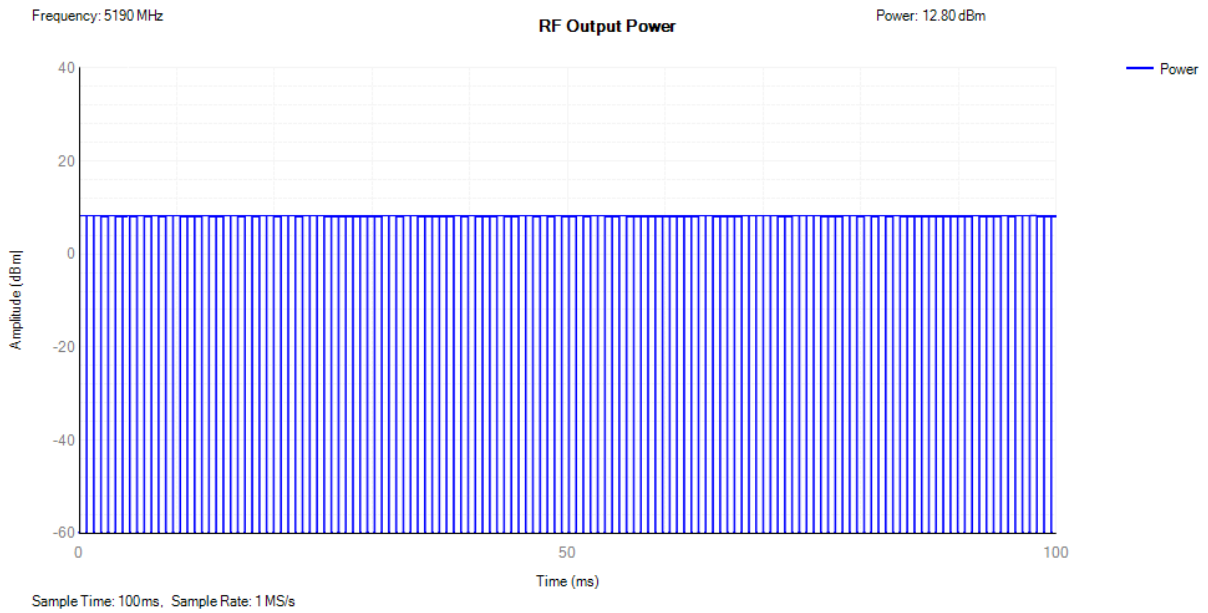

Power NVNT 802.11n(HT40) 5190MHz

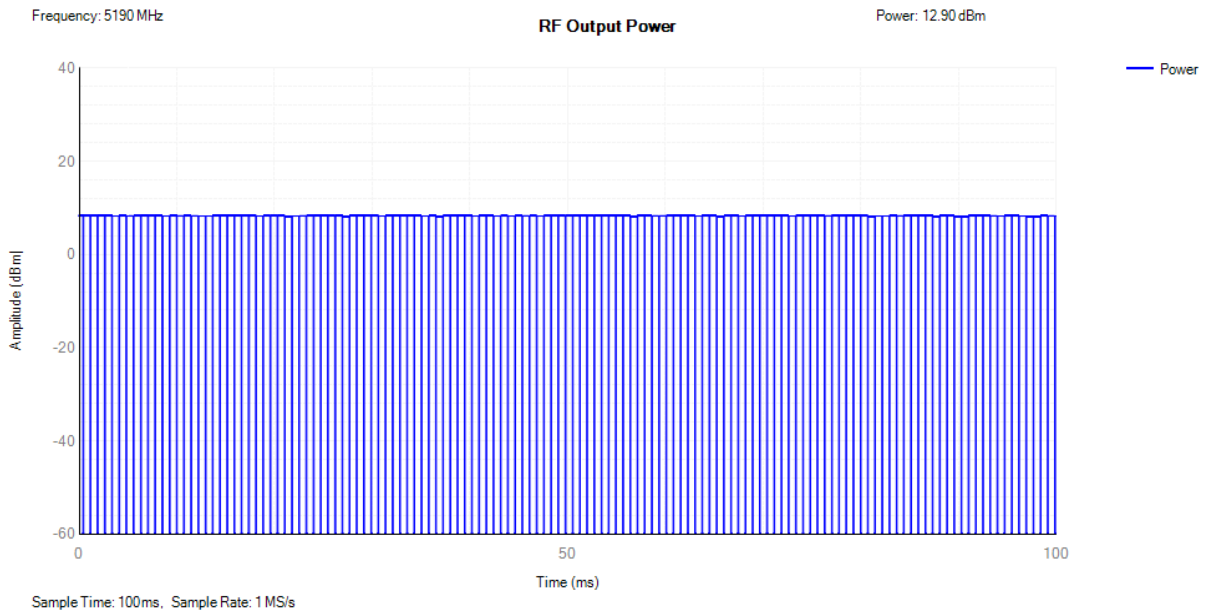

Remark: Max EIRP=Max Burst RMS Power + Antenna Gain
So RF Output Power (for External antenna B: 4.25dBi):

Condition	Mode	Frequency (MHz)	Max Burst RMS Power (dBm)	Burst Number	Max EIRP (dBm)	Limit (dBm)	Verdict
LVHT	802.11a	5180	10.68	68	14.93	23	Pass
LVLT	802.11a	5180	10.66	68	14.91	23	Pass
NVNT	802.11a	5180	10.65	67	14.9	23	Pass
LVHT	802.11ac20	5180	8.57	50	12.82	23	Pass
LVLT	802.11ac20	5180	8.57	50	12.82	23	Pass
NVNT	802.11ac20	5180	8.98	50	13.23	23	Pass
LVHT	802.11ac40	5190	7.46	98	11.71	23	Pass
LVLT	802.11ac40	5190	7.48	97	11.73	23	Pass
NVNT	802.11ac40	5190	7.6	98	11.85	23	Pass
LVHT	802.11ac80	5210	7.14	247	11.39	23	Pass
LVLT	802.11ac80	5210	7.23	248	11.48	23	Pass
NVNT	802.11ac80	5210	7.24	247	11.49	23	Pass
LVHT	802.11n(HT20)	5180	9.57	72	13.82	23	Pass
LVLT	802.11n(HT20)	5180	9.62	72	13.87	23	Pass
NVNT	802.11n(HT20)	5180	9.67	72	13.92	23	Pass
LVHT	802.11n(HT40)	5190	8.35	137	12.6	23	Pass
LVLT	802.11n(HT40)	5190	8.3	136	12.55	23	Pass
NVNT	802.11n(HT40)	5190	8.4	137	12.65	23	Pass


RF Output Power (for Ceramic Antenna: 3dBi):

Condition	Mode	Frequency (MHz)	Max Burst RMS Power (dBm)	Burst Number	Max EIRP (dBm)	Limit (dBm)	Verdict
LVHT	802.11a	5180	10.68	48	14.93	23	Pass
LVLT	802.11a	5180	10.66	47	14.91	23	Pass
NVNT	802.11a	5180	10.65	47	14.9	23	Pass
LVHT	802.11ac20	5180	8.57	51	12.82	23	Pass
LVLT	802.11ac20	5180	8.57	50	12.82	23	Pass
NVNT	802.11ac20	5180	8.98	50	13.23	23	Pass
LVHT	802.11ac40	5190	7.46	98	11.71	23	Pass
LVLT	802.11ac40	5190	7.48	97	11.73	23	Pass
NVNT	802.11ac40	5190	7.6	97	11.85	23	Pass
LVHT	802.11ac80	5210	7.14	183	11.39	23	Pass
LVLT	802.11ac80	5210	7.23	183	11.48	23	Pass
NVNT	802.11ac80	5210	7.24	183	11.49	23	Pass
LVHT	802.11n(HT20)	5180	9.57	51	13.82	23	Pass
LVLT	802.11n(HT20)	5180	9.62	51	13.87	23	Pass
NVNT	802.11n(HT20)	5180	9.67	50	13.92	23	Pass
LVHT	802.11n(HT40)	5190	8.35	98	12.6	23	Pass
LVLT	802.11n(HT40)	5190	8.3	98	12.55	23	Pass
NVNT	802.11n(HT40)	5190	8.4	98	12.65	23	Pass


5.4.3 Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Center Frequency (MHz)	OBW (MHz)	Lower Limit (MHz)	Upper Limit(MHz)	Verdict
NVNT	802.11a	5180	5180.071	16.304	16	20	Pass
NVNT	802.11ac20	5180	5180.004	17.473	16	20	Pass
NVNT	802.11ac40	5190	5190.016	35.775	32	40	Pass
NVNT	802.11ac80	5210	5209.976	74.878	64	80	Pass
NVNT	802.11n(HT20)	5180	5180.031	17.481	16	20	Pass
NVNT	802.11n(HT40)	5190	5190.042	35.804	32	40	Pass


OBW NVNT 802.11a 5180MHz

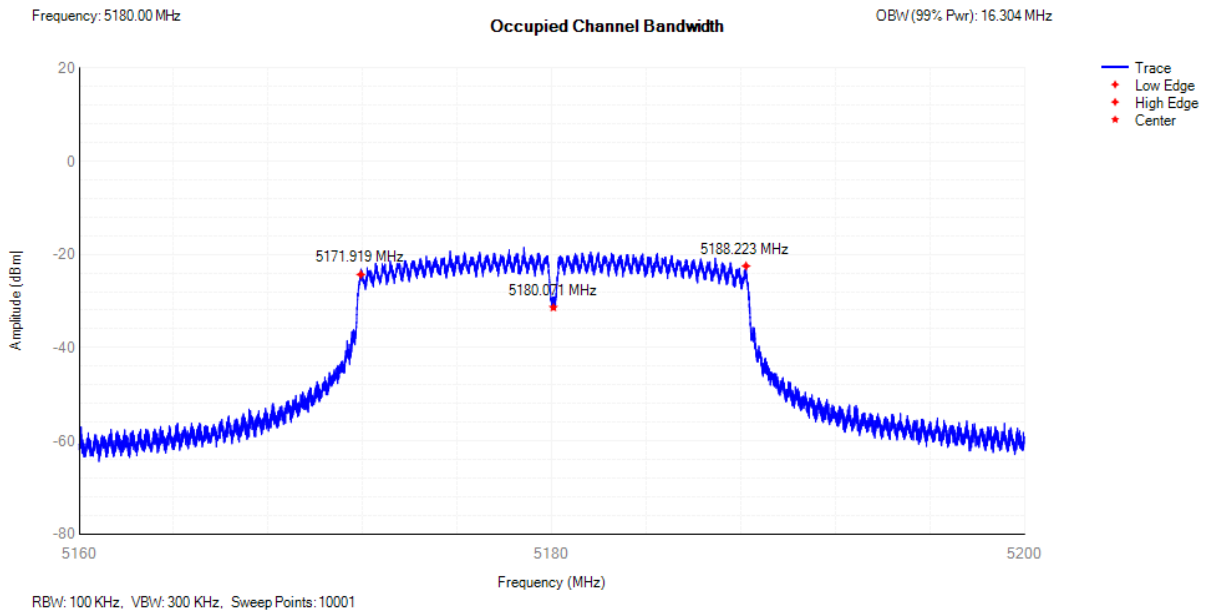


OBW NVNT 802.11ac20 5180MHz

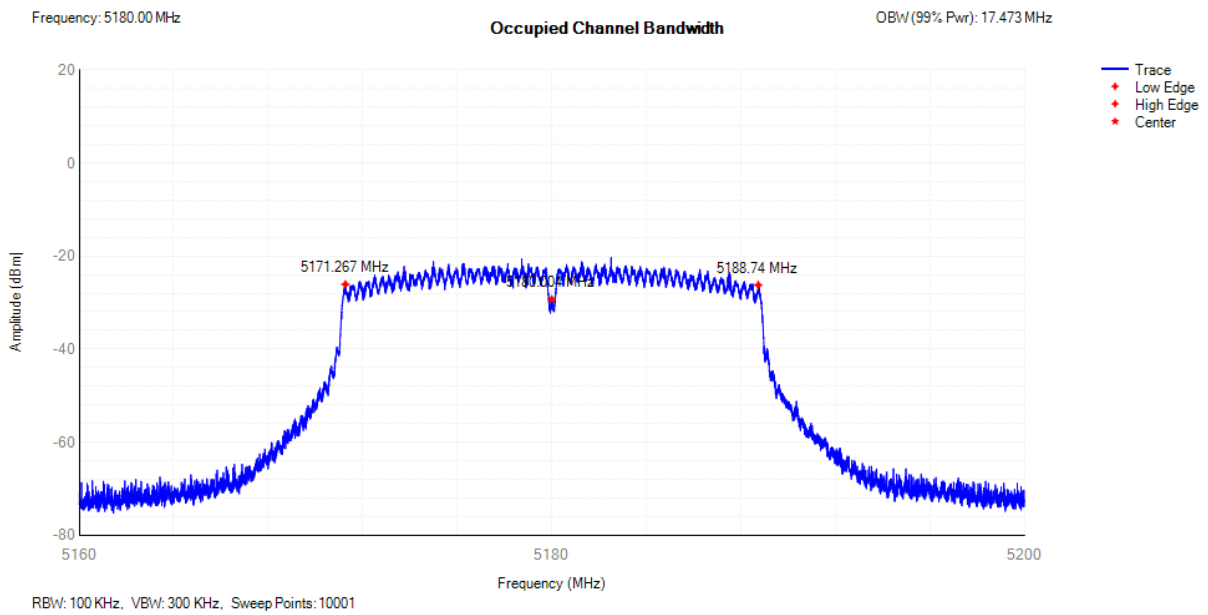


OBW NVNT 802.11ac40 5190MHz

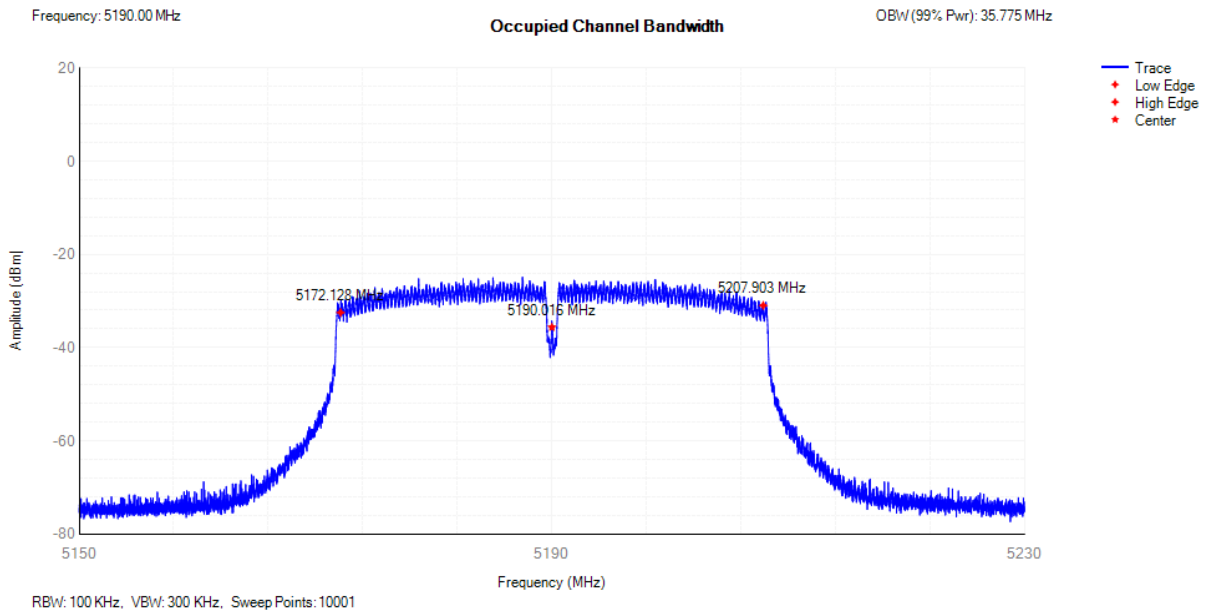


OBW NVNT 802.11ac80 5210MHz

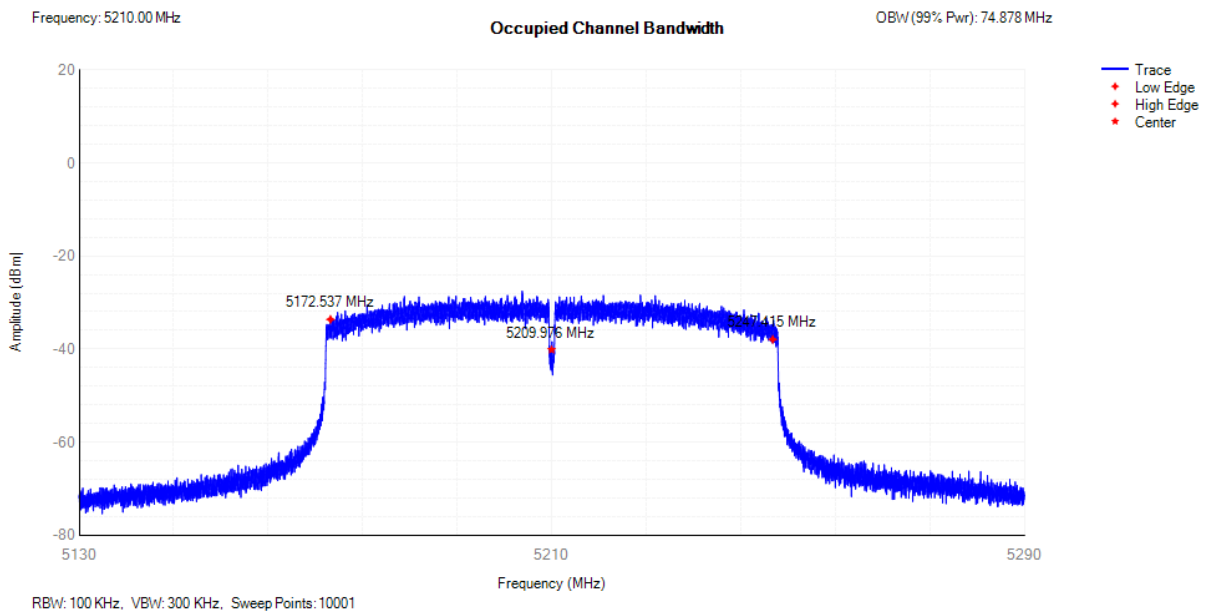

OBW NVNT 802.11n(HT20) 5180MHz

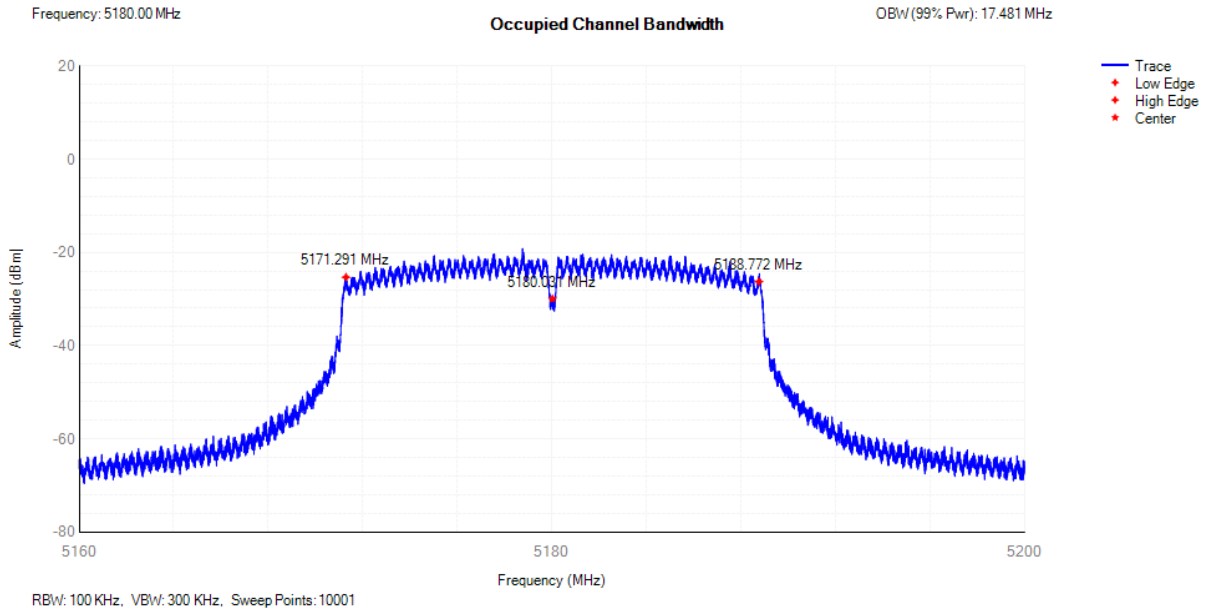


OBW NVNT 802.11n(HT40) 5190MHz

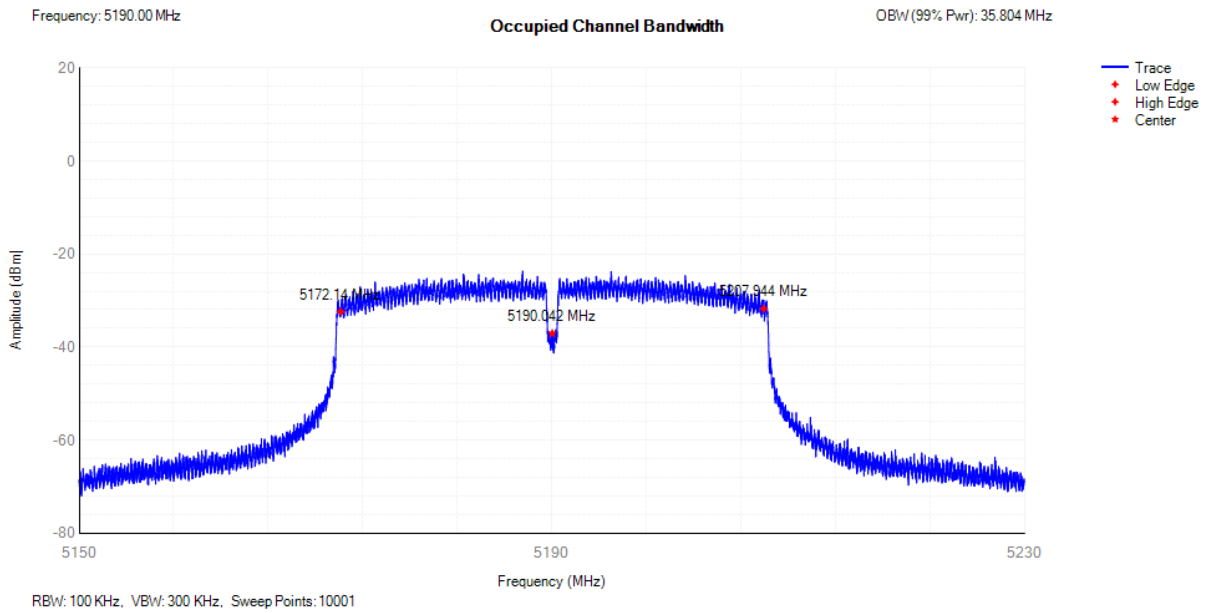


5.4.4 Power Spectral Density (for External antenna A: 4.5dBi):

Condition	Mode	Frequency (MHz)	Max PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
NVNT	802.11a	5180	2.81	10	Pass
NVNT	802.11ac20	5180	0.92	10	Pass
NVNT	802.11ac40	5190	-3.57	10	Pass
NVNT	802.11ac80	5210	-6.66	10	Pass
NVNT	802.11n(HT20)	5180	1.62	10	Pass
NVNT	802.11n(HT40)	5190	-2.56	10	Pass


PSD NVNT 802.11a 5180MHz

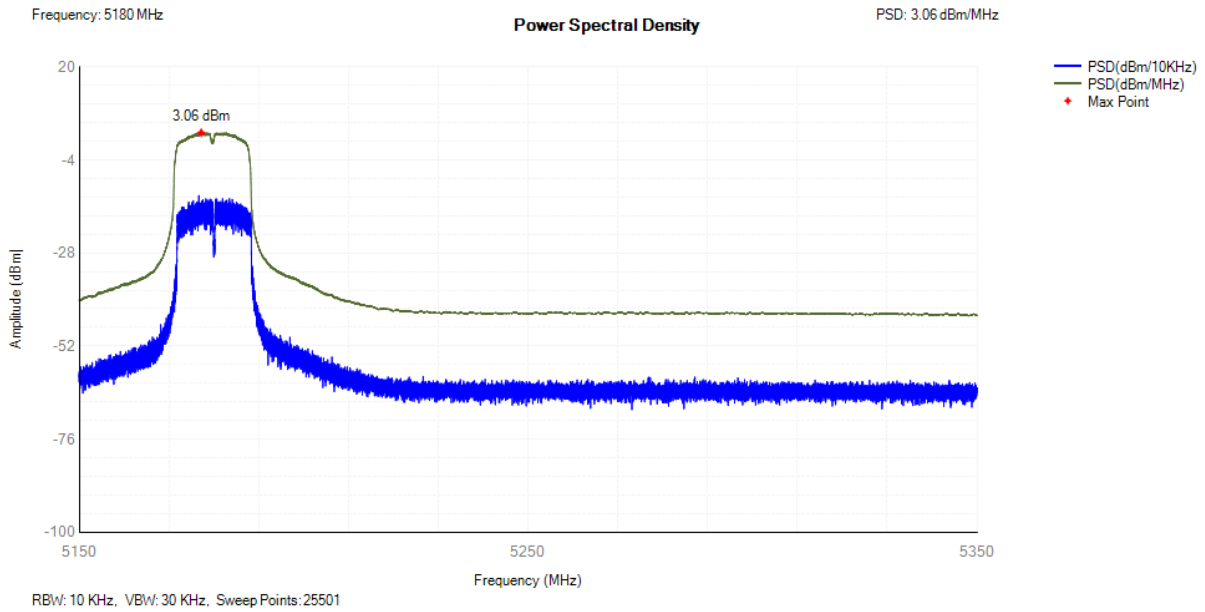


PSD NVNT 802.11ac20 5180MHz

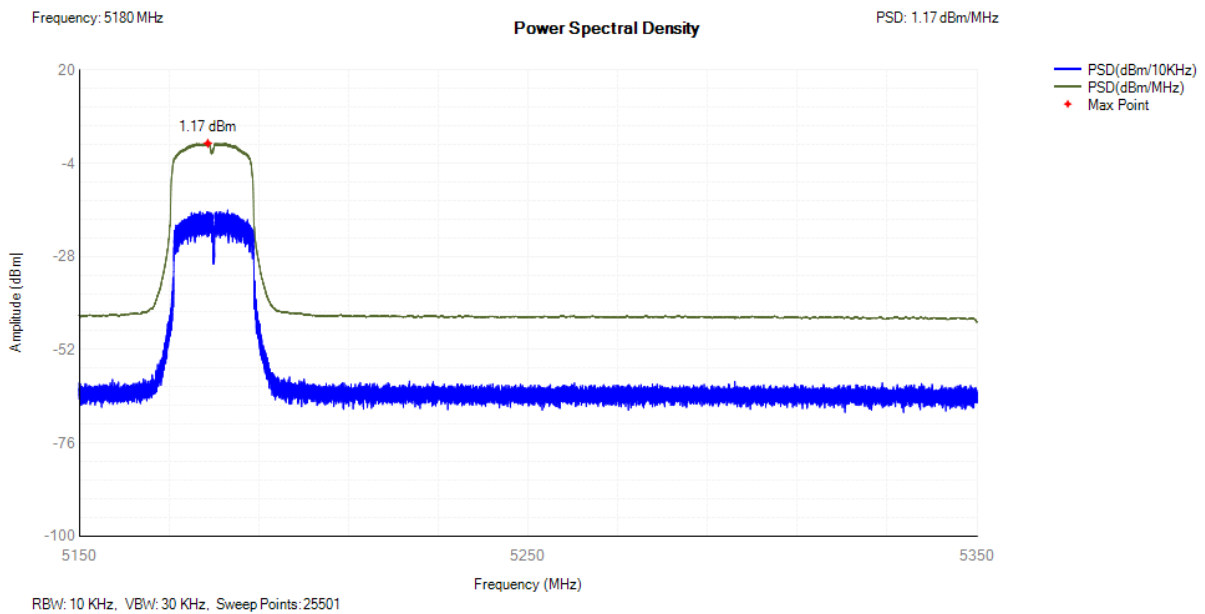


PSD NVNT 802.11ac40 5190MHz

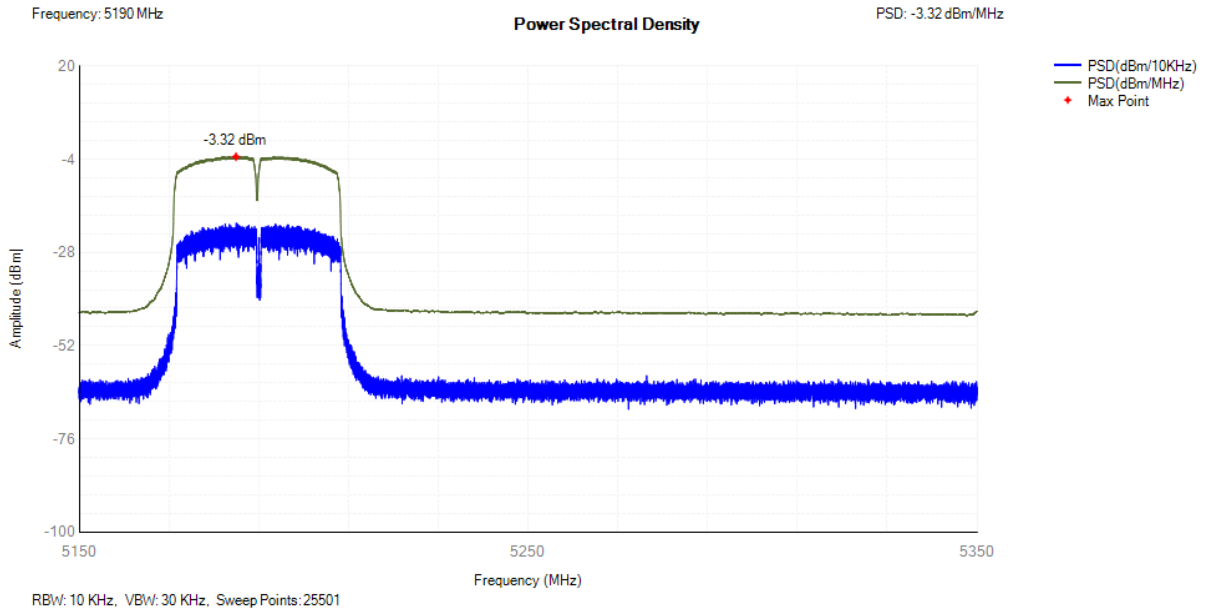


PSD NVNT 802.11ac80 5210MHz

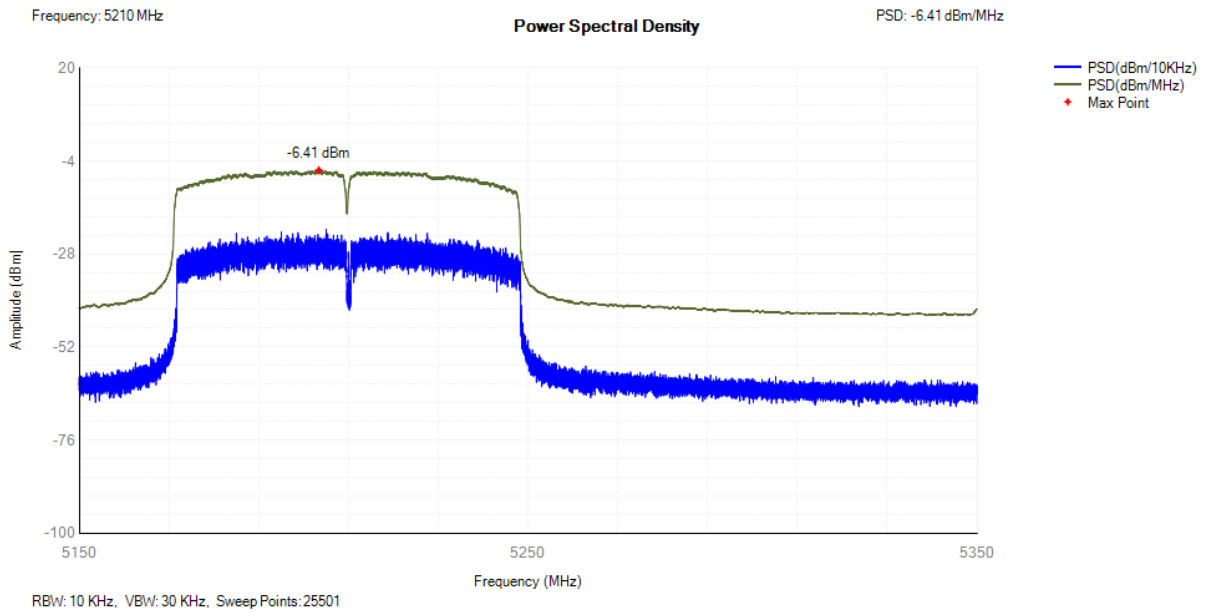

PSD NVNT 802.11n(HT20) 5180MHz

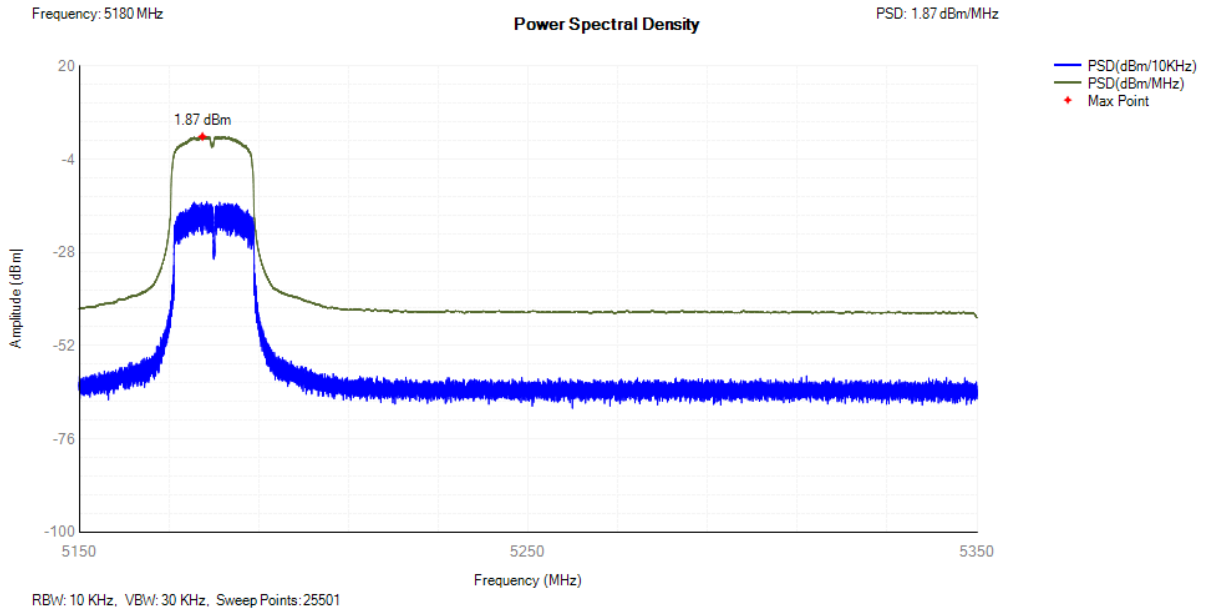

PSD NVNT 802.11n(HT40) 5190MHz

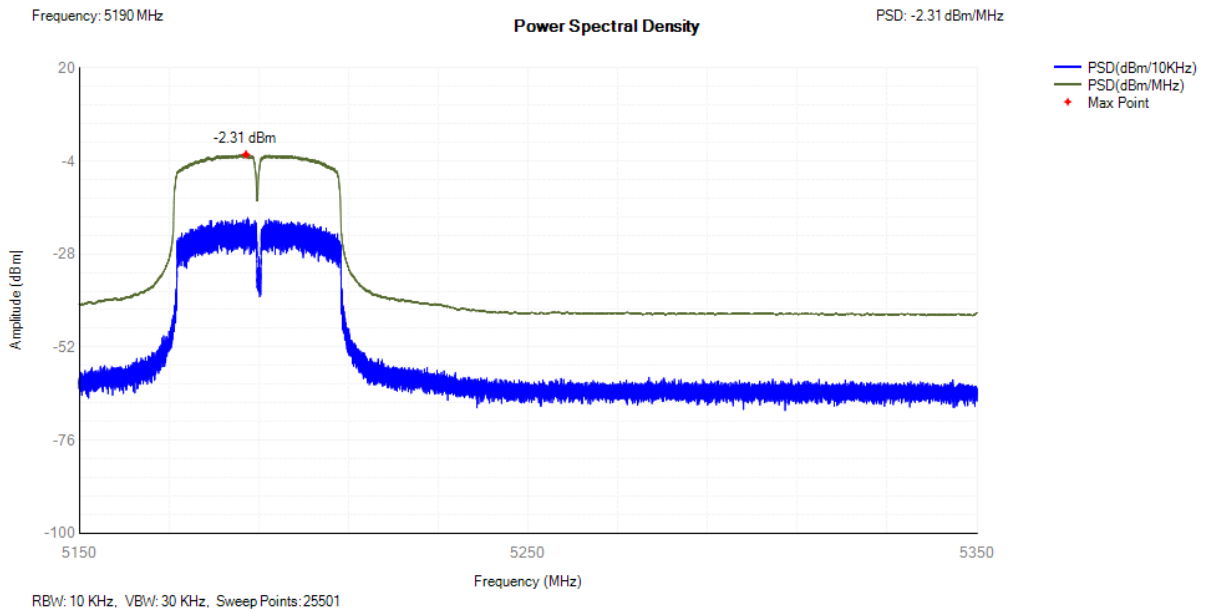

**Remark: Max PSD= Conducted PSD + Antenna Gain
So Power Spectral Density (for for External antenna: 4.25dBi):**

Condition	Mode	Frequency (MHz)	Max PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
NVNT	802.11a	5180	2.54	10	Pass
NVNT	802.11ac20	5180	1.57	10	Pass
NVNT	802.11ac40	5190	-2.7	10	Pass
NVNT	802.11ac80	5210	-7.61	10	Pass
NVNT	802.11n(HT20)	5180	1.47	10	Pass
NVNT	802.11n(HT40)	5190	-2.45	10	Pass


Power Spectral Density (for Ceramic Antenna: 3dBi):

Condition	Mode	Frequency (MHz)	Max PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
NVNT	802.11a	5180	2.54	10	Pass
NVNT	802.11ac20	5180	1.57	10	Pass
NVNT	802.11ac40	5190	-2.7	10	Pass
NVNT	802.11ac80	5210	-7.61	10	Pass
NVNT	802.11n(HT20)	5180	1.47	10	Pass
NVNT	802.11n(HT40)	5190	-2.45	10	Pass


5.4.5 Transmitter unwanted emissions in the spurious domain

Condition	Mode	Frequency (MHz)	Range	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
-----------	------	-----------------	-------	-----------------	------------------	-------------	---------


Tx. Spurious NVNT 802.11a 5180MHz

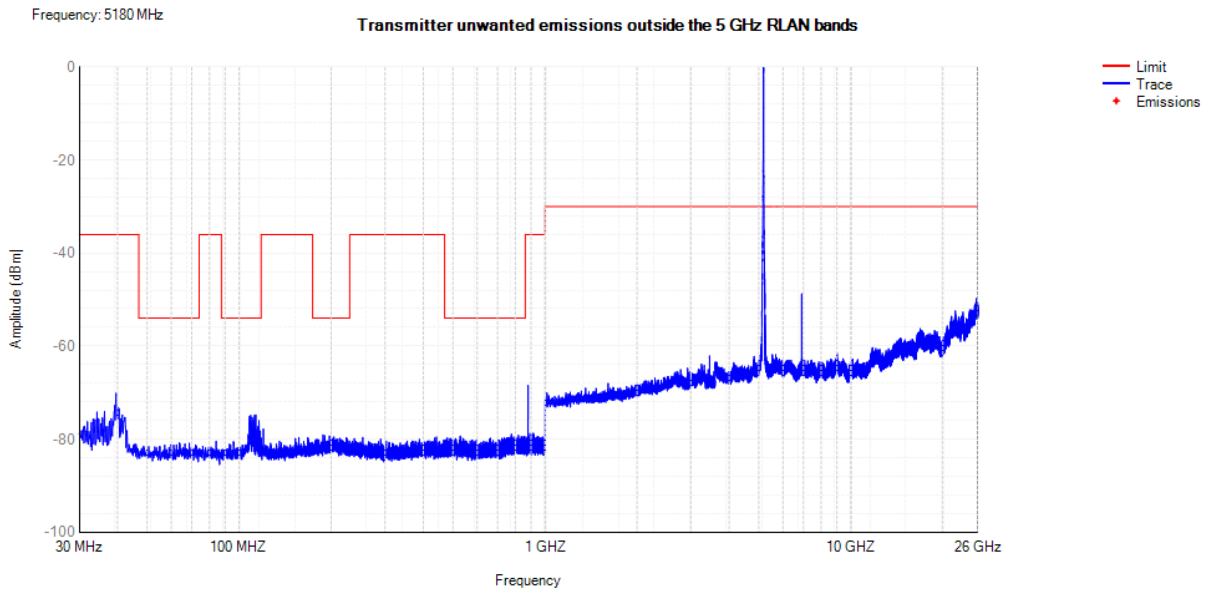

Tx. Spurious NVNT 802.11ac20 5180MHz

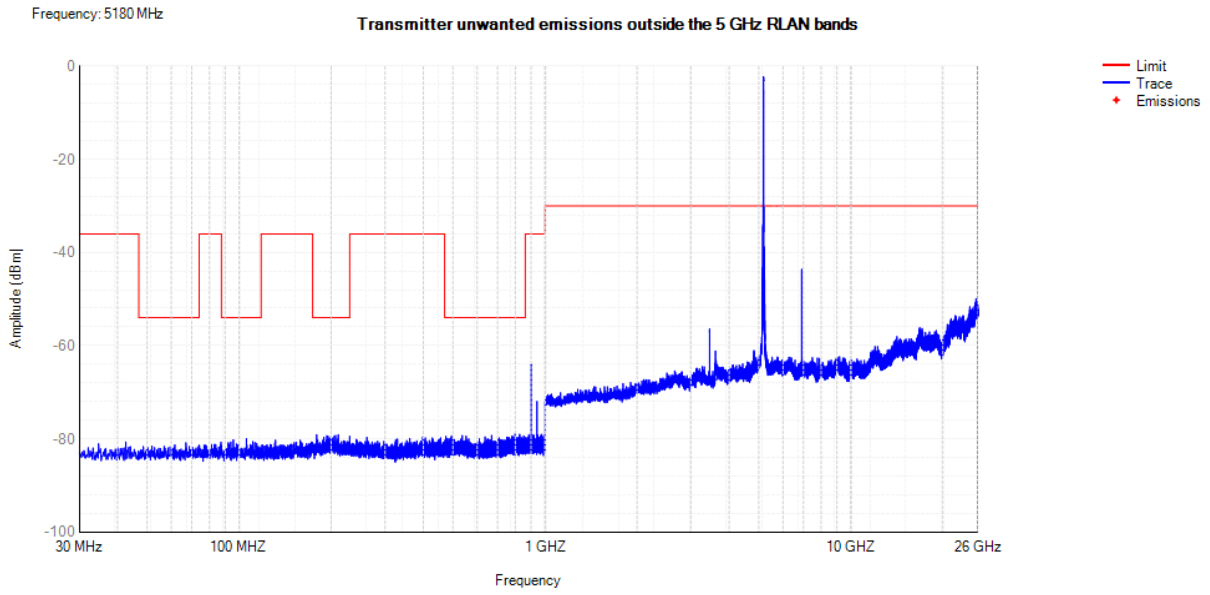


Tx. Spurious NVNT 802.11ac40 5190MHz

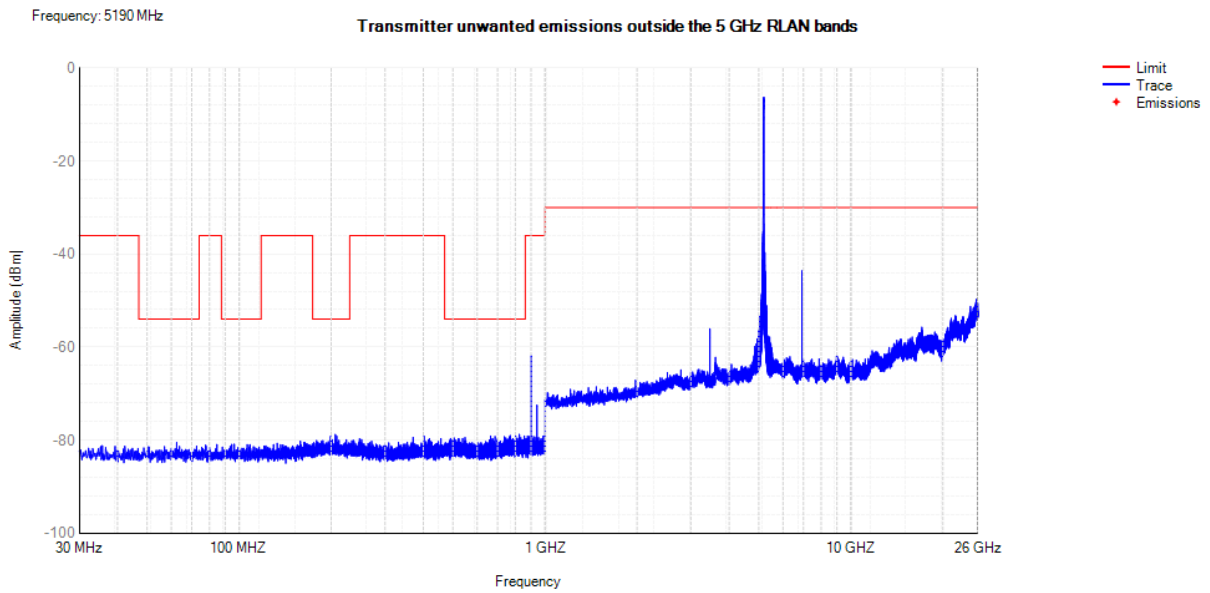

Tx. Spurious NVNT 802.11ac80 5210MHz

Frequency: 5210 MHz


Transmitter unwanted emissions outside the 5 GHz WLAN bands

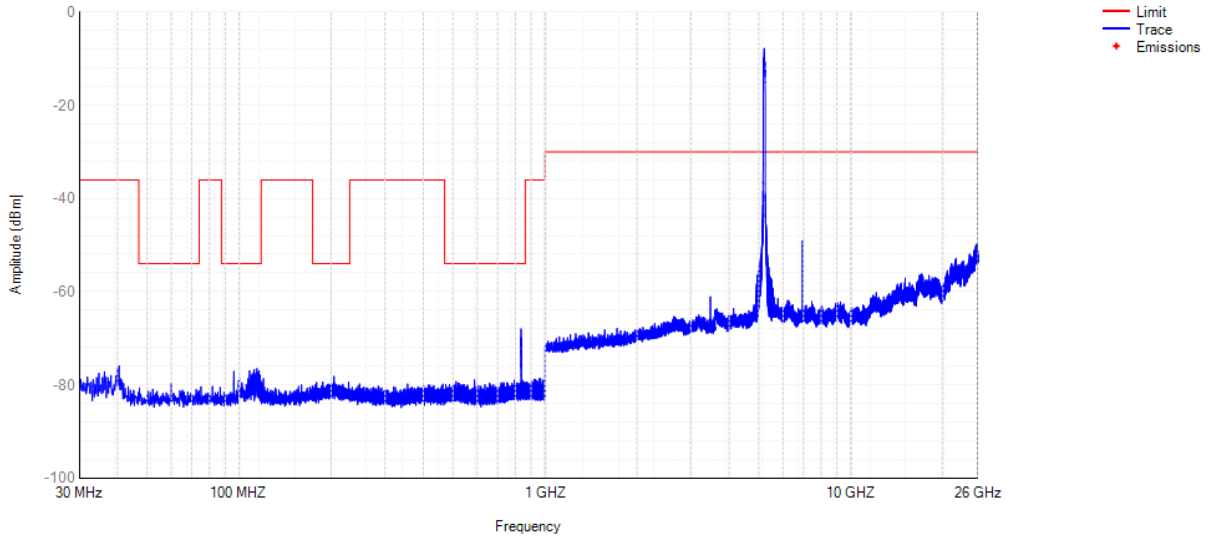


Tx. Spurious NVNT 802.11n(HT20) 5180MHz

Frequency: 5180 MHz

Transmitter unwanted emissions outside the 5 GHz WLAN bands

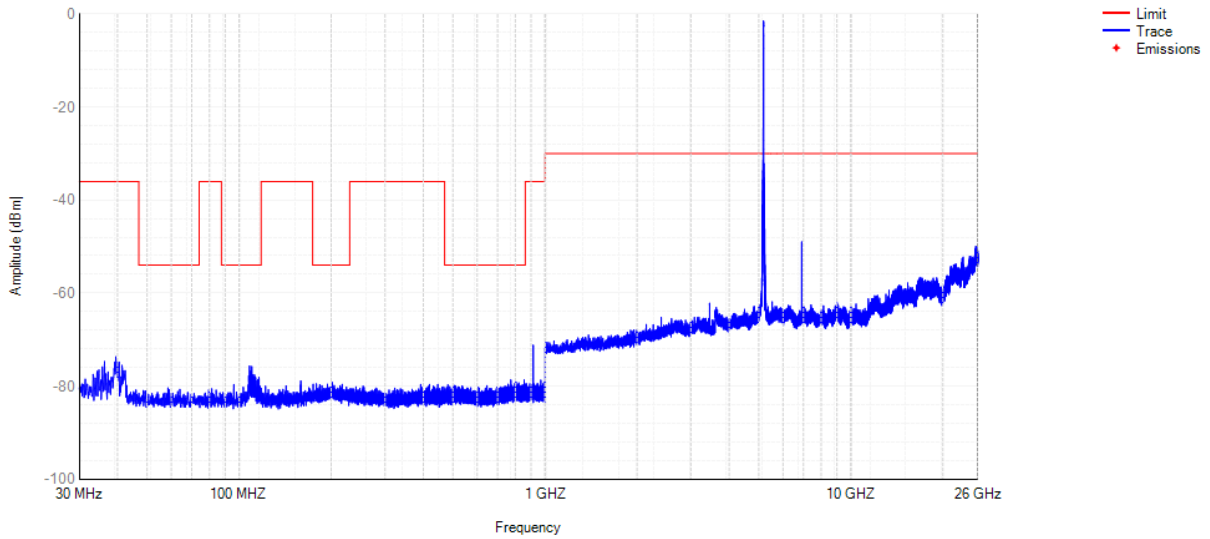


Tx. Spurious NVNT 802.11n(HT40) 5190MHz

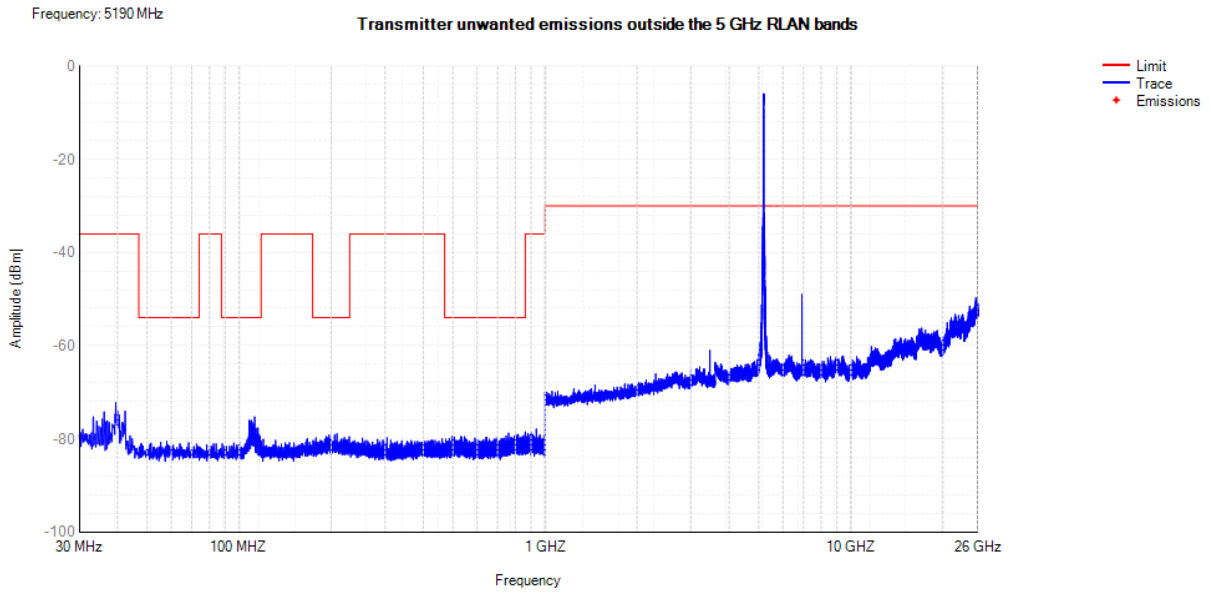


5.4.6 Transmitter unwanted emissions within the 5 GHz RLAN bands

Condition	Mode	Frequency (MHz)	Sub Band	Worst EIB Frequency (MHz)	Level (dB)	Limit (dB)	Verdict
NVNT	802.11a	5180	Band1	5150	-45.47	-40	Pass
NVNT	802.11a	5180	Band2	5532.12	-62.3	-47	Pass
NVNT	802.11ac20	5180	Band1	5211.88	-53.97	-40	Pass
NVNT	802.11ac20	5180	Band2	5532.17	-59.26	-47	Pass
NVNT	802.11ac40	5190	Band1	5250.12	-52.78	-40	Pass
NVNT	802.11ac40	5190	Band2	5713.27	-58.28	-47	Pass
NVNT	802.11ac80	5210	Band1	5330	-51.41	-40	Pass
NVNT	802.11ac80	5210	Band2	5562.11	-52.69	-40	Pass
NVNT	802.11n(HT20)	5180	Band1	5150.12	-49.85	-39.85	Pass
NVNT	802.11n(HT20)	5180	Band2	5532.07	-60.93	-47	Pass
NVNT	802.11n(HT40)	5190	Band1	5167.92	-32.71	-20.03	Pass
NVNT	802.11n(HT40)	5190	Band2	5715.11	-59.47	-47	Pass


Tx. Emissions EIB NVNT 802.11a 5180MHz Sub Band1

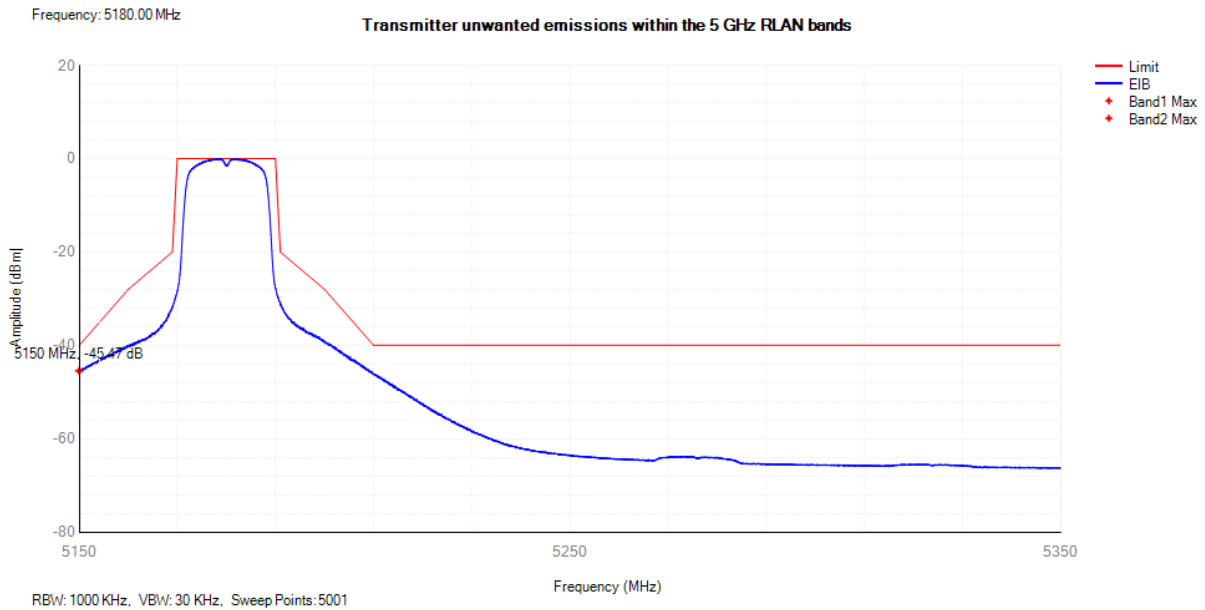


Tx. Emissions EIB NVNT 802.11a 5180MHz Sub Band2

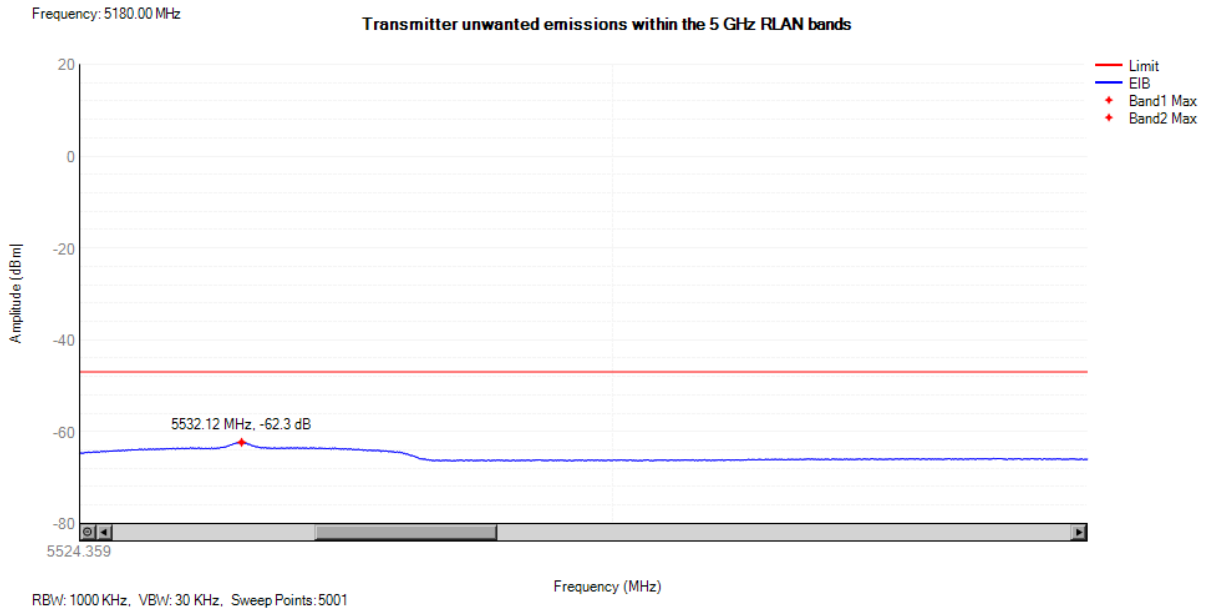


Tx. Emissions EIB NVNT 802.11ac20 5180MHz Sub Band1

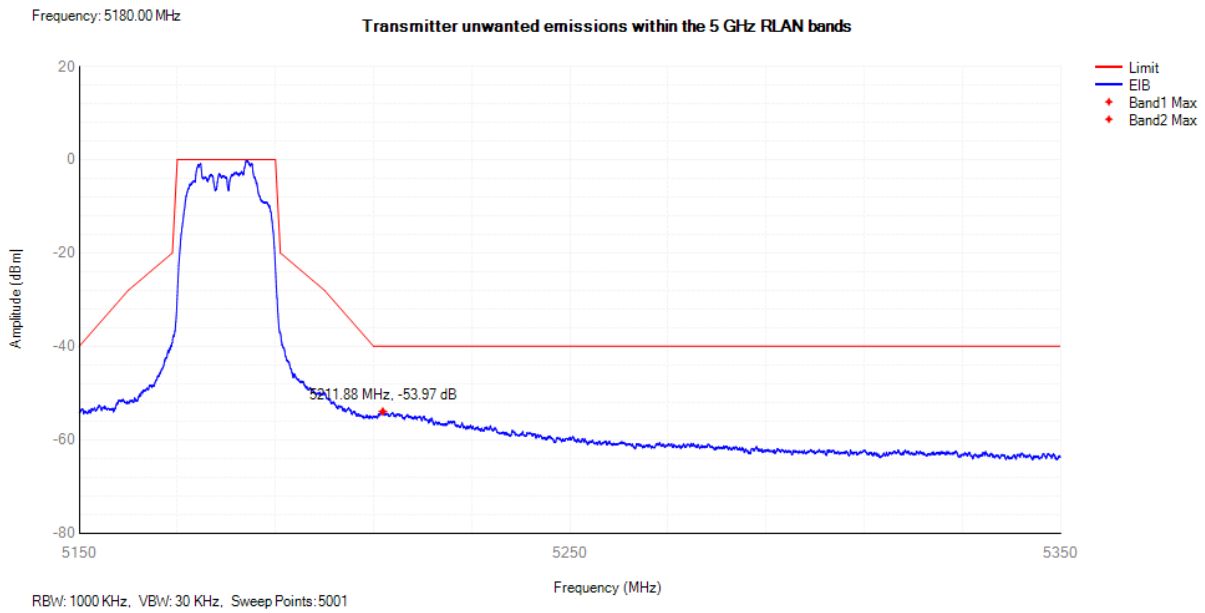


Tx. Emissions EIB NVNT 802.11ac20 5180MHz Sub Band2

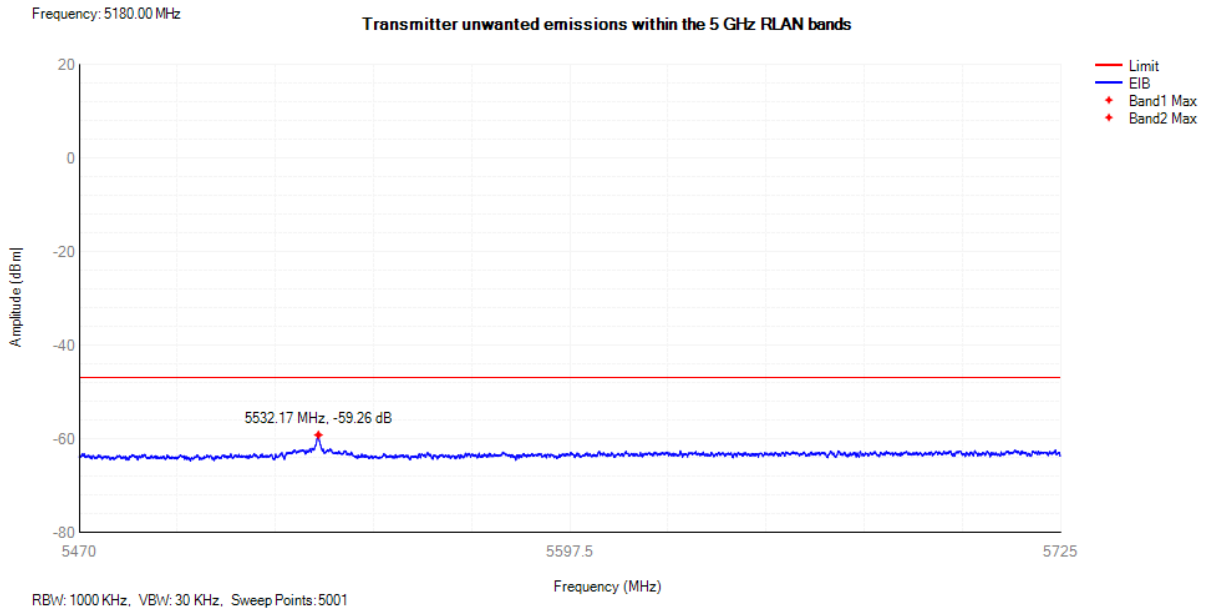


Tx. Emissions EIB NVNT 802.11ac40 5190MHz Sub Band1

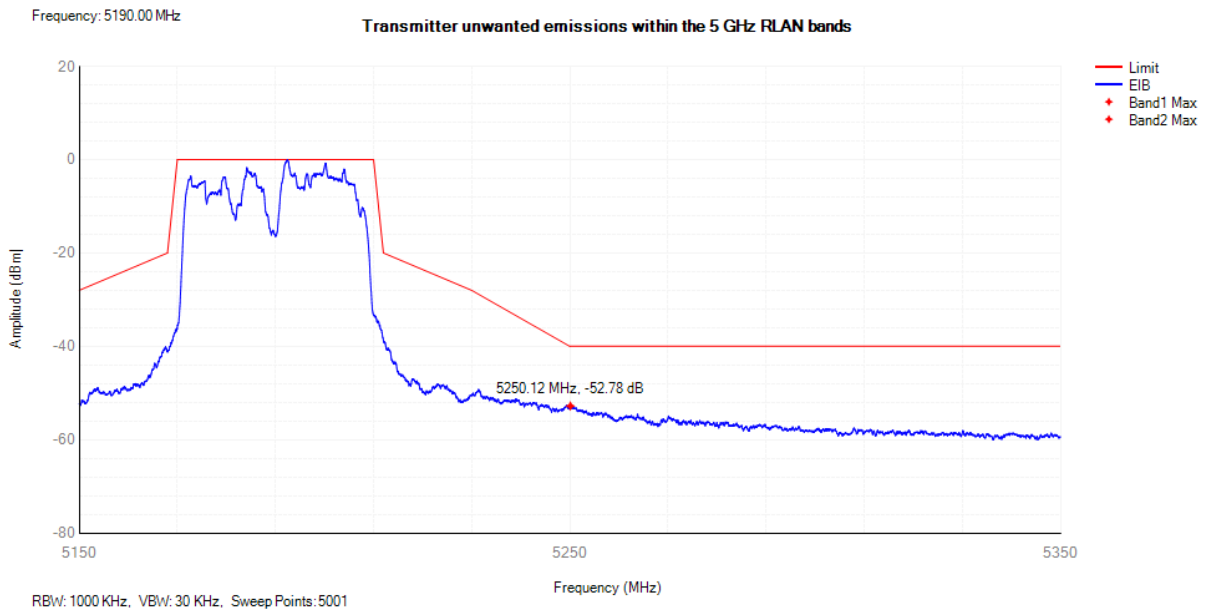


Tx. Emissions EIB NVNT 802.11ac40 5190MHz Sub Band2

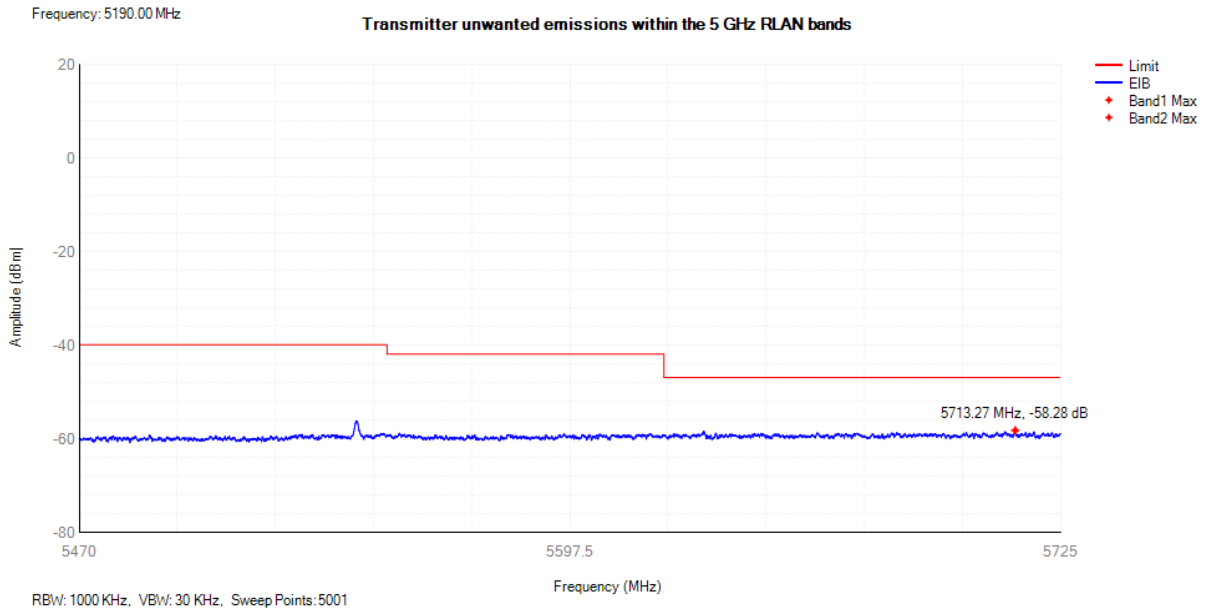


Tx. Emissions EIB NVNT 802.11ac80 5210MHz Sub Band1

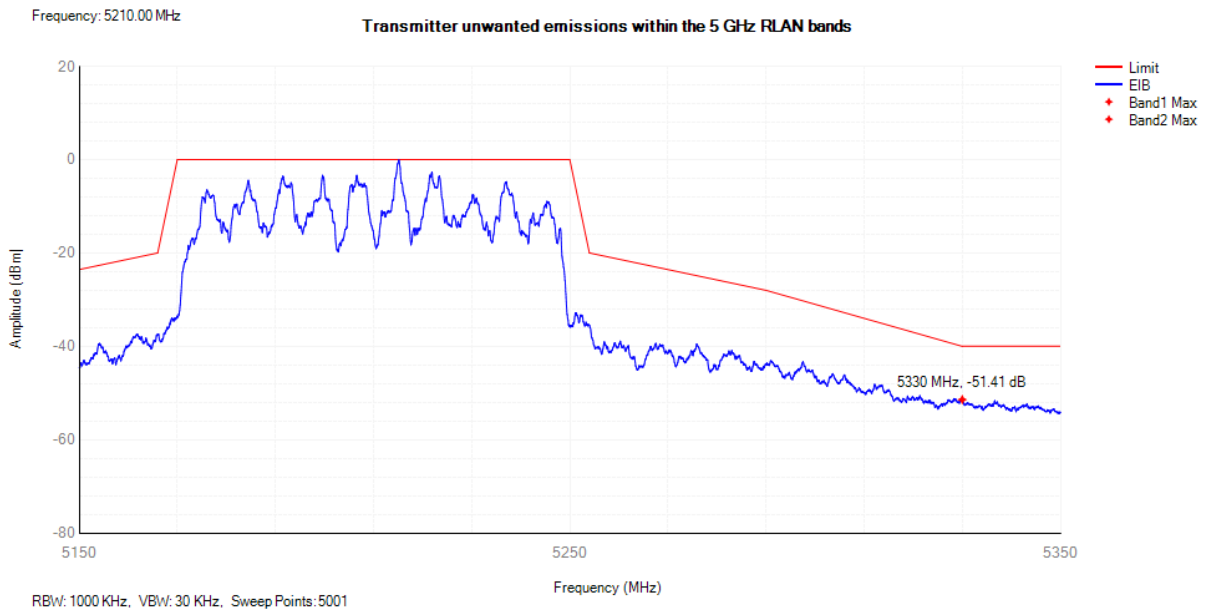


Tx. Emissions EIB NVNT 802.11ac80 5210MHz Sub Band2

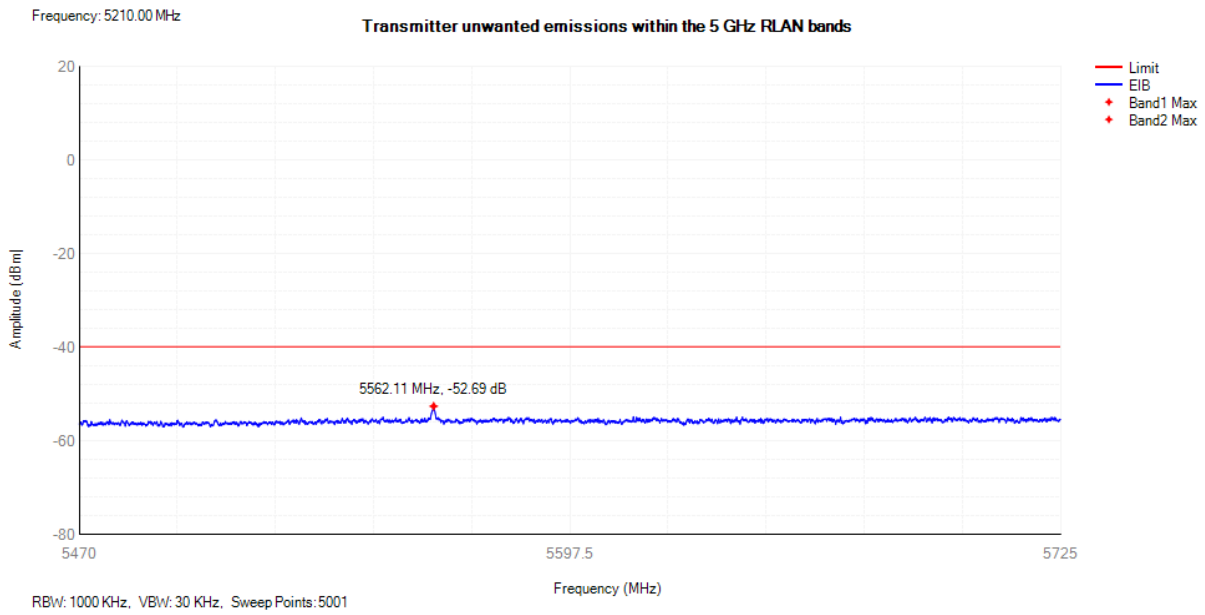


Tx. Emissions EIB NVNT 802.11n(HT20) 5180MHz Sub Band1

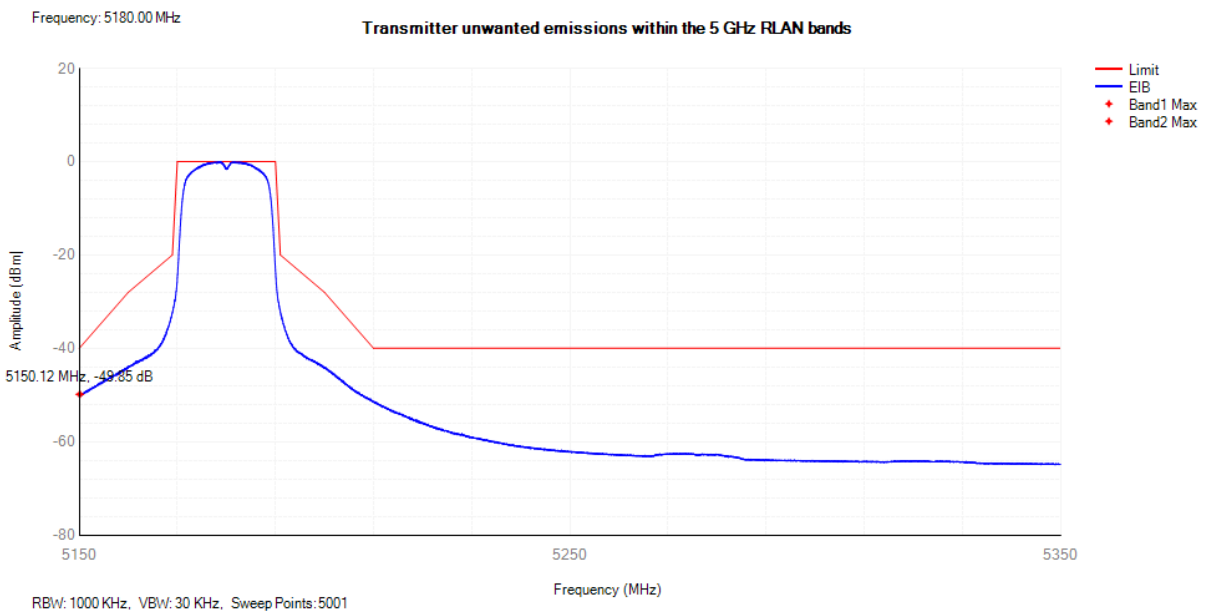


Tx. Emissions EIB NVNT 802.11n(HT20) 5180MHz Sub Band2

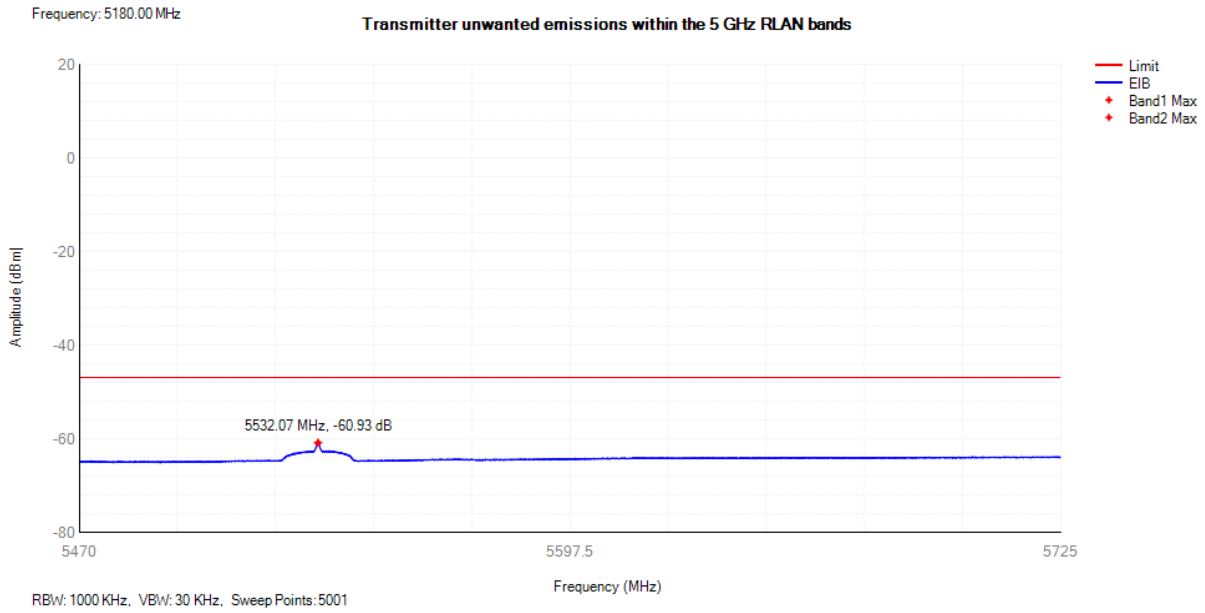

Tx. Emissions EIB NVNT 802.11n(HT40) 5190MHz Sub Band1

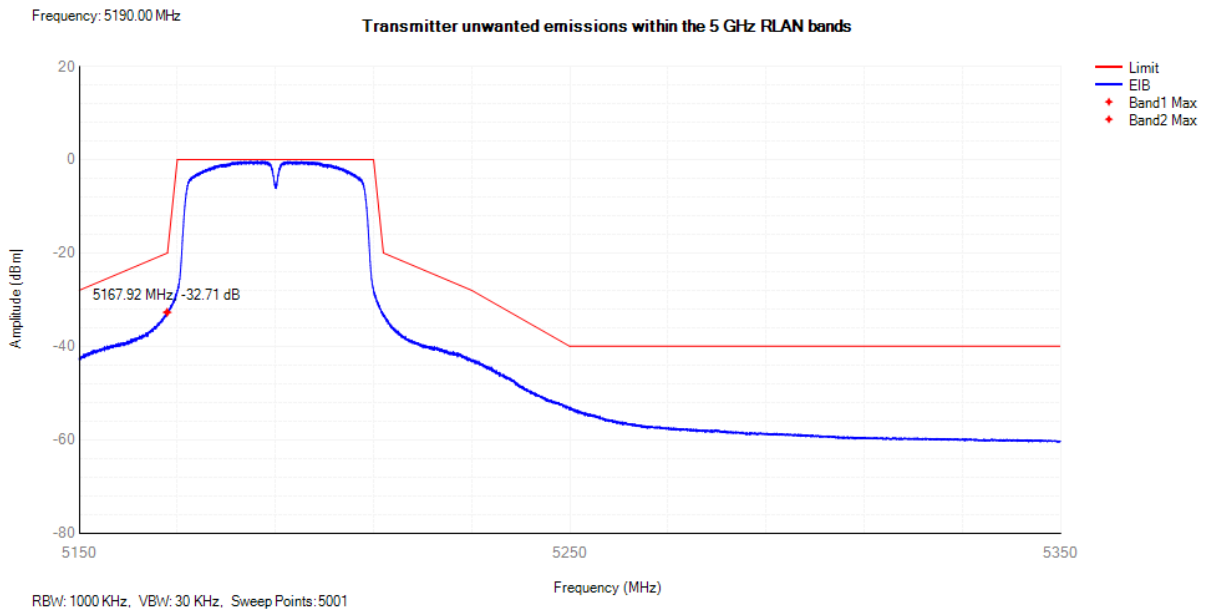


Tx. Emissions EIB NVNT 802.11n(HT40) 5190MHz Sub Band2

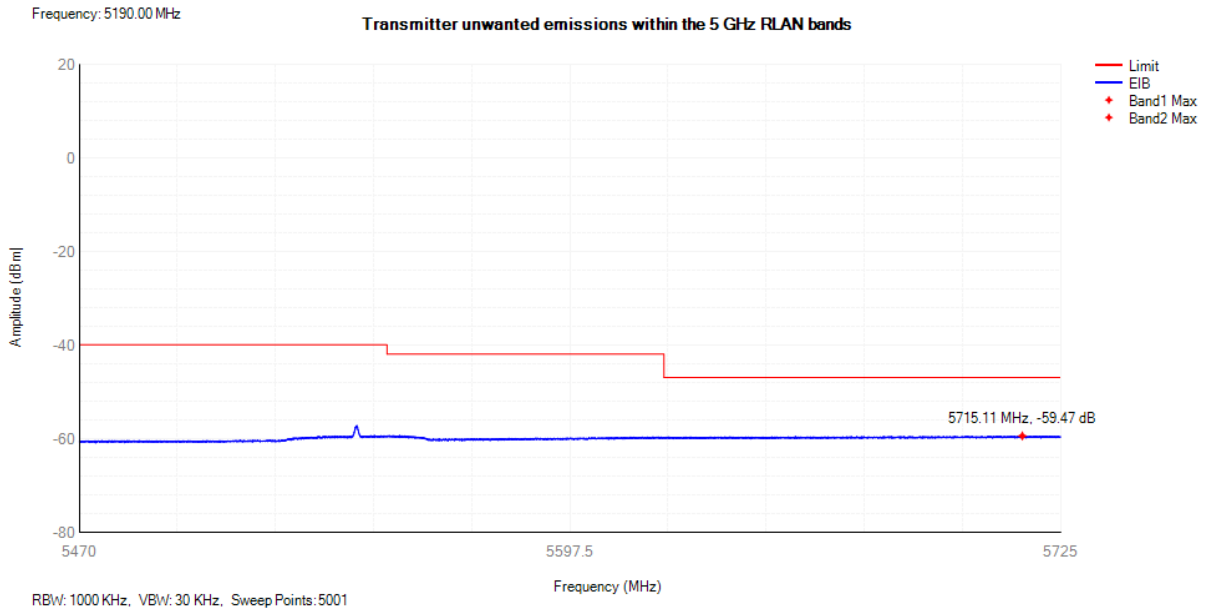


5.4.7 Receiver spurious emissions

Condition	Mode	Frequency (MHz)	Range	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
-----------	------	-----------------	-------	-----------------	------------------	-------------	---------


Rx. Spurious NVNT 802.11a 5180MHz

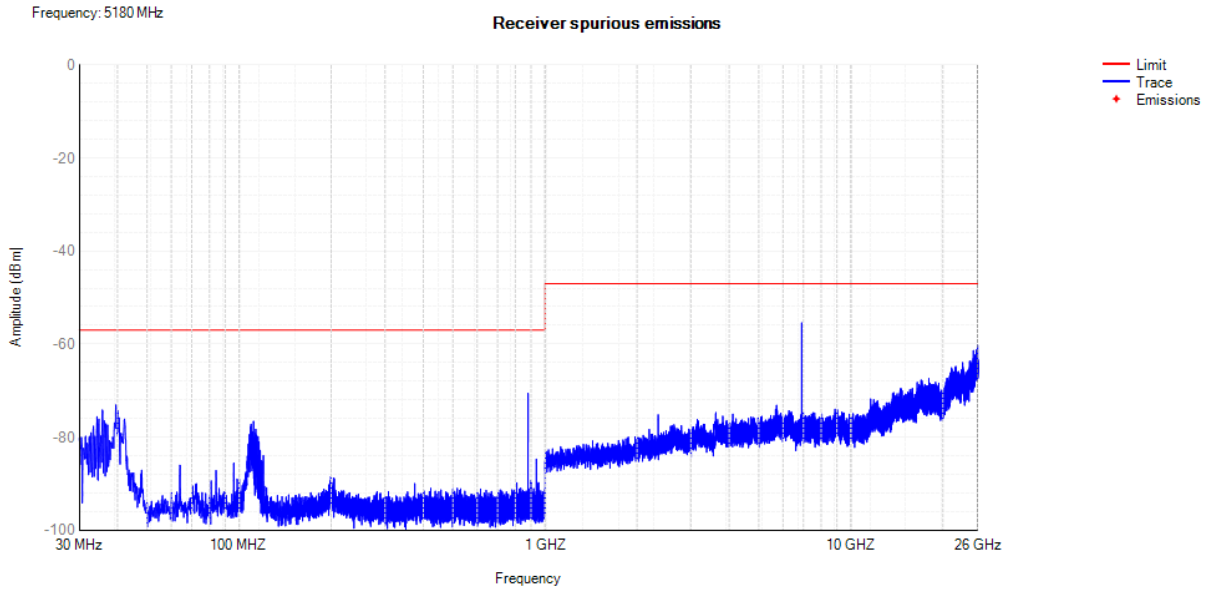


Rx. Spurious NVNT 802.11ac20 5180MHz

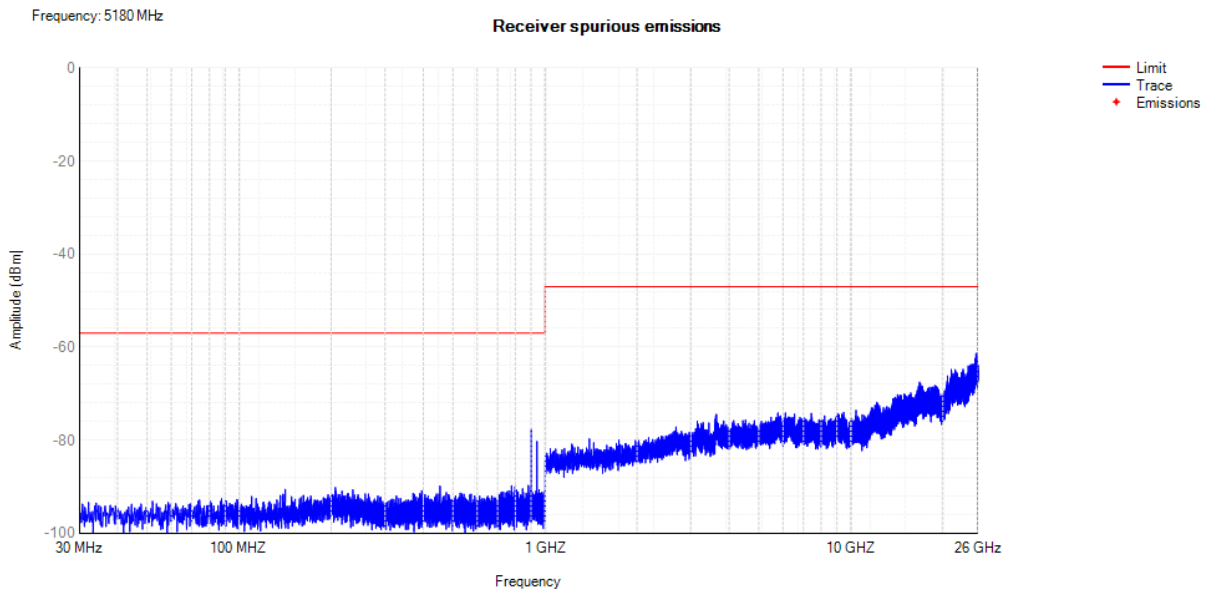


Rx. Spurious NVNT 802.11ac40 5190MHz

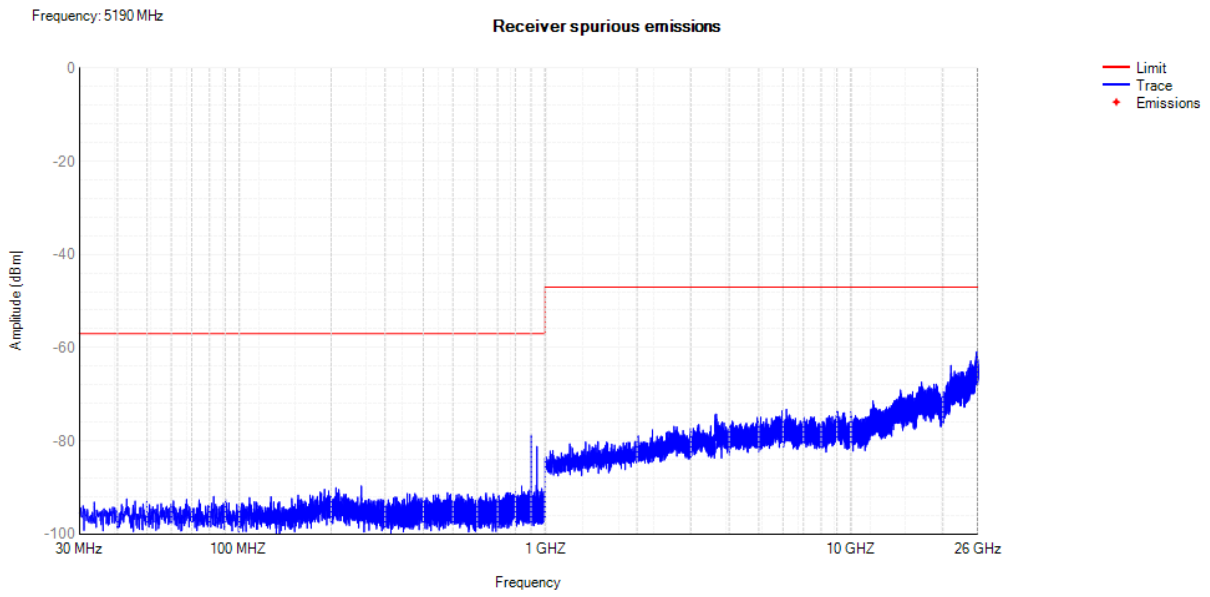


Rx. Spurious NVNT 802.11ac80 5210MHz

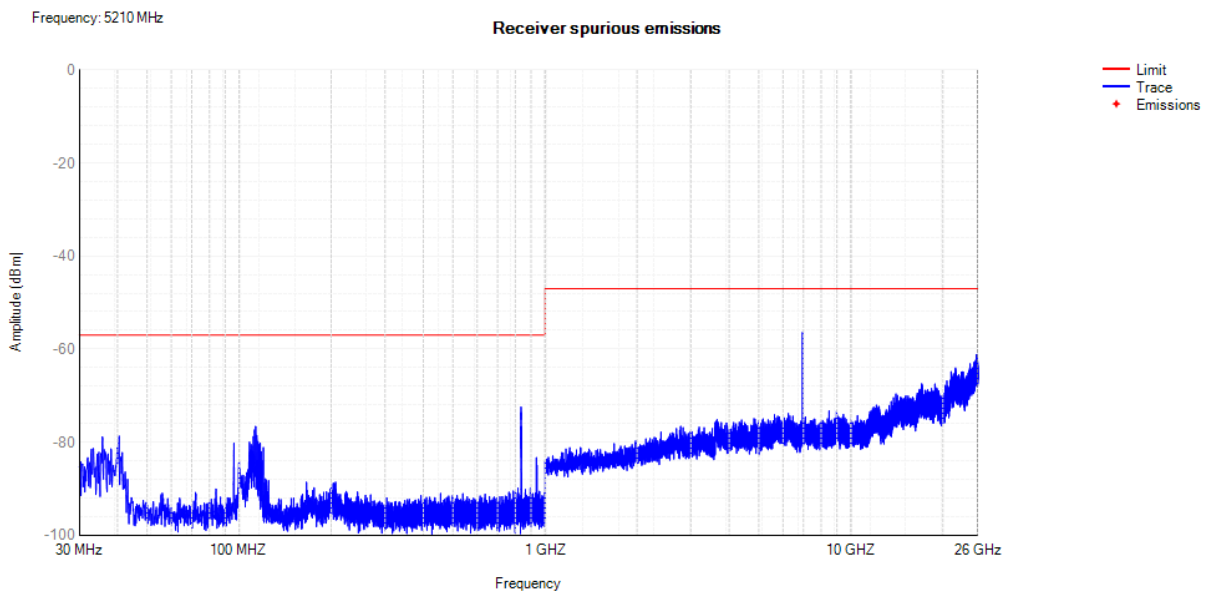

Rx. Spurious NVNT 802.11n(HT20) 5180MHz

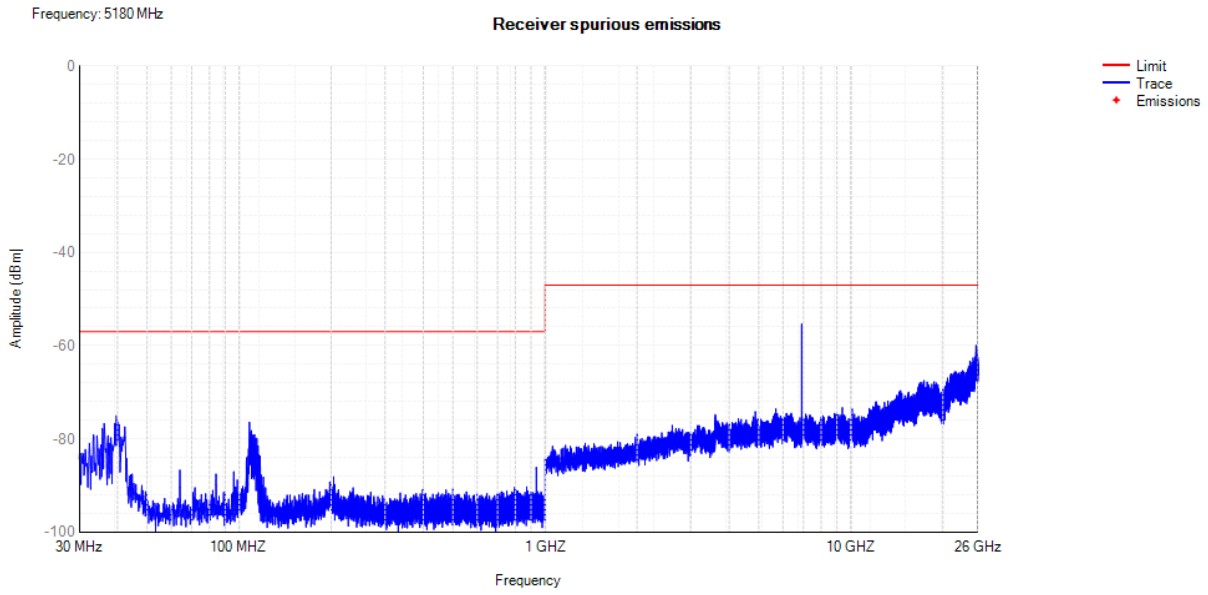

Rx. Spurious NVNT 802.11n(HT40) 5190MHz

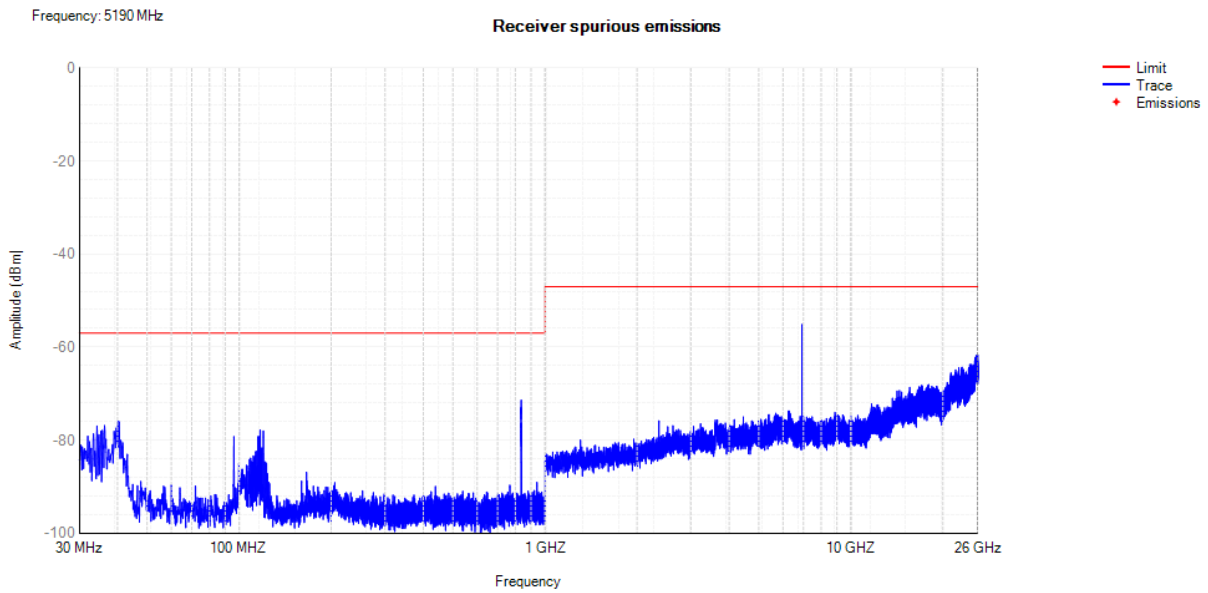


Clause 5.4.9 Adaptivity COT Channel Occupancy Time


Condition	Mode	Frequency (MHz)	Priority Class	Max COT (ms)	Limit COT (ms)	Min Idle Time (ms)	Limit Idle Time (ms)	Verdict
NVNT	a	5180	2	0.248	<=6	1.297	>0.027	Pass
NVNT	ac20	5180	2	0.197	<=6	0.07	>0.027	Pass
NVNT	ac40	5190	2	0.197	<=6	2.02	>0.027	Pass
NVNT	ac80	5210	2	0.312	<=6	0.068	>0.027	Pass

NVNT	n20	5180	2	0.152	<=6	1.293	>0.027	Pass
NVNT	n40	5190	2	0.267	<=6	0.089	>0.027	Pass


COT NVNT a 5180MHz

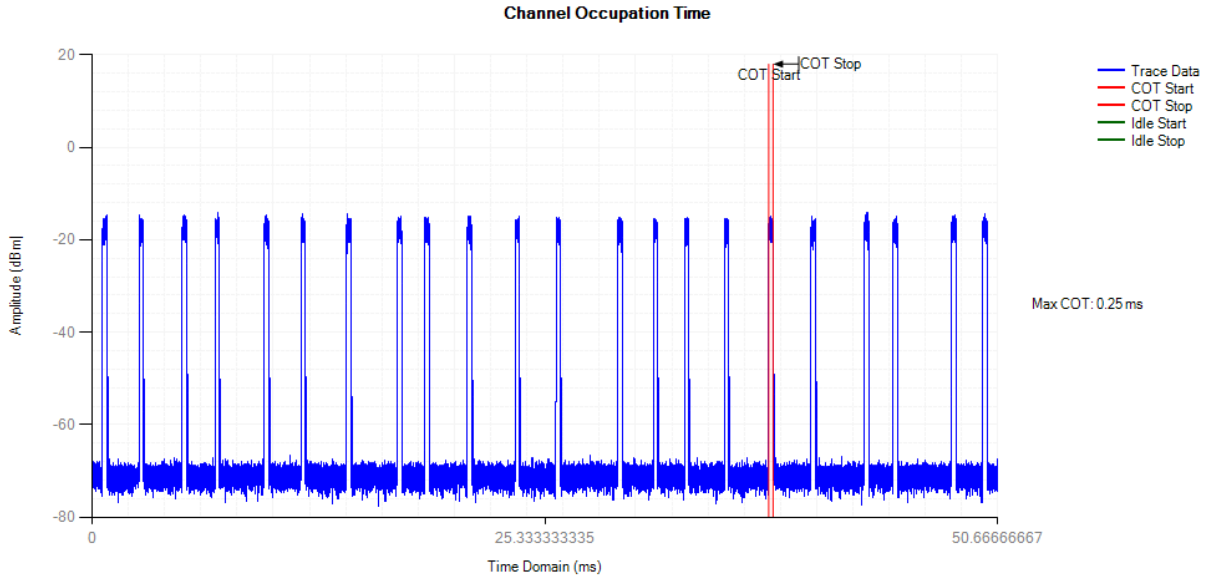


COT NVNT ac20 5180MHz

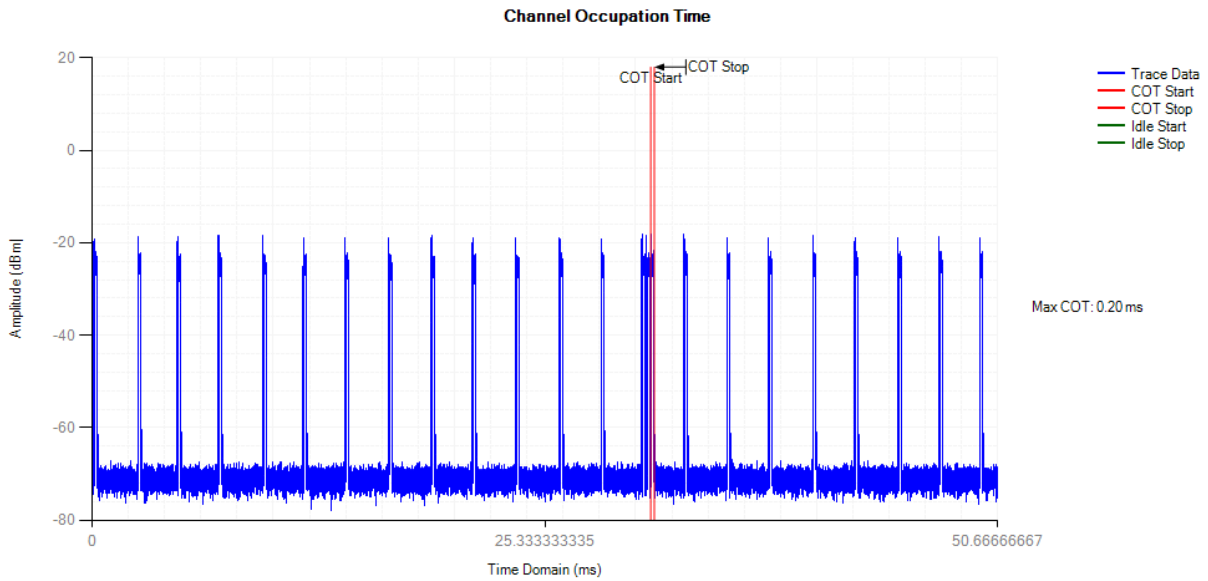


COT NVNT ac40 5190MHz

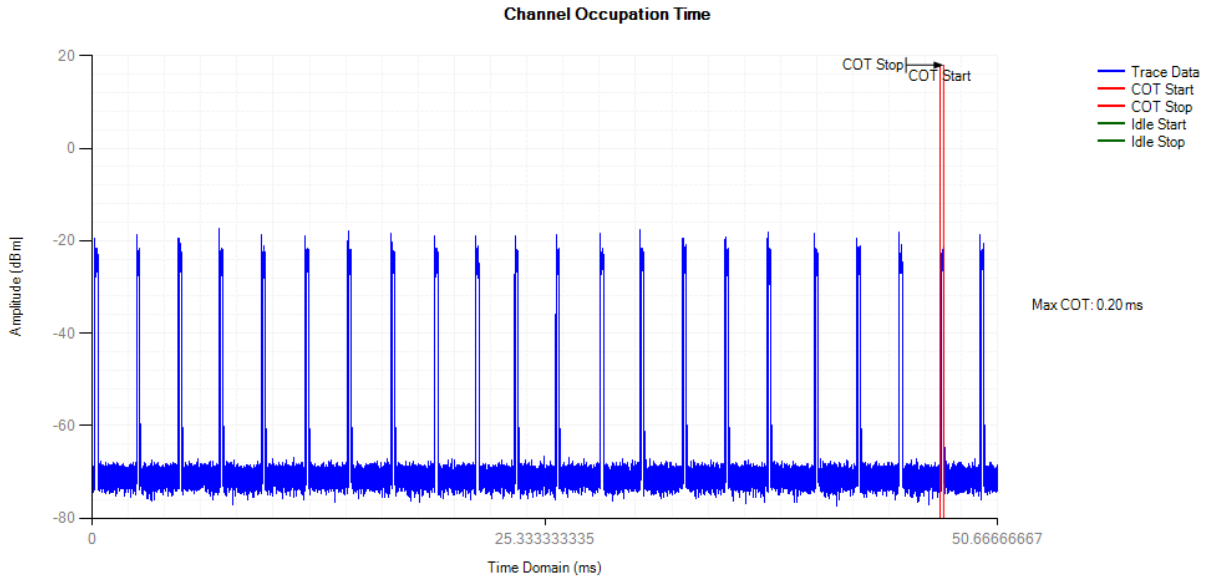


COT NVNT ac80 5210MHz

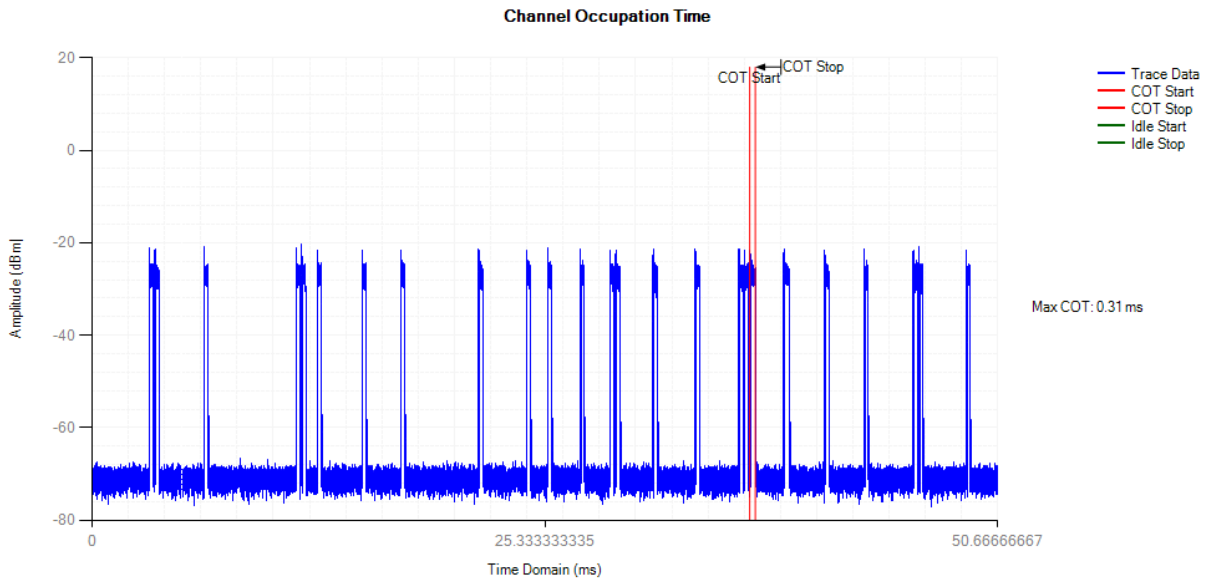

COT NVNT n20 5180MHz

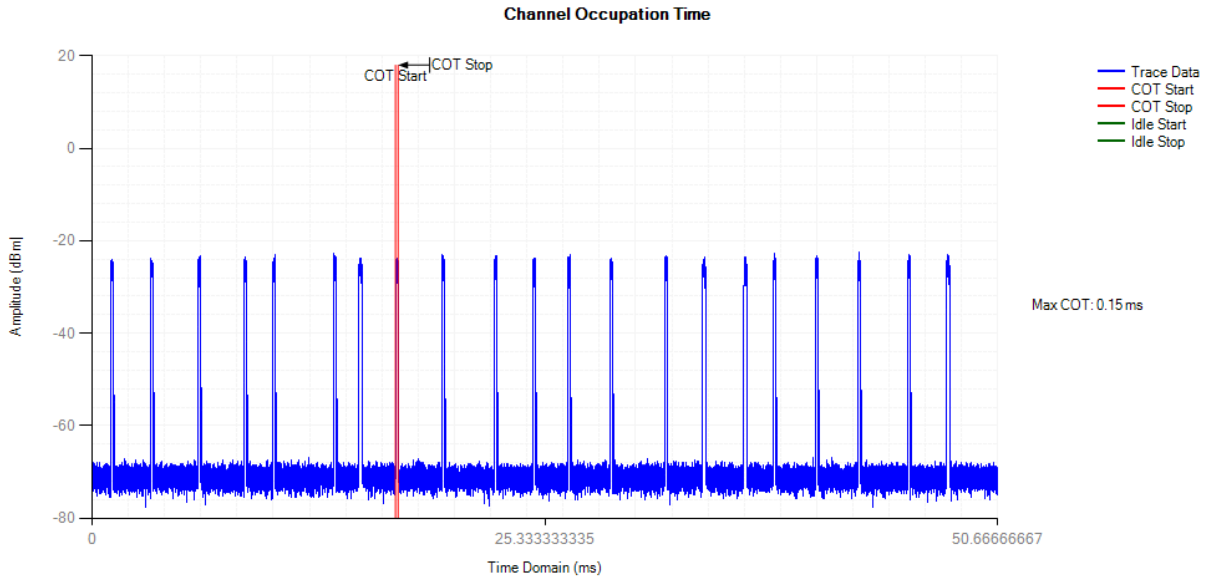

COT NVNT n40 5190MHz

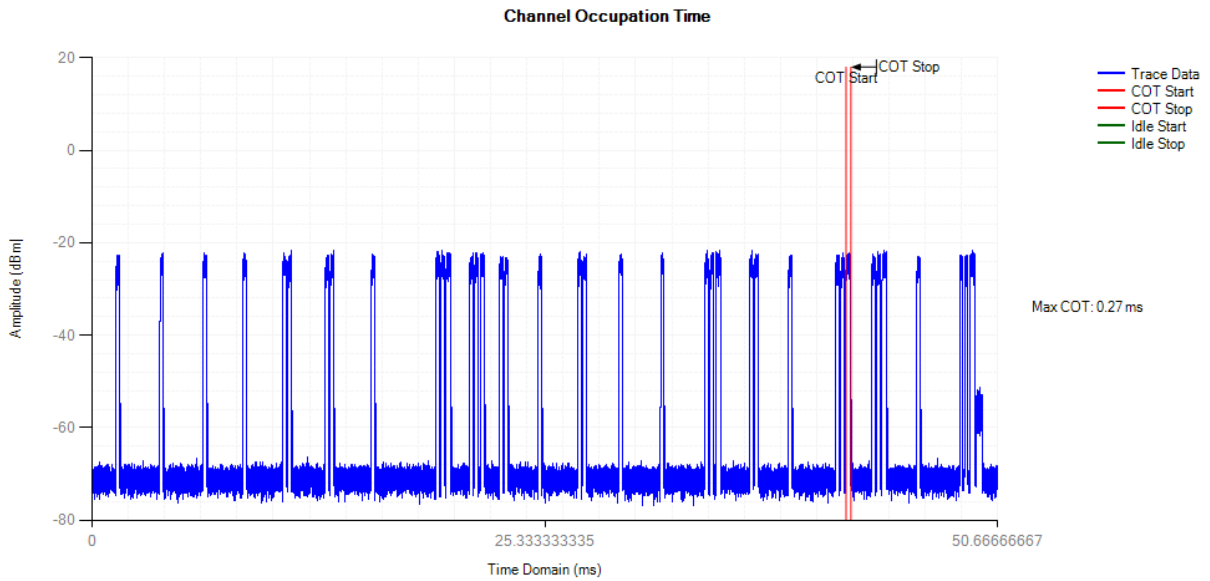


Clause 5.4.9 Adaptivity COT Idle Period Probability

Condition	Mode	Frequency (MHz)	Priority Class	Bn	H(Bn)	Pn (%)	Limit (%)	Verdict
NVNT	a	5180	2	0	4	3.7	5	Pass
NVNT	a	5180	2	1	0	3.7	12	Pass
NVNT	a	5180	2	2	0	3.7	18.25	Pass
NVNT	a	5180	2	3	0	3.7	24.5	Pass
NVNT	a	5180	2	4	0	3.7	30.75	Pass
NVNT	a	5180	2	5	0	3.7	37	Pass
NVNT	a	5180	2	6	0	3.7	43.25	Pass
NVNT	a	5180	2	7	0	3.7	49.5	Pass
NVNT	a	5180	2	8	0	3.7	55.75	Pass
NVNT	a	5180	2	9	0	3.7	62	Pass
NVNT	a	5180	2	10	0	3.7	68.25	Pass
NVNT	a	5180	2	11	0	3.7	74.5	Pass
NVNT	a	5180	2	12	0	3.7	80.75	Pass
NVNT	a	5180	2	13	0	3.7	87	Pass
NVNT	a	5180	2	14	0	3.7	93.25	Pass
NVNT	a	5180	2	15	0	3.7	99.5	Pass
NVNT	a	5180	2	16	104	100	100	Pass
NVNT	ac20	5180	2	0	4	3.41	5	Pass
NVNT	ac20	5180	2	1	0	3.41	12	Pass
NVNT	ac20	5180	2	2	0	3.41	18.25	Pass
NVNT	ac20	5180	2	3	0	3.41	24.5	Pass
NVNT	ac20	5180	2	4	2	5.12	30.75	Pass
NVNT	ac20	5180	2	5	3	7.69	37	Pass
NVNT	ac20	5180	2	6	0	7.69	43.25	Pass
NVNT	ac20	5180	2	7	4	11.11	49.5	Pass
NVNT	ac20	5180	2	8	0	11.11	55.75	Pass
NVNT	ac20	5180	2	9	0	11.11	62	Pass
NVNT	ac20	5180	2	10	0	11.11	68.25	Pass
NVNT	ac20	5180	2	11	0	11.11	74.5	Pass
NVNT	ac20	5180	2	12	0	11.11	80.75	Pass
NVNT	ac20	5180	2	13	0	11.11	87	Pass
NVNT	ac20	5180	2	14	0	11.11	93.25	Pass
NVNT	ac20	5180	2	15	0	11.11	99.5	Pass
NVNT	ac20	5180	2	16	104	100	100	Pass
NVNT	ac40	5190	2	0	3	2.97	5	Pass
NVNT	ac40	5190	2	1	0	2.97	12	Pass
NVNT	ac40	5190	2	2	0	2.97	18.25	Pass


NVNT	ac40	5190	2	3	0	2.97	24.5	Pass
NVNT	ac40	5190	2	4	3	5.94	30.75	Pass
NVNT	ac40	5190	2	5	4	9.9	37	Pass
NVNT	ac40	5190	2	6	5	14.85	43.25	Pass
NVNT	ac40	5190	2	7	1	15.84	49.5	Pass
NVNT	ac40	5190	2	8	0	15.84	55.75	Pass
NVNT	ac40	5190	2	9	0	15.84	62	Pass
NVNT	ac40	5190	2	10	0	15.84	68.25	Pass
NVNT	ac40	5190	2	11	0	15.84	74.5	Pass
NVNT	ac40	5190	2	12	0	15.84	80.75	Pass
NVNT	ac40	5190	2	13	0	15.84	87	Pass
NVNT	ac40	5190	2	14	0	15.84	93.25	Pass
NVNT	ac40	5190	2	15	0	15.84	99.5	Pass
NVNT	ac40	5190	2	16	85	100	100	Pass
NVNT	ac80	5180	2	0	3	3	5	Pass
NVNT	ac80	5180	2	1	0	3	12	Pass
NVNT	ac80	5180	2	2	0	3	18.25	Pass
NVNT	ac80	5180	2	3	0	3	24.5	Pass
NVNT	ac80	5180	2	4	5	8	30.75	Pass
NVNT	ac80	5180	2	5	3	11	37	Pass
NVNT	ac80	5180	2	6	6	17	43.25	Pass
NVNT	ac80	5180	2	7	2	19	49.5	Pass
NVNT	ac80	5180	2	8	0	19	55.75	Pass
NVNT	ac80	5180	2	9	0	19	62	Pass
NVNT	ac80	5180	2	10	0	19	68.25	Pass
NVNT	ac80	5180	2	11	0	19	74.5	Pass
NVNT	ac80	5180	2	12	0	19	80.75	Pass
NVNT	ac80	5180	2	13	0	19	87	Pass
NVNT	ac80	5180	2	14	0	19	93.25	Pass
NVNT	ac80	5180	2	15	0	19	99.5	Pass
NVNT	ac80	5180	2	16	81	100	100	Pass
NVNT	n20	5180	2	0	3	2.36	5	Pass
NVNT	n20	5180	2	1	0	2.36	12	Pass
NVNT	n20	5180	2	2	0	2.36	18.25	Pass
NVNT	n20	5180	2	3	0	2.36	24.5	Pass
NVNT	n20	5180	2	4	0	2.36	30.75	Pass
NVNT	n20	5180	2	5	0	2.36	37	Pass
NVNT	n20	5180	2	6	12	11.81	43.25	Pass
NVNT	n20	5180	2	7	9	18.89	49.5	Pass
NVNT	n20	5180	2	8	11	27.55	55.75	Pass

NVNT	n20	5180	2	9	10	35.43	62	Pass
NVNT	n20	5180	2	10	0	35.43	68.25	Pass
NVNT	n20	5180	2	11	0	35.43	74.5	Pass
NVNT	n20	5180	2	12	0	35.43	80.75	Pass
NVNT	n20	5180	2	13	0	35.43	87	Pass
NVNT	n20	5180	2	14	0	35.43	93.25	Pass
NVNT	n20	5180	2	15	0	35.43	99.5	Pass
NVNT	n20	5180	2	16	82	100	100	Pass
NVNT	n40	5190	2	0	3	2.83	5	Pass
NVNT	n40	5190	2	1	0	2.83	12	Pass
NVNT	n40	5190	2	2	0	2.83	18.25	Pass
NVNT	n40	5190	2	3	0	2.83	24.5	Pass
NVNT	n40	5190	2	4	0	2.83	30.75	Pass
NVNT	n40	5190	2	5	0	2.83	37	Pass
NVNT	n40	5190	2	6	4	6.6	43.25	Pass
NVNT	n40	5190	2	7	8	14.15	49.5	Pass
NVNT	n40	5190	2	8	5	18.86	55.75	Pass
NVNT	n40	5190	2	9	3	21.69	62	Pass
NVNT	n40	5190	2	10	0	21.69	68.25	Pass
NVNT	n40	5190	2	11	0	21.69	74.5	Pass
NVNT	n40	5190	2	12	0	21.69	80.75	Pass
NVNT	n40	5190	2	13	0	21.69	87	Pass
NVNT	n40	5190	2	14	0	21.69	93.25	Pass
NVNT	n40	5190	2	15	0	21.69	99.5	Pass
NVNT	n40	5190	2	16	83	100	100	Pass


Idle Period Probability NVNT a 5180MHz

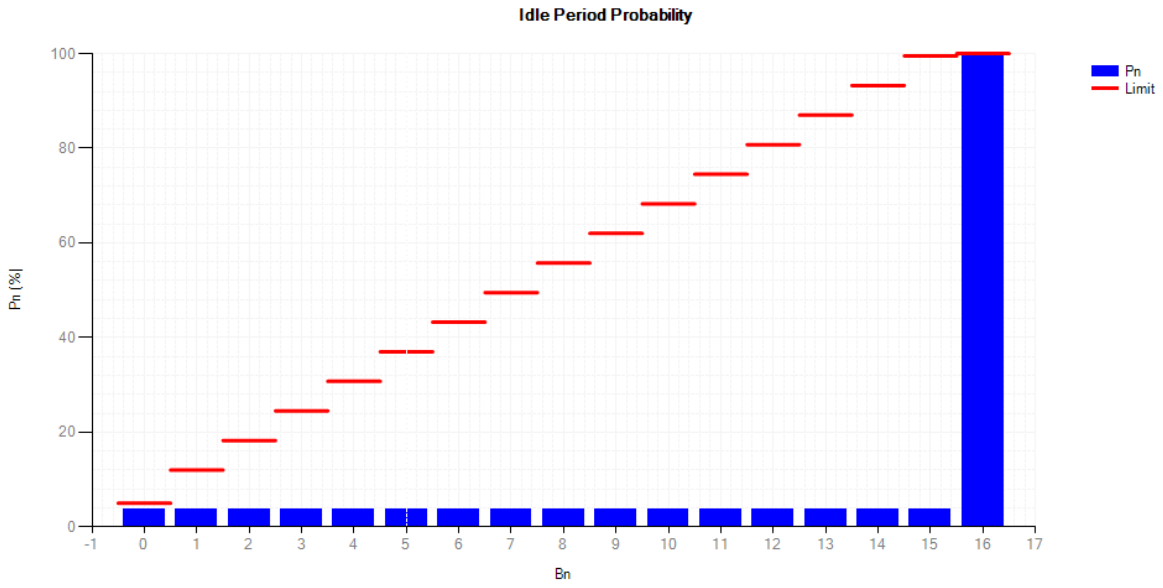


Idle Period Probability NVNT ac20 5180MHz

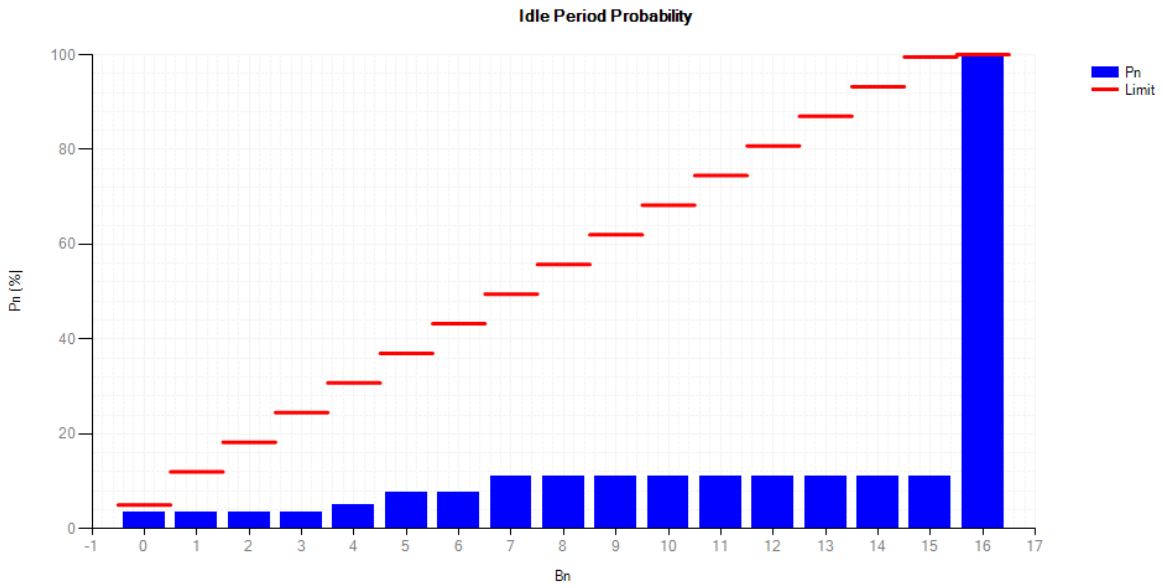


Idle Period Probability NVNT ac40 5190MHz

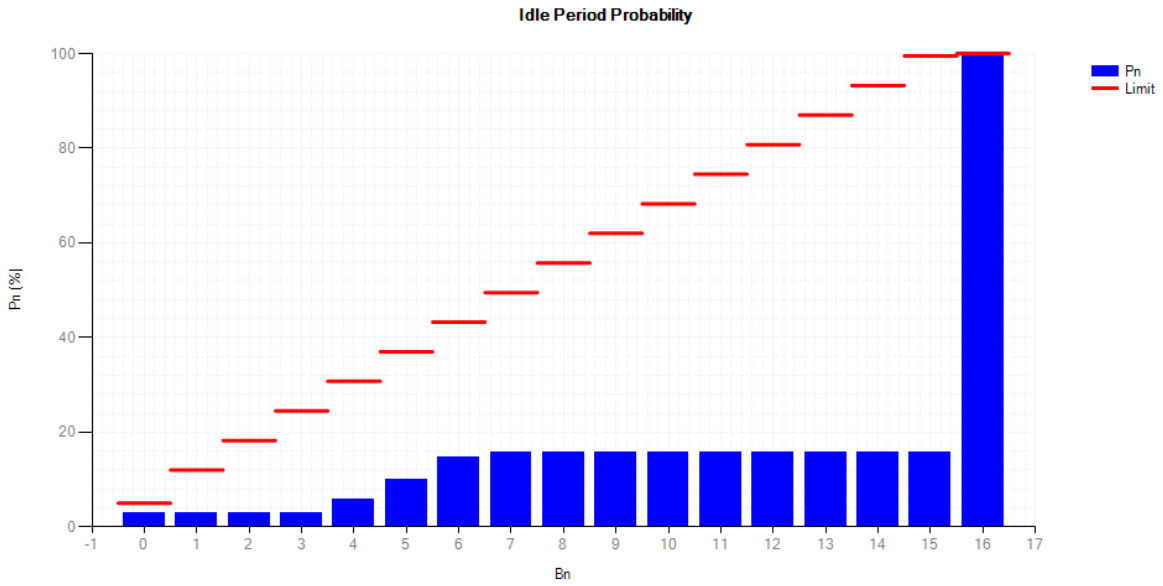


Idle Period Probability NVNT ac80 5210MHz

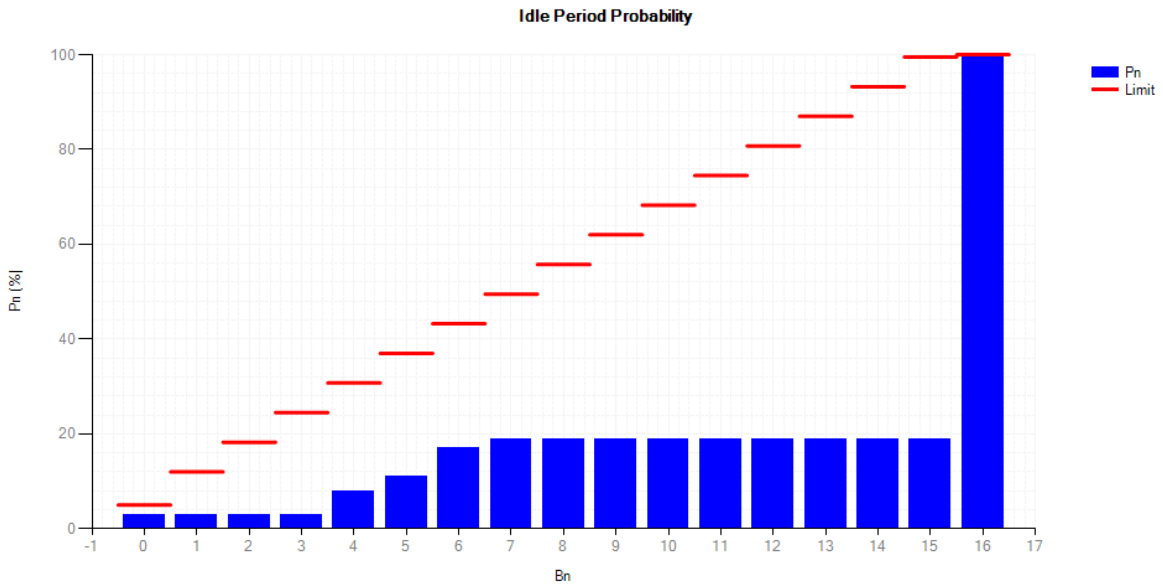

Idle Period Probability NVNT n20 5180MHz

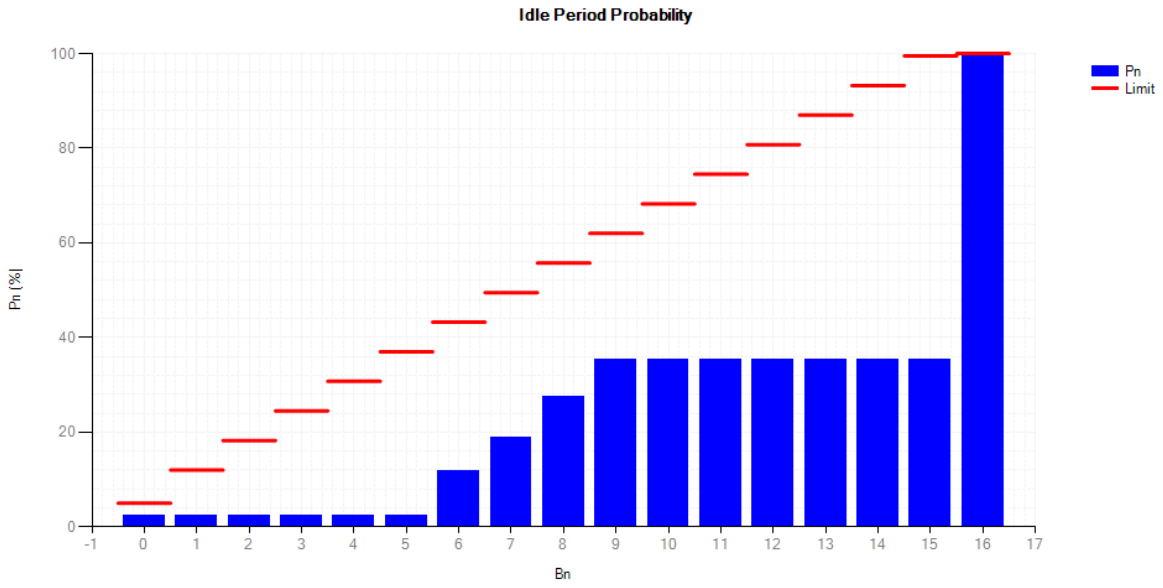


Idle Period Probability NVNT n40 5190MHz

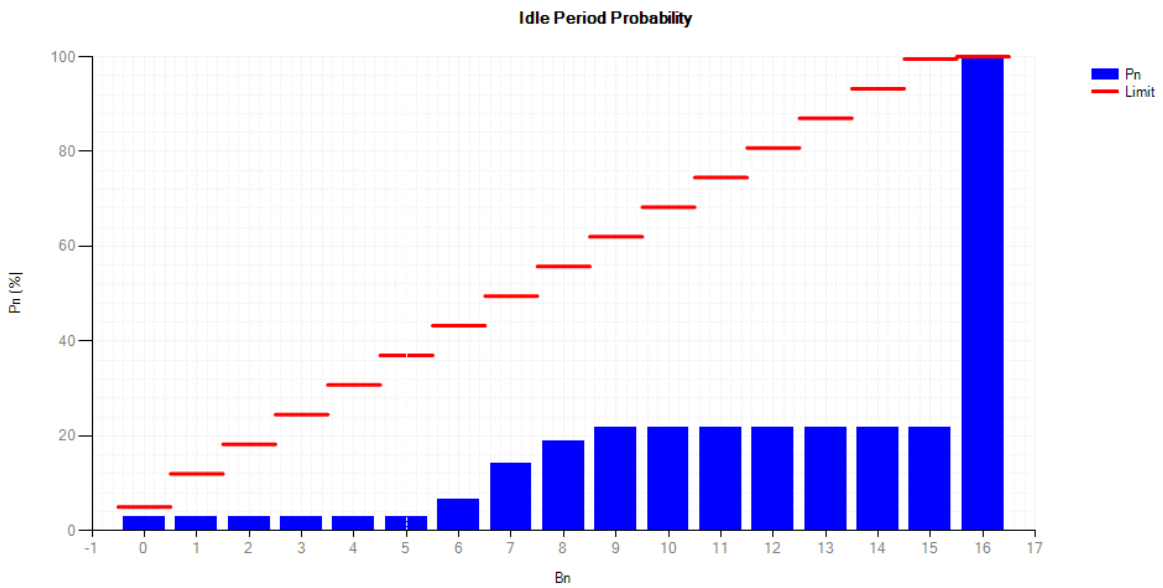


Clause 5.4.9 Adaptivity

Condition	Mode	Frequency (MHz)	Interfer Type	Interfer Level (dBm/MHz)	Short Control (ms)	Limit (ms)	Short Control (n)	Limit (n)	Verdict
NVNT	a	5180	AWGN	-77.18	0	<=2.5	0	<=50	Pass
NVNT	a	5180	LTE	-77.18	0	<=2.5	0	<=50	Pass
NVNT	a	5180	OFDM	-77.18	0	<=2.5	0	<=50	Pass
NVNT	ac20	5180	AWGN	-75	0	<=2.5	0	<=50	Pass
NVNT	ac20	5180	LTE	-75	0	<=2.5	0	<=50	Pass
NVNT	ac20	5180	OFDM	-75	0	<=2.5	0	<=50	Pass
NVNT	ac40	5190	AWGN	-75	0	<=2.5	0	<=50	Pass
NVNT	ac40	5190	LTE	-75	0	<=2.5	0	<=50	Pass
NVNT	ac40	5190	OFDM	-75	0	<=2.5	0	<=50	Pass
NVNT	ac80	5210	AWGN	-75	0	<=2.5	0	<=50	Pass
NVNT	ac80	5210	LTE	-75	0	<=2.5	0	<=50	Pass
NVNT	ac80	5210	OFDM	-75	0	<=2.5	0	<=50	Pass
NVNT	n20	5180	AWGN	-75	0	<=2.5	0	<=50	Pass
NVNT	n20	5180	LTE	-75	0	<=2.5	0	<=50	Pass
NVNT	n20	5180	OFDM	-75	0	<=2.5	0	<=50	Pass
NVNT	n40	5190	AWGN	-75	0	<=2.5	0	<=50	Pass
NVNT	n40	5190	LTE	-75	0	<=2.5	0	<=50	Pass
NVNT	n40	5190	OFDM	-75	0	<=2.5	0	<=50	Pass
Remark	Signal amplitude was lower than the normal signal amplitude is not short control signal, interference from auxiliary equipment of PA.								


Adaptivity NVNT a 5180MHz AWGN

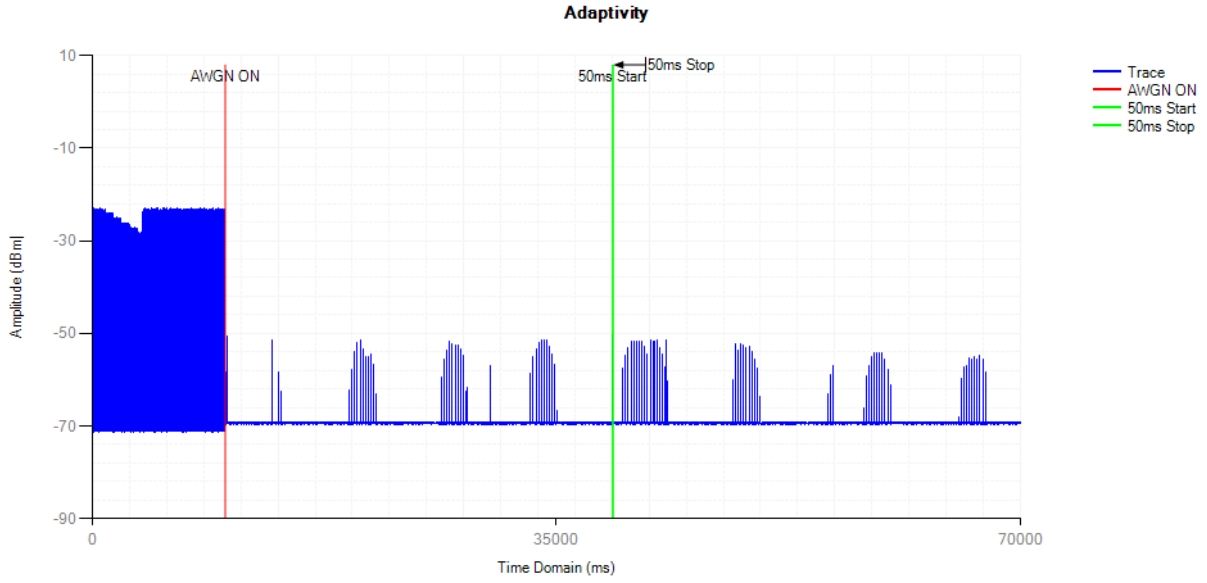


Control Signal NVNT a 5180MHz AWGN

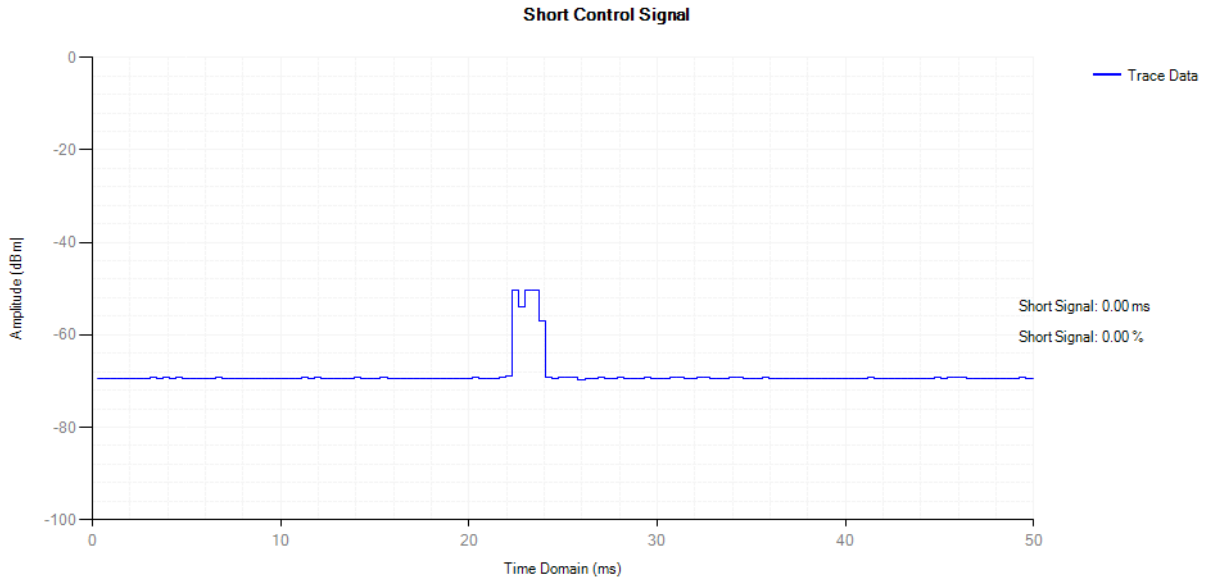


Adaptivity NVNT a 5180MHz LTE

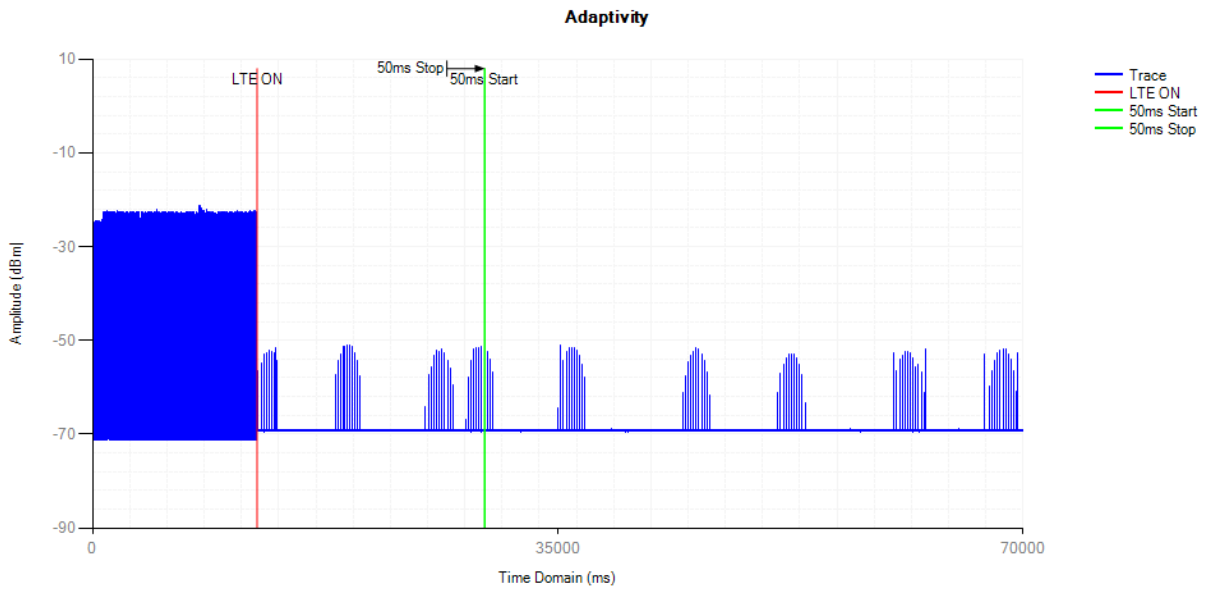


Control Signal NVNT a 5180MHz LTE

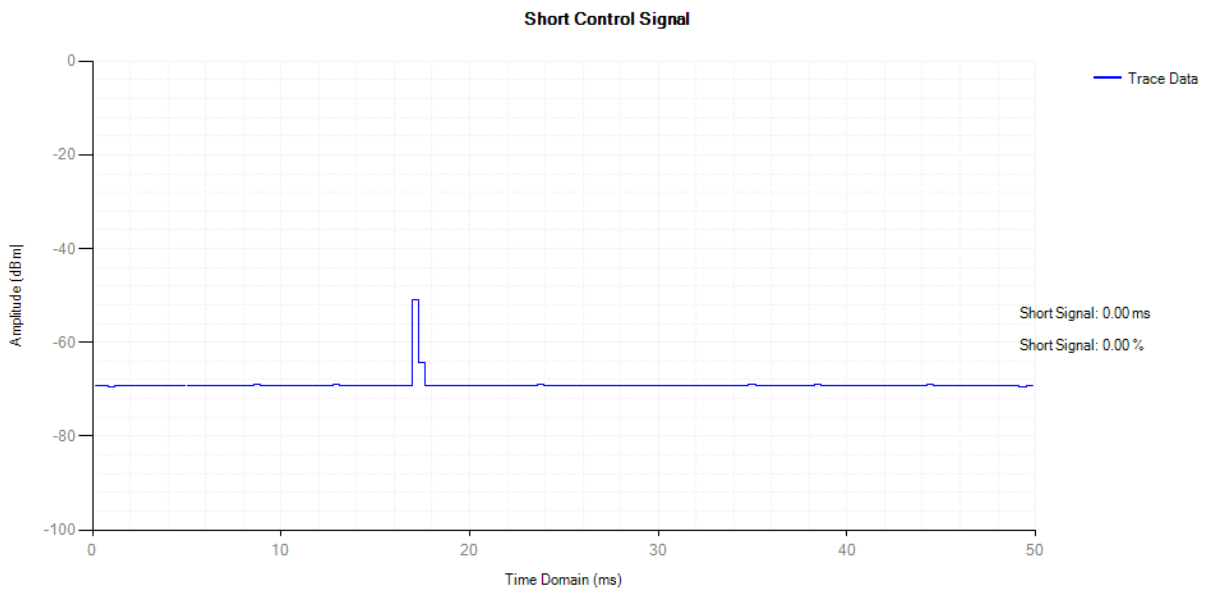


Adaptivity NVNT a 5180MHz OFDM

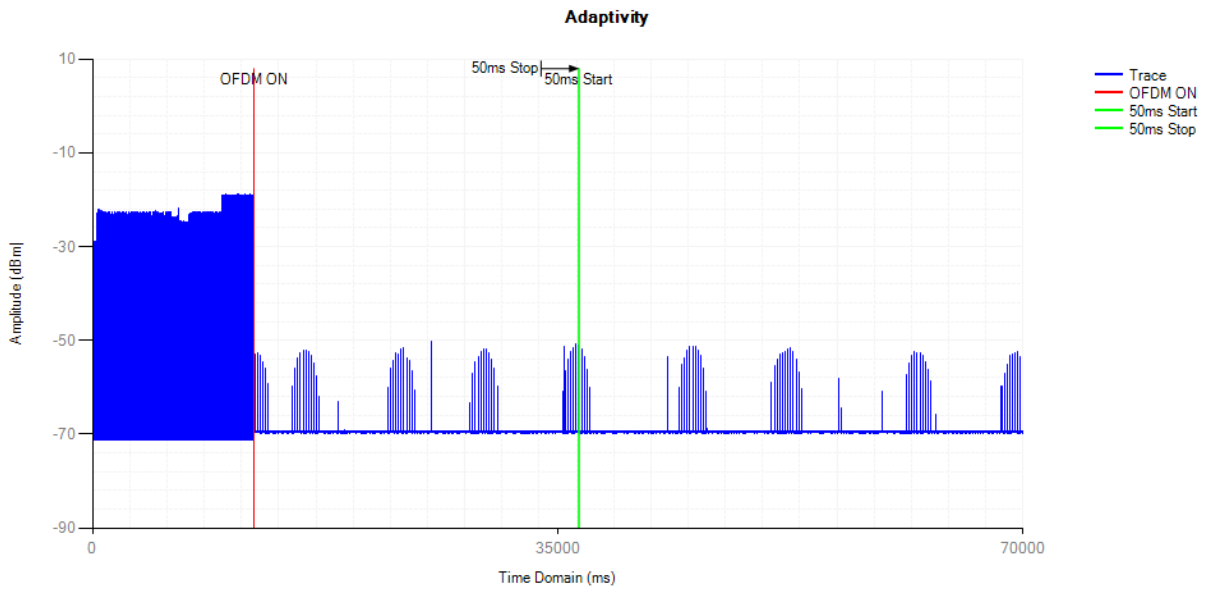


Control Signal NVNT a 5180MHz OFDM

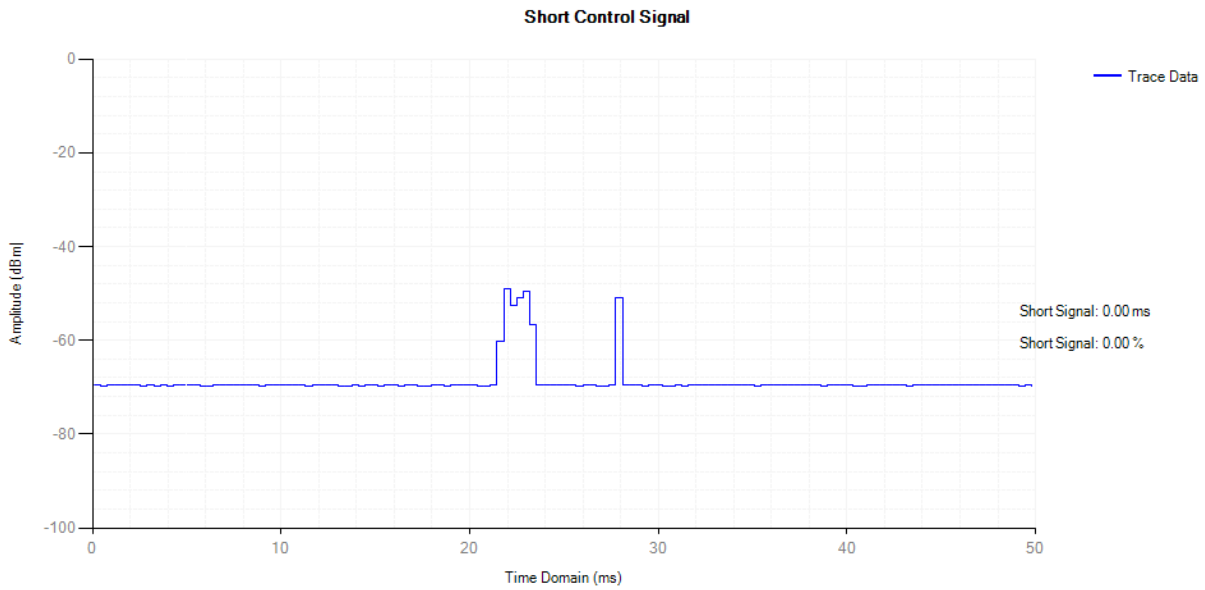


Adaptivity NVNT ac20 5180MHz AWGN

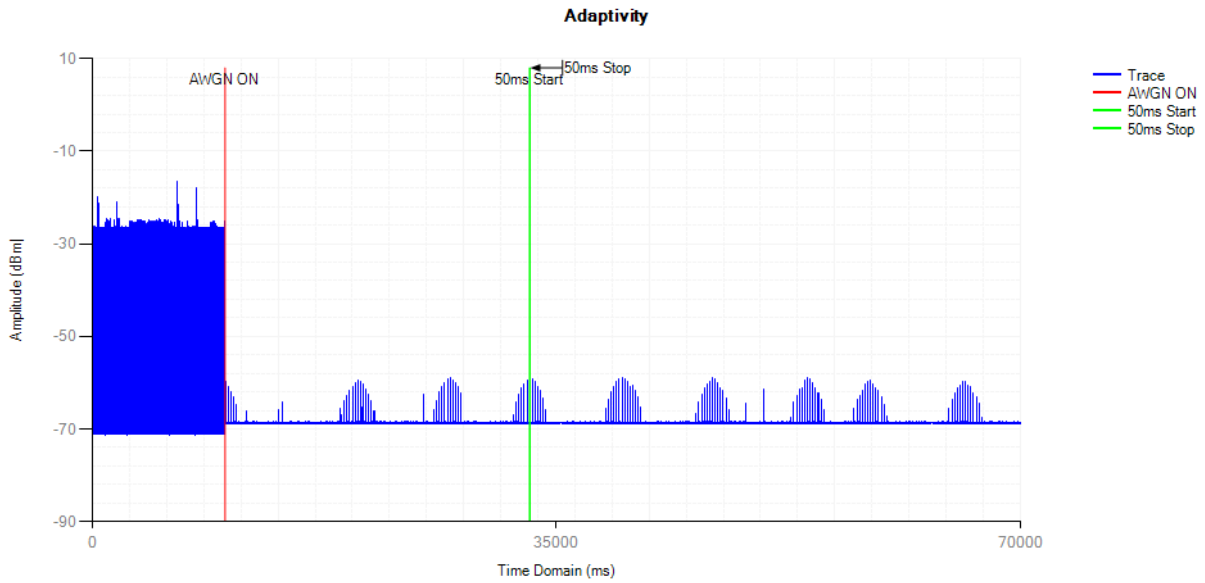


Control Signal NVNT ac20 5180MHz AWGN

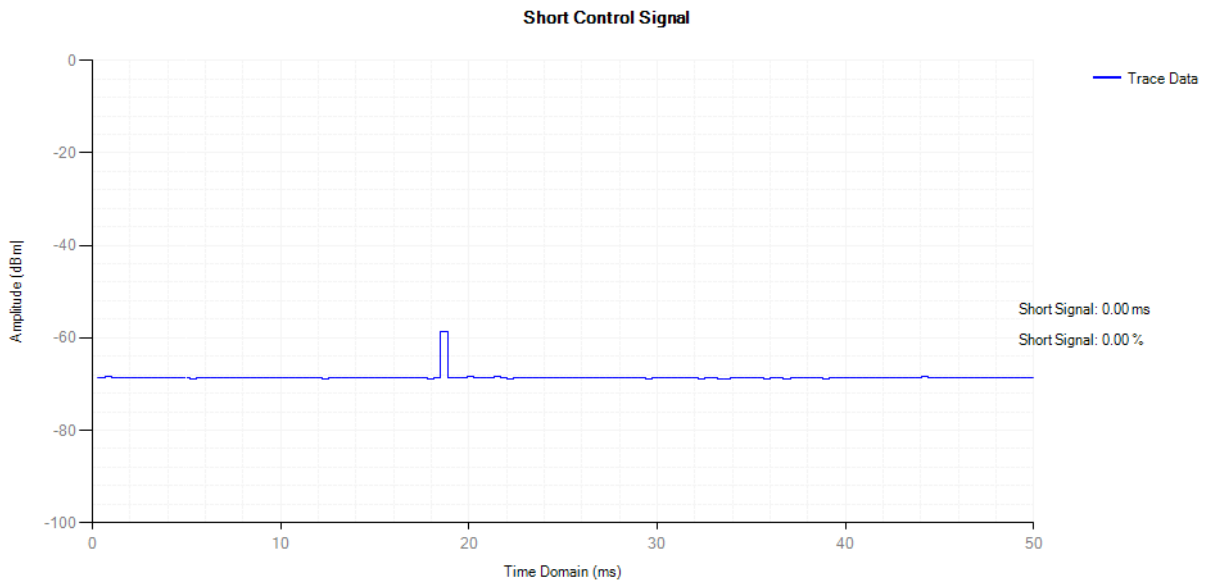


Adaptivity NVNT ac20 5180MHz LTE

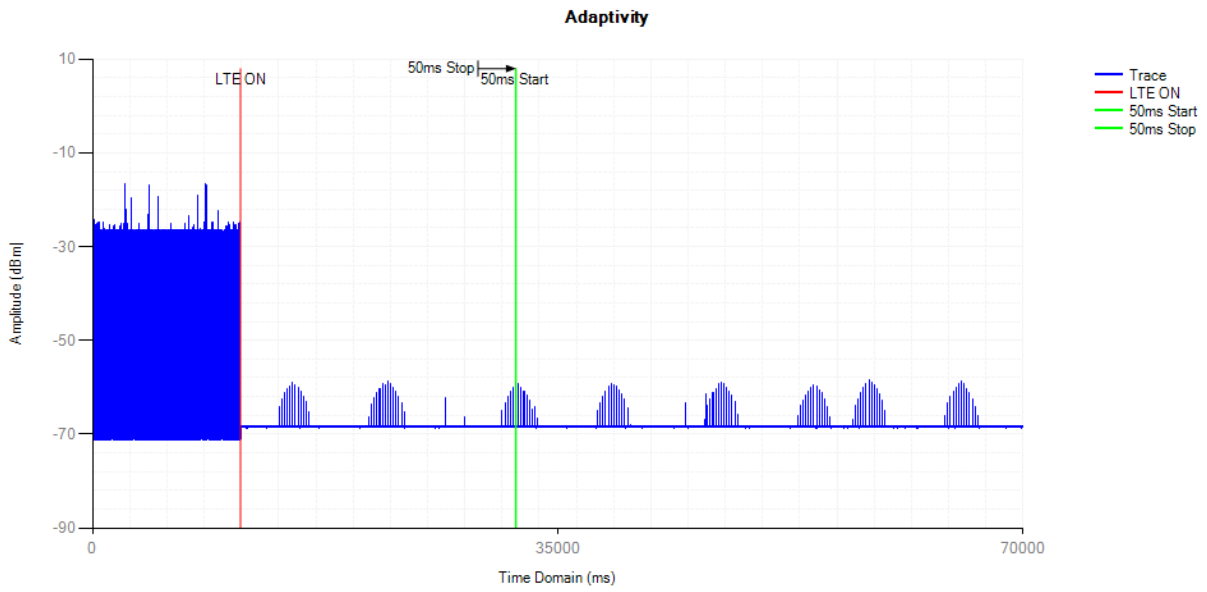


Control Signal NVNT ac20 5180MHz LTE

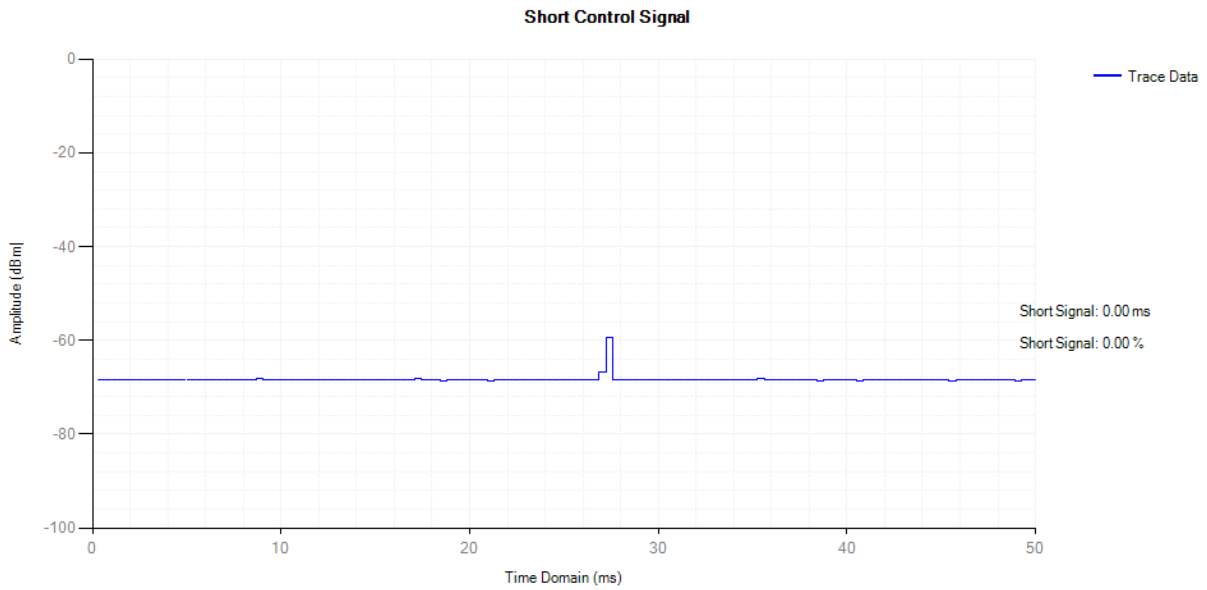


Adaptivity NVNT ac20 5180MHz OFDM

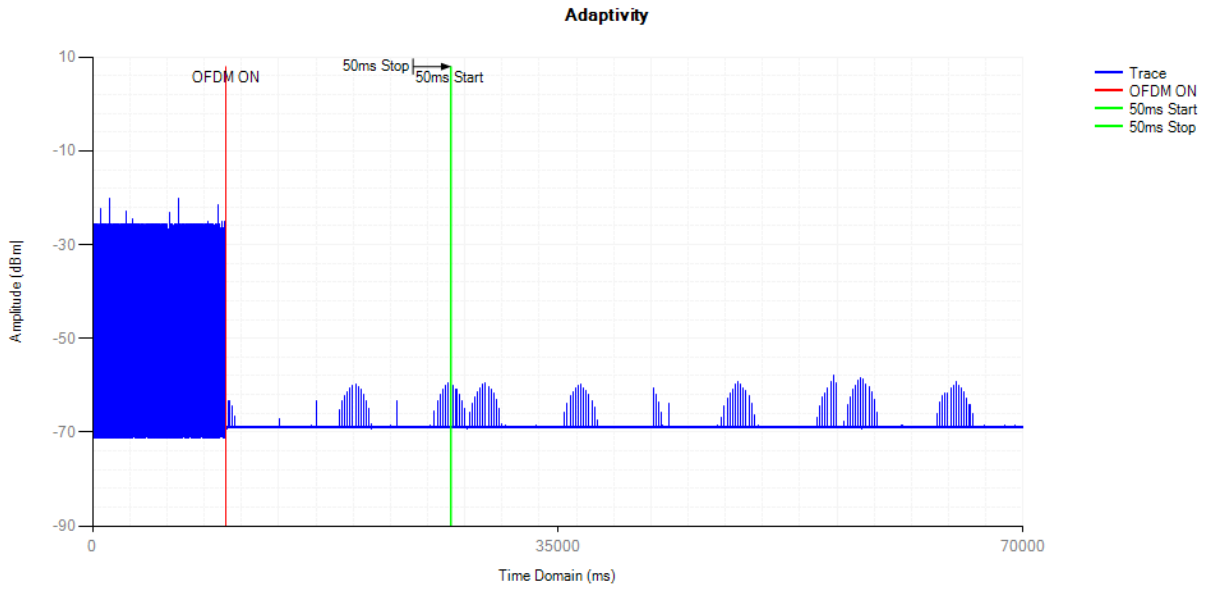


Control Signal NVNT ac20 5180MHz OFDM

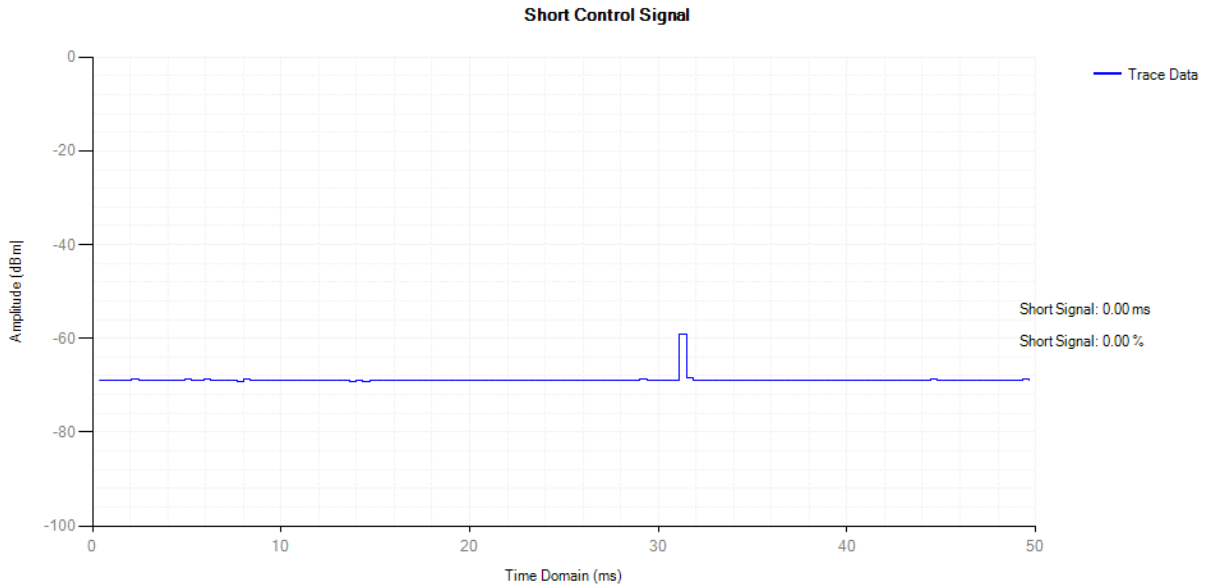


Adaptivity NVNT ac40 5190MHz AWGN

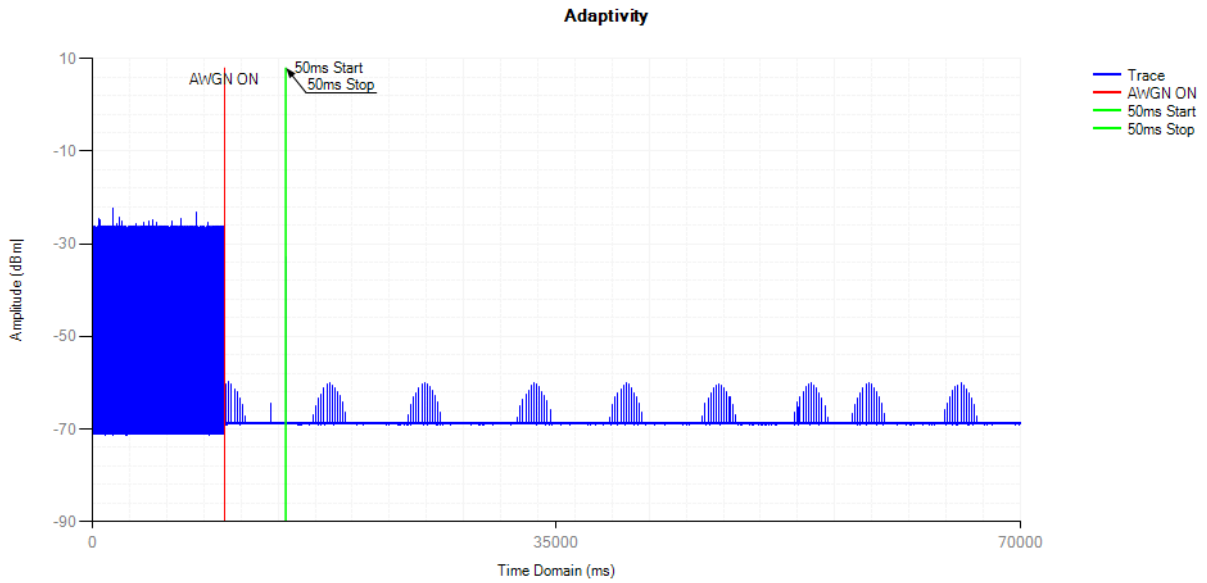


Control Signal NVNT ac40 5190MHz AWGN

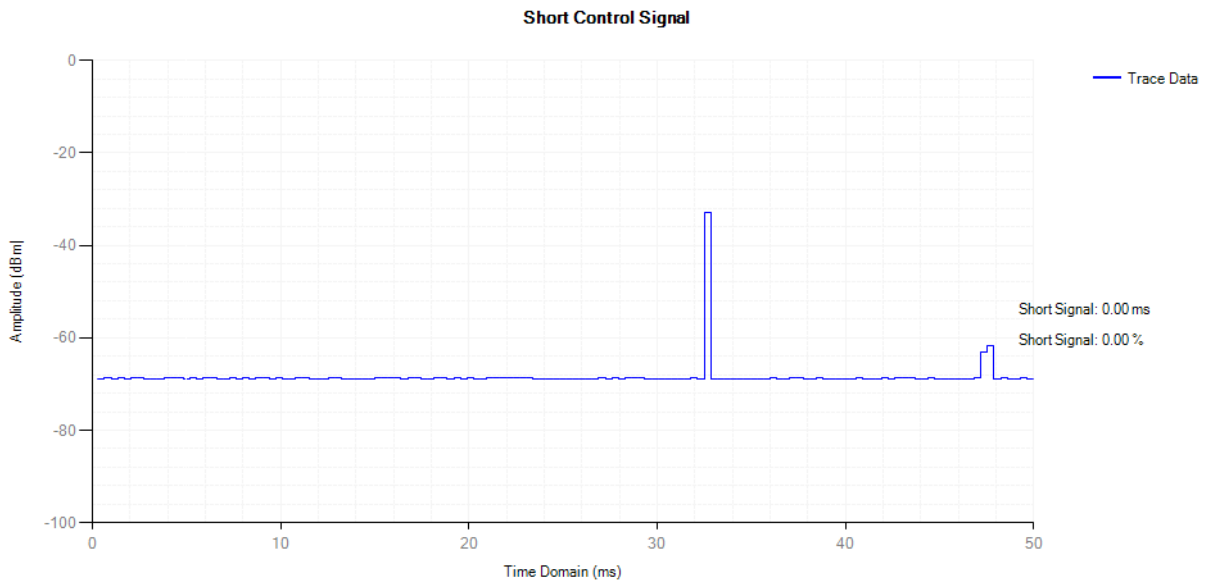


Adaptivity NVNT ac40 5190MHz LTE

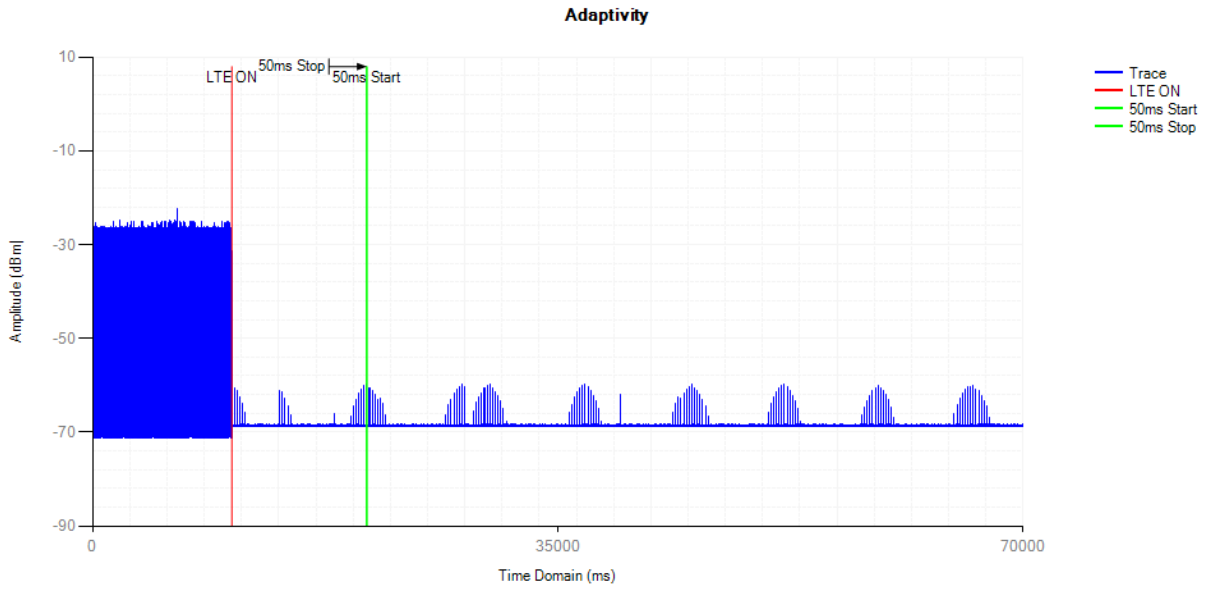


Control Signal NVNT ac40 5190MHz LTE

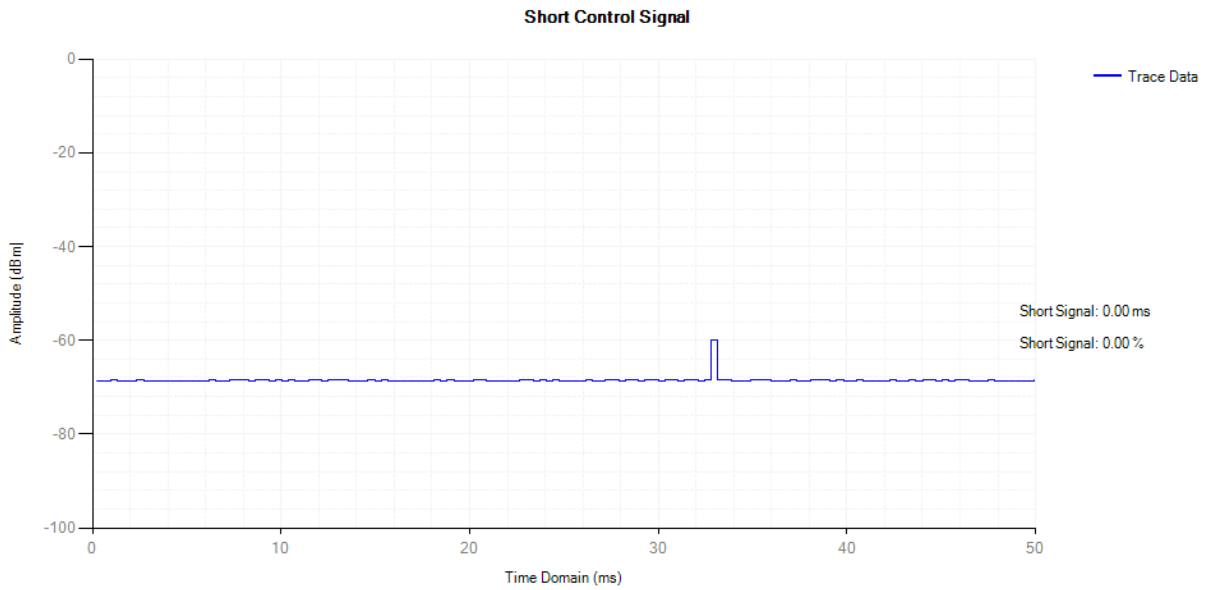


Adaptivity NVNT ac40 5190MHz OFDM

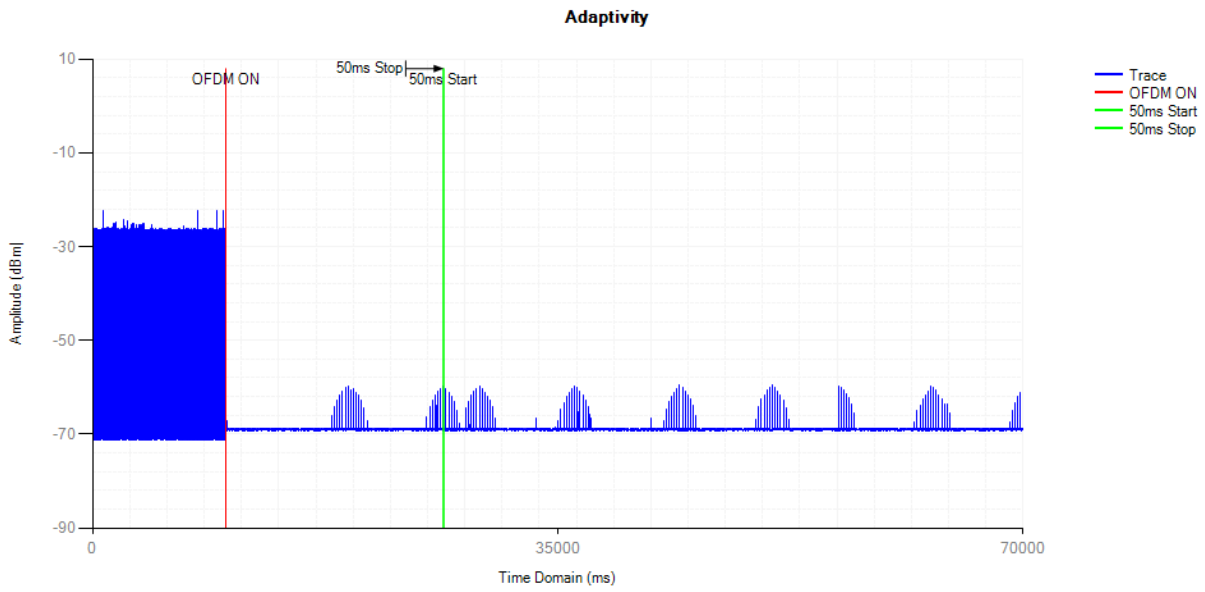


Control Signal NVNT ac40 5190MHz OFDM

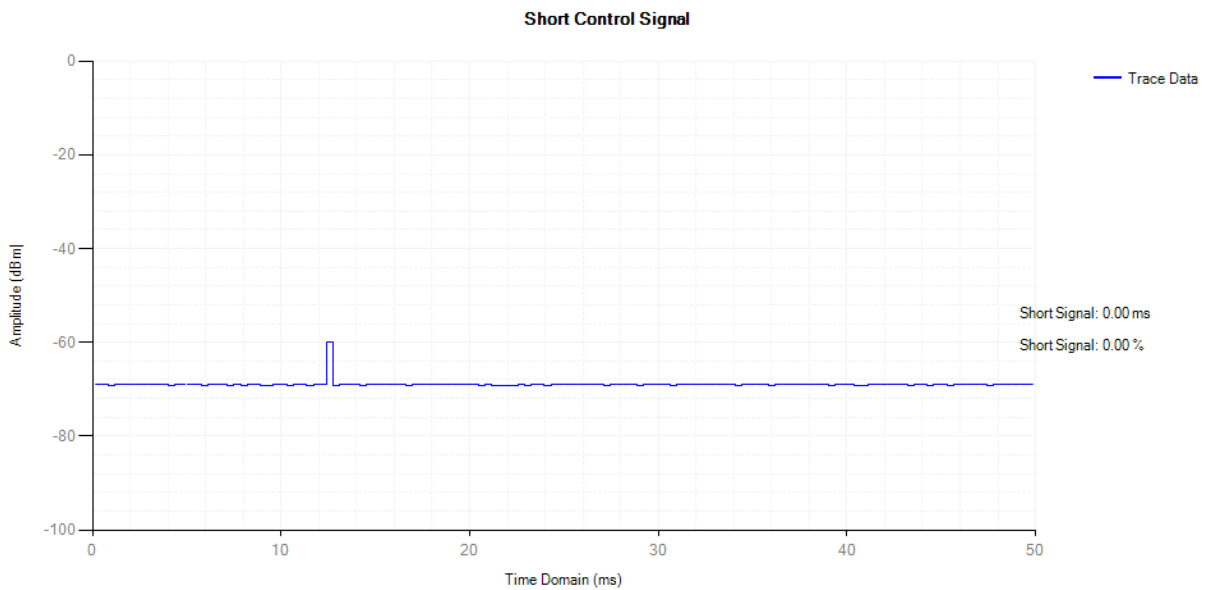


Adaptivity NVNT ac80 5210MHz AWGN

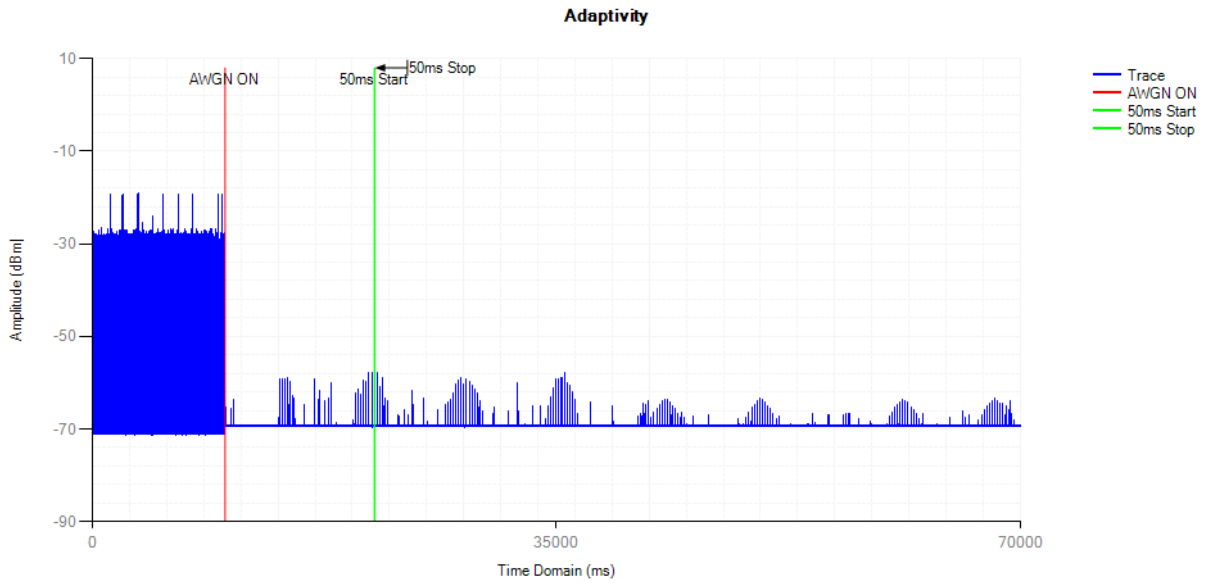


Control Signal NVNT ac80 5210MHz AWGN

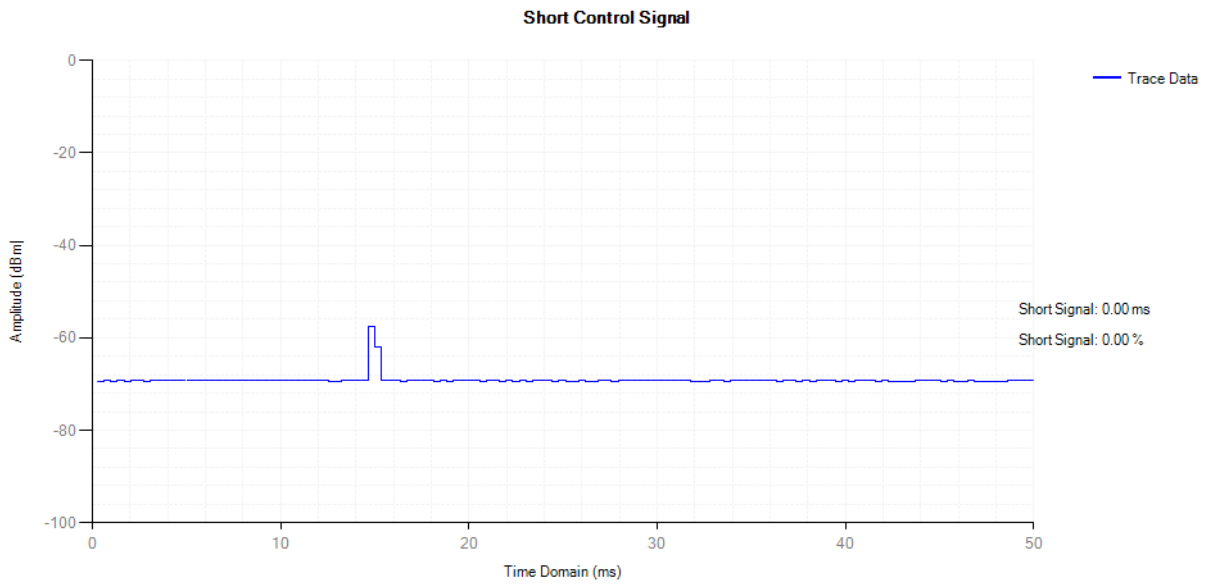


Adaptivity NVNT ac80 5210MHz LTE

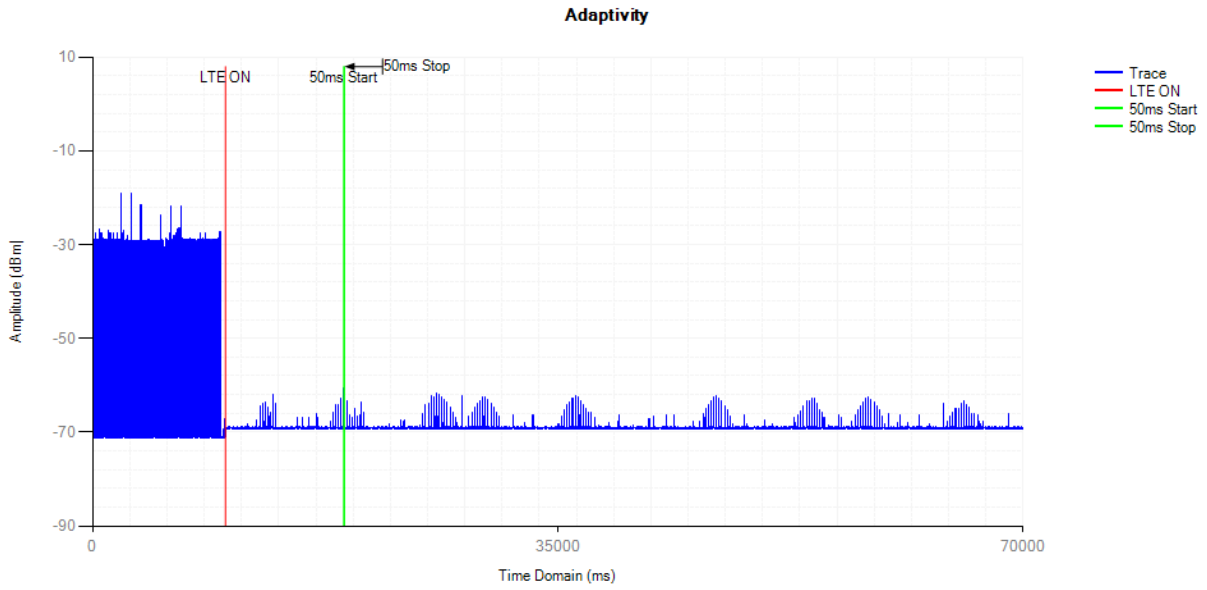


Control Signal NVNT ac80 5210MHz LTE

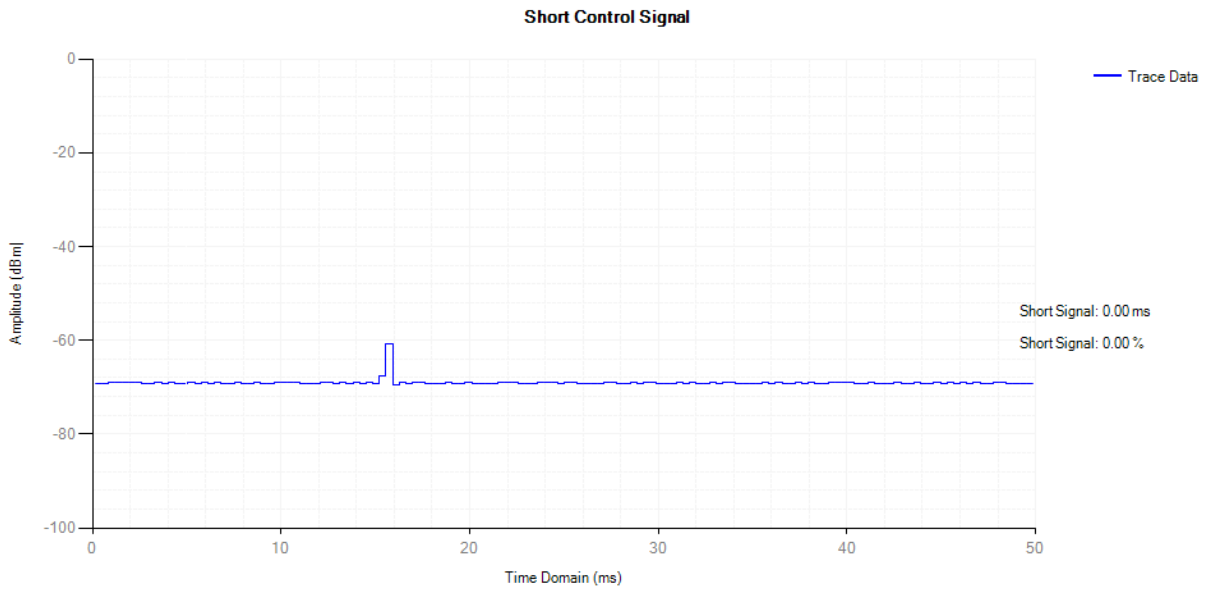


Adaptivity NVNT ac80 5210MHz OFDM

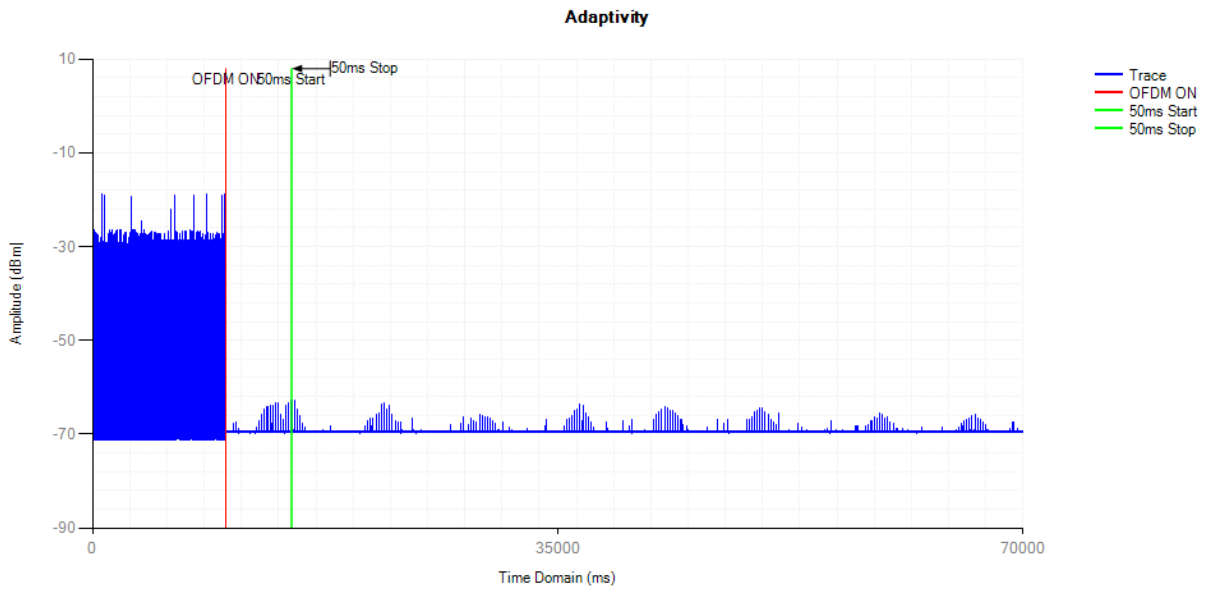


Control Signal NVNT ac80 5210MHz OFDM

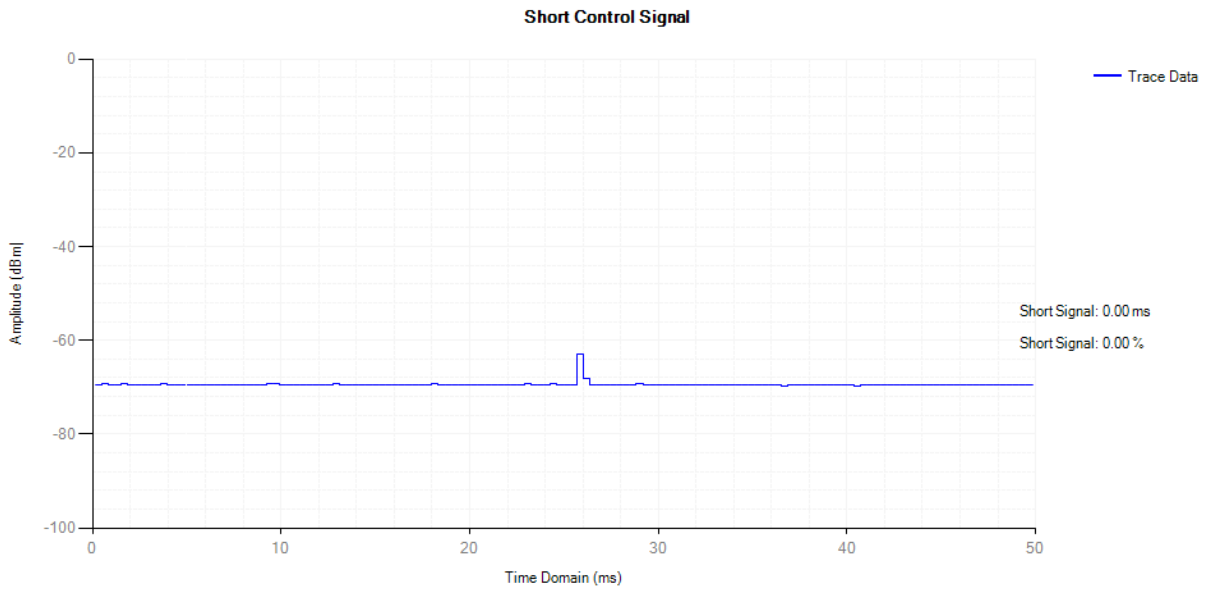


Adaptivity NVNT n20 5180MHz AWGN

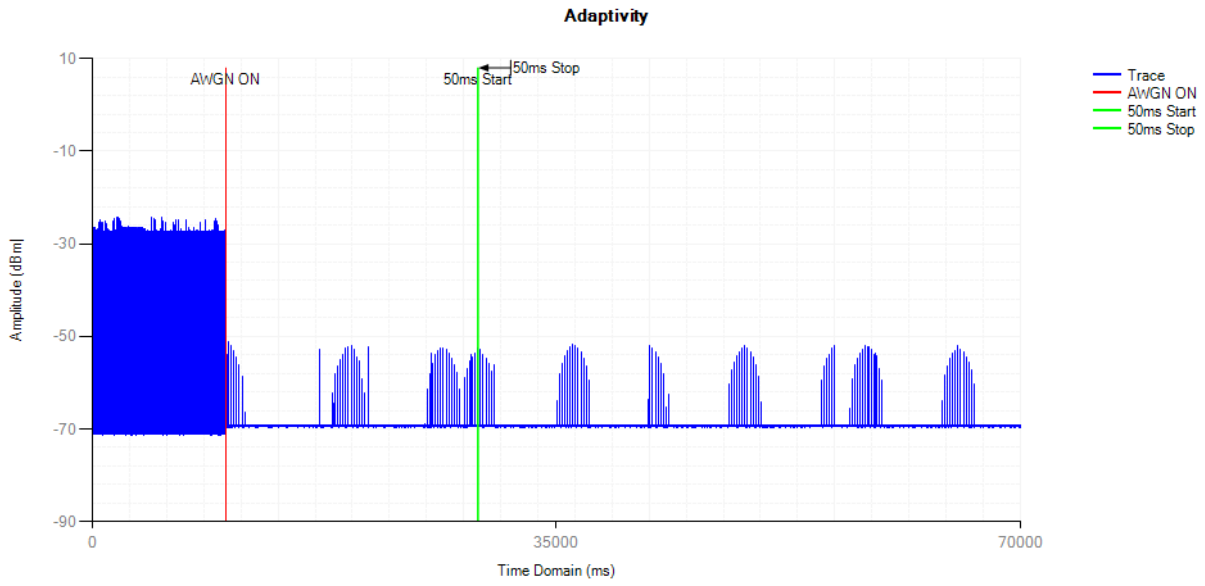


Control Signal NVNT n20 5180MHz AWGN

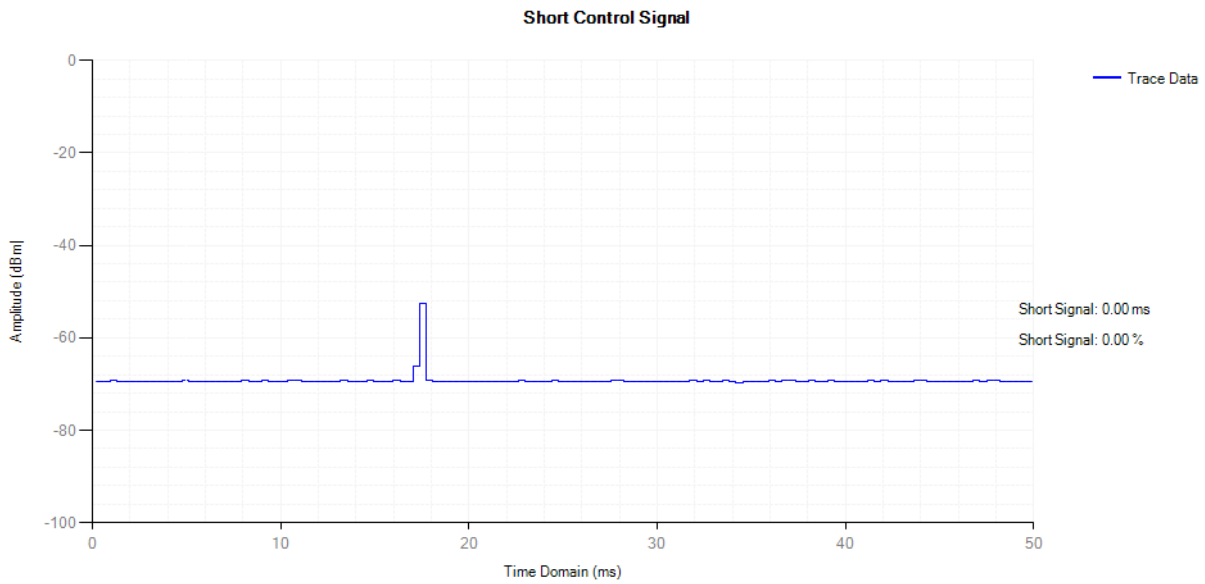


Adaptivity NVNT n20 5180MHz LTE

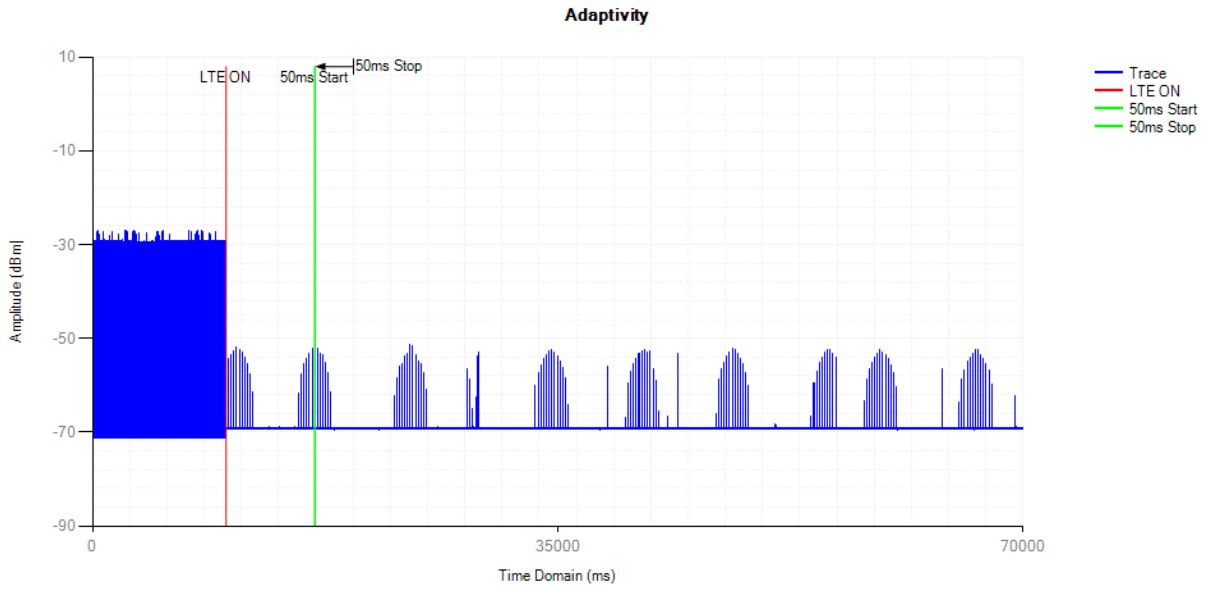


Control Signal NVNT n20 5180MHz LTE

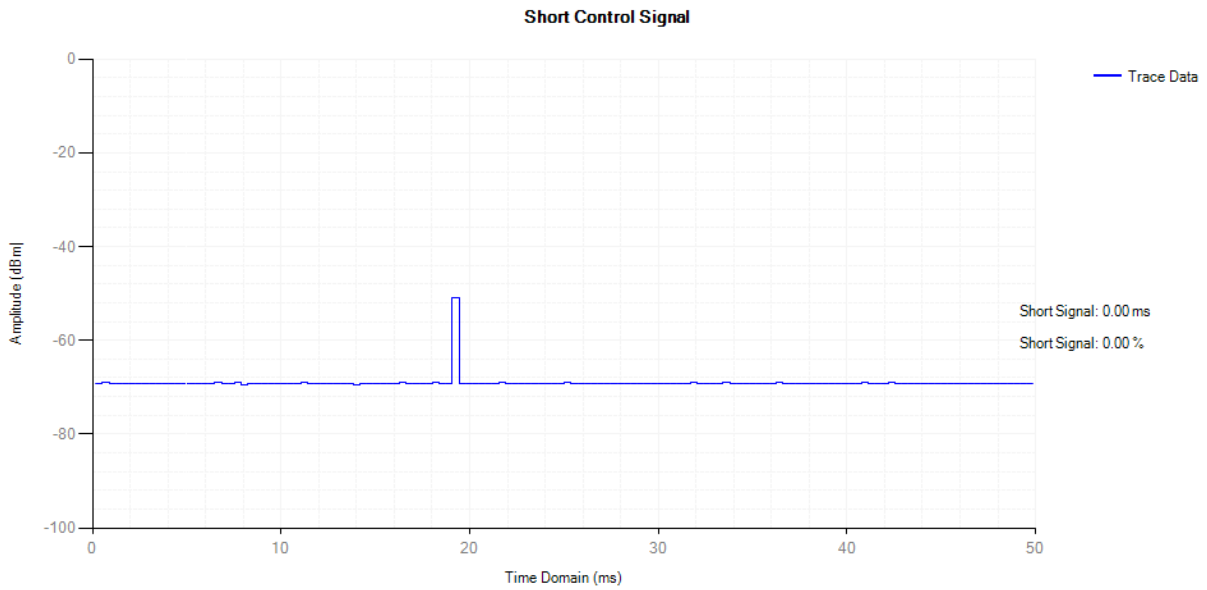


Adaptivity NVNT n20 5180MHz OFDM

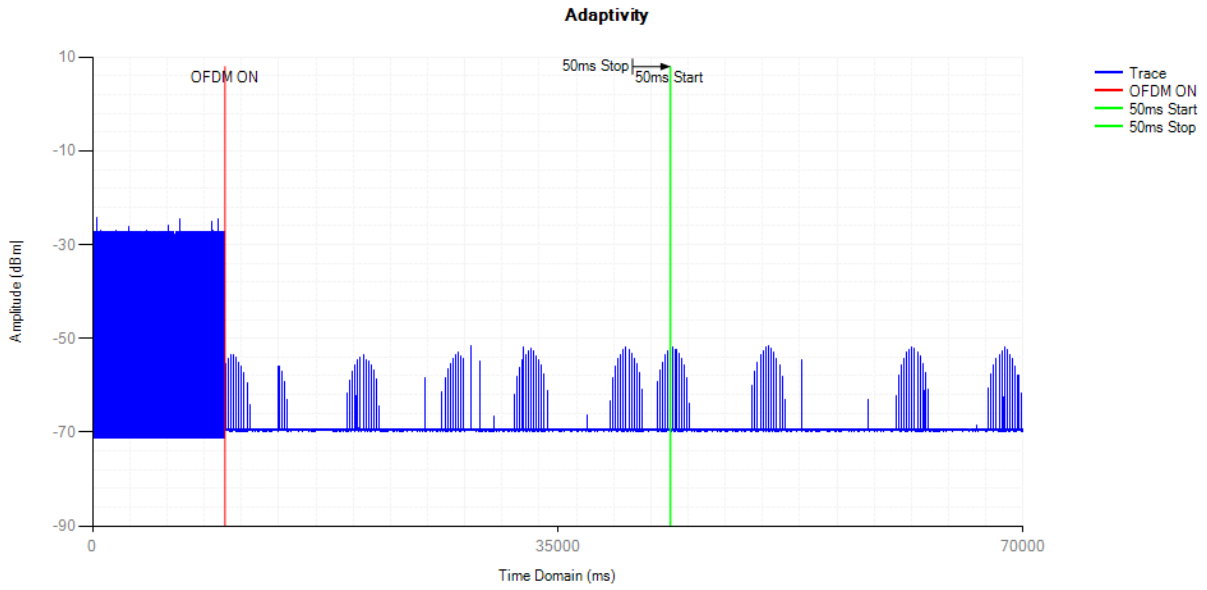


Control Signal NVNT n20 5180MHz OFDM

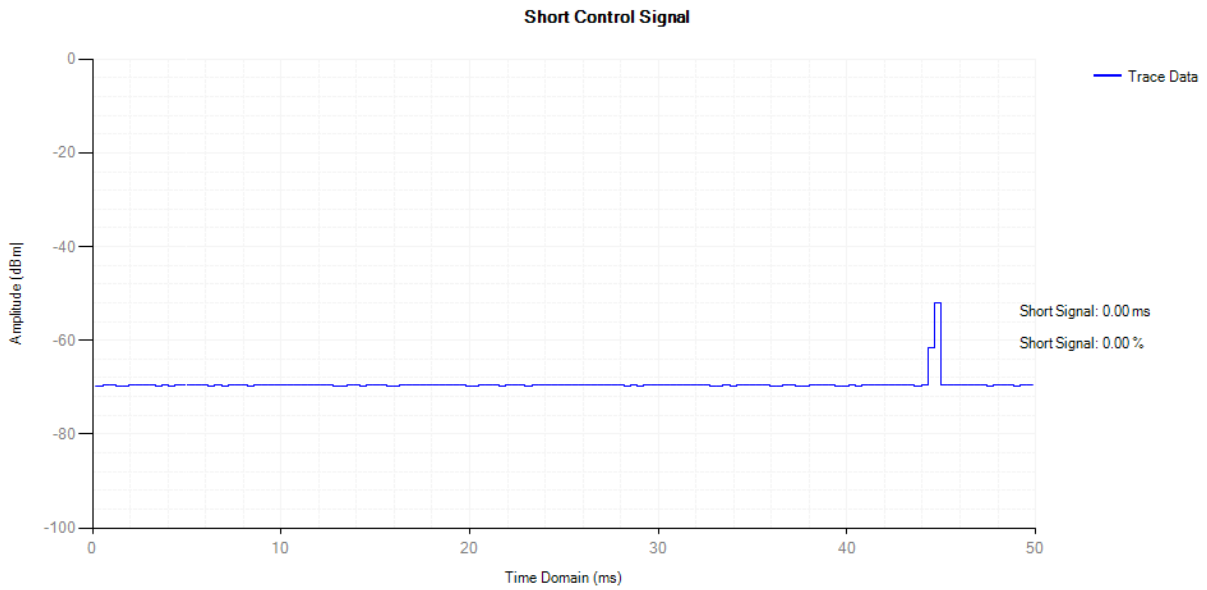


Adaptivity NVNT n40 5190MHz AWGN

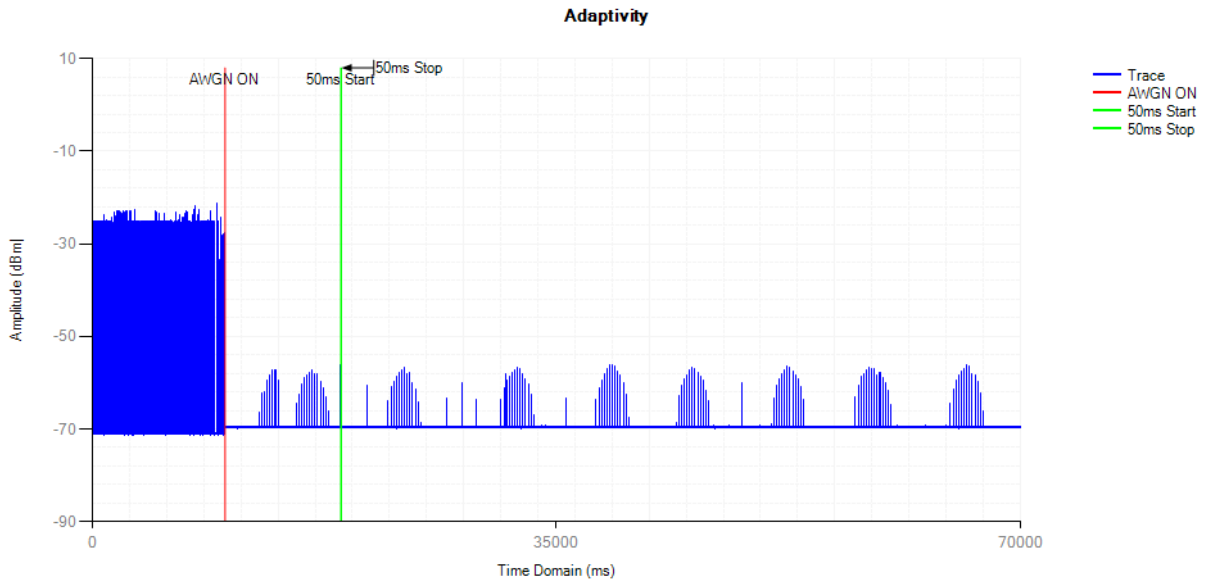


Control Signal NVNT n40 5190MHz AWGN

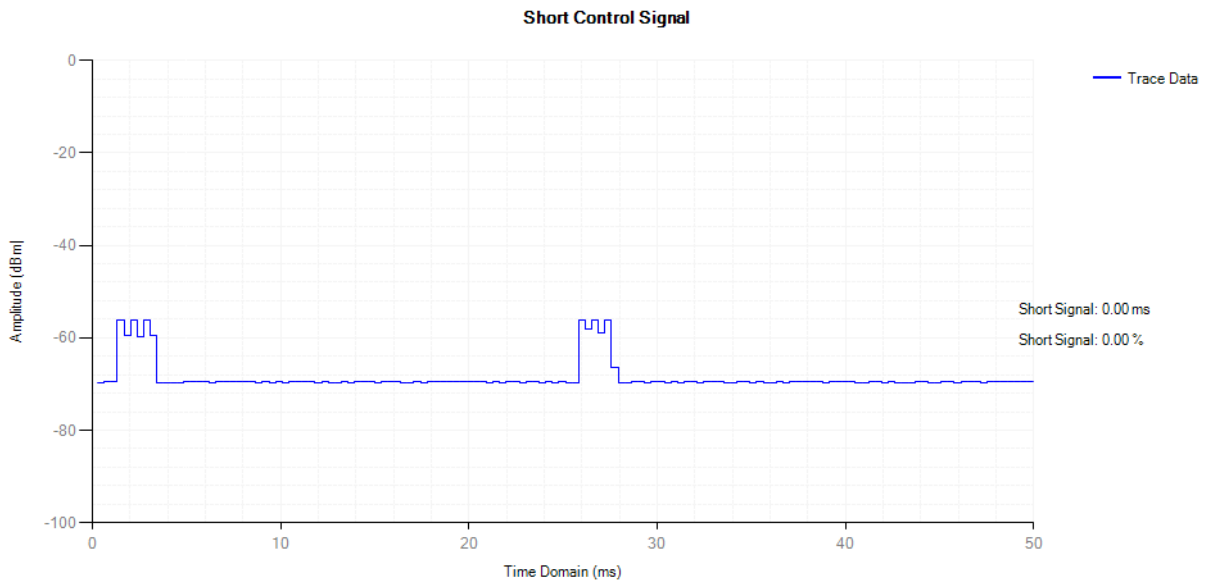


Adaptivity NVNT n40 5190MHz LTE

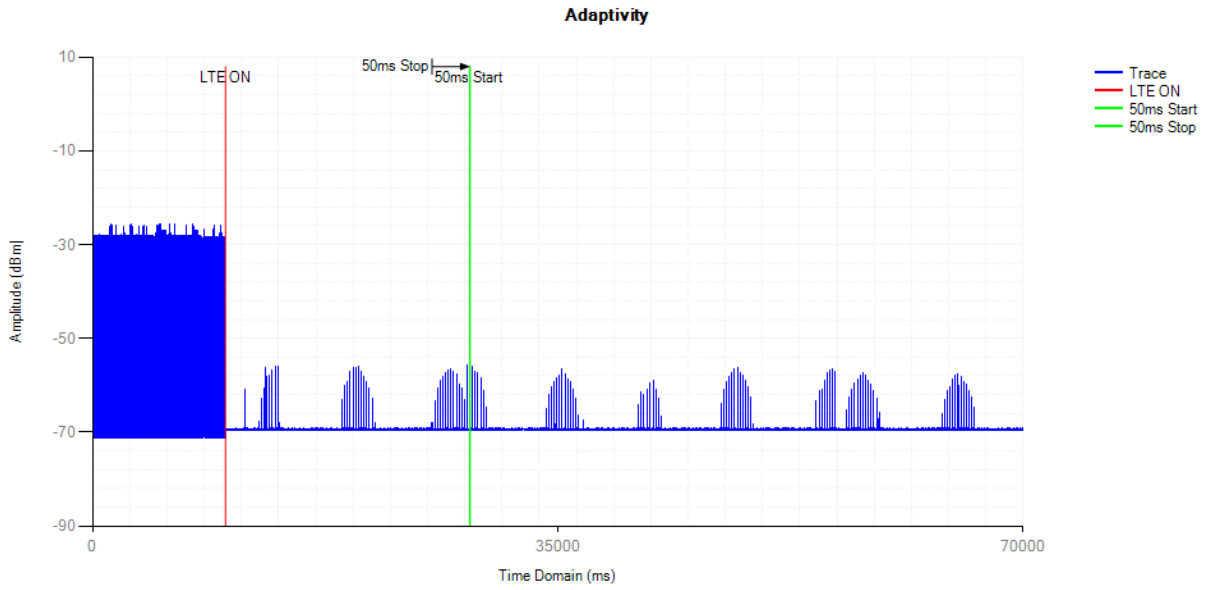

Control Signal NVNT n40 5190MHz LTE

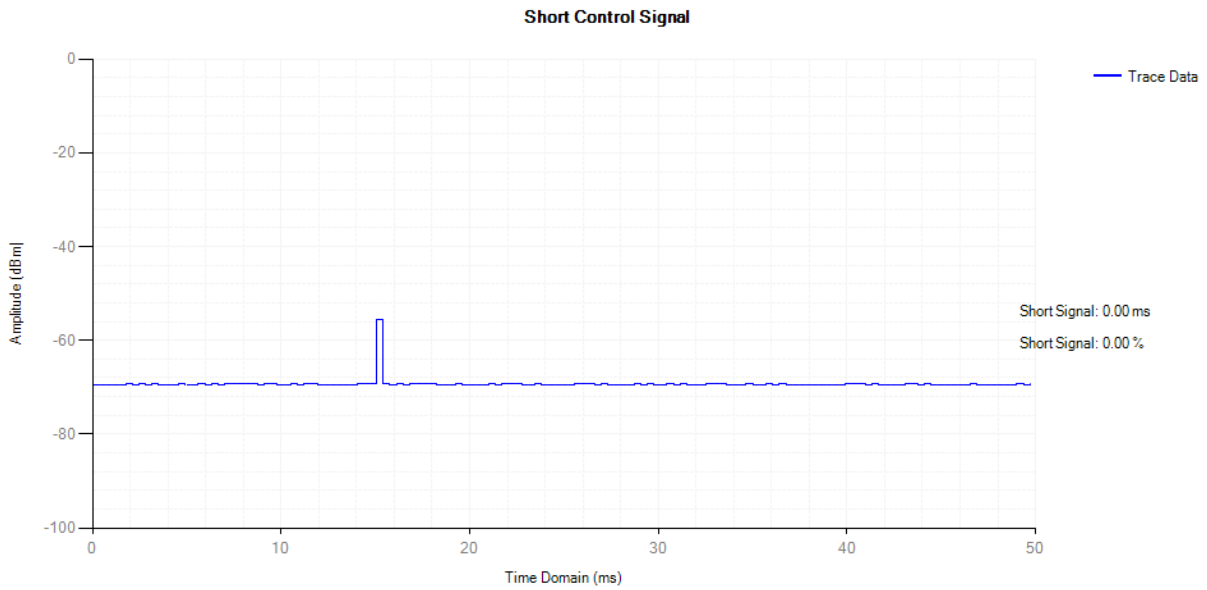

Adaptivity NVNT n40 5190MHz OFDM

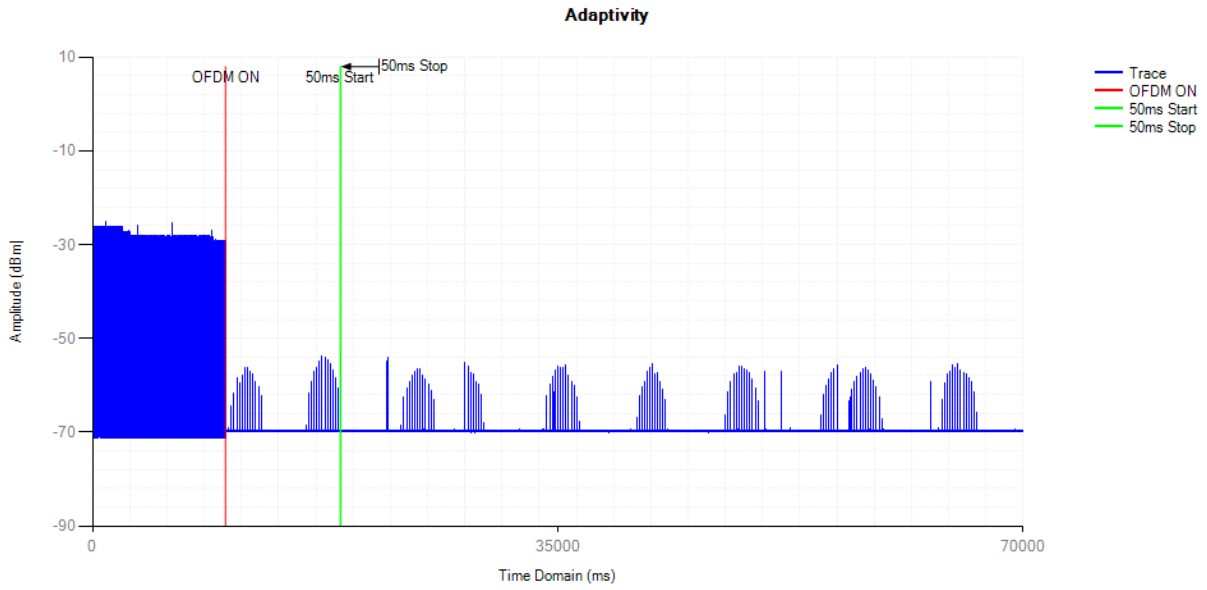

Control Signal NVNT n40 5190MHz OFDM

