


## Test Data


### 5.4.2 RF Output Power (for External antenna A: 4dBi)

Condition	Mode	Frequency (MHz)	Max Burst RMS Power (dBm)	Burst Number	Max EIRP (dBm)	Limit (dBm)	Verdict
NVHT	1-DH5	2402	7.35	27	11.35	20	Pass
NVHT	1-DH5	2441	7.49	27	11.49	20	Pass
NVHT	1-DH5	2480	7.69	28	11.69	20	Pass
NVLT	1-DH5	2402	7.34	28	11.34	20	Pass
NVLT	1-DH5	2441	7.5	27	11.5	20	Pass
NVLT	1-DH5	2480	7.58	27	11.58	20	Pass
NVNT	1-DH5	2402	7.36	28	11.36	20	Pass
NVNT	1-DH5	2441	7.51	27	11.51	20	Pass
NVNT	1-DH5	2480	7.58	28	11.58	20	Pass
NVHT	2-DH5	2402	6.25	28	10.25	20	Pass
NVHT	2-DH5	2441	6.39	28	10.39	20	Pass
NVHT	2-DH5	2480	6.56	27	10.56	20	Pass
NVLT	2-DH5	2402	6.28	28	10.28	20	Pass
NVLT	2-DH5	2441	6.45	27	10.45	20	Pass
NVLT	2-DH5	2480	6.6	28	10.6	20	Pass
NVNT	2-DH5	2402	6.31	27	10.31	20	Pass
NVNT	2-DH5	2441	6.42	27	10.42	20	Pass
NVNT	2-DH5	2480	6.57	28	10.57	20	Pass
NVHT	3-DH5	2402	5.3	27	9.3	20	Pass
NVHT	3-DH5	2441	5.45	27	9.45	20	Pass
NVHT	3-DH5	2480	5.47	28	9.47	20	Pass
NVLT	3-DH5	2402	5.27	27	9.27	20	Pass
NVLT	3-DH5	2441	5.44	27	9.44	20	Pass
NVLT	3-DH5	2480	5.44	27	9.44	20	Pass
NVNT	3-DH5	2402	5.29	27	9.29	20	Pass
NVNT	3-DH5	2441	5.46	28	9.46	20	Pass
NVNT	3-DH5	2480	5.45	28	9.45	20	Pass


## Power NVHT 1-DH5 2402MHz

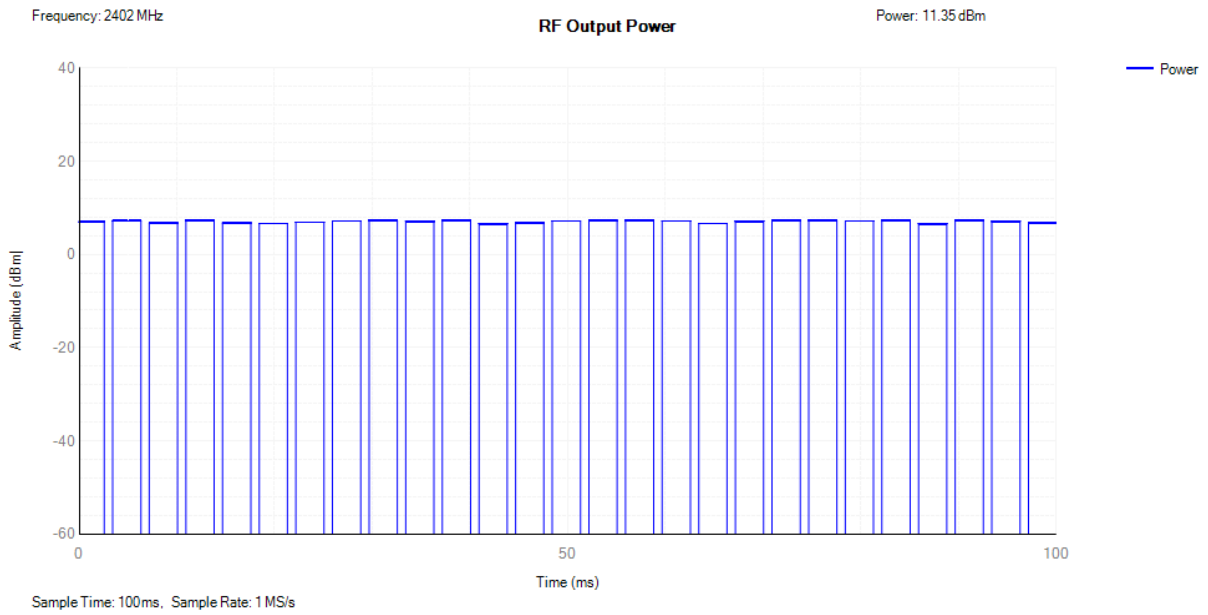


## Power NVHT 1-DH5 2441MHz

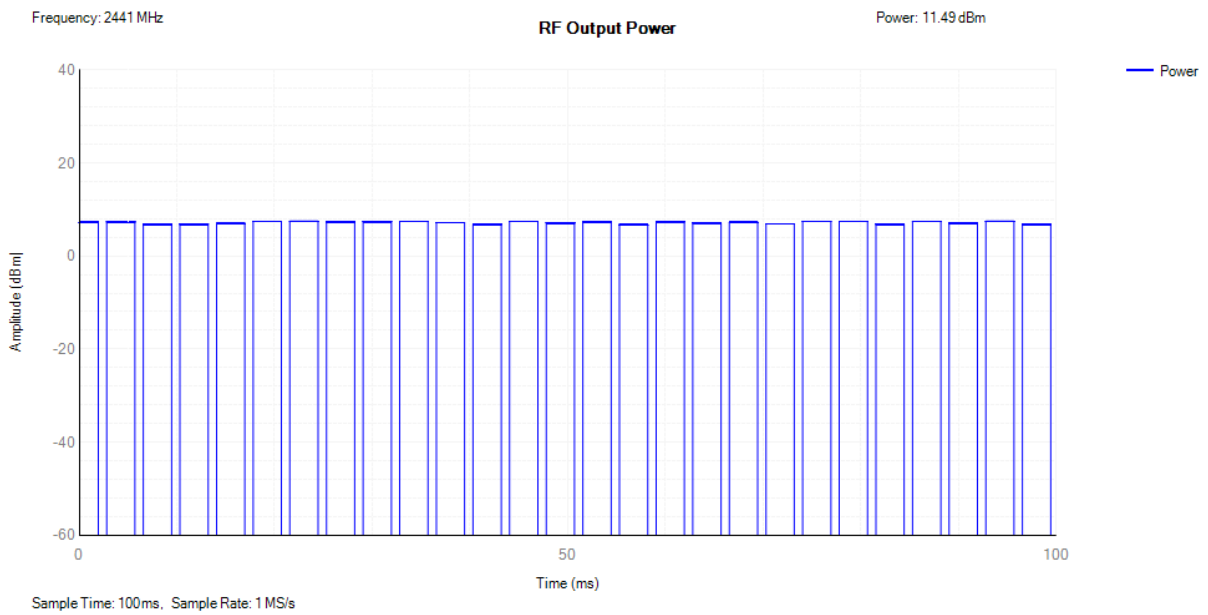


### Power NVHT 1-DH5 2492MHz

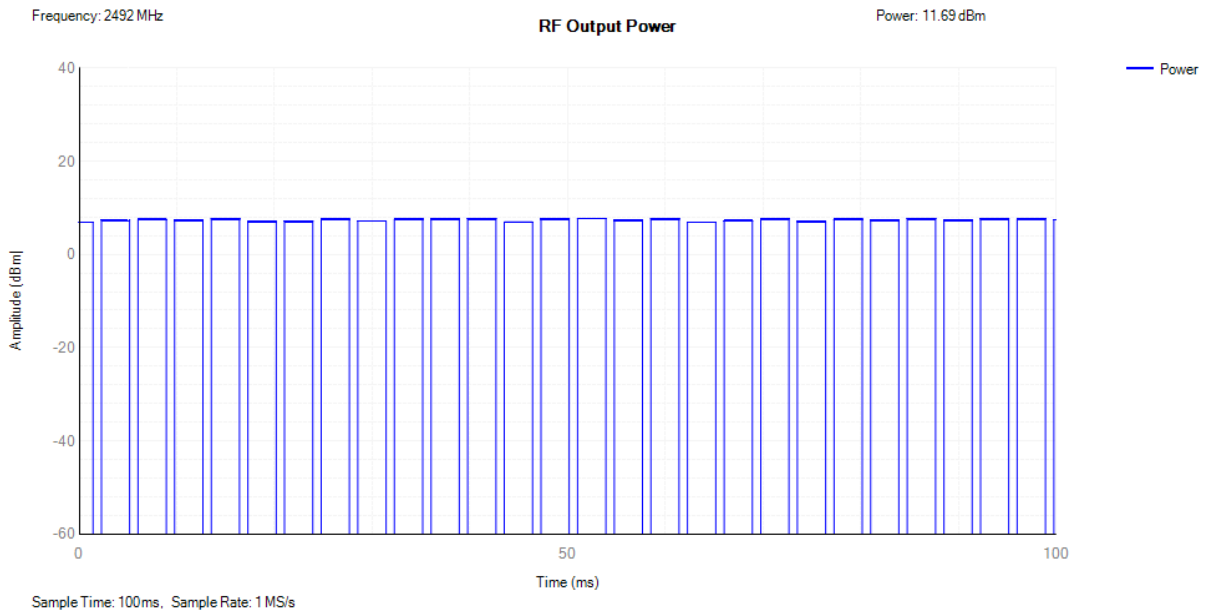


### Power NVLT 1-DH5 2402MHz

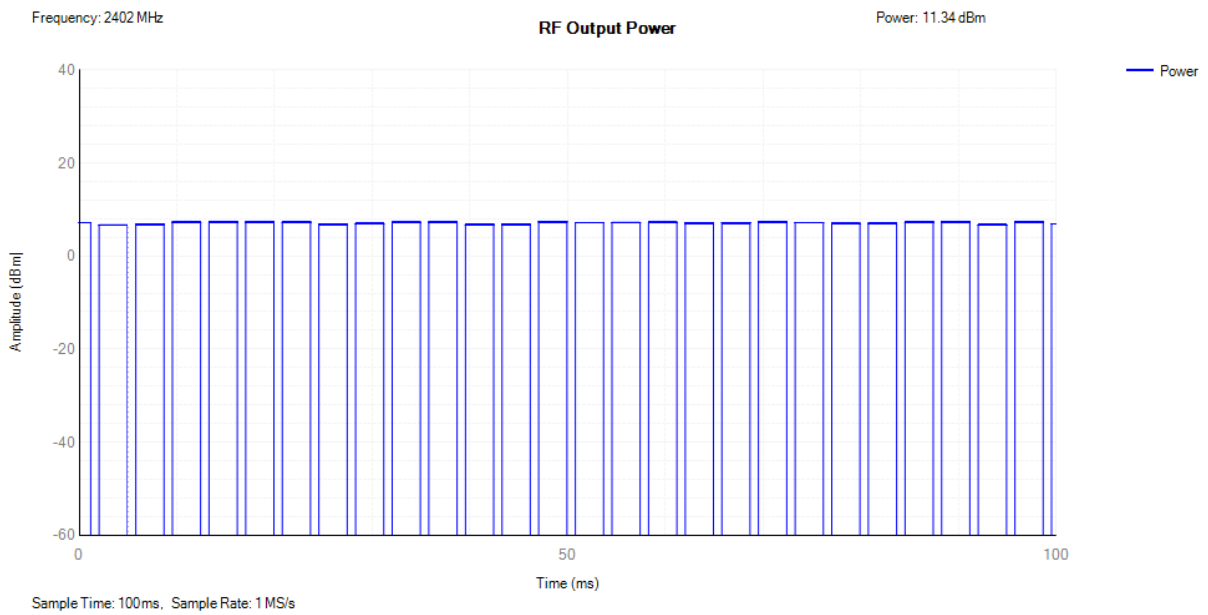


## Power NVLT 1-DH5 2441MHz

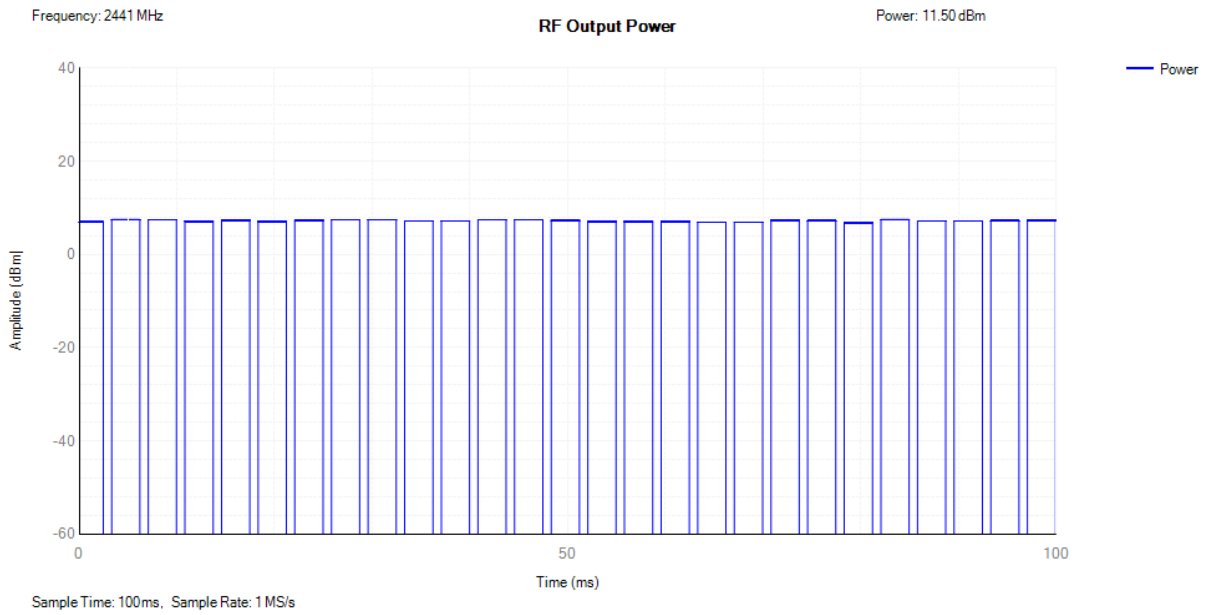


## Power NVLT 1-DH5 2480MHz

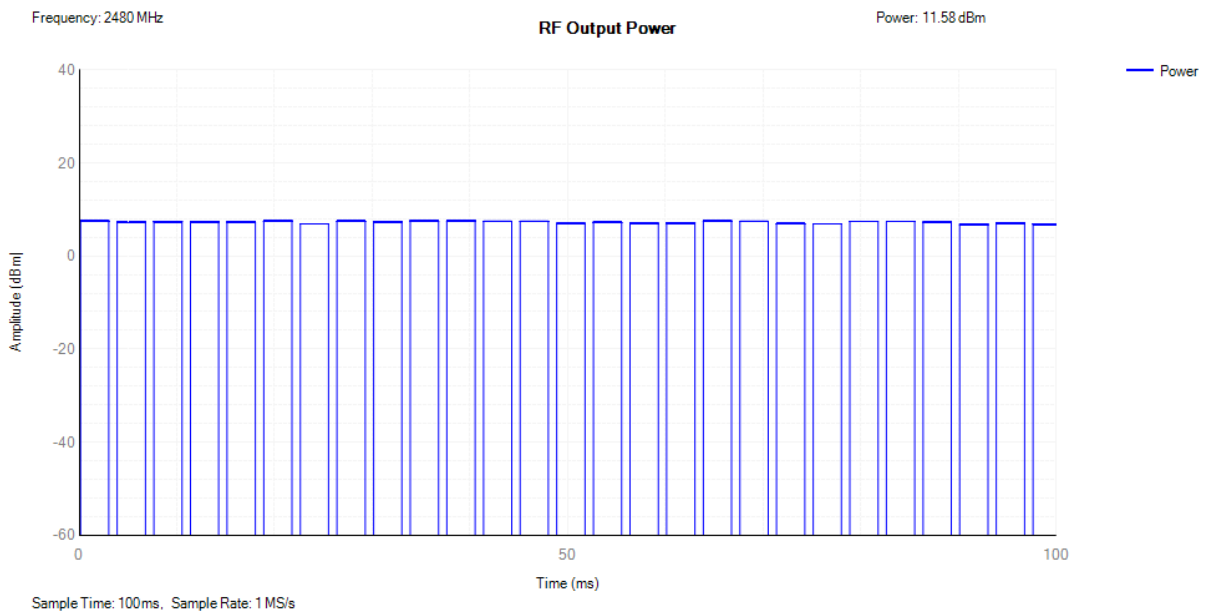


### Power NVNT 1-DH5 2402MHz

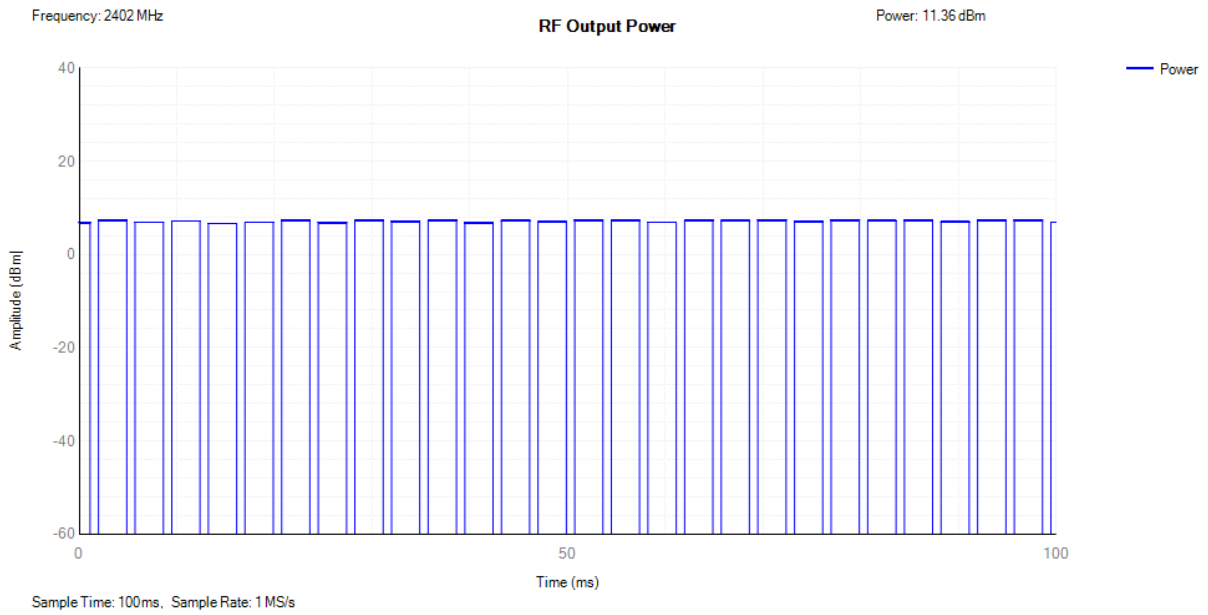


### Power NVNT 1-DH5 2441MHz

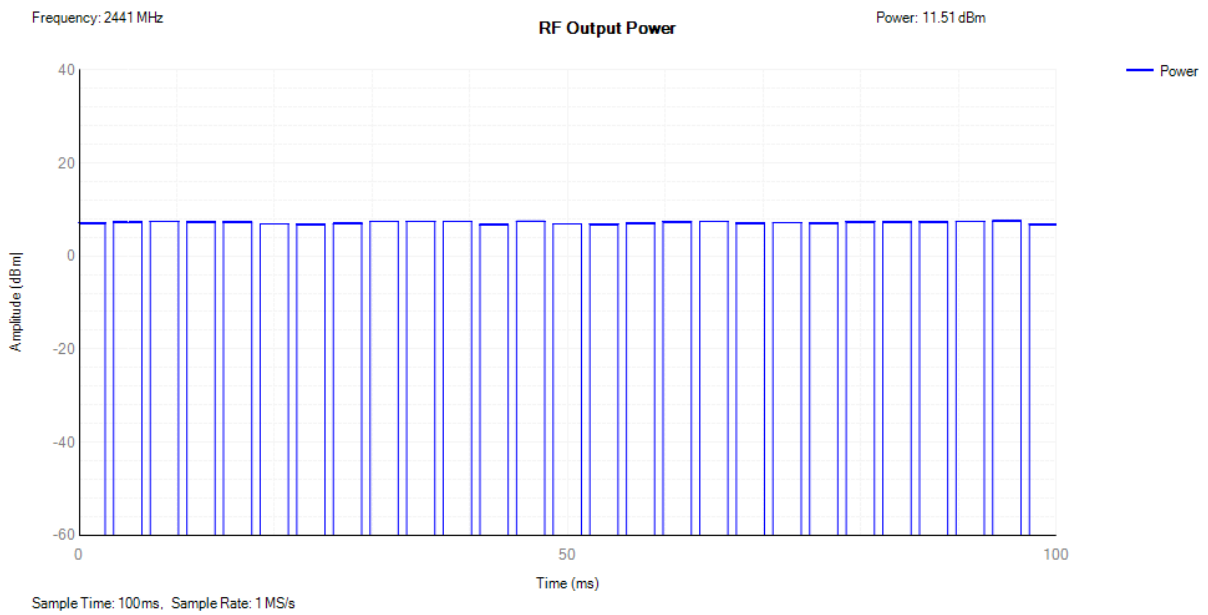


## Power NVNT 1-DH5 2480MHz

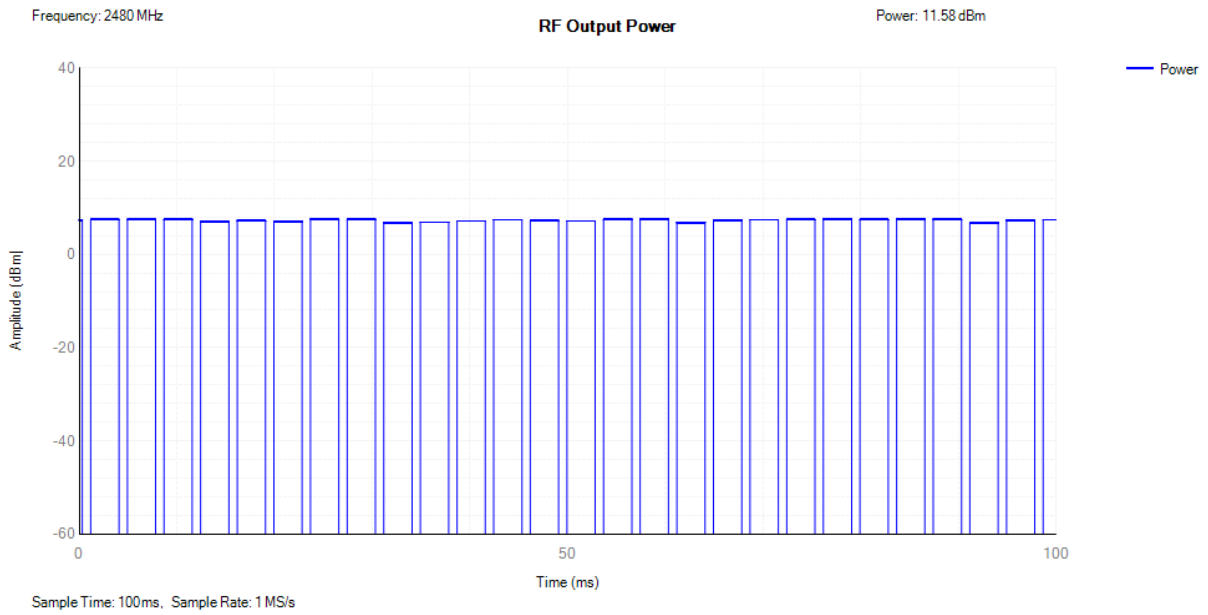


## Power NVHT 2-DH5 2402MHz

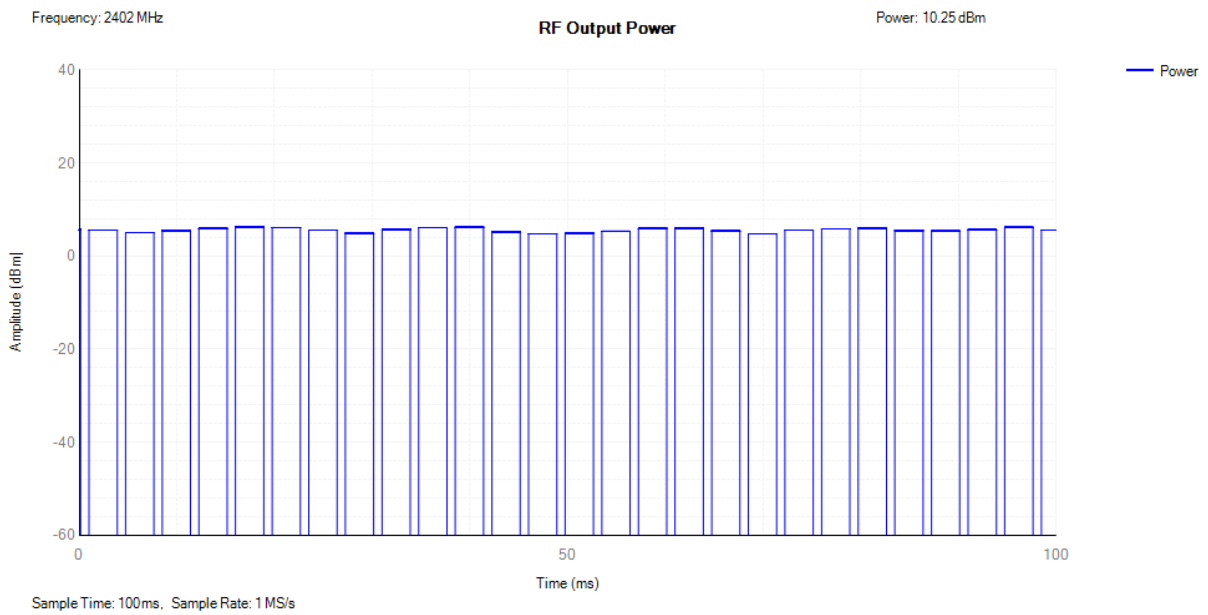


## Power NVHT 2-DH5 2441MHz

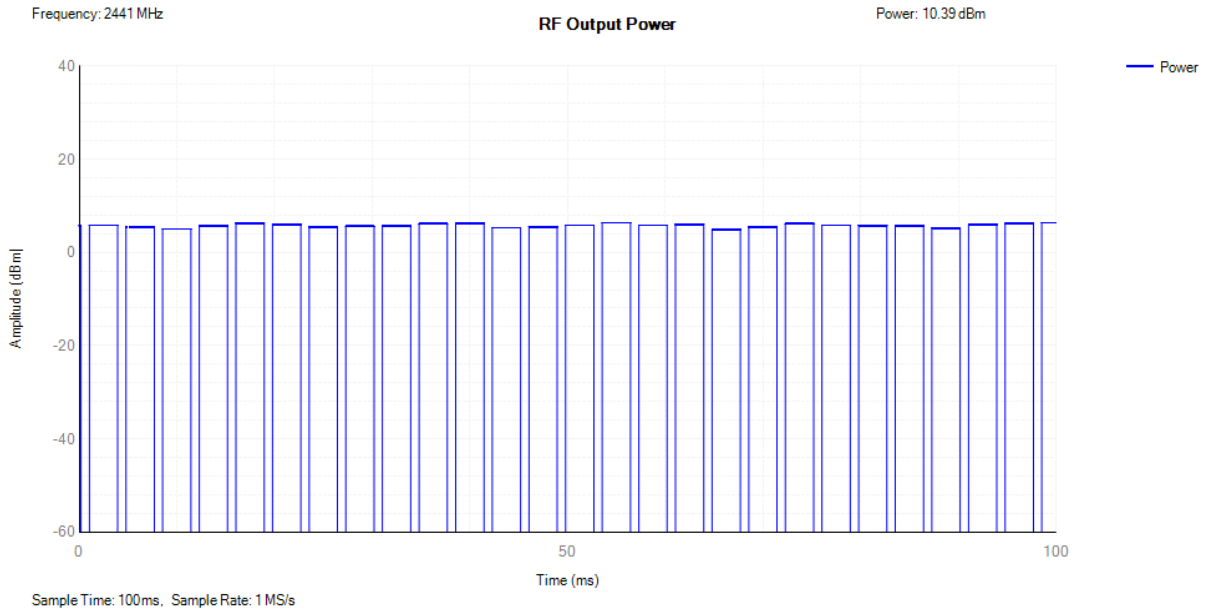


## Power NVHT 2-DH5 2480MHz

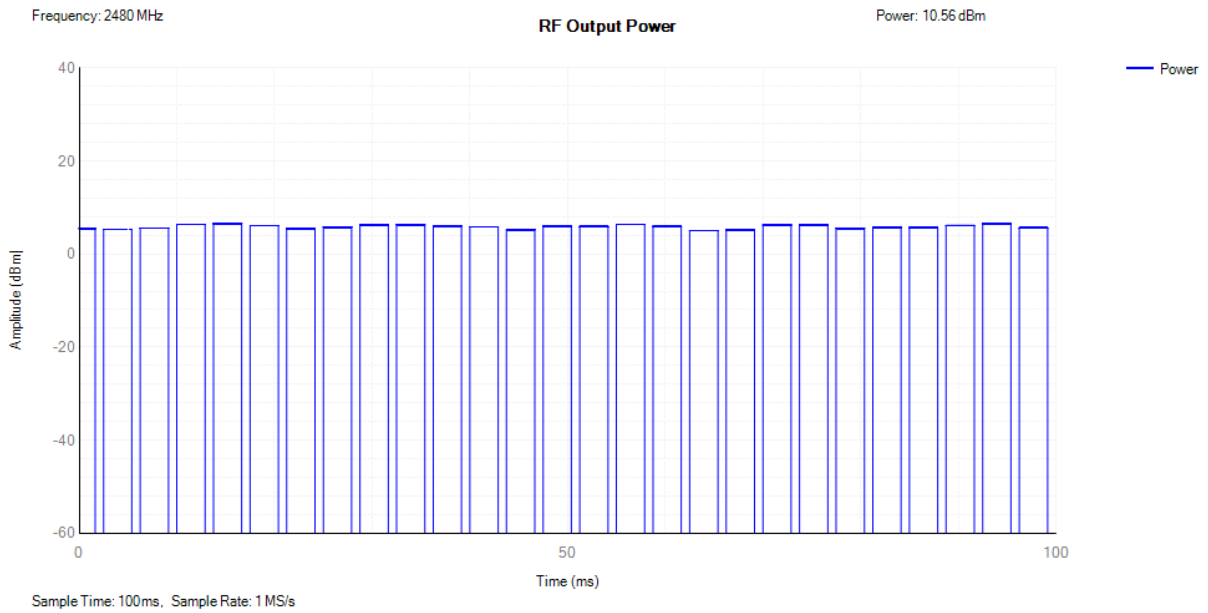

## Power NVLT 2-DH5 2402MHz

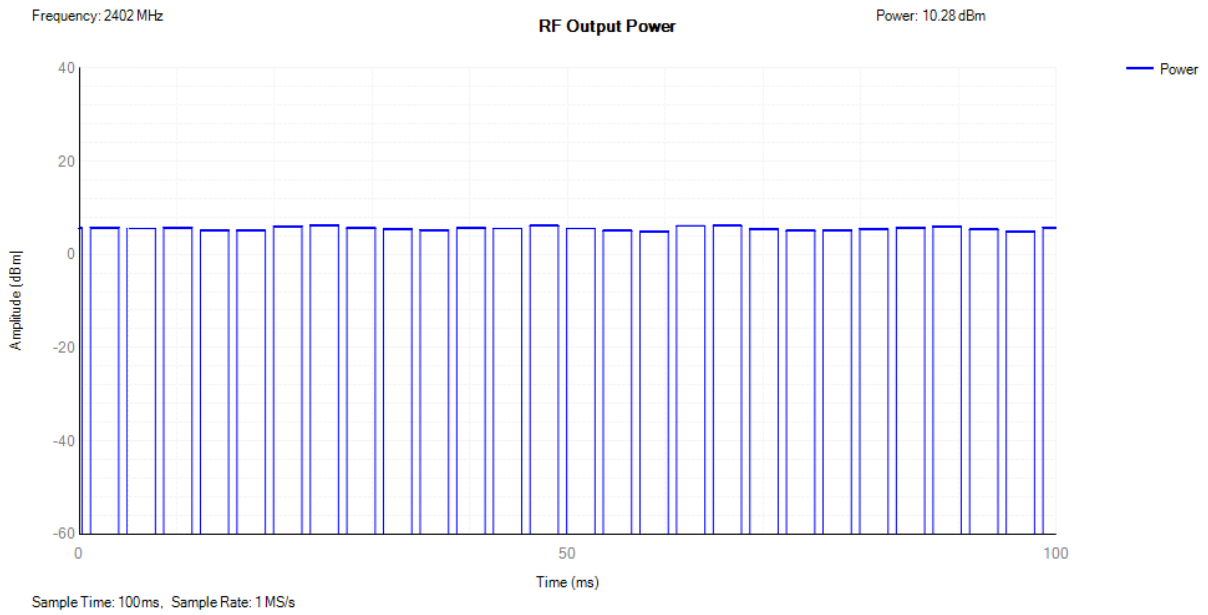


## Power NVLT 2-DH5 2441MHz

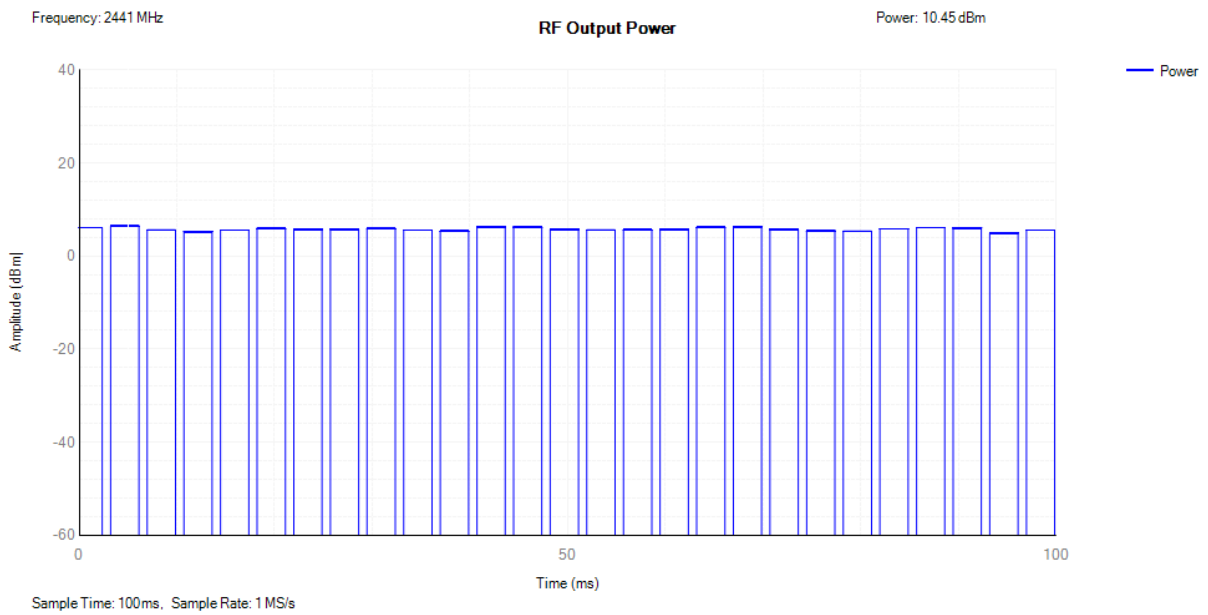





## Power NVLT 2-DH5 2480MHz

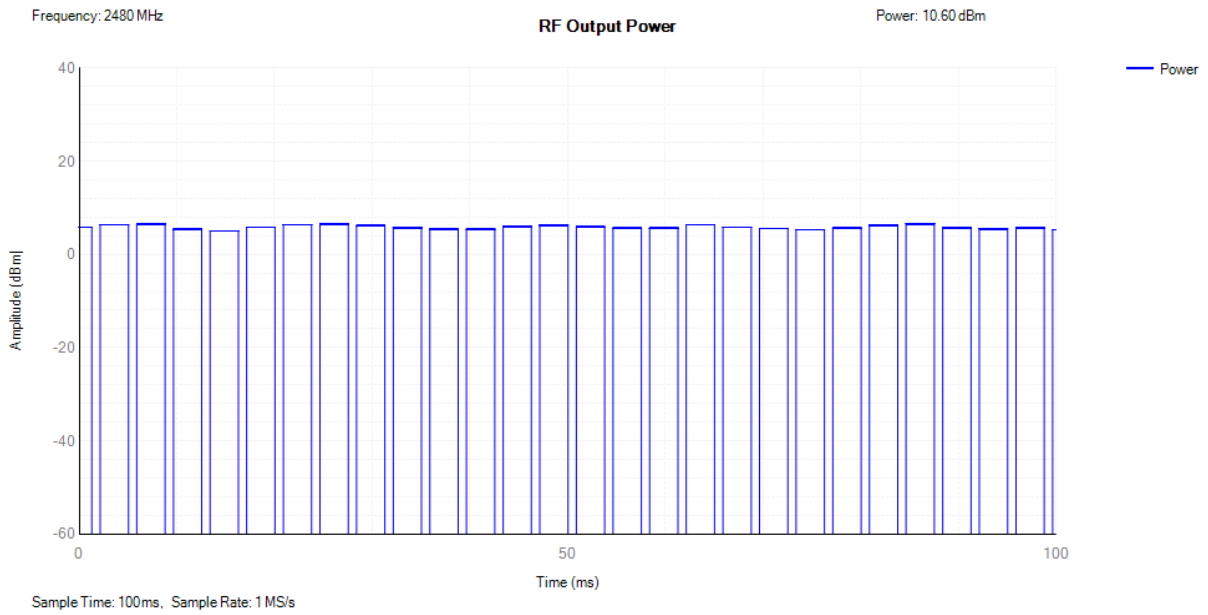


## Power NVNT 2-DH5 2402MHz

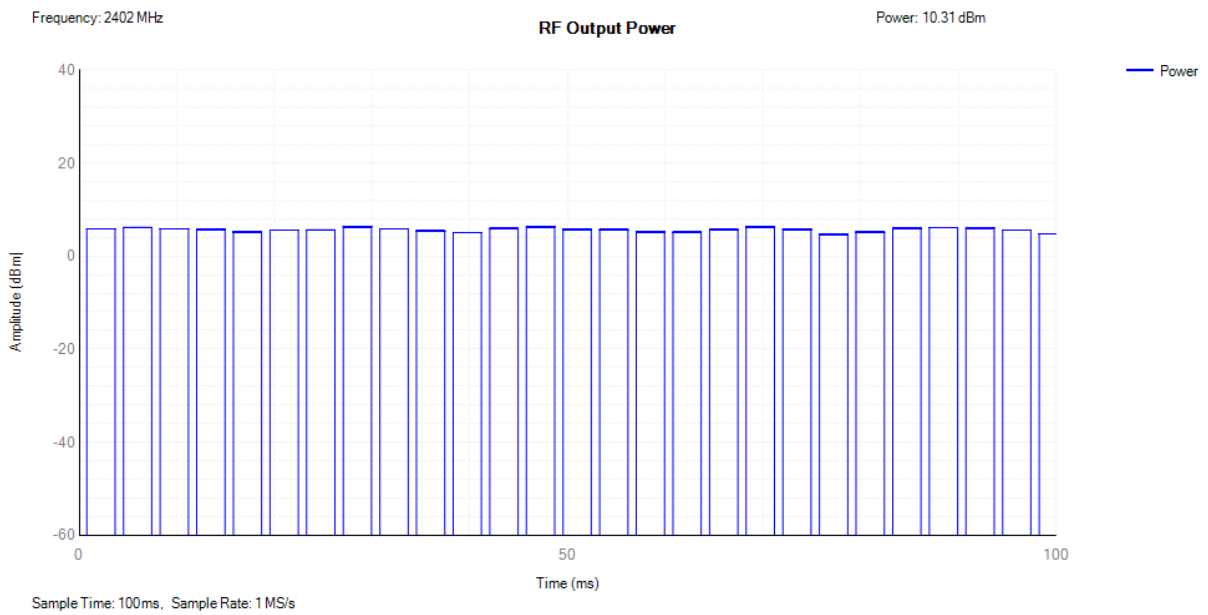


### Power NVNT 2-DH5 2444MHz

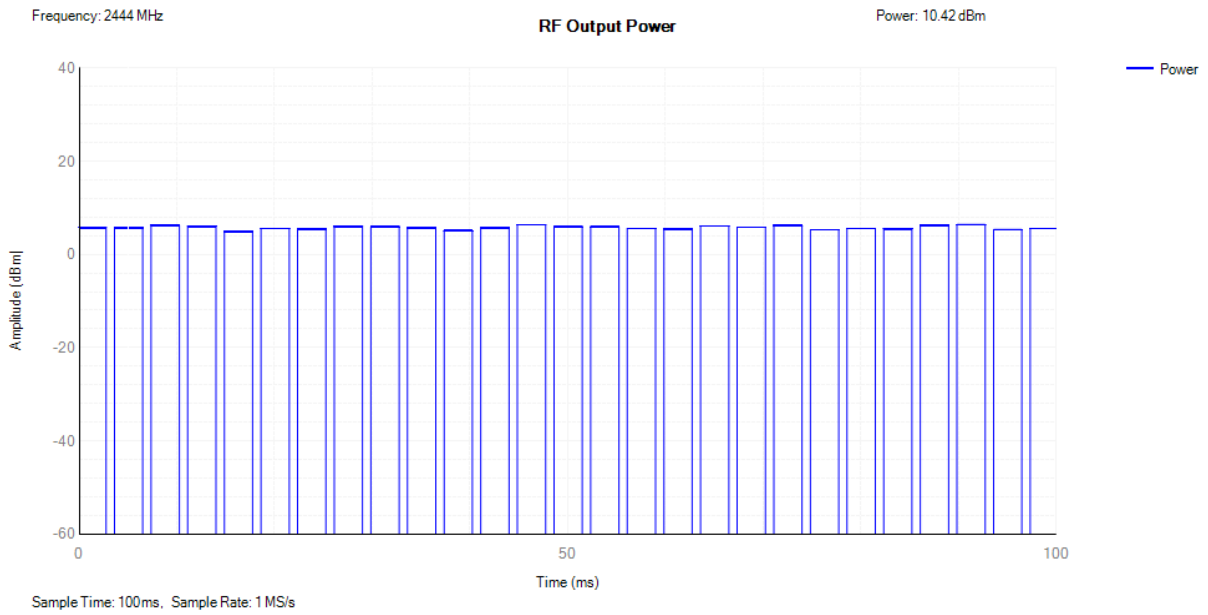


### Power NVNT 2-DH5 2480MHz

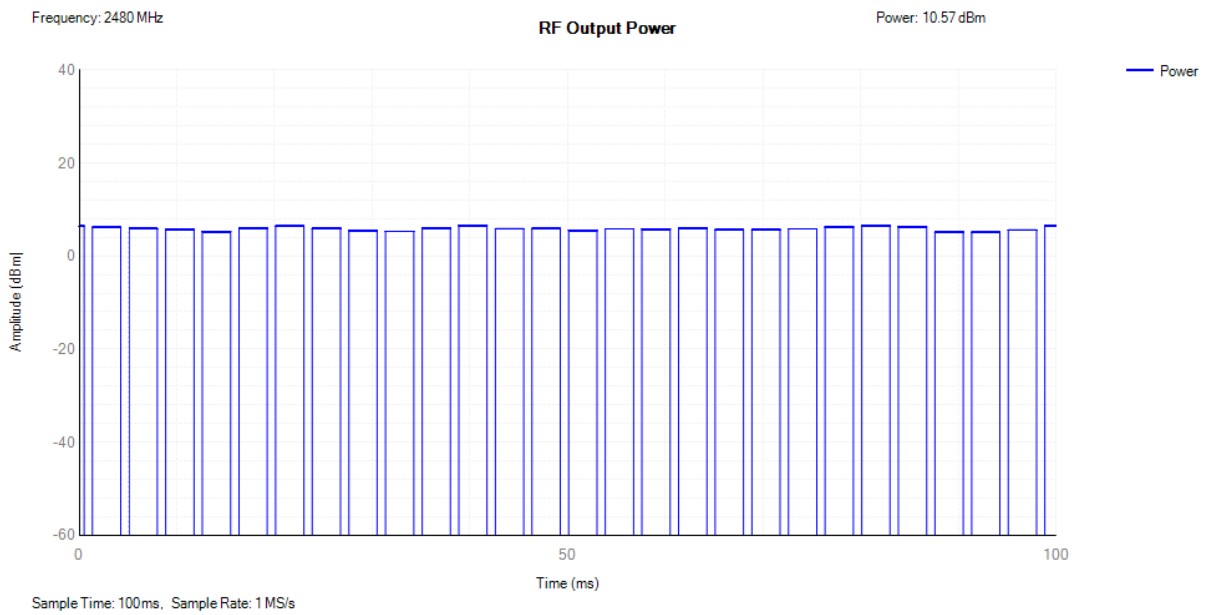


## Power NVHT 3-DH5 2402MHz

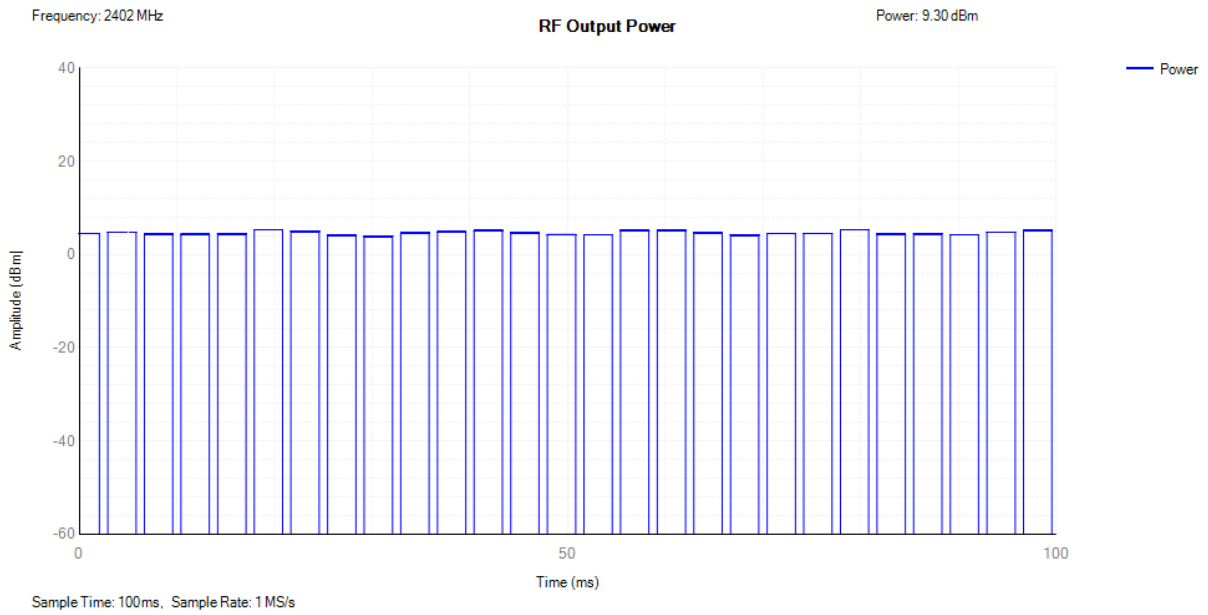


## Power NVHT 3-DH5 2441MHz

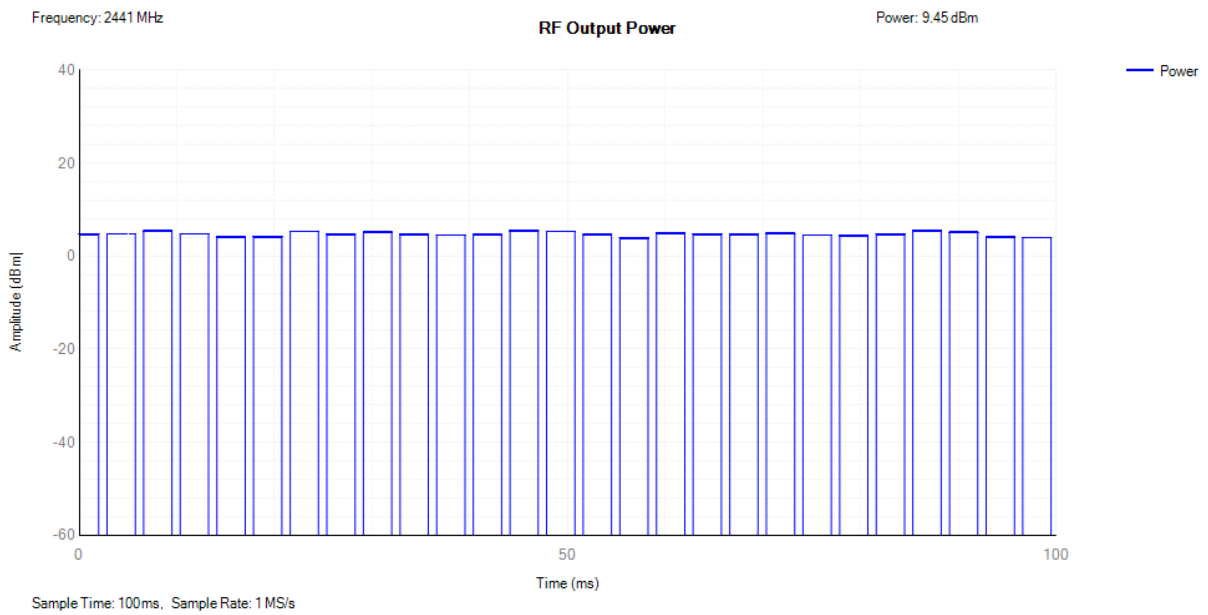


### Power NVHT 3-DH5 2480MHz

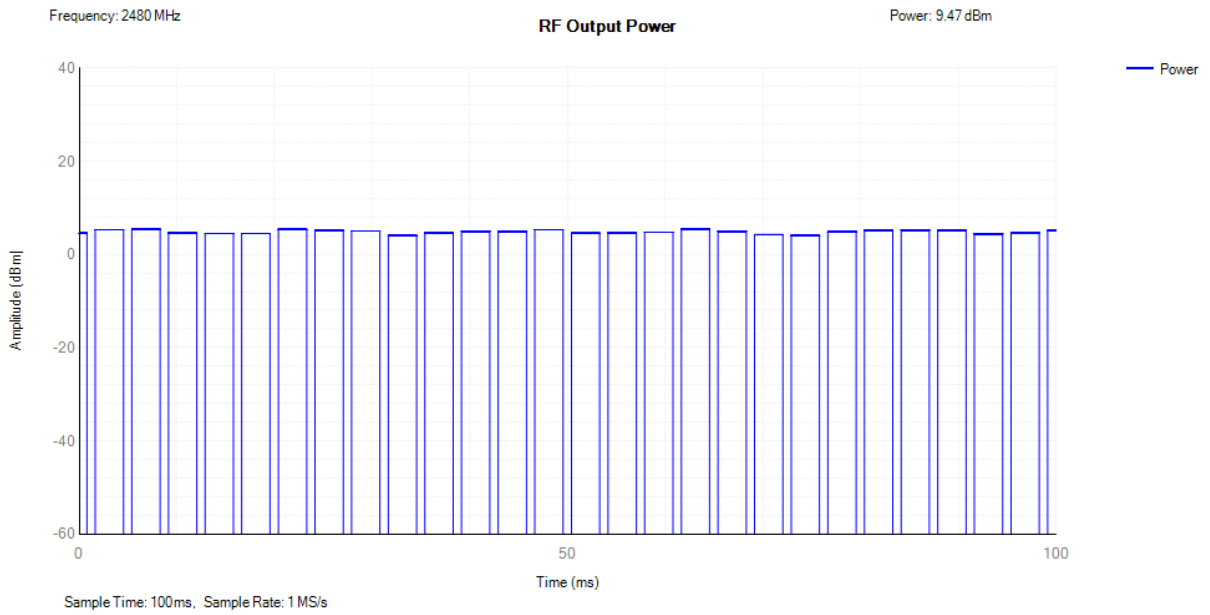


### Power NVLT 3-DH5 2402MHz

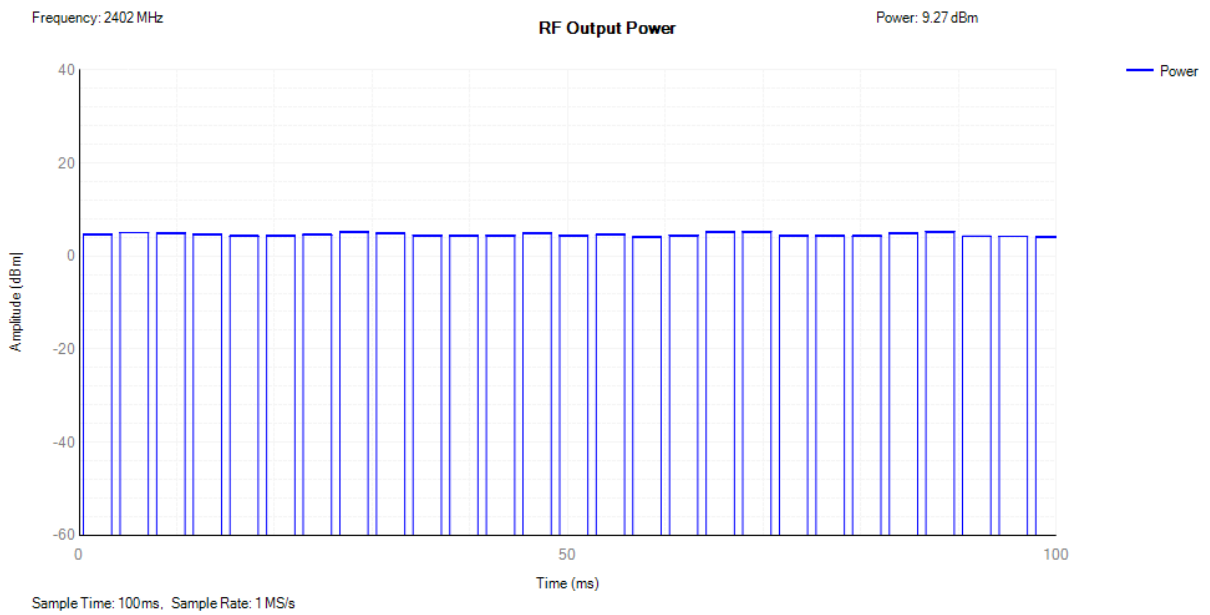


## Power NVLT 3-DH5 2441MHz

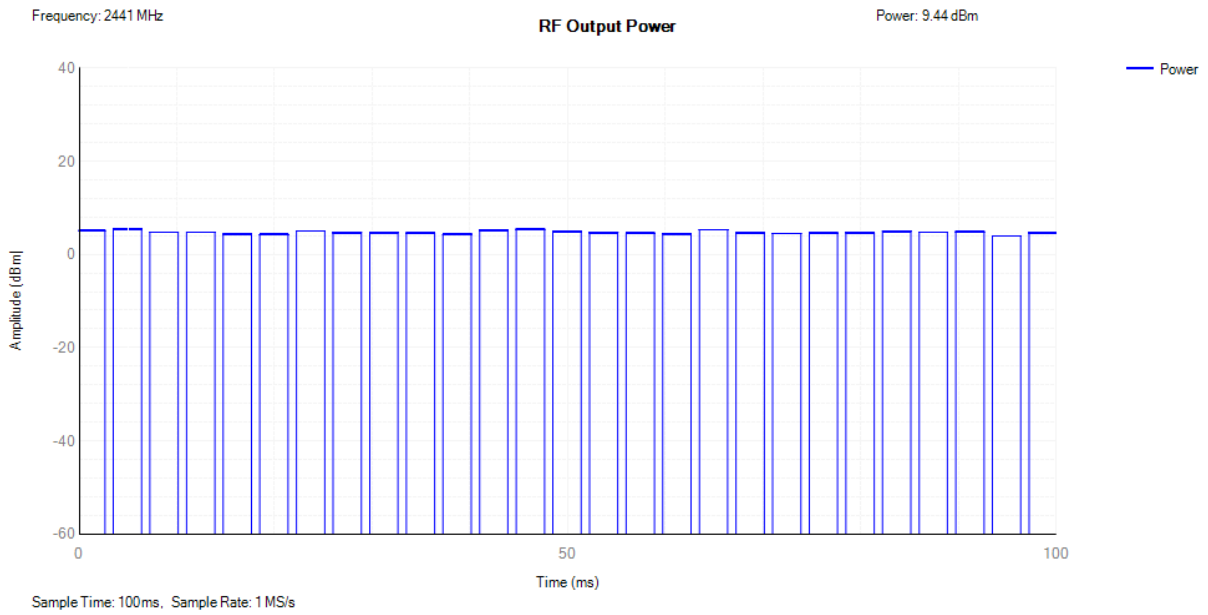


## Power NVLT 3-DH5 2480MHz

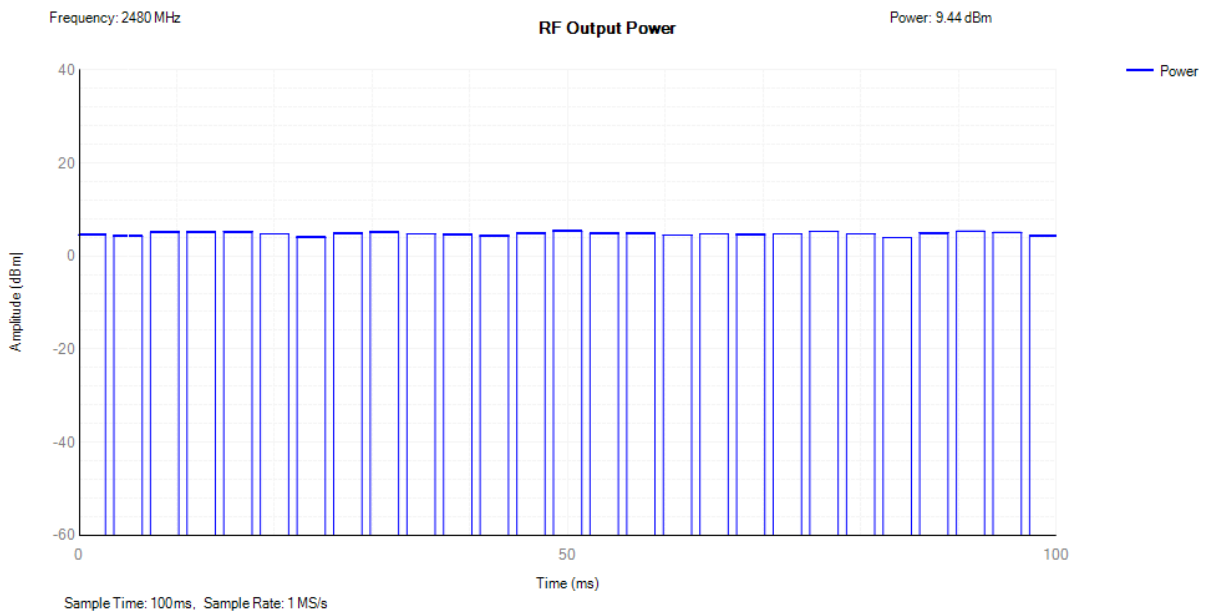


## Power NVNT 3-DH5 2402MHz

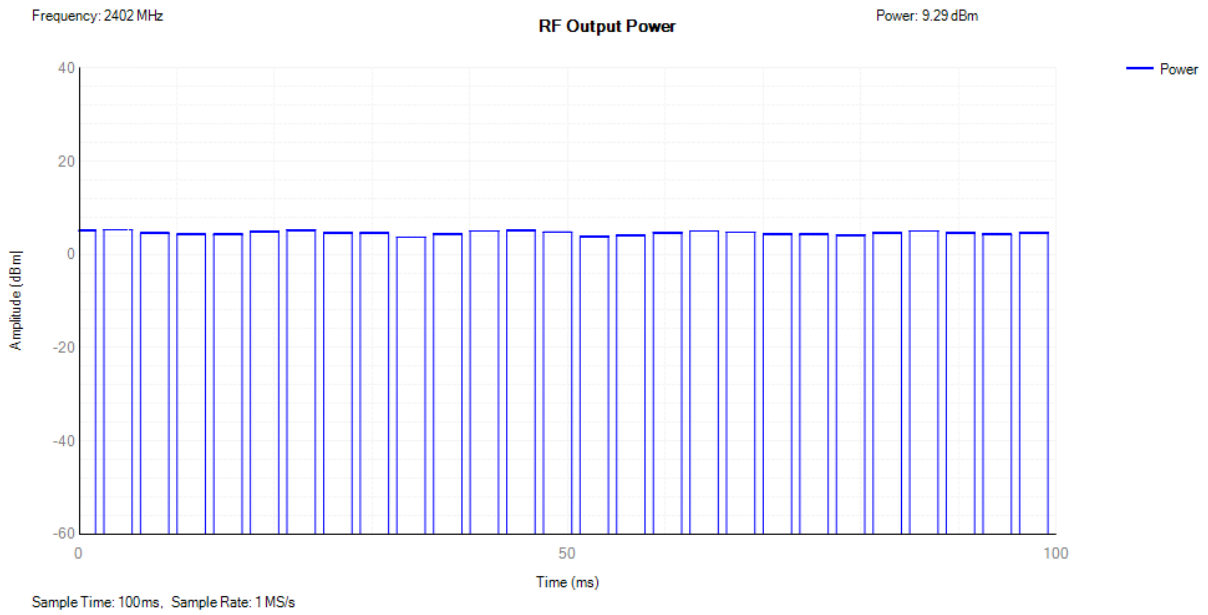

## Power NVNT 3-DH5 2441MHz

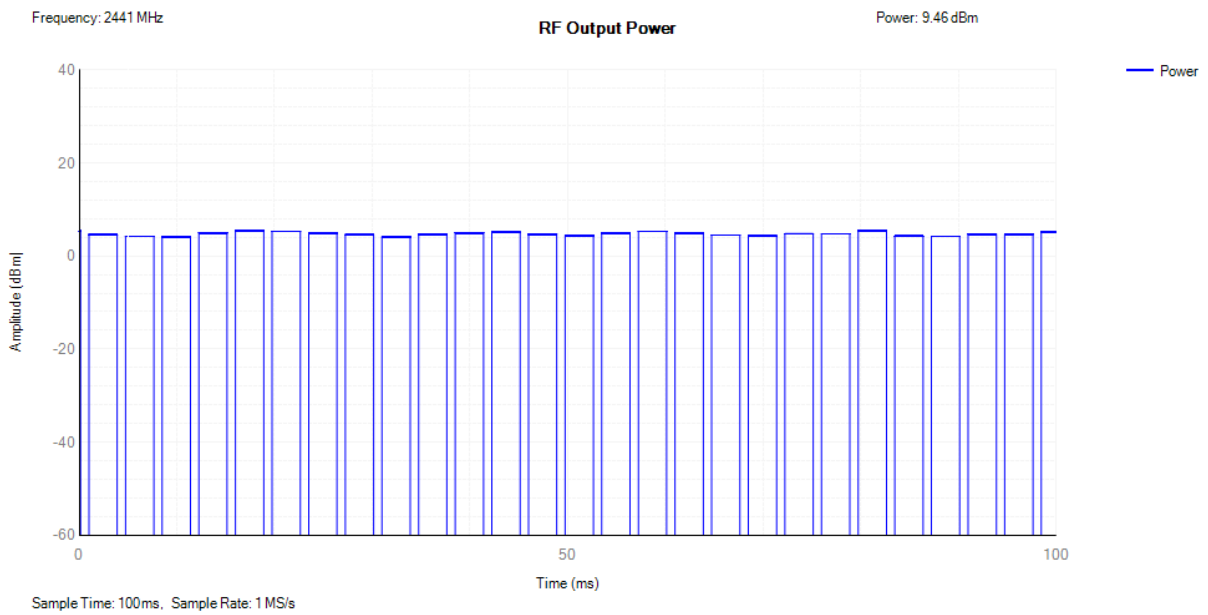

Power NVNT 3-DH5 2480MHz

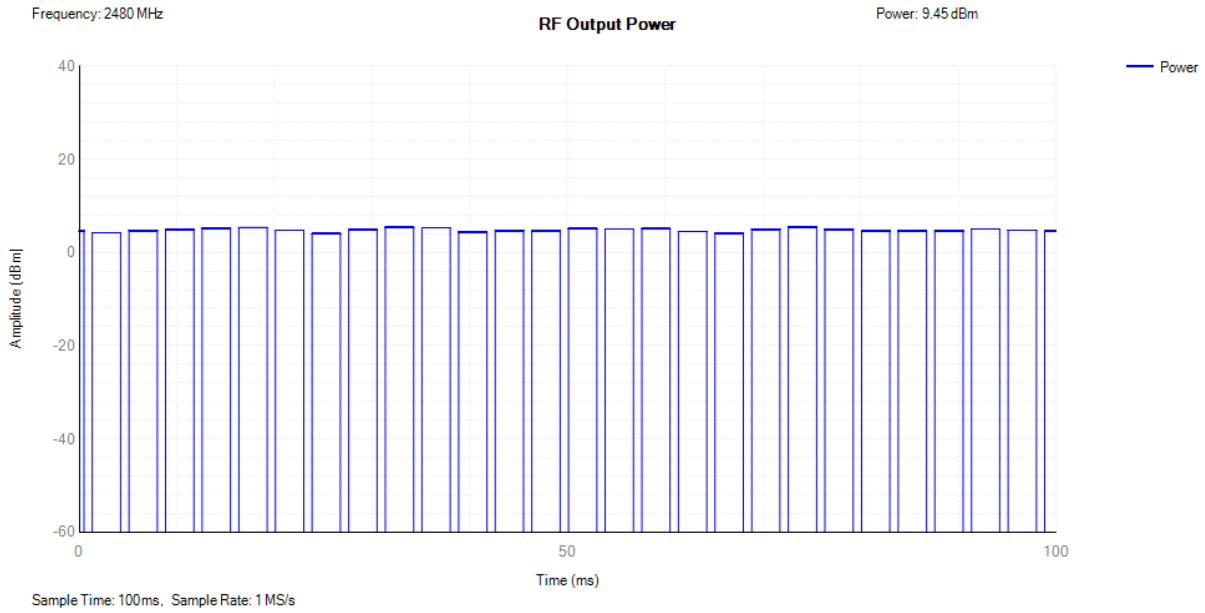

**Remark: Max EIRP=Max Burst RMS Power + Antenna Gain**  
**RF Output Power (for External antenna B: 3.2dBi) :**

Condition	Mode	Frequency (MHz)	Max Burst RMS Power (dBm)	Burst Number	Max EIRP (dBm)	Limit (dBm)	Verdict
LVHT	1-DH5	2402	7.35	27	10.35	20	Pass
LVHT	1-DH5	2441	7.49	27	10.49	20	Pass
LVHT	1-DH5	2480	7.69	28	10.69	20	Pass
LVLT	1-DH5	2402	7.34	28	10.34	20	Pass
LVLT	1-DH5	2441	7.5	27	10.5	20	Pass
LVLT	1-DH5	2480	7.58	27	10.58	20	Pass
NVNT	1-DH5	2402	7.36	28	10.36	20	Pass
NVNT	1-DH5	2441	7.51	27	10.51	20	Pass
NVNT	1-DH5	2480	7.58	28	10.58	20	Pass
LVHT	2-DH5	2402	6.25	28	9.25	20	Pass
LVHT	2-DH5	2441	6.39	28	9.39	20	Pass
LVHT	2-DH5	2480	6.56	27	9.56	20	Pass
LVLT	2-DH5	2402	6.28	28	9.28	20	Pass
LVLT	2-DH5	2441	6.45	27	9.45	20	Pass
LVLT	2-DH5	2480	6.6	28	9.6	20	Pass
NVNT	2-DH5	2402	6.31	27	9.31	20	Pass
NVNT	2-DH5	2441	6.42	27	9.42	20	Pass
NVNT	2-DH5	2480	6.57	28	9.57	20	Pass
LVHT	3-DH5	2402	5.3	27	8.3	20	Pass
LVHT	3-DH5	2441	5.45	27	8.45	20	Pass
LVHT	3-DH5	2480	5.47	28	8.47	20	Pass

LVLT	3-DH5	2402	5.27	27	8.27	20	Pass
LVLT	3-DH5	2441	5.44	27	8.44	20	Pass
LVLT	3-DH5	2480	5.44	27	8.44	20	Pass
NVNT	3-DH5	2402	5.29	27	8.29	20	Pass
NVNT	3-DH5	2441	5.46	28	8.46	20	Pass
NVNT	3-DH5	2480	5.45	28	8.45	20	Pass

### RF Output Power (for Ceramic Antenna 3dBi) :


Condition	Mode	Frequency (MHz)	Max Burst RMS Power (dBm)	Burst Number	Max EIRP (dBm)	Limit (dBm)	Verdict
LVHT	1-DH5	2402	7.35	27	10.35	20	Pass
LVHT	1-DH5	2441	7.49	27	10.49	20	Pass
LVHT	1-DH5	2480	7.69	28	10.69	20	Pass
LVLT	1-DH5	2402	7.34	28	10.34	20	Pass
LVLT	1-DH5	2441	7.5	27	10.5	20	Pass
LVLT	1-DH5	2480	7.58	27	10.58	20	Pass
NVNT	1-DH5	2402	7.36	28	10.36	20	Pass
NVNT	1-DH5	2441	7.51	27	10.51	20	Pass
NVNT	1-DH5	2480	7.58	28	10.58	20	Pass
LVHT	2-DH5	2402	6.25	28	9.25	20	Pass
LVHT	2-DH5	2441	6.39	28	9.39	20	Pass
LVHT	2-DH5	2480	6.56	27	9.56	20	Pass
LVLT	2-DH5	2402	6.28	28	9.28	20	Pass
LVLT	2-DH5	2441	6.45	27	9.45	20	Pass
LVLT	2-DH5	2480	6.6	28	9.6	20	Pass
NVNT	2-DH5	2402	6.31	27	9.31	20	Pass
NVNT	2-DH5	2441	6.42	27	9.42	20	Pass
NVNT	2-DH5	2480	6.57	28	9.57	20	Pass
LVHT	3-DH5	2402	5.3	27	8.3	20	Pass
LVHT	3-DH5	2441	5.45	27	8.45	20	Pass
LVHT	3-DH5	2480	5.47	28	8.47	20	Pass
LVLT	3-DH5	2402	5.27	27	8.27	20	Pass
LVLT	3-DH5	2441	5.44	27	8.44	20	Pass
LVLT	3-DH5	2480	5.44	27	8.44	20	Pass
NVNT	3-DH5	2402	5.29	27	8.29	20	Pass
NVNT	3-DH5	2441	5.46	28	8.46	20	Pass
NVNT	3-DH5	2480	5.45	28	8.45	20	Pass




## 5.4.4 Accumulated Transmit Time

Condition	Mode	Frequency (MHz)	Accumulated Transmit Time (ms)	Limit (ms)	Sweep Time (ms)	Burst Number	Verdict
NVNT	1-DH5	2402	343.91	400	31600	119	Pass
NVNT	2-DH5	2402	320.79	400	31600	111	Pass
NVNT	3-DH5	2402	327.7	400	31600	113	Pass


Dwell NVNT 1-DH5 2402MHz

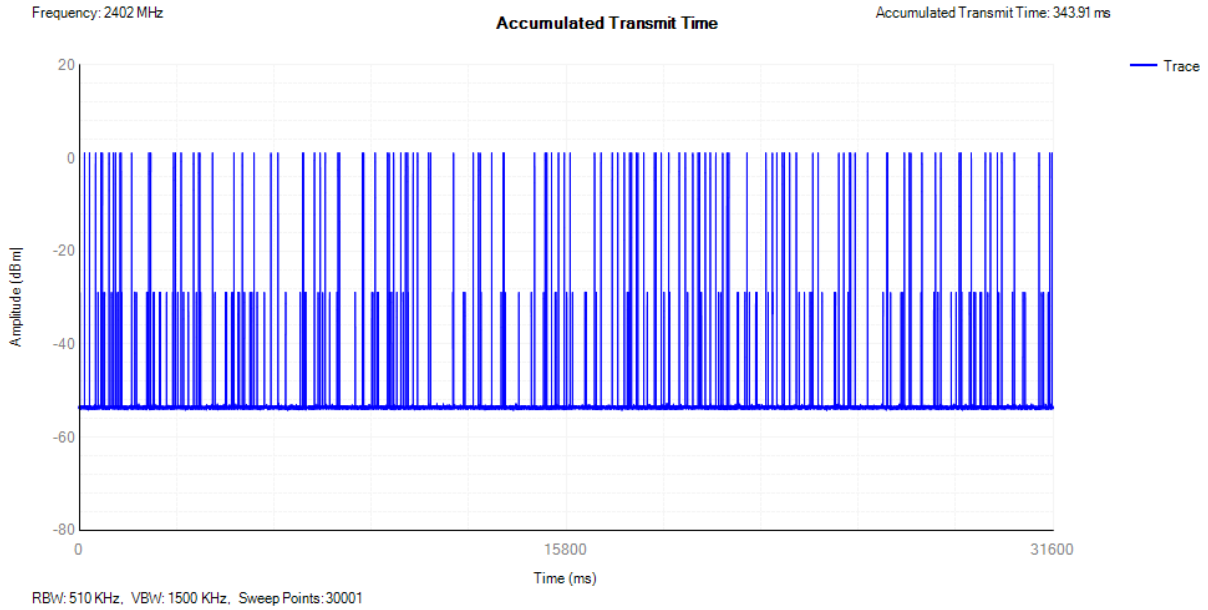

Dwell NVNT 2-DH5 2402MHz

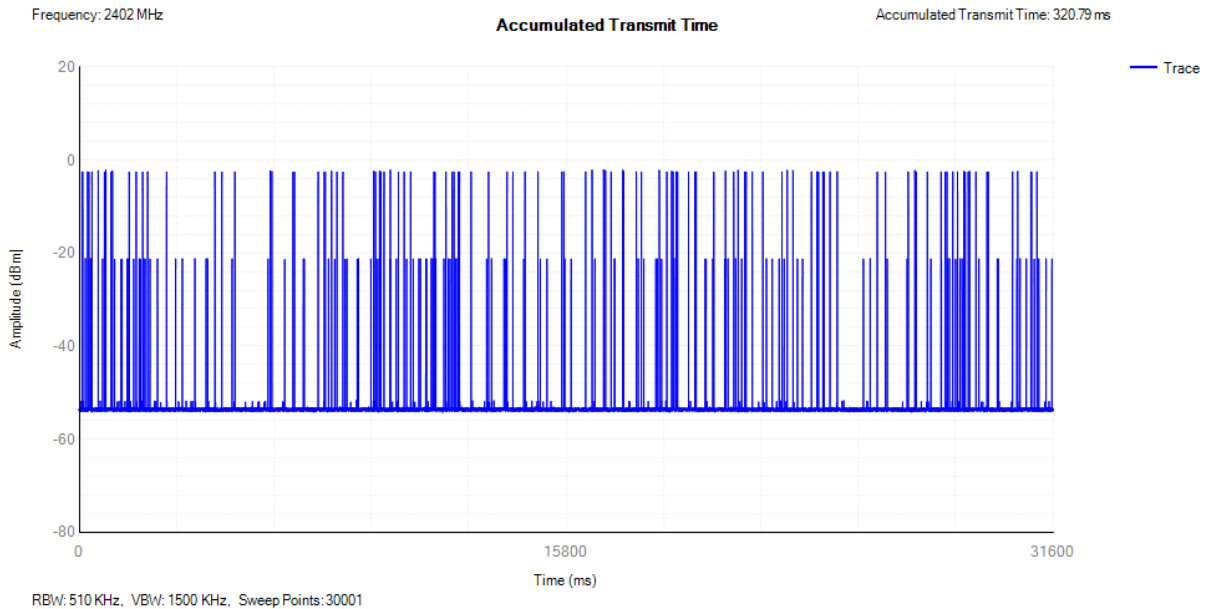


## Dwell NVNT 3-DH5 2402MHz

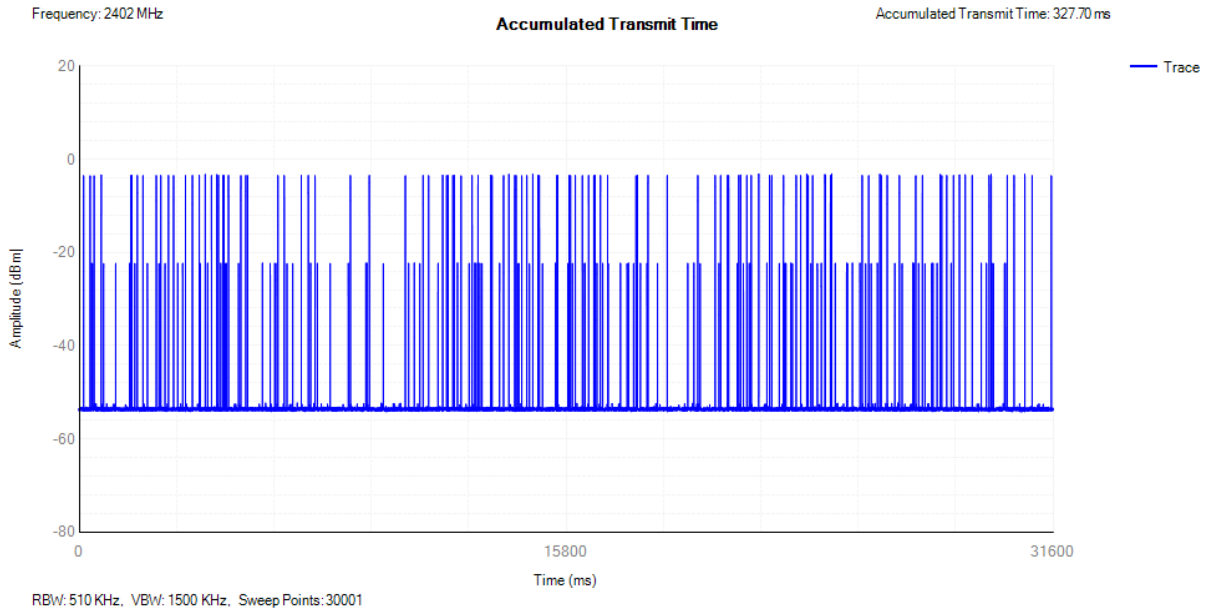


### 5.4.4 Frequency Occupation

Condition	Mode	Frequency (MHz)	Frequency Occupation (ms)	Limit (ms)	Sweep Time (ms)	Burst Number	Verdict
NVNT	1-DH5	2402	2.89	0	913.24	1	Pass
NVNT	2-DH5	2402	14.45	0	913.24	5	Pass
NVNT	3-DH5	2402	8.7	0	916.4	3	Pass


Freq. Occup. NVNT 1-DH5 2402MHz

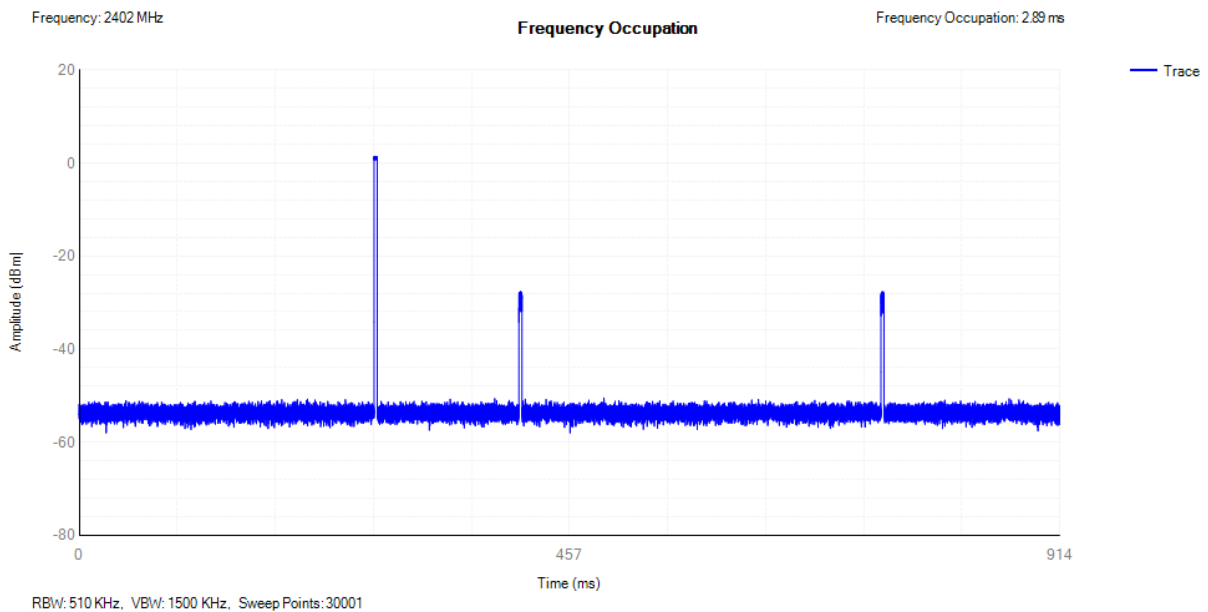

### Freq. Occup. NVNT 2-DH5 2402MHz

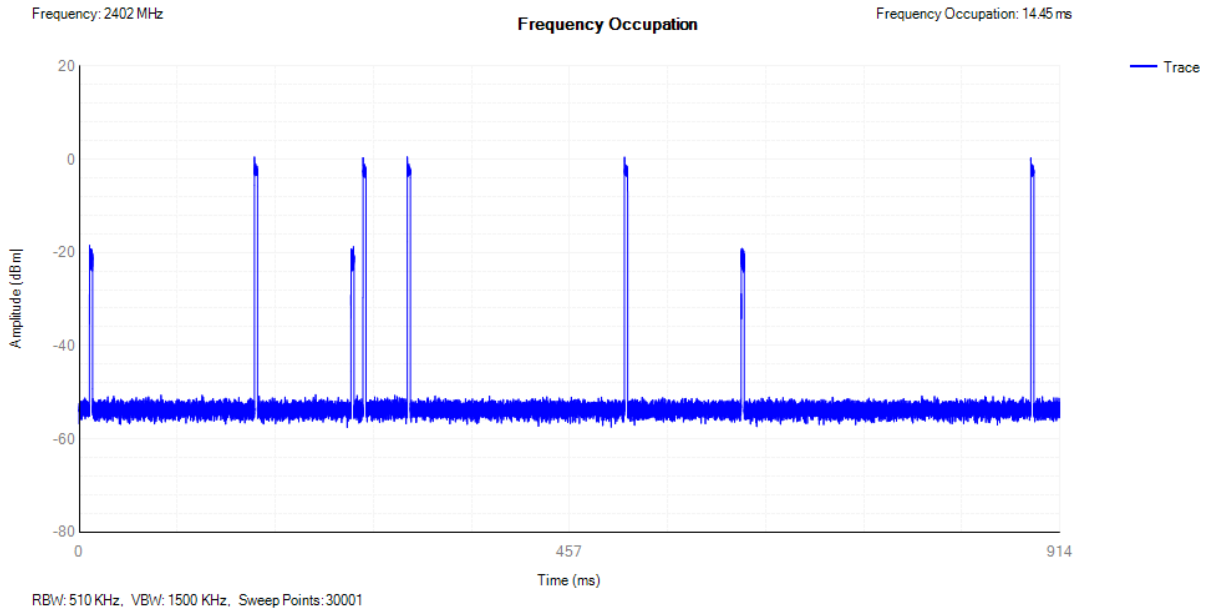


### Freq. Occup. NVNT 3-DH5 2402MHz

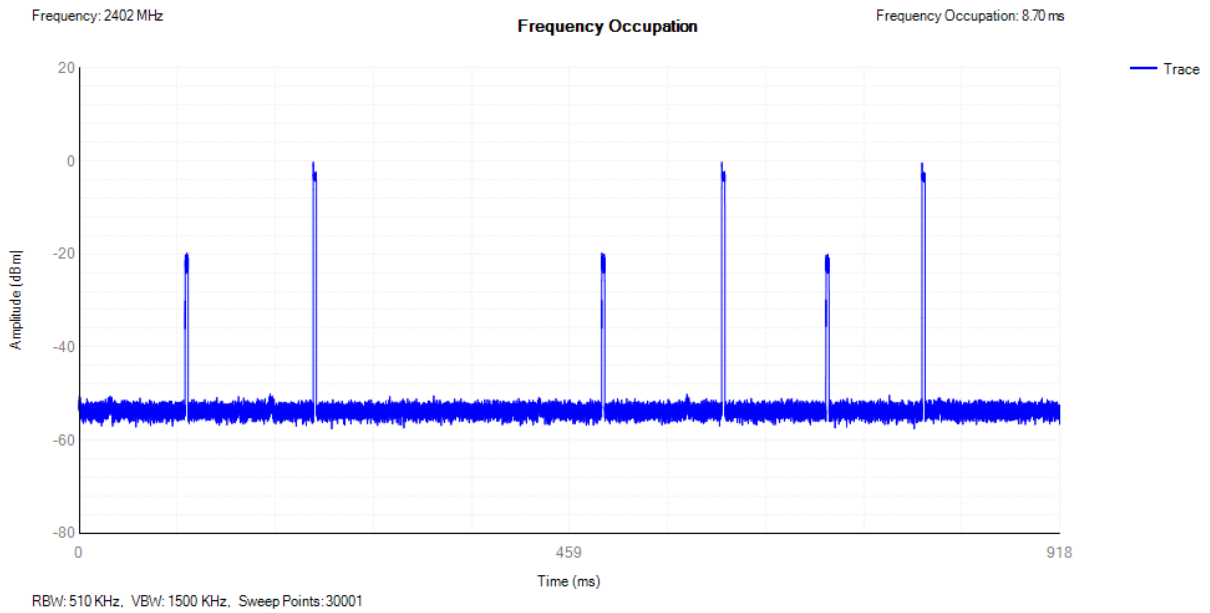


#### 5.4.4 Hopping Sequence

Condition	Mode	Hopping Number	Limit	Band Allocation (%)	Limit Band Allocation (%)	Verdict
NVNT	1-DH5	79	15	95.46	70	Pass
NVNT	2-DH5	79	15	95.94	70	Pass
NVNT	3-DH5	79	15	95.9	70	Pass


## Hopping Seq. NVNT 1-DH5 2402MHz

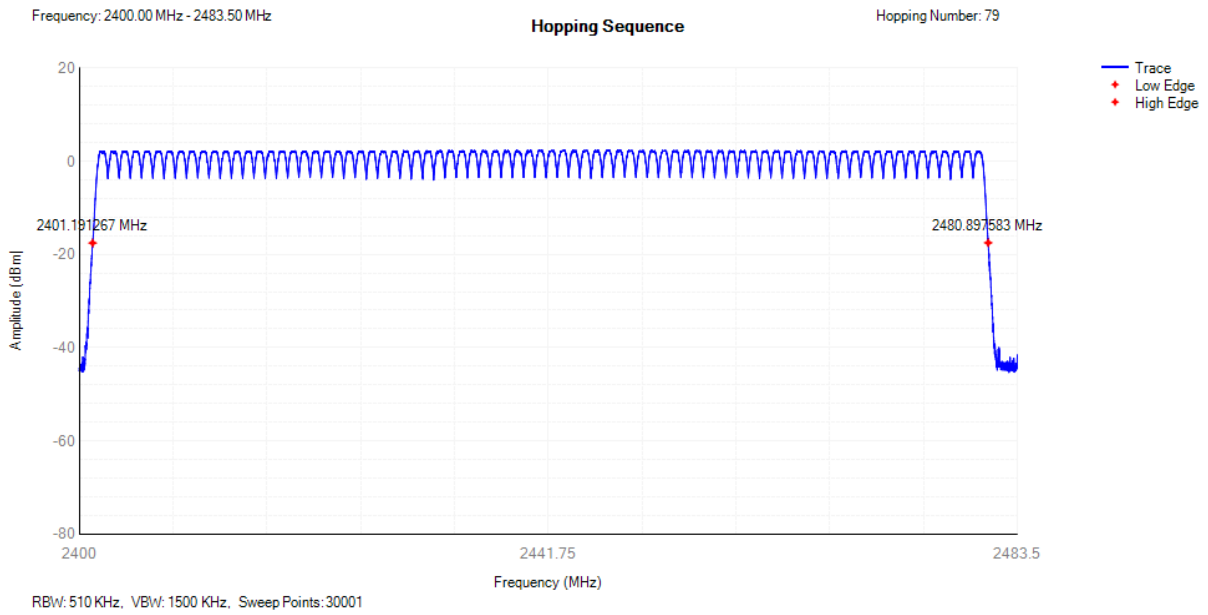

## Hopping Seq. NVNT 2-DH5 2402MHz

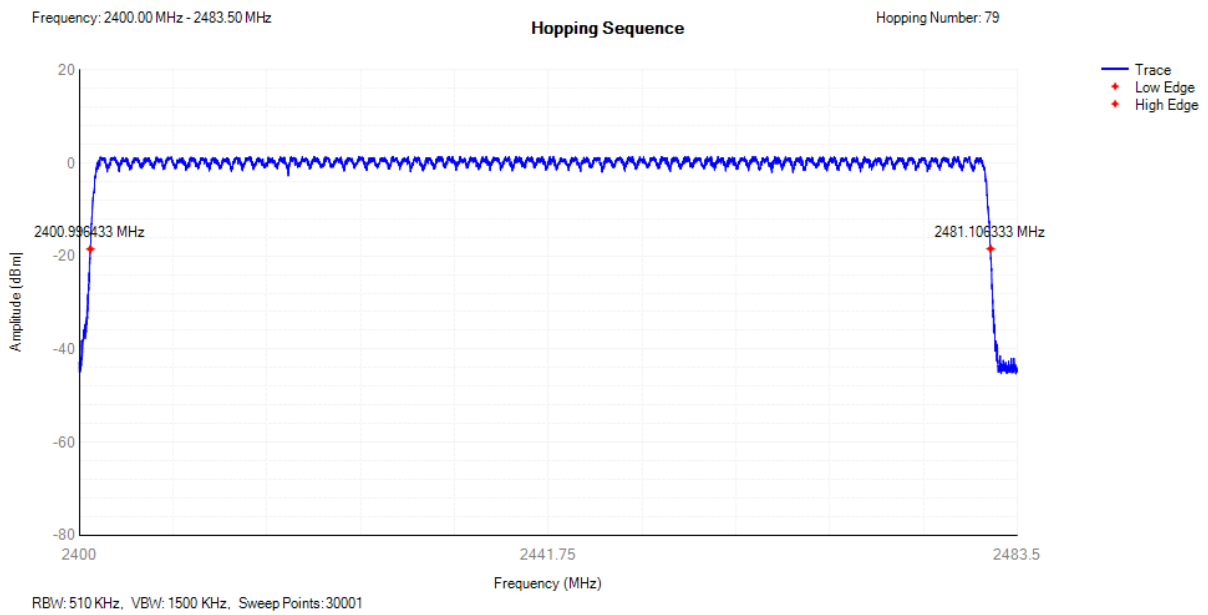


## Hopping Seq. NVNT 3-DH5 2402MHz

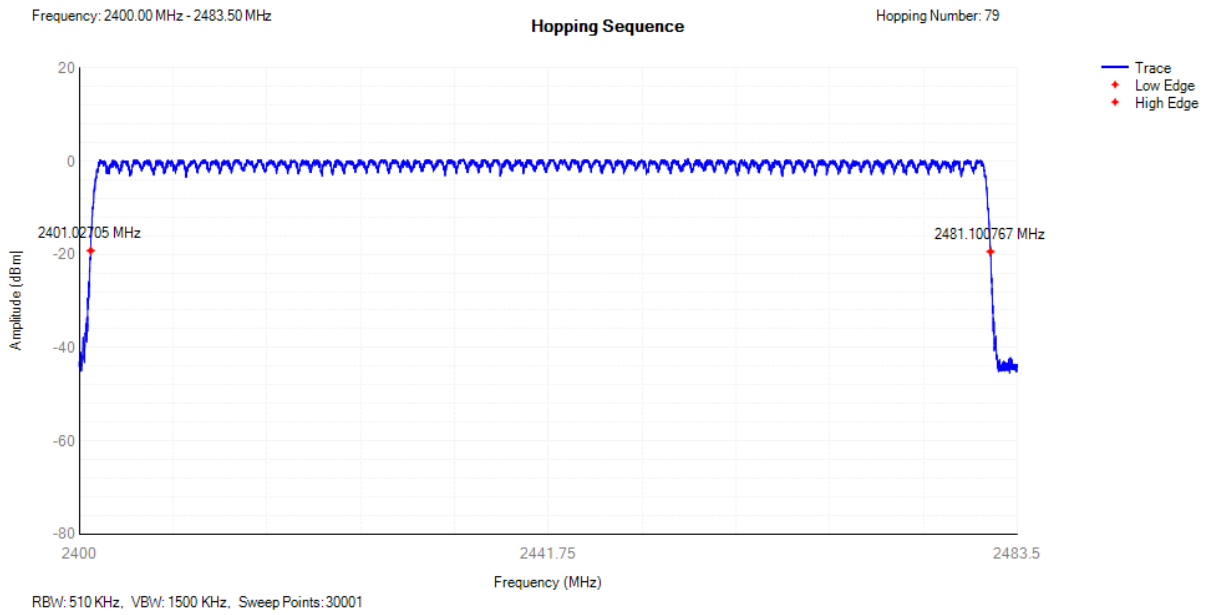


### 5.4.7 Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Center Frequency (MHz)	OBW (MHz)	Lower Edge (MHz)	Upper Edge (MHz)	Limit OBW (MHz)	Verdict
NVNT	1-DH5	2402	2402.007	0.909	2401.553	2402.462	2400 - 2483.5MHz	Pass
NVNT	1-DH5	2480	2480.007	0.908	2479.553	2480.461	2400 - 2483.5MHz	Pass
NVNT	2-DH5	2402	2402.004	1.184	2401.412	2402.597	2400 - 2483.5MHz	Pass
NVNT	2-DH5	2480	2480.004	1.184	2479.412	2480.596	2400 - 2483.5MHz	Pass
NVNT	3-DH5	2402	2402.005	1.194	2401.408	2402.602	2400 - 2483.5MHz	Pass
NVNT	3-DH5	2480	2480.005	1.193	2479.409	2480.602	2400 - 2483.5MHz	Pass


## OBW NVNT 1-DH5 2402MHz

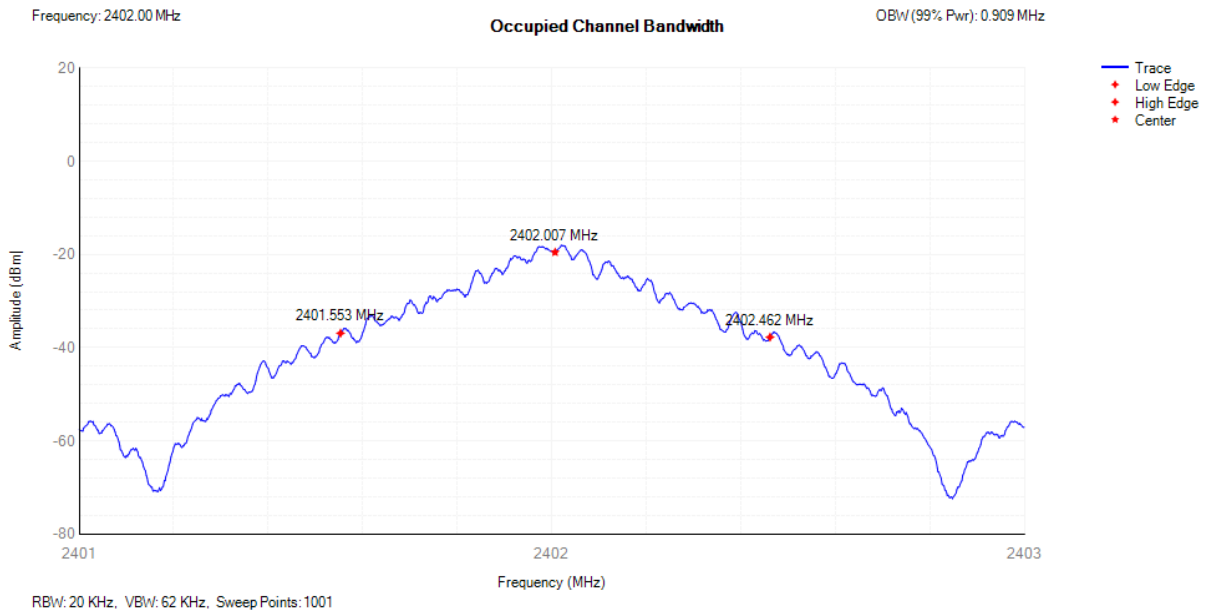


## OBW NVNT 1-DH5 2480MHz

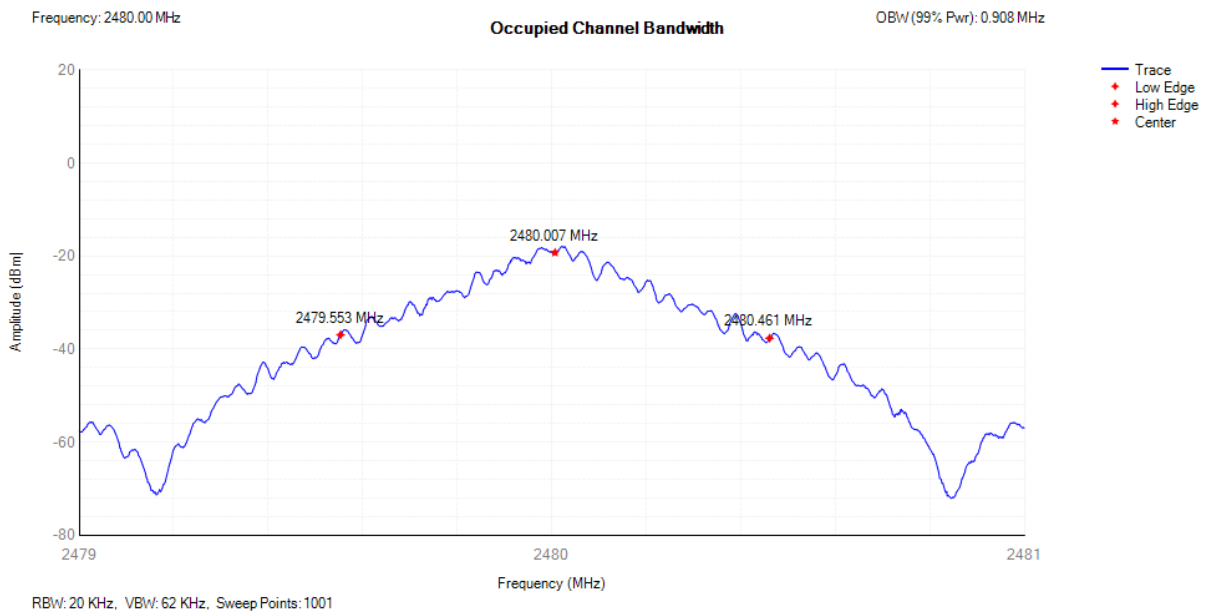


## OBW NVNT 2-DH5 2402MHz

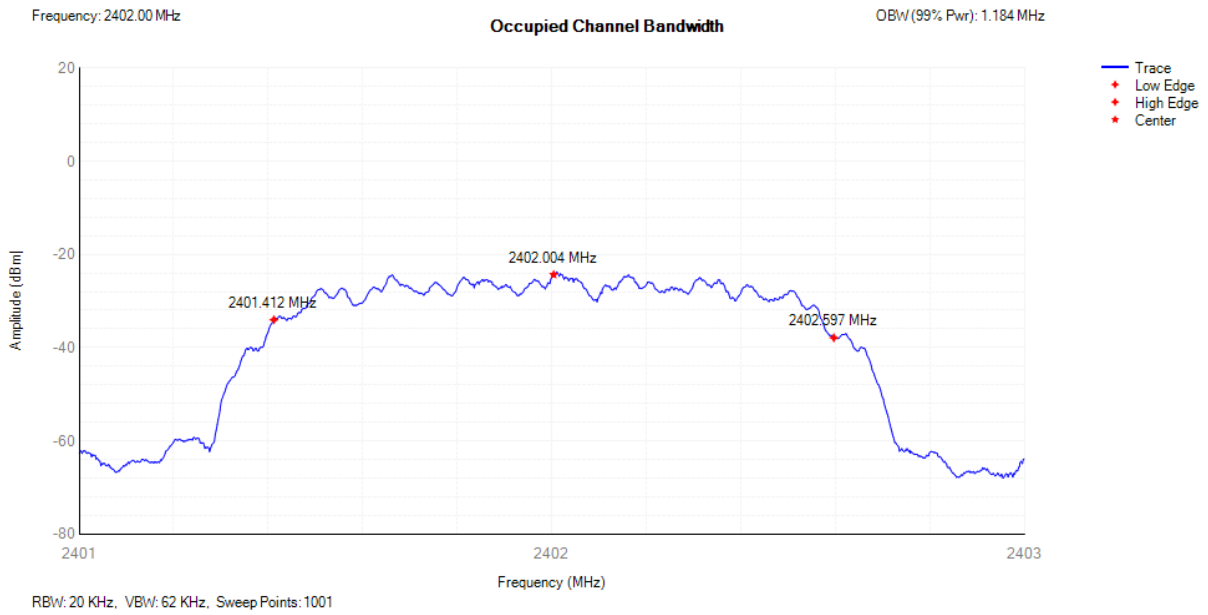


## OBW NVNT 2-DH5 2480MHz

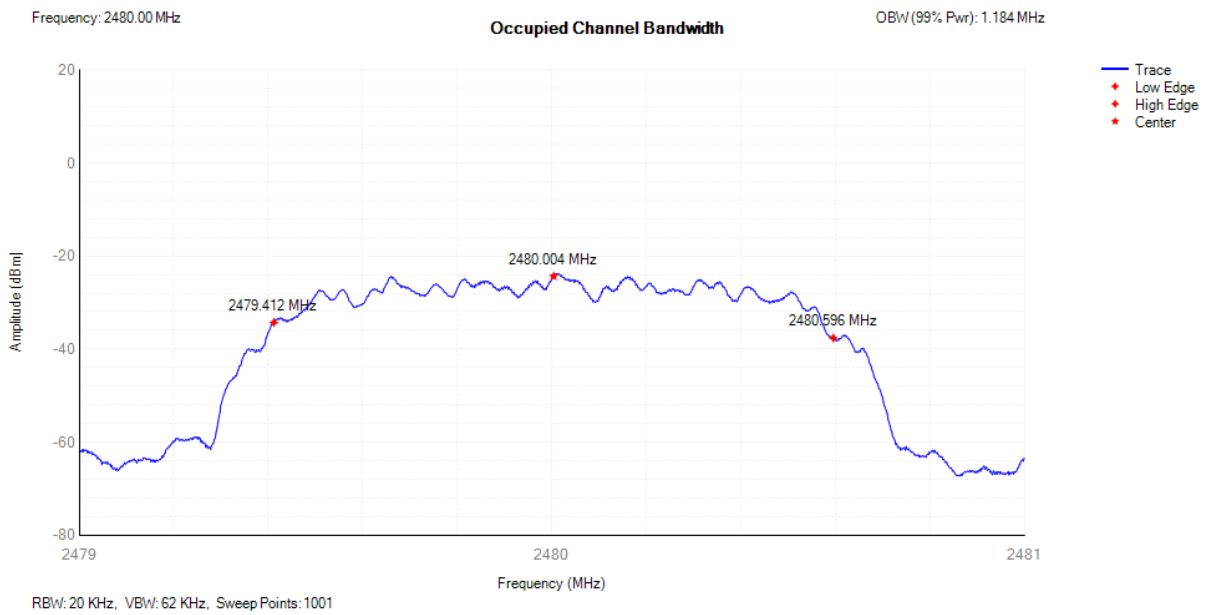

## OBW NVNT 3-DH5 2402MHz

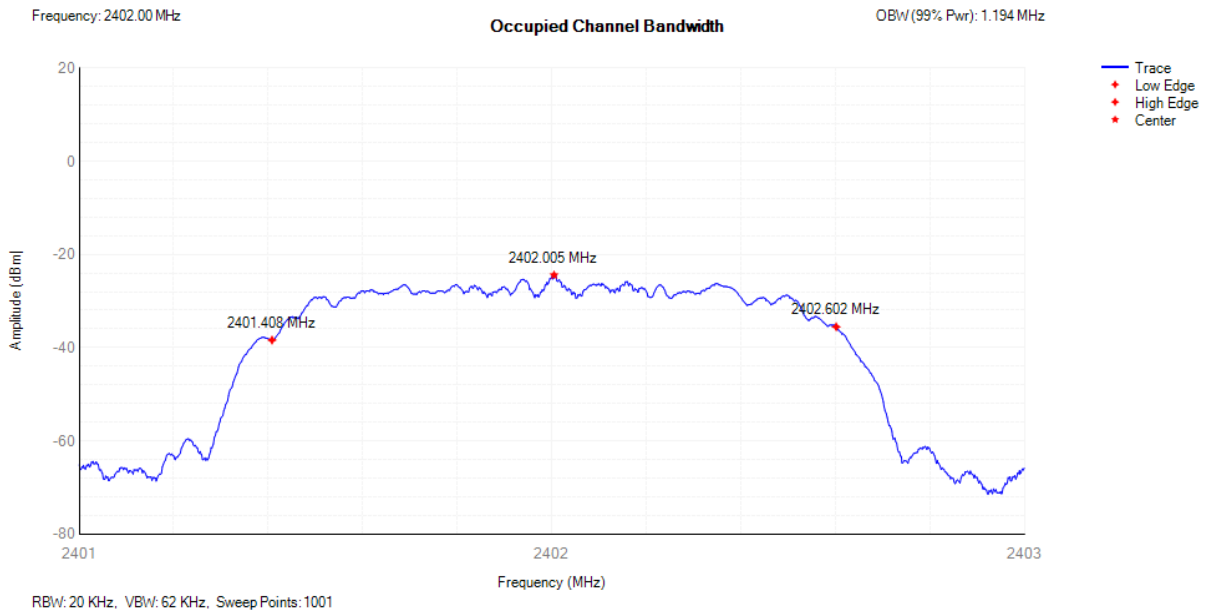

## OBW NVNT 3-DH5 2480MHz

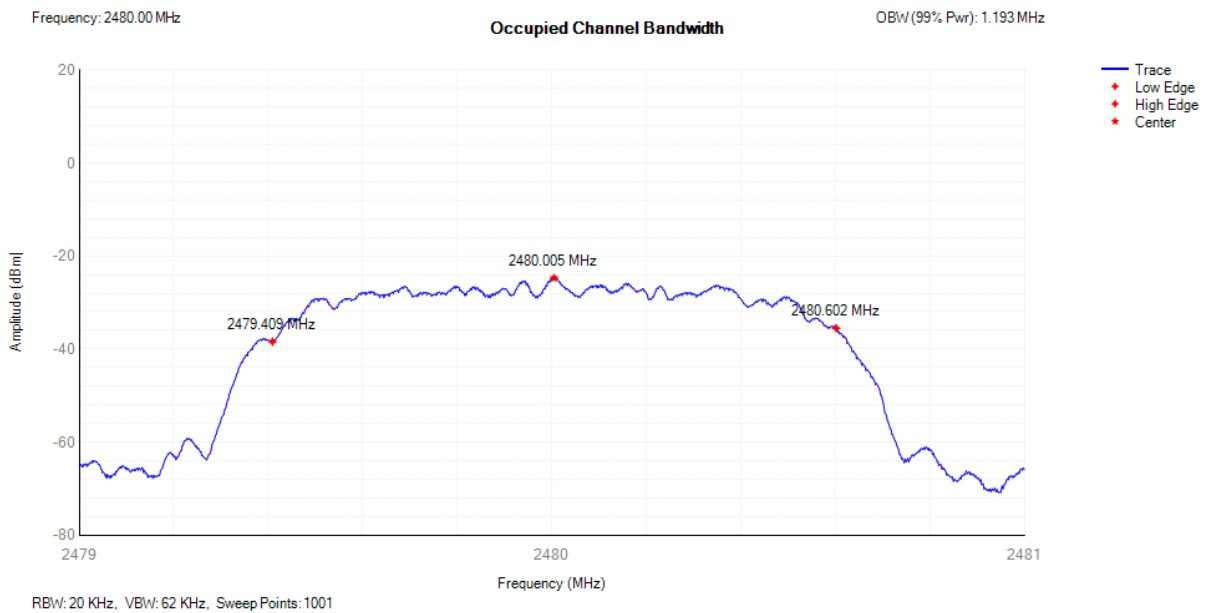


### 5.4.8 Transmitter unwanted emissions in the out-of-band domain (for External antenna A: 4dBi)

Condition	Mode	Frequency (MHz)	OOB Frequency (MHz)	Level (dBm/MHz)	Limit (dBm/MHz)	Verdict
NVNT	1-DH5	2402	2399.5	-52.75	-10	Pass
NVNT	1-DH5	2402	2398.5	-55.97	-20	Pass
NVNT	1-DH5	2402	2484	-63.93	-10	Pass
NVNT	1-DH5	2402	2485	-63.91	-20	Pass




NVNT	1-DH5	2480	2399.5	-63.9	-10	Pass
NVNT	1-DH5	2480	2398.5	-63.95	-20	Pass
NVNT	1-DH5	2480	2484	-57.51	-10	Pass
NVNT	1-DH5	2480	2485	-58.88	-20	Pass
NVNT	2-DH5	2402	2399.5	-47.73	-10	Pass
NVNT	2-DH5	2402	2399.316	-51.41	-10	Pass
NVNT	2-DH5	2402	2398.316	-55.06	-20	Pass
NVNT	2-DH5	2402	2398.132	-55.24	-20	Pass
NVNT	2-DH5	2402	2484	-64.02	-10	Pass
NVNT	2-DH5	2402	2485	-64.02	-20	Pass
NVNT	2-DH5	2480	2399.5	-63.91	-10	Pass
NVNT	2-DH5	2480	2399.316	-63.94	-10	Pass
NVNT	2-DH5	2480	2398.316	-63.97	-20	Pass
NVNT	2-DH5	2480	2398.132	-63.95	-20	Pass
NVNT	2-DH5	2480	2484	-58.4	-10	Pass
NVNT	2-DH5	2480	2484.184	-58.71	-10	Pass
NVNT	2-DH5	2480	2485.184	-59.56	-20	Pass
NVNT	2-DH5	2480	2485.368	-59.7	-20	Pass
NVNT	3-DH5	2402	2399.5	-48.96	-10	Pass
NVNT	3-DH5	2402	2399.306	-51.98	-10	Pass
NVNT	3-DH5	2402	2398.306	-54.74	-20	Pass
NVNT	3-DH5	2402	2398.112	-55.08	-20	Pass
NVNT	3-DH5	2402	2484	-64.05	-10	Pass
NVNT	3-DH5	2402	2484.184	-64.07	-10	Pass
NVNT	3-DH5	2402	2485.184	-64.01	-20	Pass
NVNT	3-DH5	2402	2485.368	-64.06	-20	Pass
NVNT	3-DH5	2480	2399.5	-63.91	-10	Pass
NVNT	3-DH5	2480	2399.306	-63.94	-10	Pass
NVNT	3-DH5	2480	2398.306	-63.9	-20	Pass
NVNT	3-DH5	2480	2398.112	-64	-20	Pass
NVNT	3-DH5	2480	2484	-57.72	-10	Pass
NVNT	3-DH5	2480	2484.193	-57.95	-10	Pass
NVNT	3-DH5	2480	2485.193	-59.17	-20	Pass
NVNT	3-DH5	2480	2485.386	-59.41	-20	Pass


## Tx. Emissions OOB NVNT 1-DH5 2402MHz

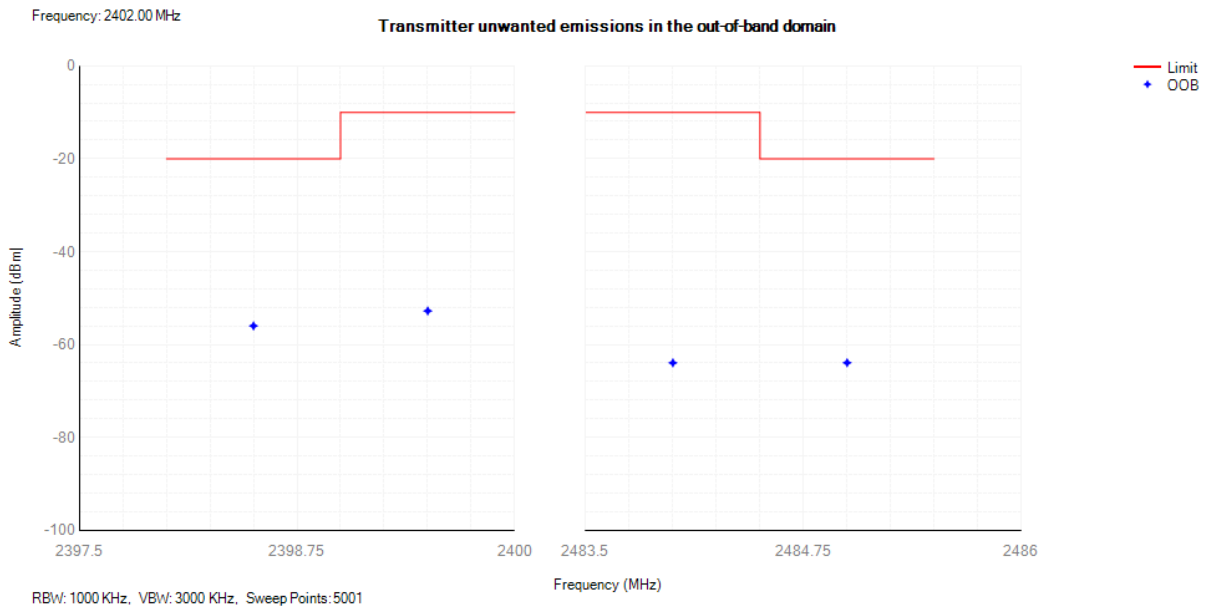


## Tx. Emissions OOB NVNT 1-DH5 2480MHz

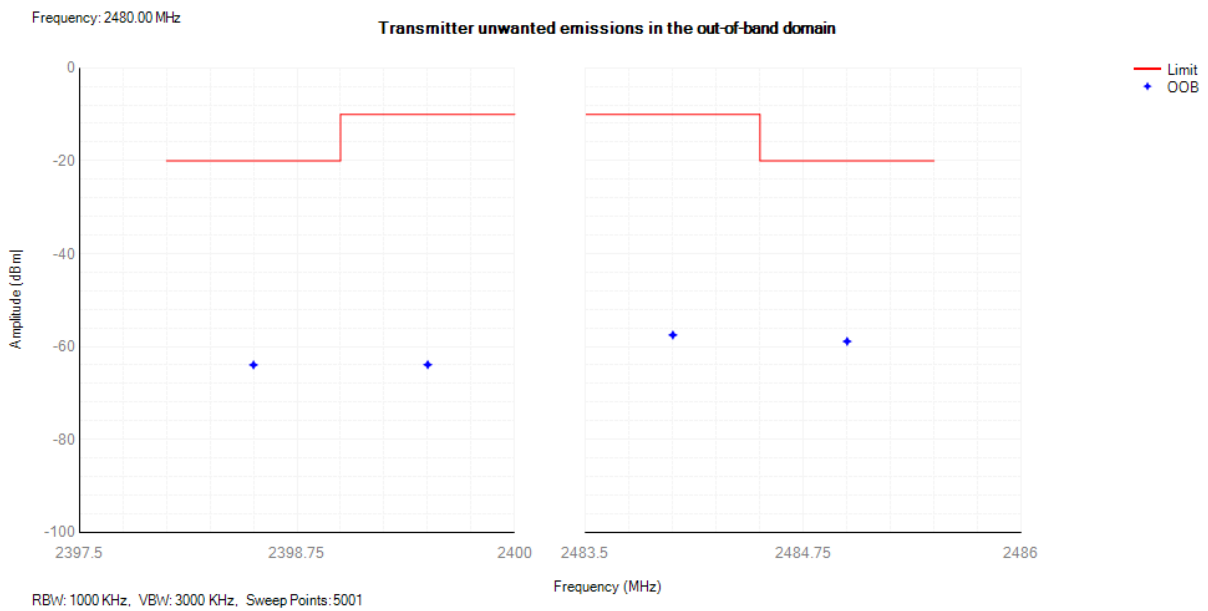


## Tx. Emissions OOB NVNT 2-DH5 2402MHz

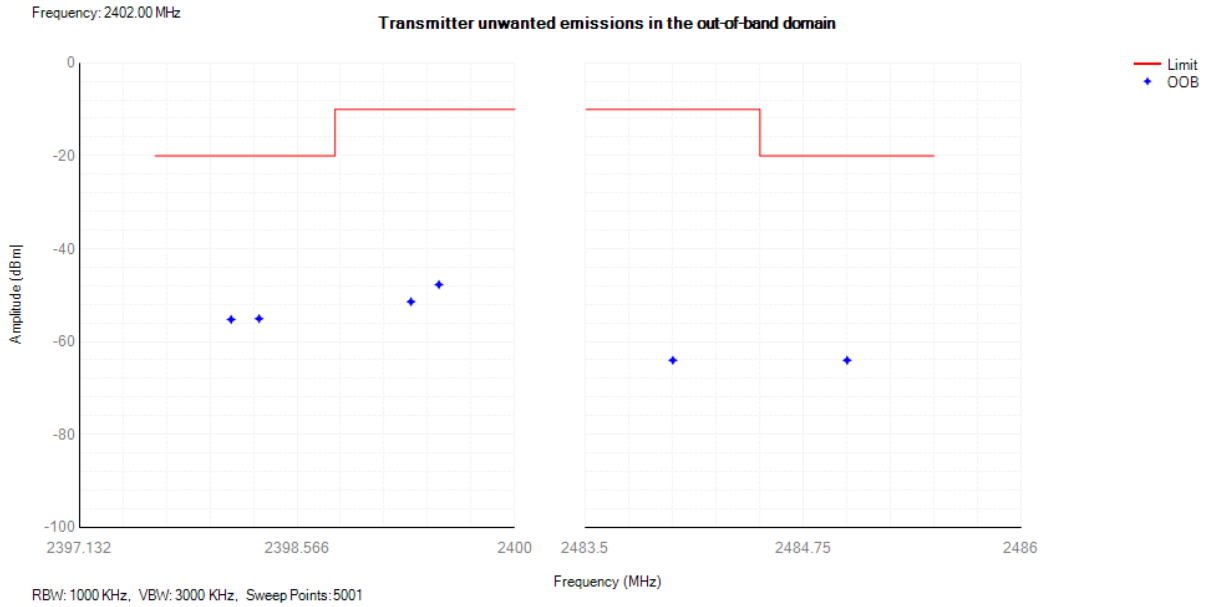


## Tx. Emissions OOB NVNT 2-DH5 2480MHz

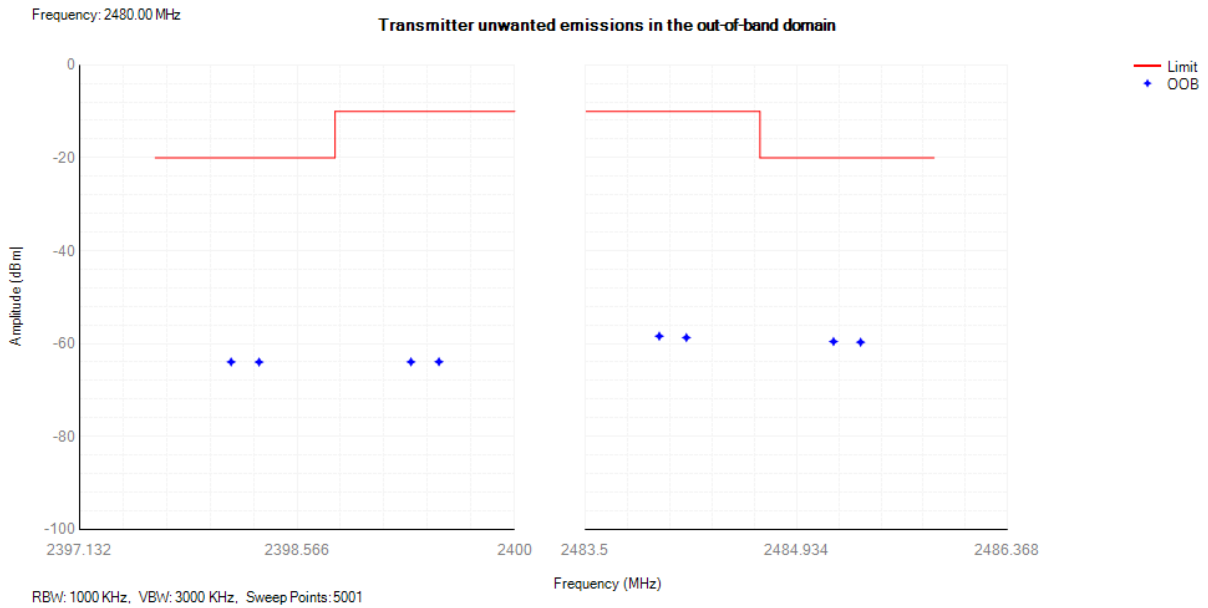

### Tx. Emissions OOB NVNT 3-DH5 2402MHz

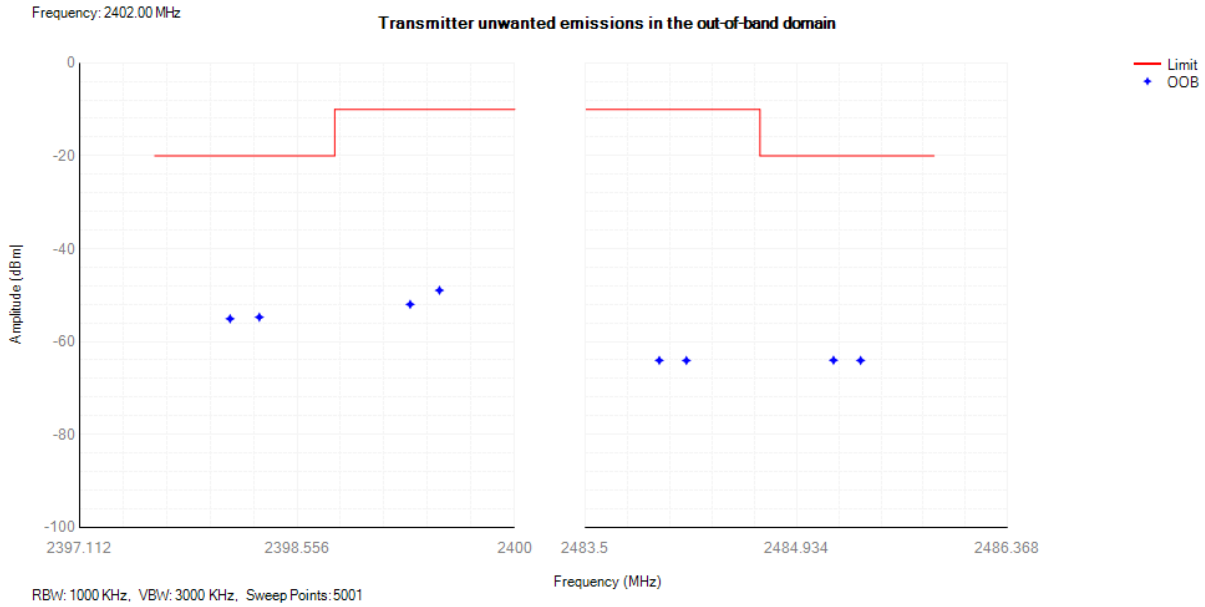

### Tx. Emissions OOB NVNT 3-DH5 2480MHz

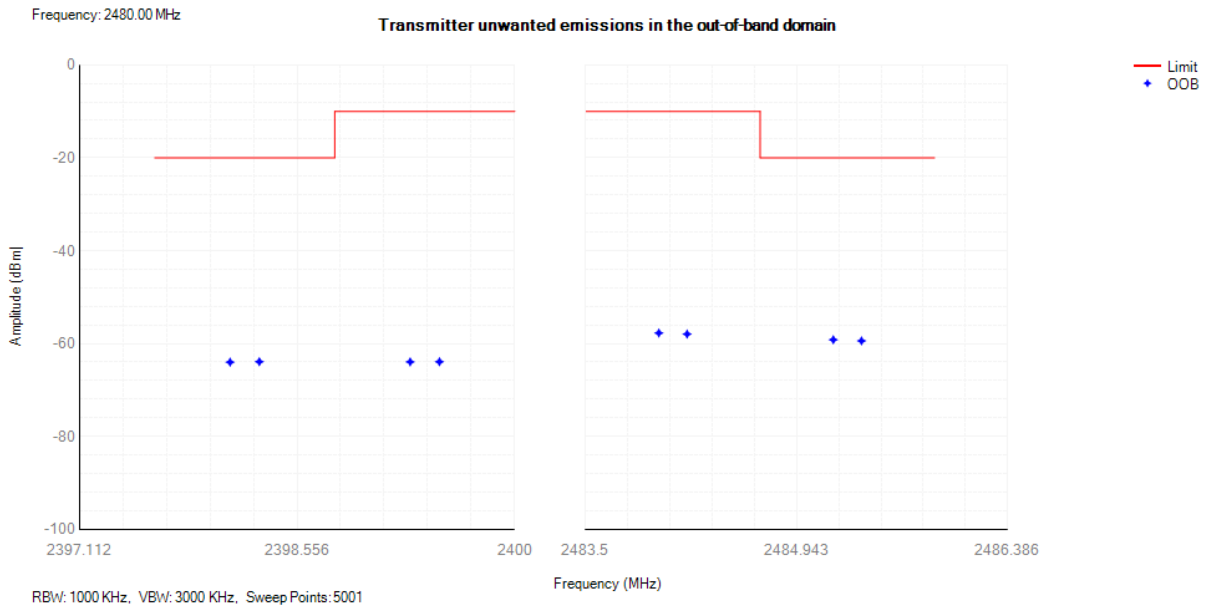

**Remark: OOB Level= Conducted Level + Antenna Gain**  
**So Transmitter unwanted emissions in the out-of-band domain (for External antenna A: 4dBi)**

Condition	Mode	Frequency (MHz)	OOB Frequency (MHz)	Level (dBm/MHz)	Limit (dBm/MHz)	Verdict
NVNT	1-DH5	2402	2399.5	-53.55	-10	Pass
NVNT	1-DH5	2402	2398.5	-56.77	-20	Pass
NVNT	1-DH5	2402	2484	-64.73	-10	Pass
NVNT	1-DH5	2402	2485	-64.71	-20	Pass

NVNT	1-DH5	2480	2399.5	-64.7	-10	Pass
NVNT	1-DH5	2480	2398.5	-64.75	-20	Pass
NVNT	1-DH5	2480	2484	-58.31	-10	Pass
NVNT	1-DH5	2480	2485	-59.68	-20	Pass
NVNT	2-DH5	2402	2399.5	-48.53	-10	Pass
NVNT	2-DH5	2402	2399.316	-52.21	-10	Pass
NVNT	2-DH5	2402	2398.316	-55.86	-20	Pass
NVNT	2-DH5	2402	2398.132	-56.04	-20	Pass
NVNT	2-DH5	2402	2484	-64.82	-10	Pass
NVNT	2-DH5	2402	2485	-64.82	-20	Pass
NVNT	2-DH5	2480	2399.5	-64.71	-10	Pass
NVNT	2-DH5	2480	2399.316	-64.74	-10	Pass
NVNT	2-DH5	2480	2398.316	-64.77	-20	Pass
NVNT	2-DH5	2480	2398.132	-64.75	-20	Pass
NVNT	2-DH5	2480	2484	-59.2	-10	Pass
NVNT	2-DH5	2480	2484.184	-59.51	-10	Pass
NVNT	2-DH5	2480	2485.184	-60.36	-20	Pass
NVNT	2-DH5	2480	2485.368	-60.5	-20	Pass
NVNT	3-DH5	2402	2399.5	-49.76	-10	Pass
NVNT	3-DH5	2402	2399.306	-52.78	-10	Pass
NVNT	3-DH5	2402	2398.306	-55.54	-20	Pass
NVNT	3-DH5	2402	2398.112	-55.88	-20	Pass
NVNT	3-DH5	2402	2484	-64.85	-10	Pass
NVNT	3-DH5	2402	2484.184	-64.87	-10	Pass
NVNT	3-DH5	2402	2485.184	-64.81	-20	Pass
NVNT	3-DH5	2402	2485.368	-64.86	-20	Pass
NVNT	3-DH5	2480	2399.5	-64.71	-10	Pass
NVNT	3-DH5	2480	2399.306	-64.74	-10	Pass
NVNT	3-DH5	2480	2398.306	-64.7	-20	Pass
NVNT	3-DH5	2480	2398.112	-64.8	-20	Pass
NVNT	3-DH5	2480	2484	-58.52	-10	Pass
NVNT	3-DH5	2480	2484.193	-58.75	-10	Pass
NVNT	3-DH5	2480	2485.193	-59.97	-20	Pass
NVNT	3-DH5	2480	2485.386	-60.21	-20	Pass

**Transmitter unwanted emissions in the out-of-band domain (for Ceramic Antenna : 3dBi)**


Condition	Mode	Frequency (MHz)	OOB Frequency (MHz)	Level (dBm/MHz)	Limit (dBm/MHz)	Verdict
NVNT	1-DH5	2402	2399.5	-53.75	-10	Pass
NVNT	1-DH5	2402	2398.5	-56.97	-20	Pass

NVNT	1-DH5	2402	2484	-64.93	-10	Pass
NVNT	1-DH5	2402	2485	-64.91	-20	Pass
NVNT	1-DH5	2480	2399.5	-64.9	-10	Pass
NVNT	1-DH5	2480	2398.5	-64.95	-20	Pass
NVNT	1-DH5	2480	2484	-58.51	-10	Pass
NVNT	1-DH5	2480	2485	-59.88	-20	Pass
NVNT	2-DH5	2402	2399.5	-48.73	-10	Pass
NVNT	2-DH5	2402	2399.316	-52.41	-10	Pass
NVNT	2-DH5	2402	2398.316	-56.06	-20	Pass
NVNT	2-DH5	2402	2398.132	-56.24	-20	Pass
NVNT	2-DH5	2402	2484	-65.02	-10	Pass
NVNT	2-DH5	2402	2485	-65.02	-20	Pass
NVNT	2-DH5	2480	2399.5	-64.91	-10	Pass
NVNT	2-DH5	2480	2399.316	-64.94	-10	Pass
NVNT	2-DH5	2480	2398.316	-64.97	-20	Pass
NVNT	2-DH5	2480	2398.132	-64.95	-20	Pass
NVNT	2-DH5	2480	2484	-59.4	-10	Pass
NVNT	2-DH5	2480	2484.184	-59.71	-10	Pass
NVNT	2-DH5	2480	2485.184	-60.56	-20	Pass
NVNT	2-DH5	2480	2485.368	-60.7	-20	Pass
NVNT	3-DH5	2402	2399.5	-49.96	-10	Pass
NVNT	3-DH5	2402	2399.306	-52.98	-10	Pass
NVNT	3-DH5	2402	2398.306	-55.74	-20	Pass
NVNT	3-DH5	2402	2398.112	-56.08	-20	Pass
NVNT	3-DH5	2402	2484	-65.05	-10	Pass
NVNT	3-DH5	2402	2484.184	-65.07	-10	Pass
NVNT	3-DH5	2402	2485.184	-65.01	-20	Pass
NVNT	3-DH5	2402	2485.368	-65.06	-20	Pass
NVNT	3-DH5	2480	2399.5	-64.91	-10	Pass
NVNT	3-DH5	2480	2399.306	-64.94	-10	Pass
NVNT	3-DH5	2480	2398.306	-64.9	-20	Pass
NVNT	3-DH5	2480	2398.112	-65	-20	Pass
NVNT	3-DH5	2480	2484	-58.72	-10	Pass
NVNT	3-DH5	2480	2484.193	-58.95	-10	Pass
NVNT	3-DH5	2480	2485.193	-60.17	-20	Pass
NVNT	3-DH5	2480	2485.386	-60.41	-20	Pass


## 5.4.5 Hopping Frequency Separation

Condition	Mode	Hopping Freq1 (MHz)	Hopping Freq2 (MHz)	HFS (MHz)	Limit (MHz)	Verdict
NVNT	1-DH5	2441.0102	2442.0251	1.0149	0.1	Pass
NVNT	2-DH5	2441.0129	2442.0155	1.0026	0.1	Pass
NVNT	3-DH5	2441.0589	2442.0591	1.0002	0.1	Pass


HFS NVNT 1-DH5 2441MHz

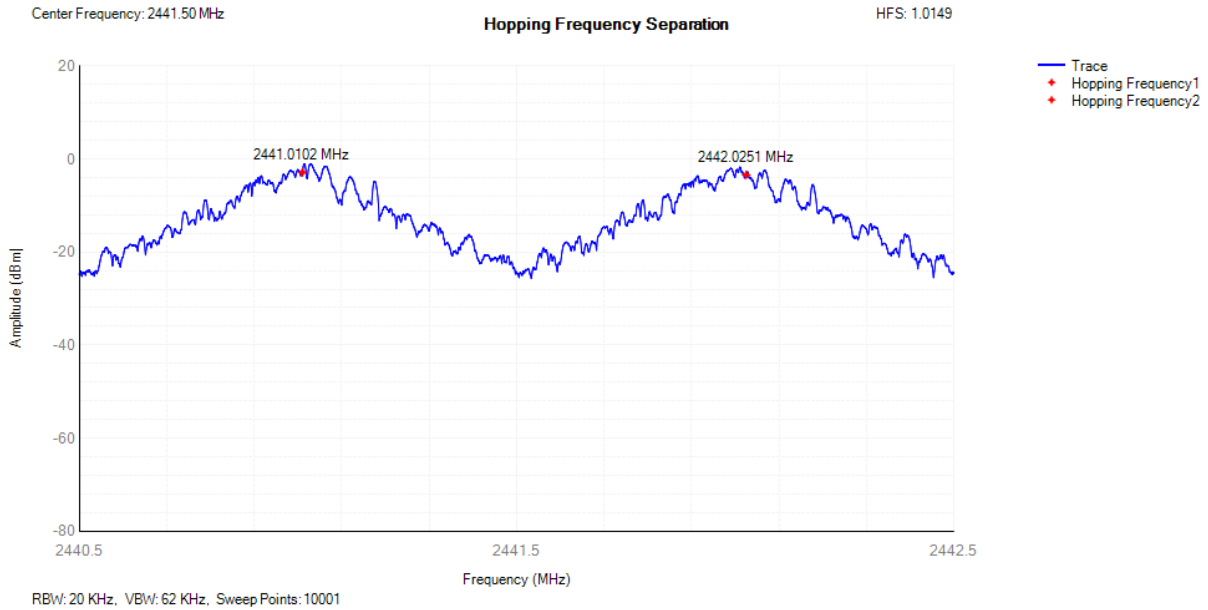

HFS NVNT 2-DH5 2441MHz

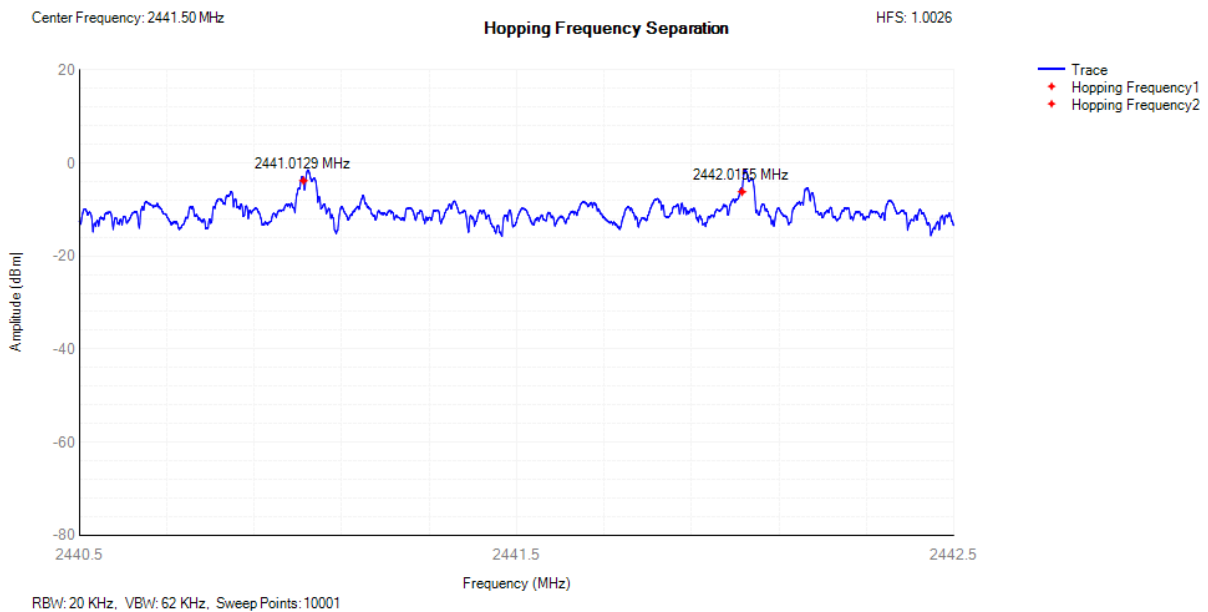


## HFS NVNT 3-DH5 2441MHz

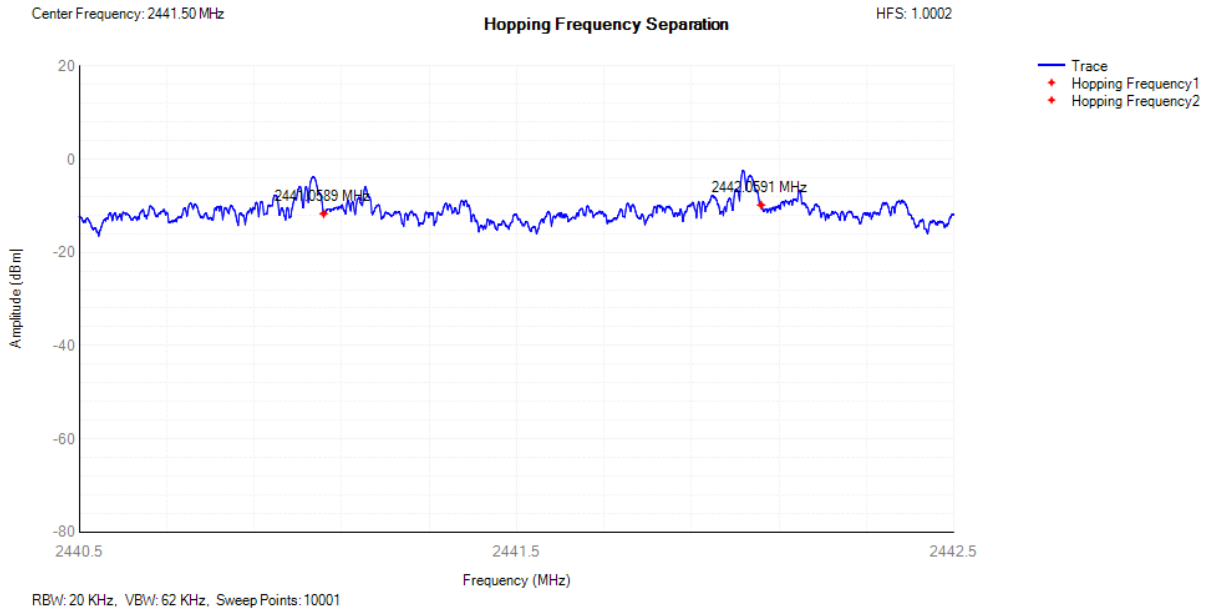

### 5.4.6 Adaptivity


Condition	Mode	Frequency (MHz)	AWGN Level (dBm/MHz)	CW Level (dBm)	Short Control Width (ms)	Short Control Ratio(%)	Limit (%)	Verdict
NVNT	1-DH5	2402	-61.36	-30	4.33	8.66	<=10	Pass
NVNT	1-DH5	2480	-61.58	-30	4.33	8.66	<=10	Pass
NVNT	2-DH5	2402	-60.31	-30	4.33	8.66	<=10	Pass
NVNT	2-DH5	2480	-60.57	-30	4.33	8.66	<=10	Pass

Adaptivity NVNT 1-DH5 2402MHz

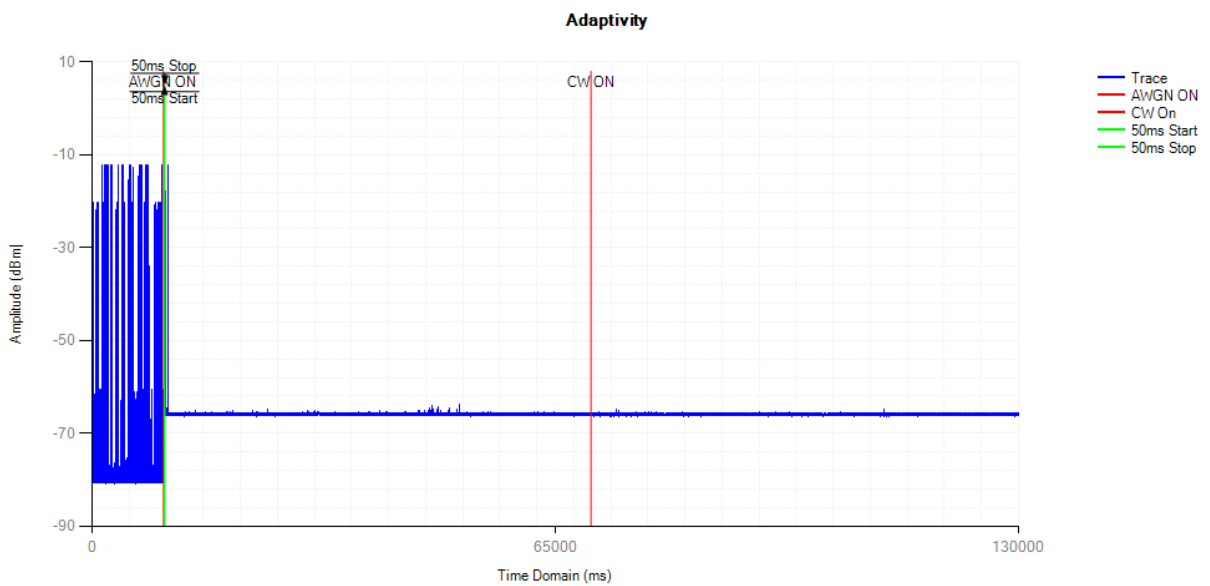





## Control Signal NVNT 1-DH5 2402MHz

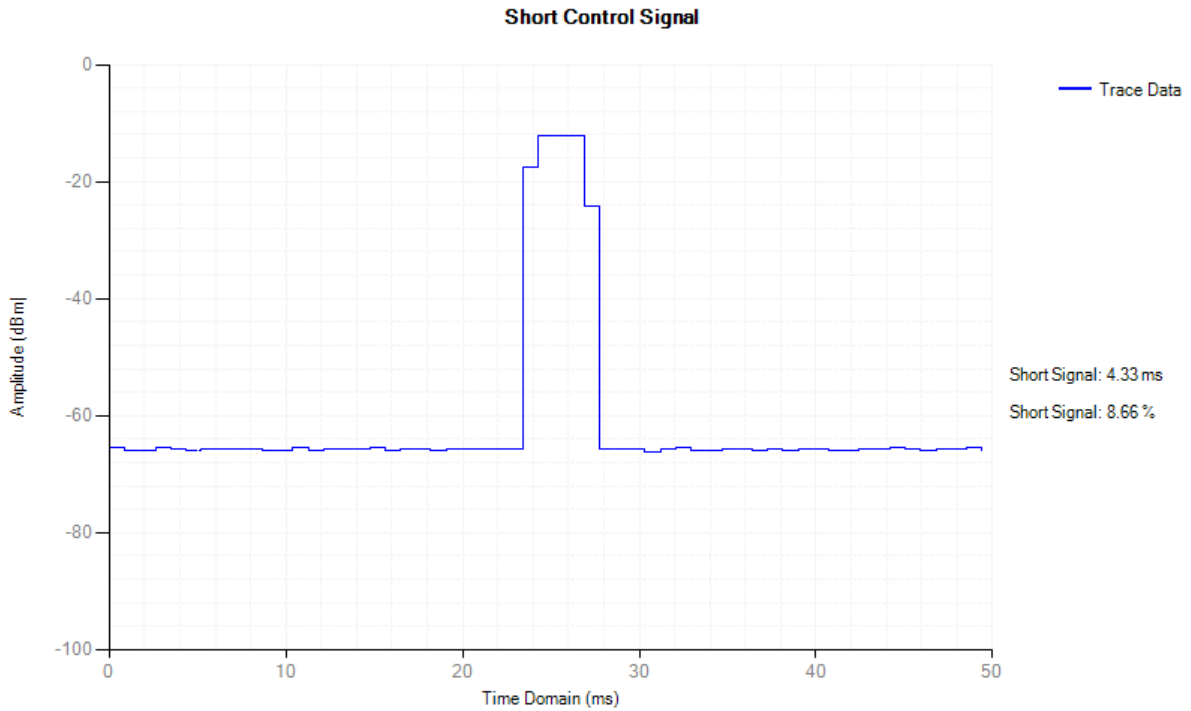


## Adaptivity NVNT 1-DH5 2480MHz

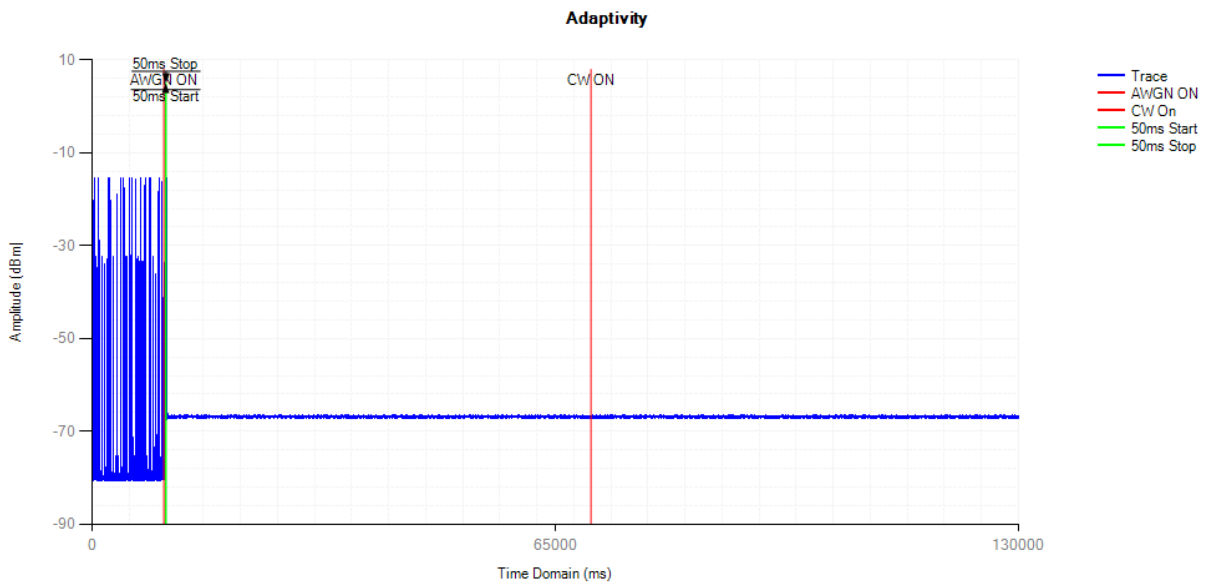


## Control Signal NVNT 1-DH5 2480MHz

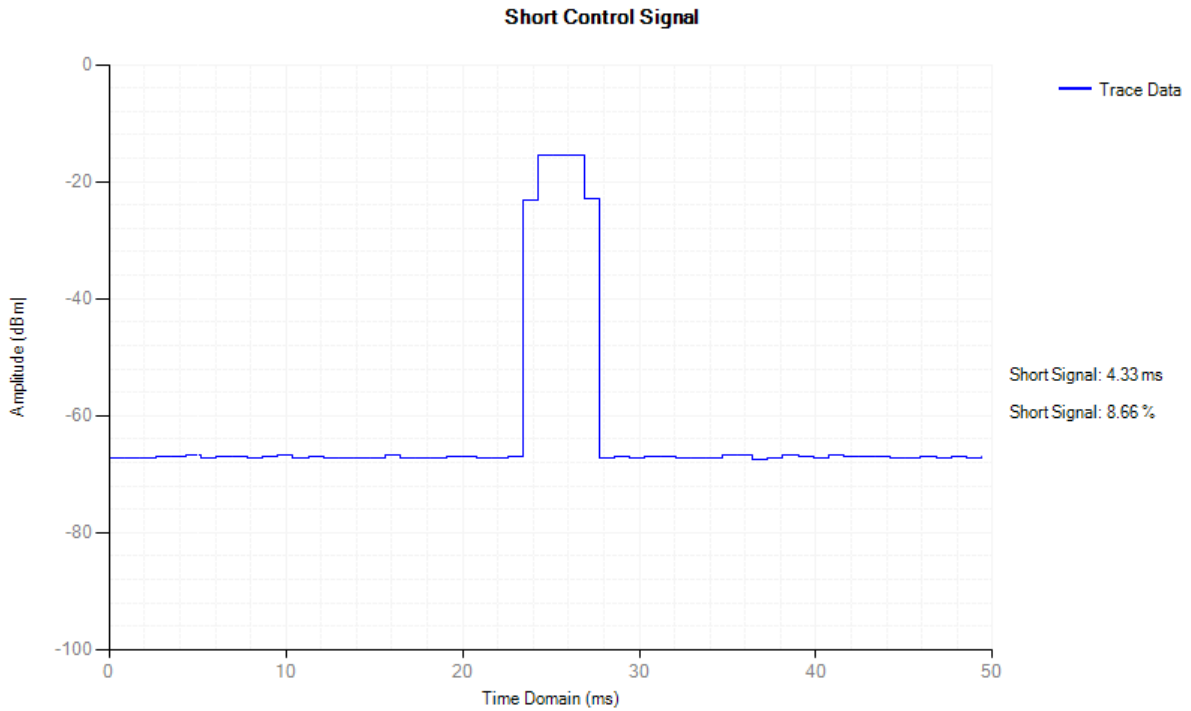


## Adaptivity NVNT 2-DH5 2402MHz

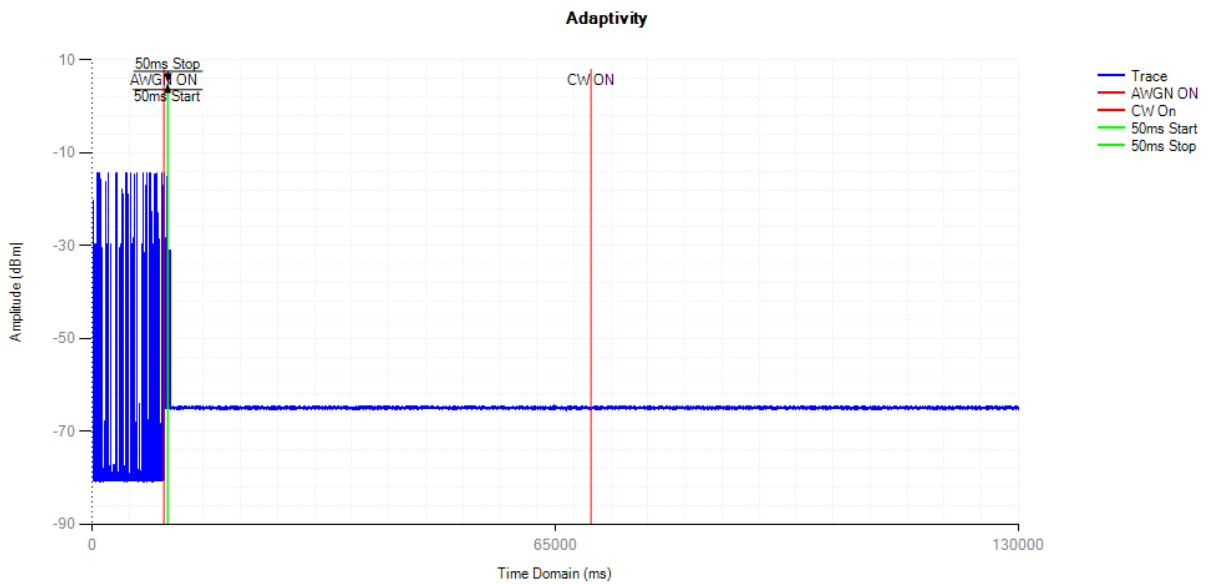


## Control Signal NVNT 2-DH5 2402MHz

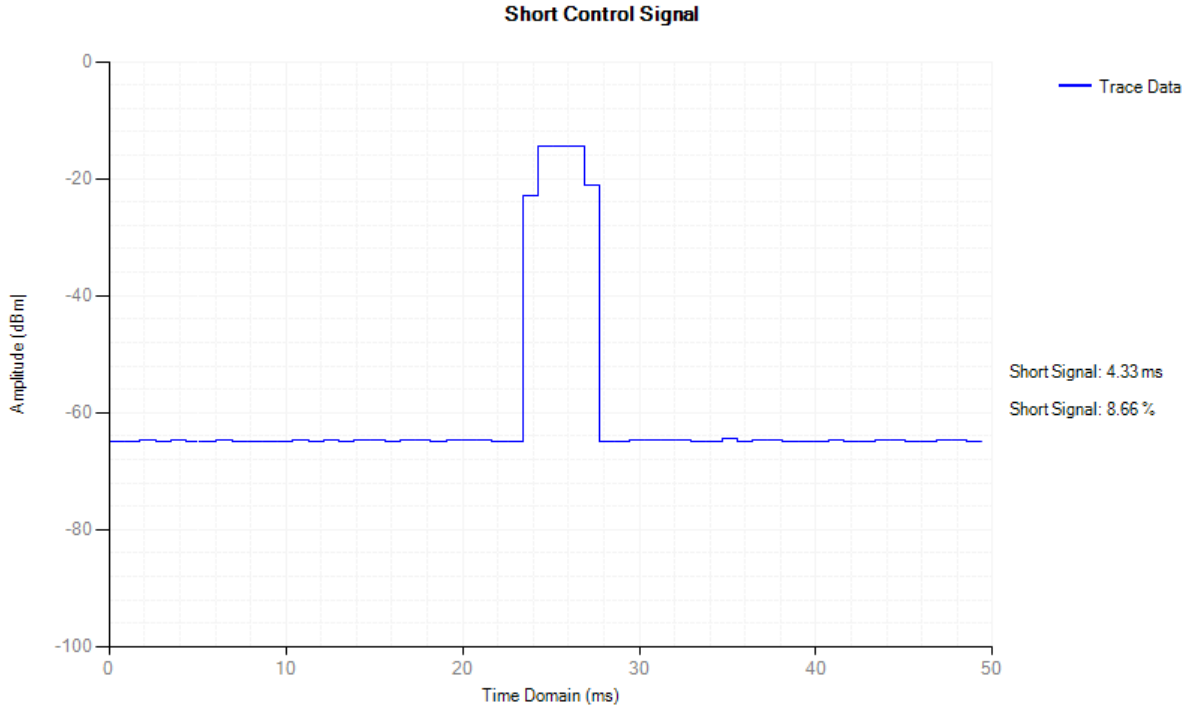

## Adaptivity NVNT 2-DH5 2480MHz

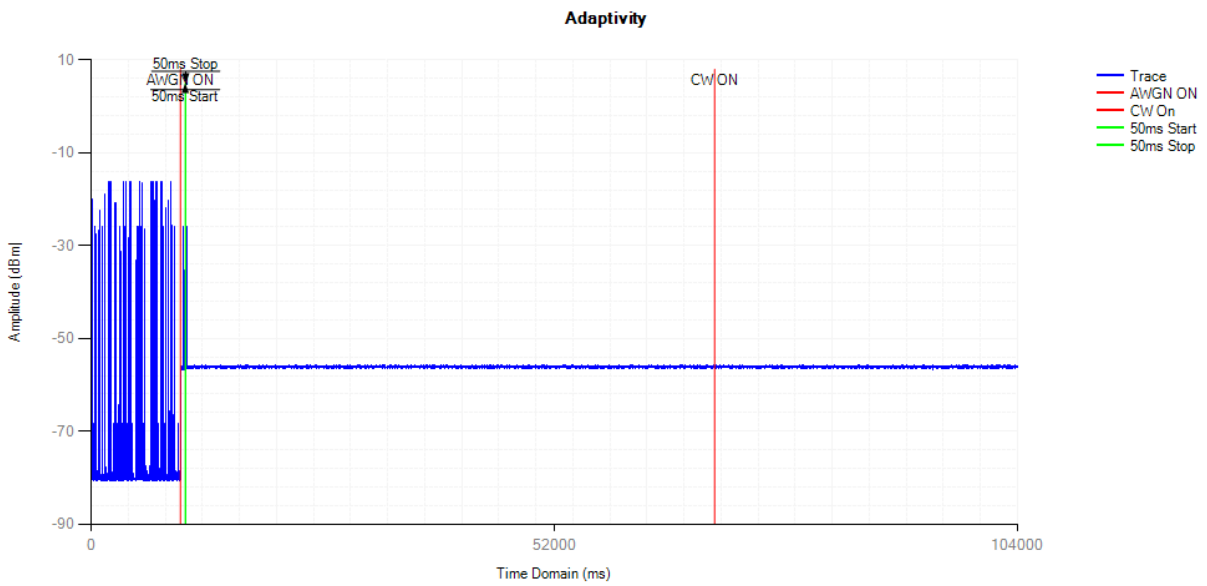


## Control Signal NVNT 2-DH5 2480MHz

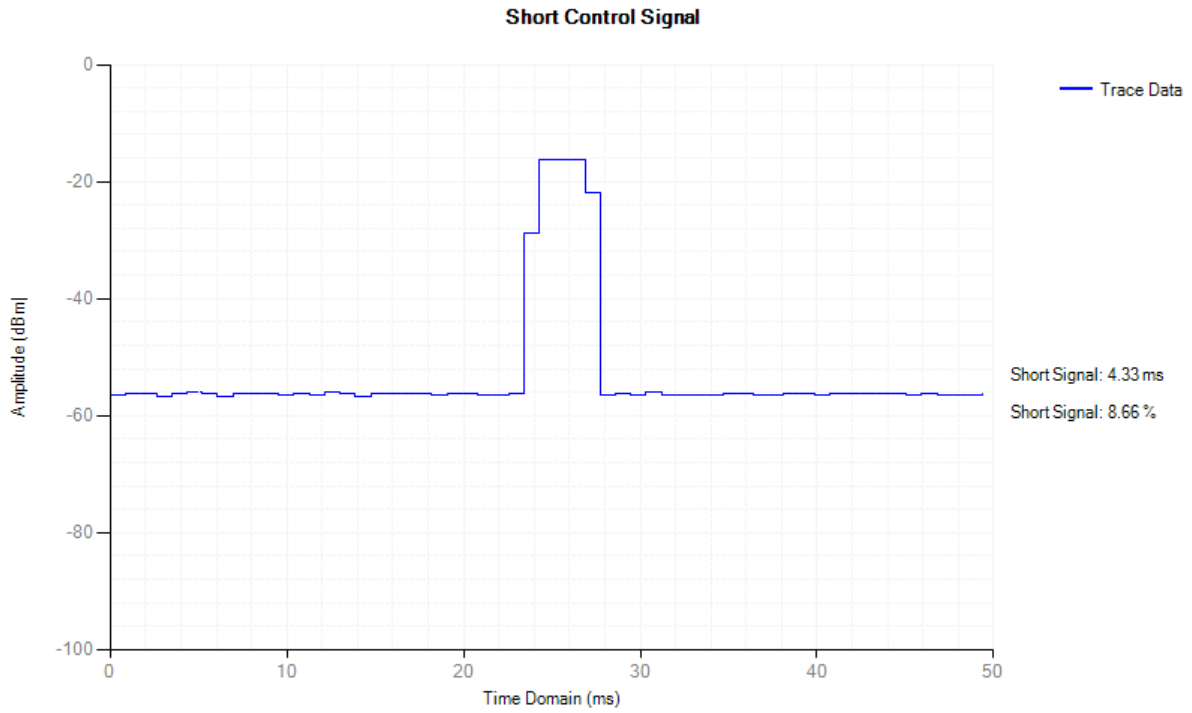


### 5.4.6 Adaptivity COT Channel Occupancy Time (for External antenna)

Condition	Mode	Frequency (MHz)	Priority Class	Max COT (ms)	Limit COT (ms)	Min Idle Time (ms)	Limit Idle Time (ms)	Verdict
NVNT	1-DH5	2402	1	0.267	<=13	3.615	>0.018	Pass
NVNT	1-DH5	2480	1	0.269	<=13	18.617	>0.018	Pass
NVNT	2-DH5	2402	1	0.134	<=13	29.867	>0.018	Pass
NVNT	2-DH5	2480	1	0.267	<=13	7.367	>0.018	Pass


COT NVNT 1-DH5 2402MHz

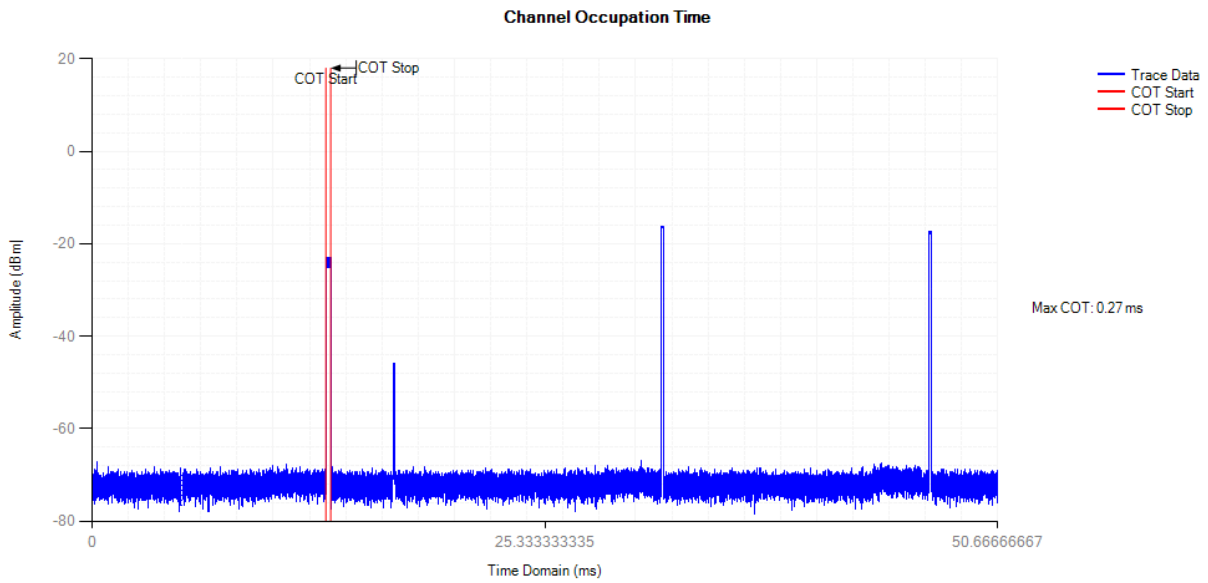


## Idle NVNT 1-DH5 2402MHz

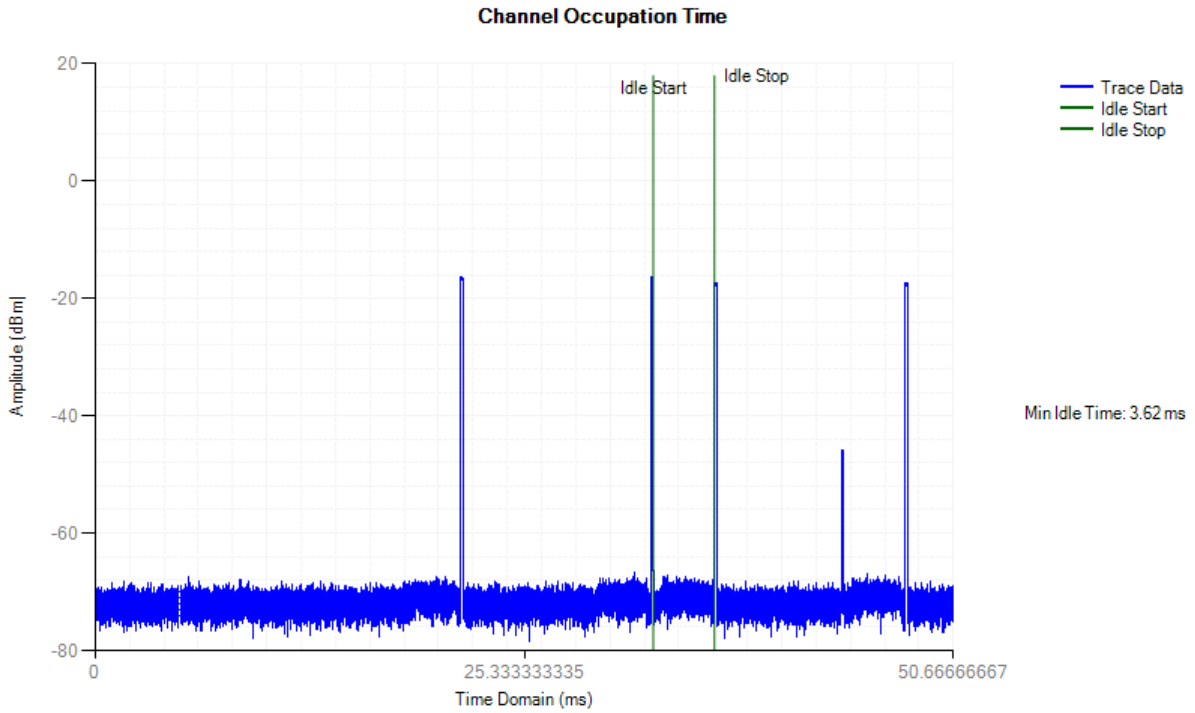


## COT NVNT 1-DH5 2480MHz

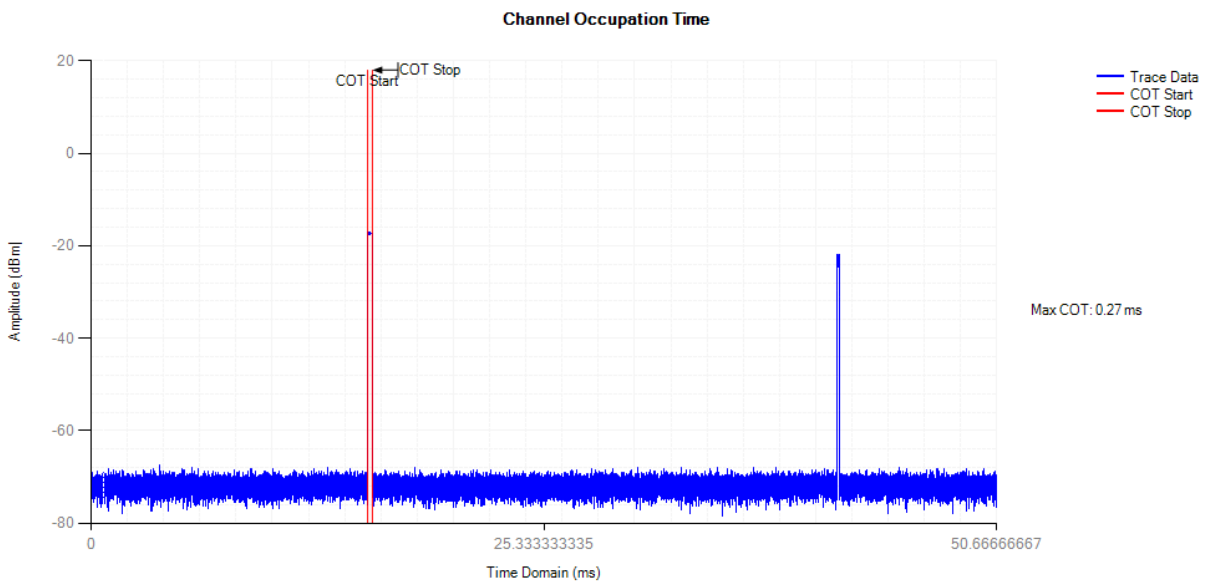


## Idle NVNT 1-DH5 2480MHz

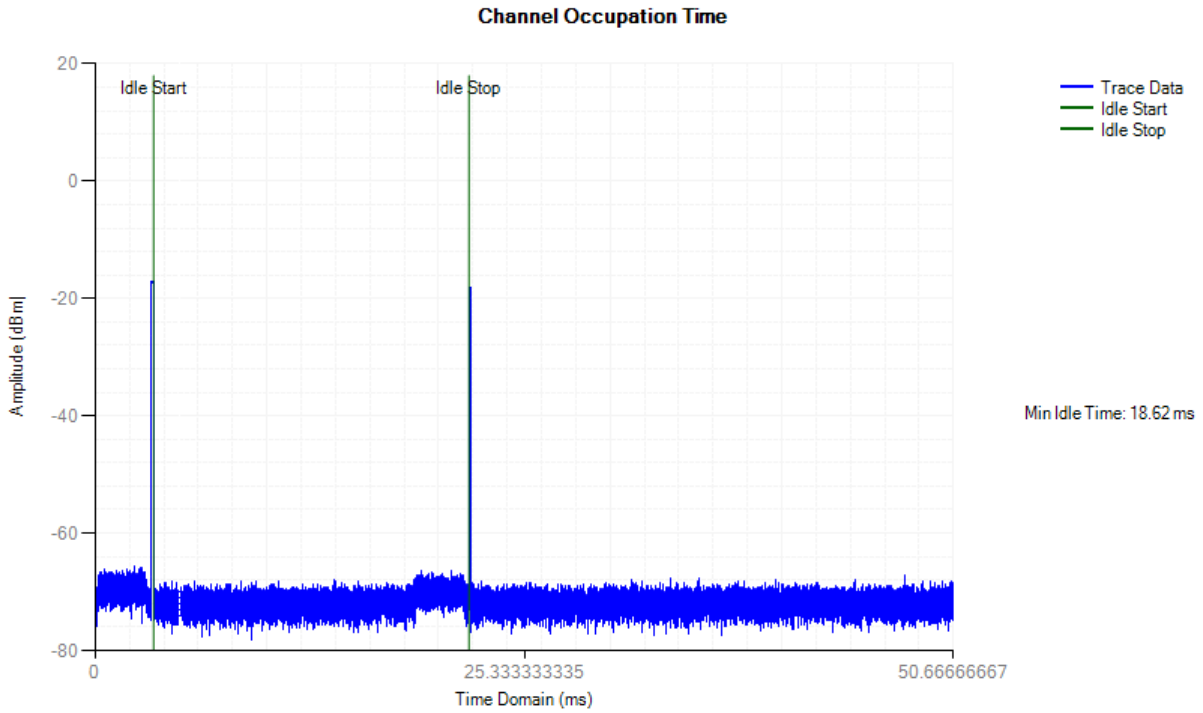


## COT NVNT 2-DH5 2402MHz

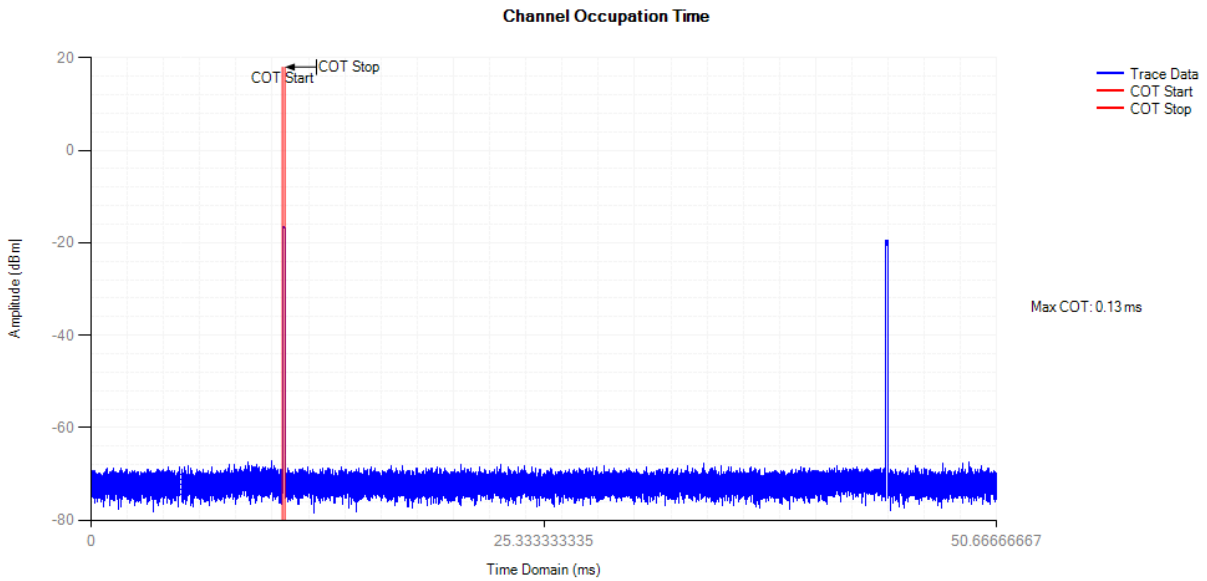

## Idle NVNT 2-DH5 2402MHz

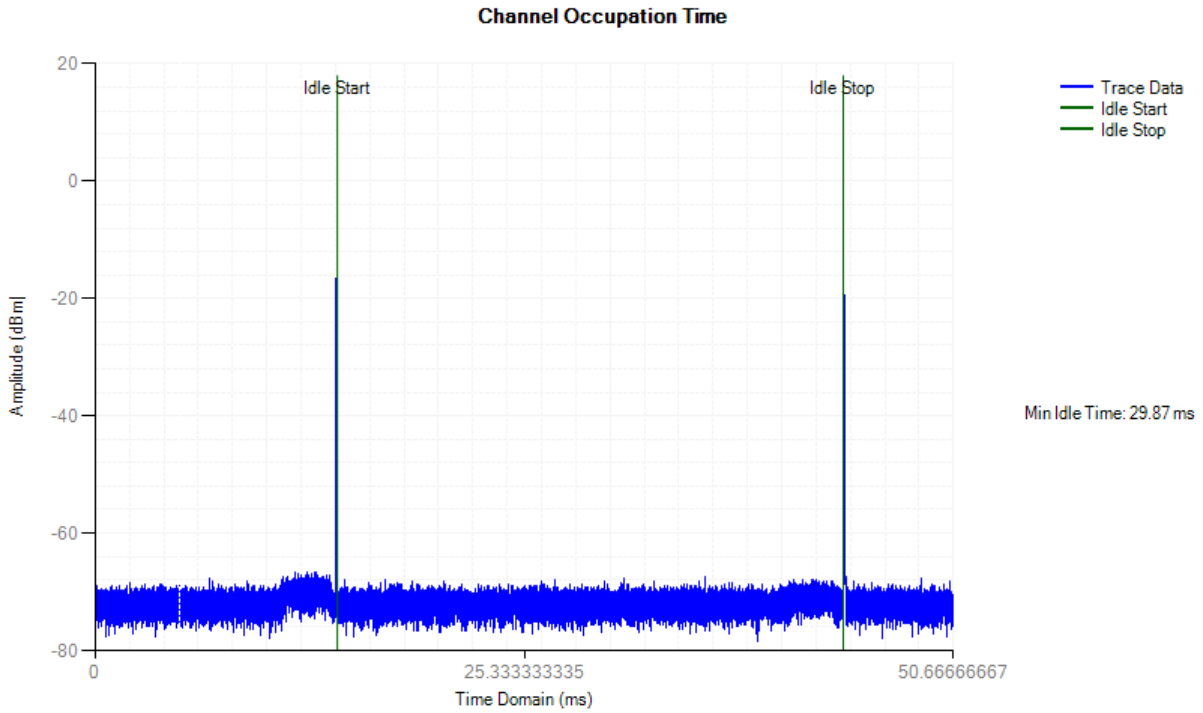

## COT NVNT 2-DH5 2480MHz

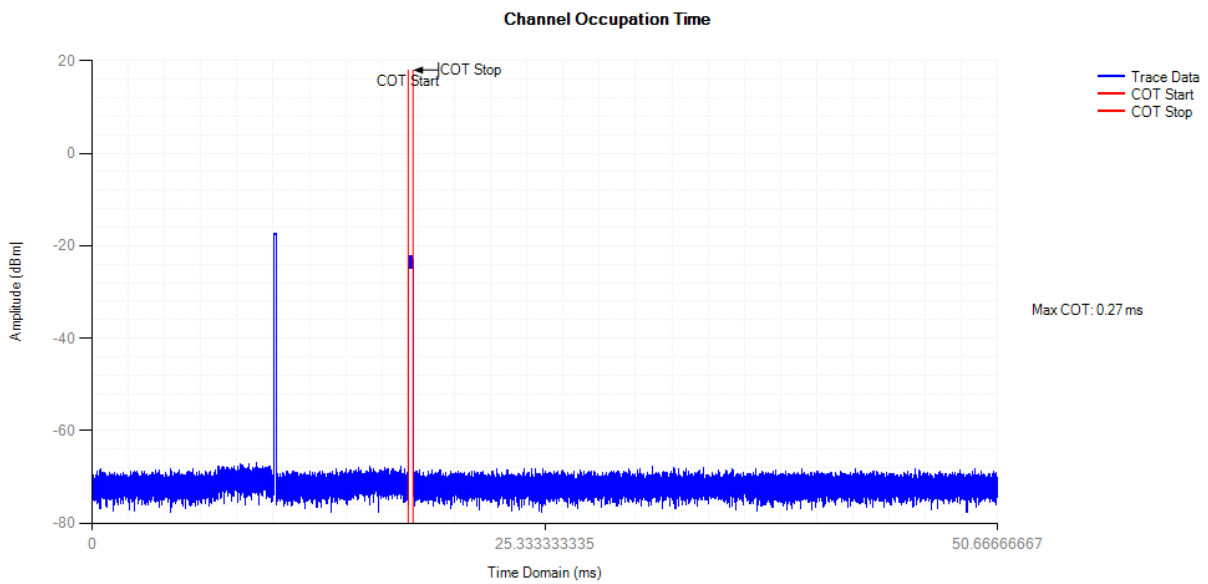



## Idle NVNT 2-DH5 2480MHz

