

Quectel SC60

Multi-mode Smart LTE Module with Wi-Fi & Bluetooth



SC60 is Quectel’s new generation of multi-mode Smart LTE Cat 6 module with built-in Android 7.1 Nougat OS. Based on Qualcomm Octa-core and 64-bit high-performance processors, SC60 is designed to support leading performance, rich multimedia features and Quick Charge 3.0 technology. It is ideal for both industrial and consumer applications requiring high data-rate and multimedia functions.

SC60 supports multiple-input multiple-output (MIMO) technology. The use of multiple antennas at the receiver end at the same time and on the same frequency band greatly minimizes errors and optimizes the data speed. The module also combines high-speed wireless connectivity with embedded multi-constellation and high-sensitivity GNSS (GPS, GLONASS and BeiDou) receiver for positioning.

A rich set of interfaces (such as LCM, Camera, Touch Panel, MIC, SPK, UART, USB, I2C, SPI) extend the applicability of the module to a wide range of M2M applications, including smart cash registers, tax controllers, security monitoring, on-board equipment, high-level information collection equipment, intelligent robots, smart home, intelligent hardware, intelligent industrial handhelds, intelligent industrial PADs, drones, high-level police enforcement instruments, intelligent intercom devices, smart wearables, vending machines, logistics cabinets, etc.




Key Benefits

- ✓ LTE Cat 6 modem supporting 2x20MHz carrier aggregation, with maximum download speed up to 300Mbps
- ✓ Worldwide LTE, UMTS/HSPA+ and GSM/GPRS/EDGE coverage
- ✓ Dual LCDs and dual touch panels for independent display and operation: 1920x1200 @60fps for primary display and 1920x1080 @60fps for secondary display
- ✓ Support maximally four cameras, with two of them working simultaneously
- ✓ Multi-constellation GNSS receiver available for applications requiring fast and accurate fixes in any environment
- ✓ Support recording and playback of 1080p videos at 60fps



ARM Cortex-A53
64-bit Processor
(Octa-core)



Qualcomm®
Adreno™ 506 GPU



Cat 6
Max 300Mbps (DL)
Max 50Mbps (UL)



IEEE 802.11
a/b/g/n/ac



BT4.2 (BR/EDR+BLE)



GPS+GLONASS+
BeiDou



16GB EMMC
+2GB LPDDR3




Android 7.1



LCC+LGA Package

Quectel SC60

Multi-mode Smart LTE Module with Wi-Fi & Bluetooth

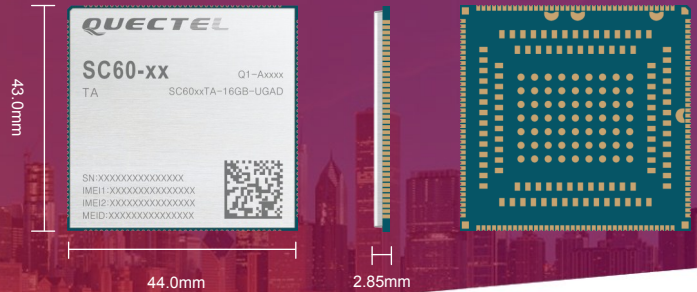

Variant for China/India

SC60-CE:

LTE FDD: B1/B3/B5/B8
LTE TDD: B34/B38/B39/B40/B41
WCDMA: B1/B8
TD-SCDMA: B34/B39
CDMA: BC0
GSM: 900/1800MHz

Variant for EMEA/Korea/Thailand

SC60-E*:

LTE FDD: B1/B3/B5/B7/B8/B20
LTE TDD: B38/B39/B40/B41
WCDMA: B1/B2/B5/B8
GSM: 850/900/1800/1900MHz

Variant for North America

SC60-A*:

LTE FDD: B2/B4/B5/B7/B12/B13/B14/B25/B26
LTE TDD: B41
WCDMA: B1/B2/B4/B5
GSM: 850/1900MHz

Variant for Australia/Taiwan/Brazil

SC60-AU*:

LTE FDD: B1/B3/B5/B7/B8/B28
LTE TDD: B40
WCDMA: B1/B2/B5/B8
GSM: 850/900/1800/1900MHz

Variant for Japan

SC60-J*:

LTE FDD: B1/B3/B8/B18/B19/B26
LTE TDD: B41
WCDMA: B1/B6/B8/B19

Variant for Global

SC60-W:

Only Support Wi-Fi & BT

Data

LTE:

Cat 6 FDD: Max 300Mbps (DL)/50Mbps (UL)
Cat 6 TDD: Max 265Mbps (DL)/35Mbps (UL)
Cat 4 FDD: Max 150Mbps (DL)/50Mbps (UL)
Cat 4 TDD: Max 130Mbps (DL)/35Mbps (UL)

UMTS:

DC-USDPA: Max 42Mbps (DL)
DC-HSUPA: Max 11.2Mbps (UL)
WCDMA: Max 384Kbps (DL/UL)

TD-SCDMA:

Max 4.2Mbps (DL)/2.2Mbps (UL)

CDMA2000:

EVDO: Max 3.1Mbps (DL)/1.8Mbps (UL)
1X Advanced: Max 307.2Kbps (DL/UL)

GSM

EDGE: Max 296Kbps (DL)/236.8Kbps (UL)
GPRS: Max 107Kbps (DL)/85.6Kbps (UL)

Audio & Voice

Crystal Clear VoLTE with Ultra HD Voice and SRVCC/CSFB
High Fidelity Music Playback of 24-bit/192kHz

Interfaces

LCM:

4-lane MIPI_DSI0 + 4-lane MIPI_DSI1
WUXGA (1920x1200) @60fps

Camera:

3 Groups of 4-lane MIPI_CSI, up to 2.1Gbps/Lane
Support 3 or 4 Cameras
Up to 21MP with Dual ISPs

Touch Panel:

Capacitive Touch Panel

Audio:

Speaker, Earpiece, Headphone, and 3 MICs for Analog Audio
Support One Noise-canceling MIC

Video:

Video Encoding/Decoding up to 1080P at 60fps
Wi-Fi Display Support up to 1080P at 30fps for Encoding and 1080P at 60fps for Decoding

USB:

USB 3.0 and 2.0 Compliant
Support USB OTG

I2C: × 5

(U)SIM: × 2 (1.8V/2.95V)

UART: × 3 (Support 4Mbps with Hardware Flow Control)

SD Card: × 1 (3.0, 4-bit SDIO)

PWRKEY: 1.8V, Pulled-up Internally

SPI: × 2 (Can be Multiplexed into UART and I2S Respectively, and I2S Supports Both Tx and Rx)

ADC: × 2

GPIO: × 19

Motor Drive: × 1

Flash Driver: × 2

LED Sink: × 4

Antenna: 4 Solder Pads for Main/Rx-diversity/GNSS/Wi-Fi&BT Antenna, Respectively

Enhanced Features

Cat 6 Modem with 2x20MHz CA

BT: BT2.1+EDR/3.0/4.1 LE/4.2 BLE

WLAN: 2.4G/5G, 802.11a/b/g/n/ac

GNSS: GPS/GLONASS/BeiDou

Build-in Charge IC & Fuel Gauge

Qualcomm Quick Charge 3.0

Support Dual LCDs for Independent Display

Dual SIM Dual Standby

Firmware Upgrade over USB Interface

Electrical Characteristics

Output Power: TBD (3GPP Compliant)

Consumption: TBD

Sensitivity: TBD (3GPP Compliant)

General Features

3GPP E-UTRA Release 12

Bandwidth: 1.4/3/5/10/15/20MHz

Antenna: DL MIMO 2 × 2, Support Rx-diversity

Extended Temperature: -40°C ~ +75°C

Dimensions: 43.0mm × 44.0mm × 2.85mm

LCC+LGA Package

Weight: Approx. 13.0g

Supply Voltage: 3.55V~4.4V, 3.8V Typ.

* Under Development