

# SPECTRUM REPORT (Wi-Fi)

**Applicant:** UAB 8Devices

**Address of Applicant:** Antakalnio 17, Vilnius, LT-10312, Lithuania

## Equipment Under Test (EUT)

Product Name: Komikan

Model No.: Komikan

**Applicable standards:** ETSI EN 300 328 V2.2.2 (2019-07)

**Date of sample receipt:** 24 Mar., 2020

**Date of Test:** 25 Mar., to 12 Jun., 2020

**Date of report issue:** 15 Jun., 2020

**Test Result:** PASS\*

\*In the configuration tested, the EUT detailed in this report complied with the standards specified above.

The CE mark as shown below can be used, under the responsibility of the manufacturer, after completion of an EC Declaration of Conformity and compliance with all relevant EC Directives. The protection requirements with respect to electromagnetic compatibility contained in Directive 2014/53/EU are considered.



Bruce Zhang  
Laboratory Manager



This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the CCIS product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

## 2 Version

Version No.	Date	Description
00	15 Jun., 2020	Original

Tested by: Mike Ou  
Test Engineer

Date: 15 Jun., 2020

Reviewed by: Winner Zhang  
Project Engineer

Date: 15 Jun., 2020

### 3 Contents

	Page
1 COVER PAGE.....	1
2 VERSION.....	2
3 CONTENTS .....	3
4 TEST SUMMARY.....	4
5 GENERAL INFORMATION .....	5
5.1 CLIENT INFORMATION .....	5
5.2 GENERAL DESCRIPTION OF E.U.T.....	5
5.3 TEST ENVIRONMENT AND MODE .....	6
5.4 DESCRIPTION OF SUPPORT UNITS.....	6
5.5 MEASUREMENT UNCERTAINTY .....	6
5.6 LABORATORY FACILITY .....	7
5.7 LABORATORY LOCATION.....	7
5.8 TEST INSTRUMENTS LIST.....	8
6 RADIO TECHNICAL SPECIFICATION IN ETSI EN 300 328 .....	9
6.1 JUSTIFICATION.....	9
6.2 TEST CONFIGURATION OF EUT .....	9
6.3 TEST SETUP BLOCK.....	9
6.4 TEST RESULTS .....	10
6.4.1 Test Result Summary .....	10
6.4.2 Transmitter unwanted emissions in the spurious domain .....	11
6.4.3 Receiver spurious emissions.....	29
6.4.4 Receiver Blocking(worst case mode).....	38
7 TEST SETUP PHOTO.....	42
8 EUT CONSTRUCTIONAL DETAILS.....	43
ANNEX APPLICATION FORM FOR TESTING.....	44

## 4 Test Summary

Test Items	Test Requirement	Test method	Limit/Severity	Result
<b>Radio Spectrum Matter (RSM) Part of Tx</b>				
RF Output Power	Clause 4.3.2.2	Clause 5.4.2.2.1.2	Clause 4.3.2.2.3	PASS
Power Spectral Density	Clause 4.3.2.3	Clause 5.4.3	Clause 4.3.2.3.3	PASS
Duty Cycle, Tx-sequence, Tx-gap	Clause 4.3.2.4	Clause 5.4.2.2.1.3	Clause 4.3.2.4.3	N/A
Medium Utilisation (MU) factor	Clause 4.3.2.5	Clause 5.4.2.2.1.4	Clause 4.3.4.5.3	N/A
Adaptivity (Adaptive Equipment using Modulations Other Than FHSS)	Clause 4.3.2.6	Clause 5.4.6.2	Clause 4.3.2.6	PASS
Occupied Channel Bandwidth	Clause 4.3.2.7	Clause 5.4.7.2	Clause 4.3.2.7.3	PASS
Transmitter unwanted emissions in the out-of-band domain	Clause 4.3.2.8	Clause 5.4.8.2	Clause 4.3.2.8.3	PASS
Transmitter unwanted emissions in the spurious domain	Clause 4.3.2.9	Clause 5.4.9.2	Clause 4.3.2.9.3	PASS
<b>Radio Spectrum Matter (RSM) Part of Rx</b>				
Receiver spurious emissions	Clause 4.3.2.10	Clause 5.4.10.2	Clause 4.3.2.10.3	PASS
Receiver Blocking	Clause 4.3.2.11	Clause 5.4.11.2	Clause 4.3.2.11.4	PASS
<b>Remark:</b>				
<ol style="list-style-type: none"> <li>1. <i>Tx: In this whole report Tx (or tx) means Transmitter.</i></li> <li>2. <i>Rx: In this whole report Rx (or rx) means Receiver.</i></li> <li>3. <i>Pass: Meet the requirement.</i></li> <li>4. <i>N/A: Not Applicable.</i></li> <li>5. <i>The cable insertion loss used by "RF Output Power" and other conduction measurement items is 0.5dB (provided by the customer).</i></li> </ol>				

## 5 General Information

### 5.1 Client Information

Applicant:	UAB 8Devices
Address:	Antakalnio 17, Vilnius, LT-10312, Lithuania
Manufacturer/ Factory:	UAB 8Devices
Address:	Antakalnio 17, Vilnius, LT-10312, Lithuania

### 5.2 General Description of E.U.T.

Product Name:	Komikan
Model No.:	Komikan
Hardware version:	04
Software version:	1.0
Operation Frequency:	2412MHz~2472MHz (802.11b/802.11g/802.11n(HT20)) 2422MHz~2462MHz (802.11n(HT40))
Channel numbers:	13 for 802.11b/802.11g/802.11n(HT20), 9 for 802.11n(HT40)
Channel separation:	5MHz
Modulation technology: (IEEE 802.11b)	Direct Sequence Spread Spectrum (DSSS)
Modulation technology: (IEEE 802.11g/802.11n)	Orthogonal Frequency Division Multiplexing(OFDM)
Data speed (IEEE 802.11b):	1Mbps, 2Mbps, 5.5Mbps, 11Mbps
Data speed (IEEE 802.11g):	6Mbps, 9Mbps, 12Mbps, 18Mbps, 24Mbps, 36Mbps, 48Mbps, 54Mbps
Data speed (IEEE 802.11n):	Up to 150Mbps
Max. E.I.R.P Power:	Ceramic Antenna: 80.211b: 18.87 dBm, 802.11g: 19.84 dBm, 802.11n(HT20): 19.68 dBm 802.11n(HT40): 19.89 dBm Flex Antenna: 80.211b: 18.42 dBm, 802.11g: 19.93 dBm, 802.11n(HT20): 19.98 dBm 802.11n(HT40): 19.92 dBm Whip Antenna: 80.211b: 18.78 dBm, 802.11g: 19.94 dBm, 802.11n(HT20): 19.64 dBm 802.11n(HT40): 19.82 dBm
Equipment Type:	Adaptive equipment
Antenna Type:	Ceramic Antenna, Whip Antenna, Flex Antenna
Antenna gain:	Ceramic Antenna: 2.09 dBi Flex Antenna: 3.20 dBi Whip Antenna: 4.00 dBi
Power supply:	DC 3.3V

### 5.3 Test environment and mode

<b>Operating Environment:</b>	
Temperature:	Normal: 15°C ~ 35°C, Extreme: -20°C ~ +55°C
Humidity:	20 % ~ 75 % RH
Atmospheric Pressure:	1008 mbar
Voltage:	Nominal: 3.3Vdc, Extreme: Low 3.0 Vdc, High 3.6 Vdc
<b>Test mode:</b>	
Transmitting mode:	Keep the EUT in continuously transmitting mode with modulation.
Receiving mode:	Keep the EUT in receiving mode.
We have verified the construction and function in typical operation. All the test items were carried out with the EUT in above test modes.	
According to EN 300 328 standards, the test results are both the "worst case" and "worst setup" 1 Mbps for 802.11b, 6 Mbps for 802.11g, 6.5 Mbps for 802.11n(HT20), 13.5 Mbps for 802.11n(HT40).	

### 5.4 Description of Support Units

Manufacturer	Description	Model	Serial Number	FCC ID/DoC
DELL	PC	OPTIPLEX7070	2J8XSZ2	DoC
DELL	MONITOR	SE2018HR	3M7QPY2	DoC
DELL	KEYBOARD	KB216d	N/A	DoC
DELL	MOUSE	MS116t1	N/A	DoC
LENOVO	Laptop	SL510	2847A65	DoC
UAB 8Devices	Test suite	Komikan	/	/

### 5.5 Measurement Uncertainty

Parameter	Expanded Uncertainty (Confidence of 95%)
Occupied Channel Bandwidth	±5%
RF output power, conducted	±1.5 dB
Power Spectral Density, conducted	±3.0 dB
Unwanted Emissions, conducted	±3.0 dB
Temperature	±3 °C
Supply voltages	±3 %
Time	±5%
Radiated Emission (30MHz ~ 1000MHz)	±4.32 dB
Radiated Emission (1GHz ~ 18GHz)	±5.16 dB

## 5.6 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC - Designation No.: CN1211**

Shenzhen Zhongjian Nanfang Testing Co., Ltd. has been accredited as a testing laboratory by FCC(Federal Communications Commission). The test firm Registration No. is 727551.

- **ISED – CAB identifier.: CN0021**

The 3m Semi-anechoic chamber of Shenzhen Zhongjian Nanfang Testing Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1.

- **A2LA - Registration No.: 4346.01**

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 General requirements for the competence of testing and calibration laboratories. The test scope can be found as below link: <https://portal.a2la.org/scopepdf/4346-01.pdf>

## 5.7 Laboratory Location

Shenzhen ZhongjianNanfang Testing Co.,Ltd.

Address: No.110~116, Building B, Jinyuan Business Building, Xixiang Road, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755-23118282, Fax:+86-755-23116366

Email: info@ccis-cb.com, Website: <http://www.ccis-cb.com>

## 5.8 Test Instruments list

Radiated Emission:					
Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
3m SAC	SAEMC	9m*6m*6m	966	07-22-2017	07-21-2020
BiConiLog Antenna	SCHWARZBECK	VULB9163	497	03-07-2020	03-06-2021
Biconical Antenna	SCHWARZBECK	VUBA9117	359	06-22-2017	06-21-2020
Horn Antenna	SCHWARZBECK	BBHA9120D	916	03-07-2020	03-06-2021
Horn Antenna	SCHWARZBECK	BBHA9120D	1805	06-22-2017	06-21-2020
EMI Test Software	AUDIX	E3	Version: 6.110919b		
Pre-amplifier	HP	8447D	2944A09358	03-07-2020	03-06-2021
Pre-amplifier	CD	PAP-1G18	11804	03-07-2020	03-06-2021
Spectrum analyzer	Rohde & Schwarz	FSP30	101454	03-05-2020	03-04-2021
EMI Test Receiver	Rohde & Schwarz	ESRP7	101070	03-05-2020	03-04-2021
Signal Generator	Rohde & Schwarz	SMX	835454/016	03-05-2020	03-04-2021
Signal Generator	R&S	SMR20	1008100050	03-05-2020	03-04-2021
Cable	ZDECL	Z108-NJ-NJ-81	1608458	03-07-2020	03-06-2021
Cable	MICRO-COAX	MFR64639	K10742-5	03-07-2020	03-06-2021
Cable	SUHNER	SUCOFLEX100	58193/4PE	03-07-2020	03-06-2021
RF Switch Unit	MWRFTEST	MW200	N/A	N/A	N/A
Test Software	MWRFTEST	MTS8200	Version: 2.0.0.0		

Conducted method:					
Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
Spectrum Analyzer	Agilent	N9020A	MY50510123	11-18-2019	11-17-2020
Vector Signal Generator	Agilent	N5182A	MY49060014	11-18-2019	11-17-2020
Signal Generator	R&S	SMR20	1008100050	03-05-2020	03-04-2021
Power Sensor	D.A.R.E	RPR3006W	15I00041SNO12	11-25-2019	11-24-2020
Power Sensor	D.A.R.E	RPR3006W	15I00041SNO54	11-25-2019	11-24-2020
Power Sensor	D.A.R.E	RPR3006W	17I00015SNO27	11-25-2019	11-24-2020
Power Sensor	D.A.R.E	RPR3006W	17I00015SNO28	11-25-2019	11-24-2020
RF Switch Unit	Ascentest	AT890-RFB	N/A	N/A	N/A
Test Software	MWRFTEST	MTS 8310	Version: 2.0.0.0		
DC Power Supply	XinNuoEr	WYK-10020K	1409050110020	09-25-2019	09-24-2020
Temperature Humidity Chamber	HengPu	HPGDS-500	20140828008	11-01-2019	10-31-2020

## 6 Radio Technical Specification in ETSI EN 300 328

### 6.1 Justification

The EUT and test equipment were configured for testing according to ETSI EN 300 328 V2.2.2 (2019-07). The EUT was tested in the normal operating mode to represent worst-case results during the final qualification test.

### 6.2 Test Configuration of EUT

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	5	2432MHz	9	2452MHz	13	2472MHz
2	2417MHz	6	2437MHz	10	2457MHz		
3	2422MHz	7	2442MHz	11	2462MHz		
4	2427MHz	8	2447MHz	12	2467MHz		


*Remark: The EUT operation in above frequency list, and used test software to control the EUT for staying in continuous transmitting and receiving mode. Channel 1, 7 and 13 of 802.11B/G/N20 chosen for testing. Channel 3, 7 and 11 of 802.11 N40 chosen for testing.*

Clause No.	Test Conditions			Test Channel			Mode				Test mode		
	NVNT	NVLT	NVHT	Low	Middle	High	802.11b	802.11g	802.11n (HT20)	802.11n (HT40)	Tx	Rx	Normal
4.3.2.2	√	√	√	√	√	√	√	√	√	√	√	√	
4.3.2.3	√			√	√	√	√	√	√	√	√	√	
4.3.2.4													
4.3.2.5													
4.3.2.6	√			√		√	√	√	√	√			√
4.3.2.7	√			√		√	√	√	√	√	√	√	
4.3.2.8	√			√		√	√	√	√	√	√	√	
4.3.2.9	√			√		√	√	√	√	√	√	√	
4.3.2.10	√			√		√	√	√	√	√	√		√
4.3.2.11	√			√		√	√	√	√	√	√	√	

*Note:*

- “√” means that this configuration is chosen for test.
- “NVNT” means Normal Voltage Normal Temperature, “NVLT” means Normal Voltage Low Temperature, “NVHT” means Normal Voltage High Temperature.

### 6.3 Test Setup Block

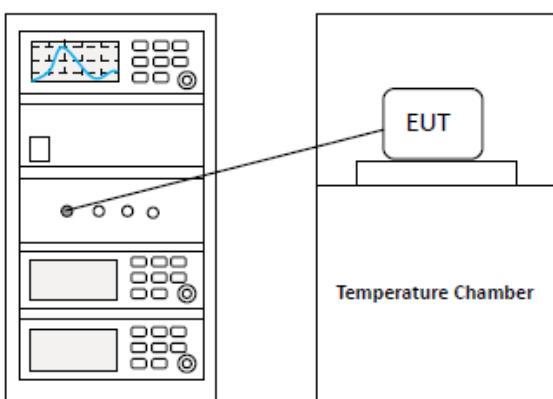

## 6.4 Test Results

### 6.4.1 Test Result Summary

Clause No.	Mode	Test Condition	Test Data	Verdict
4.3.2.2	802.11 b & g & n(HT20) & n(HT40)	NVNT	Appendix A – 2.4G Wi-Fi	Pass
		NVLT		
		NVHT		
4.3.2.3	802.11 b & g & n(HT20) & n(HT40)	NVNT	Appendix A – 2.4G Wi-Fi	Pass
4.3.2.4	N/A	N/A	N/A	N/A
4.3.2.5	N/A	N/A	N/A	N/A
4.3.2.6	802.11 b & g & n(HT20) & n(HT40)	NVNT	Appendix A – 2.4G Wi-Fi	Pass
4.3.2.7	802.11 b & g & n(HT20) & n(HT40)	NVNT	Appendix A – 2.4G Wi-Fi	Pass
4.3.2.8	802.11 b & g & n(HT20) & n(HT40)	NVNT	Appendix A – 2.4G Wi-Fi	Pass
4.3.2.9	802.11 b & g & n(HT20) & n(HT40)	NVNT	See Section 6.4.2	Pass
4.3.2.10	802.11 b & g & n(HT20) & n(HT40)	NVNT	See Section 6.4.3	Pass
4.3.2.11	802.11 b & g & n(HT20) & n(HT40)	NVNT	See Section 6.4.4	Pass

**Note:** "NVNT" means Normal Voltage Normal Temperature, "NVLT" means Normal Voltage Low Temperature, "NVHT" means Normal Voltage High Temperature.

#### 6.4.2 Transmitter unwanted emissions in the spurious domain

Ceramic antenna:

802.11b-TX0 mode lowest channel				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	Polarization	Level(dBm)		
72.85	Vertical	-63.94	-54.00	PASS
501.18	V	-66.69		
77.59	V	-60.89		
250.30	V	-61.15		
4824.00	V	-46.81		
107.51	Horizontal	-71.07		
501.18	H	-64.49		
35.50	H	-65.78		
942.13	H	-61.09		
4824.00	H	-46.79		
802.11b-TX0 mode Highest channel				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	Polarization	Level(dBm)		
72.85	Vertical	-64.38	-54.00	PASS
501.18	V	-66.87		
77.59	V	-60.77		
250.30	V	-60.76		
4944.00	V	-46.88		
107.51	Horizontal	-71.43		
501.18	H	-64.34		
35.50	H	-65.82		
942.13	H	-61.21		
4944.00	H	-47.29		

802.11b-TX1 mode lowest channel				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	Polarization	Level(dBm)		
72.85	Vertical	-63.85	-54.00	PASS
501.18	V	-66.63		
77.59	V	-60.12		
250.30	V	-60.43		
4824.00	V	-42.23		
107.51	Horizontal	-70.48		
501.18	H	-64.43		
35.50	H	-65.75		
942.13	H	-61.20		
4824.00	H	-39.23		
802.11b-TX1 mode Highest channel				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	Polarization	Level(dBm)		
72.85	Vertical	-63.95	-54.00	PASS
501.18	V	-66.38		
77.59	V	-60.10		
250.30	V	-60.62		
4944.00	V	-41.93		
107.51	Horizontal	-70.02		
501.18	H	-64.35		
35.50	H	-65.45		
942.13	H	-60.92		
4944.00	H	-39.25		

802.11g-TX0 mode lowest channel				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	Polarization	Level(dBm)		
72.85	Vertical	-63.48	-54.00	PASS
501.18	V	-67.11		
77.59	V	-61.12		
250.30	V	-60.88		
4824.00	V	-46.93		
107.51	Horizontal	-70.63		
501.18	H	-64.37		
35.50	H	-65.36		
942.13	H	-61.21		
4824.00	H	-47.17		
802.11g-TX0 mode Highest channel				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	Polarization	Level(dBm)		
72.85	Vertical	-64.06	-54.00	PASS
501.18	V	-66.43		
77.59	V	-61.02		
250.30	V	-60.85		
4944.00	V	-47.31		
107.51	Horizontal	-71.48		
501.18	H	-63.95		
35.50	H	-65.36		
942.13	H	-60.87		
4944.00	H	-47.51		

802.11g-TX1 mode lowest channel				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	Polarization	Level(dBm)		
72.85	Vertical	-64.14	-54.00	PASS
501.18	V	-66.68		
77.59	V	-60.53		
250.30	V	-60.13		
4824.00	V	-43.67		
107.51	Horizontal	-70.61		
501.18	H	-64.44		
35.50	H	-65.98		
942.13	H	-61.43		
4824.00	H	-42.58		
802.11g-TX1 mode Highest channel				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	Polarization	Level(dBm)		
72.85	Vertical	-63.55	-54.00	PASS
501.18	V	-66.64		
77.59	V	-59.98		
250.30	V	-61.01		
4944.00	V	-42.87		
107.51	Horizontal	-69.72		
501.18	H	-64.81		
35.50	H	-65.72		
942.13	H	-61.14		
4944.00	H	-41.86		

802.11n-HT20-MIMO mode lowest channel				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	Polarization	Level(dBm)		
72.85	Vertical	-63.38	-54.00	PASS
501.18	V	-66.93		
77.59	V	-61.51		
250.30	V	-60.97		
4824.00	V	-47.30		
107.51	Horizontal	-70.53		
501.18	H	-64.10		
35.50	H	-65.24		
942.13	H	-61.52		
4824.00	H	-47.58		
802.11n-HT20-MIMO mode Highest channel				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	Polarization	Level(dBm)		
72.85	Vertical	-63.25	-54.00	PASS
501.18	V	-66.67		
77.59	V	-61.54		
250.30	V	-60.81		
4944.00	V	-46.83		
107.51	Horizontal	-70.39		
501.18	H	-63.87		
35.50	H	-65.17		
942.13	H	-61.65		
4944.00	H	-47.23		

802.11n-HT40-MIMO mode lowest channel				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	Polarization	Level(dBm)		
72.85	Vertical	-63.75	-54.00	PASS
501.18	V	-66.66		
77.59	V	-61.81		
250.30	V	-61.20		
4844.00	V	-47.38		
107.51	Horizontal	-70.43		
501.18	H	-63.71		
35.50	H	-65.61		
942.13	H	-61.52		
4844.00	H	-47.59		
802.11n-HT40-MIMO mode Highest channel				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	Polarization	Level(dBm)		
72.85	Vertical	-63.74	-54.00	PASS
501.18	V	-66.97		
77.59	V	-62.27		
250.30	V	-61.13		
4944.00	V	-47.05		
107.51	Horizontal	-70.25		
501.18	H	-63.45		
35.50	H	-66.02		
942.13	H	-61.82		
4944.00	H	-47.86		

Flex antenna:

802.11b-TX0 mode lowest channel				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	Polarization	Level(dBm)		
72.85	Vertical	-63.65	-54.00	PASS
501.18	V	-67.03		
77.59	V	-60.45		
250.30	V	-61.15		
4824.00	V	-45.45		
107.51	Horizontal	-71.50		
501.18	H	-64.92		
35.50	H	-65.56		
942.13	H	-61.10		
4824.00	H	-46.66		
802.11b-TX0 mode Highest channel				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	Polarization	Level(dBm)		
72.85	Vertical	-64.46	-54.00	PASS
501.18	V	-66.84		
77.59	V	-61.18		
250.30	V	-61.66		
4944.00	V	-46.98		
107.51	Horizontal	-71.59		
501.18	H	-64.34		
35.50	H	-65.34		
942.13	H	-61.23		
4944.00	H	-47.28		

802.11b-TX1 mode lowest channel				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	Polarization	Level(dBm)		
72.85	Vertical	-63.10	-54.00	PASS
501.18	V	-66.67		
77.59	V	-60.77		
250.30	V	-60.32		
4824.00	V	-42.97		
107.51	Horizontal	-71.11		
501.18	H	-64.34		
35.50	H	-65.71		
942.13	H	-61.12		
4824.00	H	-43.81		
802.11b-TX1 mode Highest channel				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	Polarization	Level(dBm)		
72.85	Vertical	-63.40	-54.00	PASS
501.18	V	-66.39		
77.59	V	-60.72		
250.30	V	-60.00		
4944.00	V	-43.44		
107.51	Horizontal	-71.19		
501.18	H	-63.94		
35.50	H	-65.91		
942.13	H	-60.75		
4944.00	H	-43.40		

802.11g-TX0 mode lowest channel				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	Polarization	Level(dBm)		
72.85	Vertical	-62.88	-54.00	PASS
501.18	V	-66.79		
77.59	V	-61.37		
250.30	V	-60.98		
4824.00	V	-47.15		
107.51	Horizontal	-70.02		
501.18	H	-63.79		
35.50	H	-65.07		
942.13	H	-60.72		
4824.00	H	-46.78		
802.11g-TX0 mode Highest channel				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	Polarization	Level(dBm)		
72.85	Vertical	-64.22	-54.00	PASS
501.18	V	-65.97		
77.59	V	-61.15		
250.30	V	-60.84		
4944.00	V	-47.94		
107.51	Horizontal	-71.72		
501.18	H	-63.72		
35.50	H	-64.77		
942.13	H	-60.96		
4944.00	H	-48.25		

802.11g-TX1 mode lowest channel				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	Polarization	Level(dBm)		
72.85	Vertical	-63.36	-54.00	PASS
501.18	V	-67.27		
77.59	V	-61.00		
250.30	V	-60.18		
4824.00	V	-45.74		
107.51	Horizontal	-70.50		
501.18	H	-64.52		
35.50	H	-65.89		
942.13	H	-61.00		
4824.00	H	-45.64		
802.11g-TX1 mode Highest channel				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	Polarization	Level(dBm)		
72.85	Vertical	-63.56	-54.00	PASS
501.18	V	-66.11		
77.59	V	-59.71		
250.30	V	-60.39		
4944.00	V	-43.85		
107.51	Horizontal	-69.41		
501.18	H	-64.01		
35.50	H	-66.27		
942.13	H	-60.82		
4944.00	H	-44.95		

802.11n-HT20-MIMO mode lowest channel				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	Polarization	Level(dBm)		
72.85	Vertical	-63.51	-54.00	PASS
501.18	V	-67.23		
77.59	V	-61.64		
250.30	V	-61.20		
4824.00	V	-45.20		
107.51	Horizontal	-70.53		
501.18	H	-63.96		
35.50	H	-64.81		
942.13	H	-61.16		
4824.00	H	-46.24		
802.11n-HT20-MIMO mode Highest channel				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	Polarization	Level(dBm)		
72.85	Vertical	-63.15	-54.00	PASS
501.18	V	-65.93		
77.59	V	-61.65		
250.30	V	-59.95		
4944.00	V	-47.05		
107.51	Horizontal	-70.04		
501.18	H	-63.66		
35.50	H	-65.23		
942.13	H	-62.18		
4944.00	H	-47.69		

802.11n-HT40-MIMO mode lowest channel				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	Polarization	Level(dBm)		
72.85	Vertical	-63.03	-54.00	PASS
501.18	V	-67.38		
77.59	V	-61.55		
250.30	V	-61.47		
4844.00	V	-46.24		
107.51	Horizontal	-70.04		
501.18	H	-63.47		
35.50	H	-64.73		
942.13	H	-61.49		
4844.00	H	-47.13		
802.11n-HT40-MIMO mode Highest channel				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	Polarization	Level(dBm)		
72.85	Vertical	-63.18	-54.00	PASS
501.18	V	-66.17		
77.59	V	-61.18		
250.30	V	-60.32		
4944.00	V	-46.19		
107.51	Horizontal	-70.18		
501.18	H	-63.70		
35.50	H	-65.61		
942.13	H	-61.90		
4944.00	H	-47.55		

Whip antenna:

802.11b-TX0 mode lowest channel				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	Polarization	Level(dBm)		
72.85	Vertical	-64.00	-54.00	PASS
501.18	V	-66.93		
77.59	V	-60.45		
250.30	V	-61.14		
4824.00	V	-44.99		
107.51	Horizontal	-71.40		
501.18	H	-64.65		
35.50	H	-65.83		
942.13	H	-61.30		
4824.00	H	-46.88		
802.11b-TX0 mode Highest channel				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	Polarization	Level(dBm)		
72.85	Vertical	-64.44	-54.00	PASS
501.18	V	-67.28		
77.59	V	-60.75		
250.30	V	-61.20		
4944.00	V	-47.18		
107.51	Horizontal	-71.55		
501.18	H	-64.32		
35.50	H	-65.56		
942.13	H	-61.11		
4944.00	H	-47.21		

802.11b-TX1 mode lowest channel				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	Polarization	Level(dBm)		
72.85	Vertical	-63.41	-54.00	PASS
501.18	V	-66.75		
77.59	V	-60.60		
250.30	V	-60.65		
4824.00	V	-44.40		
107.51	Horizontal	-70.89		
501.18	H	-64.51		
35.50	H	-66.05		
942.13	H	-61.23		
4824.00	H	-45.24		
802.11b-TX1 mode Highest channel				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	Polarization	Level(dBm)		
72.85	Vertical	-63.66	-54.00	PASS
501.18	V	-66.75		
77.59	V	-59.89		
250.30	V	-60.66		
4944.00	V	-41.87		
107.51	Horizontal	-69.83		
501.18	H	-63.92		
35.50	H	-65.63		
942.13	H	-60.78		
4944.00	H	-39.44		

802.11g-TX0 mode lowest channel				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	Polarization	Level(dBm)		
72.85	Vertical	-63.25	-54.00	PASS
501.18	V	-67.20		
77.59	V	-61.15		
250.30	V	-61.13		
4824.00	V	-46.91		
107.51	Horizontal	-70.49		
501.18	H	-63.89		
35.50	H	-65.56		
942.13	H	-61.03		
4824.00	H	-46.75		
802.11g-TX0 mode Highest channel				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	Polarization	Level(dBm)		
72.85	Vertical	-64.35	-54.00	PASS
501.18	V	-66.38		
77.59	V	-61.00		
250.30	V	-60.64		
4944.00	V	-47.51		
107.51	Horizontal	-71.75		
501.18	H	-63.93		
35.50	H	-65.23		
942.13	H	-60.94		
4944.00	H	-47.84		

802.11g-TX1 mode lowest channel				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	Polarization	Level(dBm)		
72.85	Vertical	-63.84	-54.00	PASS
501.18	V	-66.81		
77.59	V	-60.58		
250.30	V	-60.16		
4824.00	V	-45.97		
107.51	Horizontal	-70.73		
501.18	H	-64.04		
35.50	H	-65.58		
942.13	H	-61.43		
4824.00	H	-45.74		
802.11g-TX1 mode Highest channel				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	Polarization	Level(dBm)		
72.85	Vertical	-63.71	-54.00	PASS
501.18	V	-66.46		
77.59	V	-59.68		
250.30	V	-60.58		
4944.00	V	-43.89		
107.51	Horizontal	-69.37		
501.18	H	-64.42		
35.50	H	-65.82		
942.13	H	-60.49		
4944.00	H	-44.56		

802.11n-HT20-MIMO mode lowest channel				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	Polarization	Level(dBm)		
72.85	Vertical	-63.76	-54.00	PASS
501.18	V	-67.05		
77.59	V	-61.33		
250.30	V	-61.30		
4824.00	V	-45.57		
107.51	Horizontal	-70.37		
501.18	H	-64.16		
35.50	H	-65.22		
942.13	H	-61.57		
4824.00	H	-46.68		
802.11n-HT20-MIMO mode Highest channel				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	Polarization	Level(dBm)		
72.85	Vertical	-63.54	-54.00	PASS
501.18	V	-66.34		
77.59	V	-61.18		
250.30	V	-60.41		
4944.00	V	-46.73		
107.51	Horizontal	-70.13		
501.18	H	-63.72		
35.50	H	-65.54		
942.13	H	-62.04		
4944.00	H	-47.66		

802.11n-HT40-MIMO mode lowest channel				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	Polarization	Level(dBm)		
72.85	Vertical	-63.43	-54.00	PASS
501.18	V	-67.07		
77.59	V	-61.15		
250.30	V	-61.36		
4844.00	V	-45.81		
107.51	Horizontal	-70.06		
501.18	H	-63.90		
35.50	H	-64.86		
942.13	H	-61.55		
4844.00	H	-46.66		
802.11n-HT40-MIMO mode Highest channel				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	Polarization	Level(dBm)		
72.85	Vertical	-63.06	-54.00	PASS
501.18	V	-66.55		
77.59	V	-61.08		
250.30	V	-60.15		
4944.00	V	-46.53		
107.51	Horizontal	-70.29		
501.18	H	-63.45		
35.50	H	-65.73		
942.13	H	-62.35		
4944.00	H	-47.25		

### 6.4.3 Receiver spurious emissions

Ceramic antenna:

802.11b-ANT0 mode lowest channel				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	Polarization	Level(dBm)		
77.59	Vertical	-61.28	2nW/ -57dBm below 1GHz, 20nW/ -47dBm above 1GHz.	Pass
250.30	V	-61.87		
4824.00	V	-59.78		
836.24	Horizontal	-65.17		
942.13	H	-63.09		
4824.00	H	-59.83		
802.11b-ANT0 mode Highest channel				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	Polarization	Level(dBm)		
77.59	Vertical	-61.06	2nW/ -57dBm below 1GHz, 20nW/ -47dBm above 1GHz.	Pass
250.30	V	-61.97		
4944.00	V	-58.02		
836.24	Horizontal	-65.43		
942.13	H	-63.18		
4944.00	H	-59.08		
802.11b-ANT1 mode lowest channel				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	Polarization	Level(dBm)		
77.59	Vertical	-61.32	2nW/ -57dBm below 1GHz, 20nW/ -47dBm above 1GHz.	Pass
250.30	V	-61.94		
4824.00	V	-59.76		
836.24	Horizontal	-65.58		
942.13	H	-63.23		
4824.00	H	-59.89		
802.11b-ANT 1 mode Highest channel				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	Polarization	Level(dBm)		
77.59	Vertical	-61.11	2nW/ -57dBm below 1GHz, 20nW/ -47dBm above 1GHz.	Pass
250.30	V	-61.89		
4944.00	V	-58.56		
836.24	Horizontal	-65.64		
942.13	H	-63.23		
4944.00	H	-59.16		

802.11g-ANT0 mode lowest channel				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	Polarization	Level(dBm)		
77.59	Vertical	-61.37	2nW/ -57dBm below 1GHz, 20nW/ -47dBm above 1GHz.	Pass
250.30	V	-62.21		
4824.00	V	-59.16		
836.24	Horizontal	-65.44		
942.13	H	-63.30		
4824.00	H	-60.04		

802.11g-ANT0 mode Highest channel				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	Polarization	Level(dBm)		
77.59	Vertical	-61.23	2nW/ -57dBm below 1GHz, 20nW/ -47dBm above 1GHz.	Pass
250.30	V	-62.46		
4944.00	V	-58.50		
836.24	Horizontal	-65.92		
942.13	H	-62.80		
4944.00	H	-59.23		

802.11g-ANT1 mode lowest channel				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	Polarization	Level(dBm)		
77.59	Vertical	-61.26	2nW/ -57dBm below 1GHz, 20nW/ -47dBm above 1GHz.	Pass
250.30	V	-62.21		
4824.00	V	-59.84		
836.24	Horizontal	-65.48		
942.13	H	-63.37		
4824.00	H	-60.12		

802.11g-ANT1 mode Highest channel				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	Polarization	Level(dBm)		
77.59	Vertical	-61.29	2nW/ -57dBm below 1GHz, 20nW/ -47dBm above 1GHz.	Pass
250.30	V	-62.56		
4944.00	V	-59.87		
836.24	Horizontal	-65.89		
942.13	H	-62.97		
4944.00	H	-59.38		

802.11n-HT20 MIMO mode lowest channel				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	Polarization	Level(dBm)		
77.59	Vertical	-61.78	2nW/ -57dBm below 1GHz, 20nW/ -47dBm above 1GHz.	Pass
250.30	V	-62.33		
4824.00	V	-59.33		
836.24	Horizontal	-65.40		
942.13	H	-62.85		
4824.00	H	-59.78		

802.11n-HT20 MIMO mode Highest channel				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	Polarization	Level(dBm)		
77.59	Vertical	-61.58	2nW/ -57dBm below 1GHz, 20nW/ -47dBm above 1GHz.	Pass
250.30	V	-62.16		
4944.00	V	-58.86		
836.24	Horizontal	-66.26		
942.13	H	-62.65		
4944.00	H	-59.25		

802.11n-HT40 MIMO mode lowest channel				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	Polarization	Level(dBm)		
77.59	Vertical	-62.12	2nW/ -57dBm below 1GHz, 20nW/ -47dBm above 1GHz.	Pass
250.30	V	-62.45		
4944.00	V	-59.56		
836.24	Horizontal	-65.03		
942.13	H	-62.55		
4944.00	H	-60.18		

802.11n-HT40 mode Highest channel				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	Polarization	Level(dBm)		
77.59	Vertical	-61.67	2nW/ -57dBm below 1GHz, 20nW/ -47dBm above 1GHz.	Pass
250.30	V	-62.43		
4924.00	V	-58.78		
836.24	Horizontal	-66.47		
942.13	H	-62.61		
4924.00	H	-59.13		

## Flex antenna:

802.11b-ANT0 mode lowest channel				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	Polarization	Level(dBm)		
77.59	Vertical	-62.69	2nW/ -57dBm below 1GHz, 20nW/ -47dBm above 1GHz.	Pass
250.30	V	-60.75		
4824.00	V	-65.16		
836.24	Horizontal	-64.10		
942.13	H	-59.79		
4824.00	H	-62.29		
802.11b-ANT0 mode Highest channel				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	Polarization	Level(dBm)		
77.59	Vertical	-61.22	2nW/ -57dBm below 1GHz, 20nW/ -47dBm above 1GHz.	Pass
250.30	V	-61.30		
4944.00	V	-58.55		
836.24	Horizontal	-65.99		
942.13	H	-63.46		
4944.00	H	-59.25		
802.11b-ANT1 mode lowest channel				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	Polarization	Level(dBm)		
77.59	Vertical	-62.48	2nW/ -57dBm below 1GHz, 20nW/ -47dBm above 1GHz.	Pass
250.30	V	-60.79		
4824.00	V	-60.37		
836.24	Horizontal	-64.15		
942.13	H	-59.83		
4824.00	H	-62.64		
802.11b-ANT1 mode Highest channel				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	Polarization	Level(dBm)		
77.59	Vertical	-61.46	2nW/ -57dBm below 1GHz, 20nW/ -47dBm above 1GHz.	Pass
250.30	V	-61.37		
4944.00	V	-59.48		
836.24	Horizontal	-66.06		
942.13	H	-63.34		
4944.00	H	-59.45		

802.11g-ANT0 mode lowest channel				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	Polarization	Level(dBm)		
77.59	Vertical	-60.91	2nW/ -57dBm below 1GHz, 20nW/ -47dBm above 1GHz.	Pass
250.30	V	-62.36		
4824.00	V	-59.53		
836.24	Horizontal	-64.69		
942.13	H	-63.92		
4824.00	H	-59.89		

802.11g-ANT0 mode Highest channel				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	Polarization	Level(dBm)		
77.59	Vertical	-62.49	2nW/ -57dBm below 1GHz, 20nW/ -47dBm above 1GHz.	Pass
250.30	V	-62.91		
4944.00	V	-58.06		
836.24	Horizontal	-65.84		
942.13	H	-62.38		
4944.00	H	-59.26		

802.11g-ANT1 mode lowest channel				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	Polarization	Level(dBm)		
77.59	Vertical	-60.52	2nW/ -57dBm below 1GHz, 20nW/ -47dBm above 1GHz.	Pass
250.30	V	-62.49		
4824.00	V	-59.61		
836.24	Horizontal	-64.73		
942.13	H	-63.89		
4824.00	H	-59.34		

802.11g-ANT1 mode Highest channel				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	Polarization	Level(dBm)		
77.59	Vertical	-62.48	2nW/ -57dBm below 1GHz, 20nW/ -47dBm above 1GHz.	Pass
250.30	V	-62.76		
4944.00	V	-59.24		
836.24	Horizontal	-65.87		
942.13	H	-62.45		
4944.00	H	-59.38		

802.11n-HT20 MIMO mode lowest channel				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	Polarization	Level(dBm)		
77.59	Vertical	-61.87	2nW/ -57dBm below 1GHz, 20nW/ -47dBm above 1GHz.	Pass
250.30	V	-61.97		
4824.00	V	-59.46		
836.24	Horizontal	-65.60		
942.13	H	-63.40		
4824.00	H	-59.68		

802.11n-HT20 MIMO mode Highest channel				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	Polarization	Level(dBm)		
77.59	Vertical	-61.99	2nW/ -57dBm below 1GHz, 20nW/ -47dBm above 1GHz.	Pass
250.30	V	-62.47		
4944.00	V	-58.37		
836.24	Horizontal	-66.02		
942.13	H	-62.23		
4944.00	H	-59.54		

802.11n-HT40 mode lowest channel				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	Polarization	Level(dBm)		
77.59	Vertical	-62.48	2nW/ -57dBm below 1GHz, 20nW/ -47dBm above 1GHz.	Pass
250.30	V	-62.54		
4844.00	V	-59.44		
836.24	Horizontal	-64.95		
942.13	H	-62.98		
4844.00	H	-60.57		

802.11n-HT40 MIMO mode Highest channel				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	Polarization	Level(dBm)		
77.59	Vertical	-62.43	2nW/ -57dBm below 1GHz, 20nW/ -47dBm above 1GHz.	Pass
250.30	V	-62.96		
4924.00	V	-58.76		
836.24	Horizontal	-66.13		
942.13	H	-62.16		
4924.00	H	-59.45		

Whip antenna:

802.11b-ANT0 mode lowest channel				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	Polarization	Level(dBm)		
77.59	Vertical	-62.51	2nW/ -57dBm below 1GHz, 20nW/ -47dBm above 1GHz.	Pass
250.30	V	-60.34		
4824.00	V	-65.64		
836.24	Horizontal	-63.94		
942.13	H	-59.29		
4824.00	H	-61.84		
802.11b-ANT0 Highest channel				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	Polarization	Level(dBm)		
77.59	Vertical	-61.24	2nW/ -57dBm below 1GHz, 20nW/ -47dBm above 1GHz.	Pass
250.30	V	-61.78		
4944.00	V	-58.94		
836.24	Horizontal	-65.63		
942.13	H	-63.63		
4944.00	H	-59.29		
802.11b-ANT0 mode lowest channel				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	Polarization	Level(dBm)		
77.59	Vertical	-62.46	2nW/ -57dBm below 1GHz, 20nW/ -47dBm above 1GHz.	Pass
250.30	V	-60.39		
4824.00	V	-59.86		
836.24	Horizontal	-63.94		
942.13	H	-59.67		
4824.00	H	-61.846		
802.11b-ANT0 Highest channel				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	Polarization	Level(dBm)		
77.59	Vertical	-61.14	2nW/ -57dBm below 1GHz, 20nW/ -47dBm above 1GHz.	Pass
250.30	V	-61.81		
4944.00	V	-58.67		
836.24	Horizontal	-65.49		
942.13	H	-63.68		
4944.00	H	-59.26		

802.11g-ANT0 lowest channel				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	Polarization	Level(dBm)		
77.59	Vertical	-61.27	2nW/ -57dBm below 1GHz, 20nW/ -47dBm above 1GHz.	Pass
250.30	V	-62.13		
4824.00	V	-59.40		
836.24	Horizontal	-65.06		
942.13	H	-63.80		
4824.00	H	-59.76		

802.11g-ANT0 Highest channel				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	Polarization	Level(dBm)		
77.59	Vertical	-61.04	2nW/ -57dBm below 1GHz, 20nW/ -47dBm above 1GHz.	Pass
250.30	V	-62.42		
4944.00	V	-58.12		
836.24	Horizontal	-66.21		
942.13	H	-62.62		
4944.00	H	-59.03		

802.11g-ANT1 lowest channel				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	Polarization	Level(dBm)		
77.59	Vertical	-61.48	2nW/ -57dBm below 1GHz, 20nW/ -47dBm above 1GHz.	Pass
250.30	V	-62.95		
4824.00	V	-59.44		
836.24	Horizontal	-65.36		
942.13	H	-63.89		
4824.00	H	-59.74		

802.11g-ANT1 Highest channel				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	Polarization	Level(dBm)		
77.59	Vertical	-61.21	2nW/ -57dBm below 1GHz, 20nW/ -47dBm above 1GHz.	Pass
250.30	V	-62.47		
4944.00	V	-59.43		
836.24	Horizontal	-66.46		
942.13	H	-62.52		
4944.00	H	-59.03		

802.11n-HT20 MIMO mode lowest channel				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	Polarization	Level(dBm)		
77.59	Vertical	-62.04	2nW/ -57dBm below 1GHz, 20nW/ -47dBm above 1GHz.	Pass
250.30	V	-62.46		
4824.00	V	-59.29		
836.24	Horizontal	-65.17		
942.13	H	-63.03		
4824.00	H	-60.03		

802.11n-HT20 MIMO mode Highest channel				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	Polarization	Level(dBm)		
77.59	Vertical	-61.99	2nW/ -57dBm below 1GHz, 20nW/ -47dBm above 1GHz.	Pass
250.30	V	-62.47		
4944.00	V	-58.37		
836.24	Horizontal	-66.02		
942.13	H	-62.23		
4944.00	H	-59.54		

802.11n-HT40 MIMO mode lowest channel				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	Polarization	Level(dBm)		
77.59	Vertical	-62.25	2nW/ -57dBm below 1GHz, 20nW/ -47dBm above 1GHz.	Pass
250.30	V	-62.09		
4944.00	V	-59.41		
836.24	Horizontal	-65.18		
942.13	H	-62.92		
4944.00	H	-60.47		

802.11n-HT40 MIMO mode Highest channel				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	Polarization	Level(dBm)		
77.59	Vertical	-61.41	2nW/ -57dBm below 1GHz, 20nW/ -47dBm above 1GHz.	Pass
250.30	V	-62.28		
4924.00	V	-58.62		
836.24	Horizontal	-66.70		
942.13	H	-63.07		
4924.00	H	-59.34		

#### 6.4.4 Receiver Blocking(worst case mode)

802.11b Lowest Channel:					
Wanted signal mean power from companion device (dBm)	Blocking signal frequency (MHz)	Blocking signal power(dBm)	PER measurement level (%)	PER Limit (%)	Results
-68	2380	-34	5	10	Pass
	2504		4		
-74	2300		3	10	Pass
	2330		3		
	2360		6		
	2524		4		
	2584		3	10	Pass
	2674		2		

**NOTE:**

- (1) The minimum performance criterion shall be PER less than or equal to 10 %.
- (2) The EUT belongs to receiver category 1 equipment.
- (3) Conducted measurements.

802.11b Highest Channel:					
Wanted signal mean power from companion device (dBm)	Blocking signal frequency (MHz)	Blocking signal power(dBm)	PER measurement level (%)	PER Limit (%)	Results
-68	2380	-34	4	10	Pass
	2504		5		
-74	2300		4	10	Pass
	2330		3		
	2360		5		
	2524		4		
	2584		2	10	Pass
	2674		3		

**NOTE:**

- (1) The minimum performance criterion shall be PER less than or equal to 10 %.
- (2) The EUT belongs to receiver category 1 equipment.
- (3) Conducted measurements.

802.11g Lowest Channel:					
Wanted signal mean power from companion device (dBm)	Blocking signal frequency (MHz)	Blocking signal power(dBm)	PER measurement level (%)	PER Limit (%)	Results
-68	2380	-34	5	10	Pass
	2504		2		
-74	2300	-34	3	10	Pass
	2330		4		
	2360		3		
	2524		5		
	2584		4	10	Pass
	2674		3		

**NOTE:**

- (1) The minimum performance criterion shall be PER less than or equal to 10 %.
- (2) The EUT belongs to receiver category 1 equipment.
- (3) Conducted measurements.

802.11g Highest Channel:					
Wanted signal mean power from companion device (dBm)	Blocking signal frequency (MHz)	Blocking signal power(dBm)	PER measurement level (%)	PER Limit (%)	Results
-68	2380	-34	3	10	Pass
	2504		5		
-74	2300	-34	2	10	Pass
	2330		4		
	2360		3		
	2524		5		
	2584		4	10	Pass
	2674		2		

**NOTE:**

- (1) The minimum performance criterion shall be PER less than or equal to 10 %.
- (2) The EUT belongs to receiver category 1 equipment.
- (3) Conducted measurements.

802.11n-HT20 Lowest Channel:					
Wanted signal mean power from companion device (dBm)	Blocking signal frequency (MHz)	Blocking signal power(dBm)	PER measurement level (%)	PER Limit (%)	Results
-68	2380	-34	3	10	Pass
	2504		4		
-74	2300	-34	5	10	Pass
	2330		6		
	2360		4		
	2524		3		
	2584		4	10	Pass
	2674		2		

**NOTE:**

- (1) The minimum performance criterion shall be PER less than or equal to 10 %.
- (2) The EUT belongs to receiver category 1 equipment.
- (3) Conducted measurements.

802.11n-HT20 Highest Channel:					
Wanted signal mean power from companion device (dBm)	Blocking signal frequency (MHz)	Blocking signal power(dBm)	PER measurement level (%)	PER Limit (%)	Results
-68	2380	-34	3	10	Pass
	2504		4		
-74	2300	-34	3	10	Pass
	2330		3		
	2360		5		
	2524		6		
	2584		4	10	Pass
	2674		3		

**NOTE:**

- (1) The minimum performance criterion shall be PER less than or equal to 10 %.
- (2) The EUT belongs to receiver category 1 equipment.
- (3) Conducted measurements.

802.11n-HT40 Lowest Channel:					
Wanted signal mean power from companion device (dBm)	Blocking signal frequency (MHz)	Blocking signal power(dBm)	PER measurement level (%)	PER Limit (%)	Results
-68	2380	-34	4	10	Pass
	2504		3		
	2300		5	10	Pass
	2330		4		
	2360		4		
	2524		3		
	2584		3	10	Pass
	2674		2		

**NOTE:**

- (1) The minimum performance criterion shall be PER less than or equal to 10 %.
- (2) The EUT belongs to receiver category 1 equipment.
- (3) Conducted measurements.


802.11n-HT40 Highest Channel:					
Wanted signal mean power from companion device (dBm)	Blocking signal frequency (MHz)	Blocking signal power(dBm)	PER measurement level (%)	PER Limit (%)	Results
-68	2380	-34	2	10	Pass
	2504		5		
	2300		3	10	Pass
	2330		4		
	2360		3		
	2524		5		
	2584		4	10	Pass
	2674		3		

**NOTE:**


- (1) The minimum performance criterion shall be PER less than or equal to 10 %.
- (2) The EUT belongs to receiver category 1 equipment.
- (3) Conducted measurements.

## 7 Test setup photo

Radiated Emission Below 1GHz

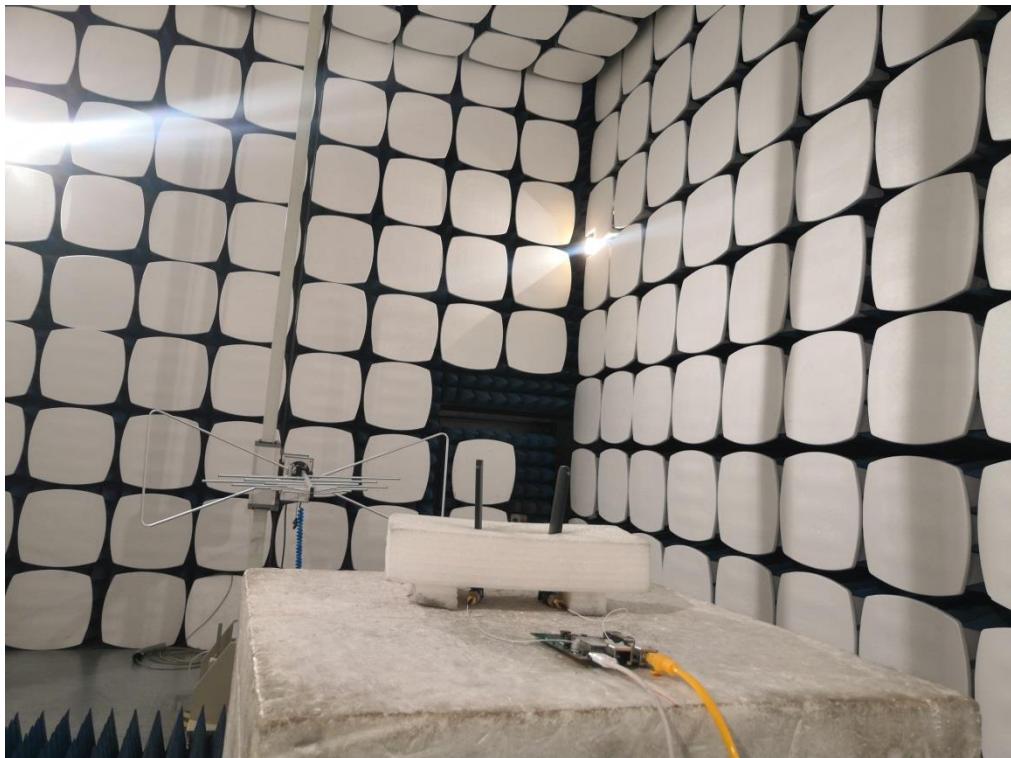

Radiated Emission Above 1GHz

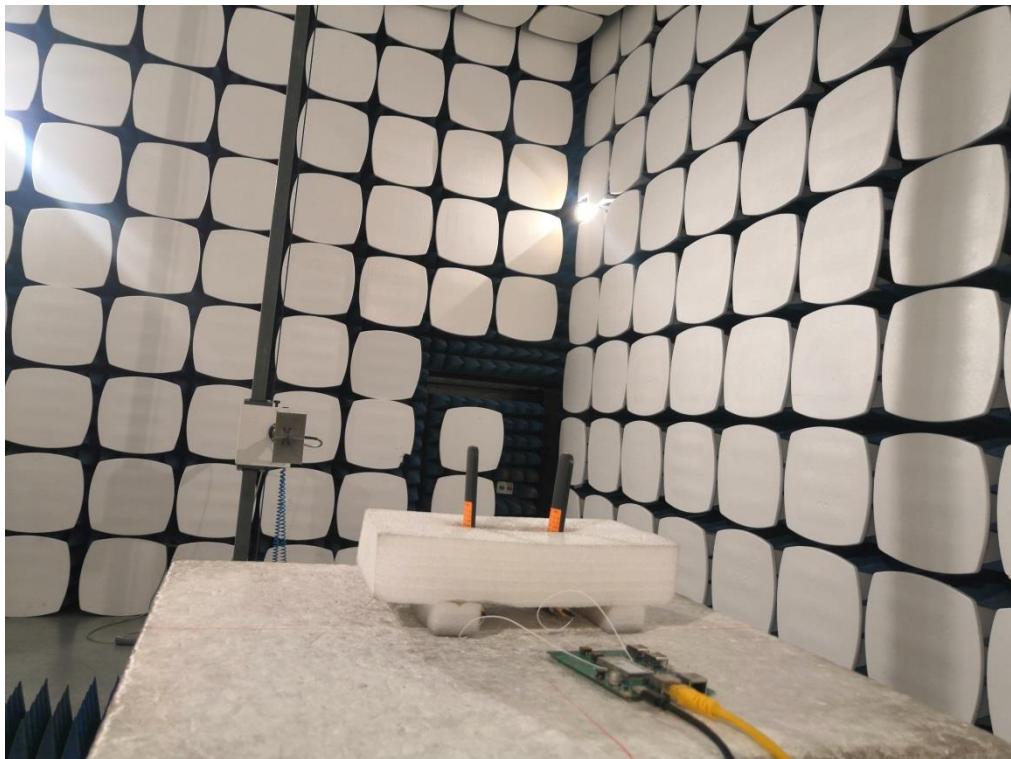

## **8 EUT Constructional Details**

Reference to the test report No. CCISE200307901.

## ANNEX Application form for testing

In accordance with EN 300 328 V2.2.2, clause 5.4.1, the following information is provided by the supplier.

**a) The type of modulation used by the equipment:**

- FHSS
- Other forms of modulation

**b) In case of FHSS modulation:**

- In case of non-Adaptive Frequency Hopping equipment:  
The number of Hopping Frequencies: ...
- In case of Adaptive Frequency Hopping Equipment:  
The maximum number of Hopping Frequencies: ...  
The minimum number of Hopping Frequencies: ...
- The Dwell Time: ...
- The Minimum Channel Occupation Time: ...

**c) Adaptive / non-adaptive equipment:**

- Non-adaptive Equipment
- Adaptive Equipment without the possibility to switch to a non-adaptive mode
- Adaptive Equipment which can also operate in a non-adaptive mode

**d) In case of adaptive equipment:**

- The Channel Occupancy Time implemented by the equipment: 6.392 ms
- The equipment has implemented an LBT based DAA mechanism
    - In case of equipment using modulation different from FHSS:
  - The equipment is Frame Based equipment
  - The equipment is Load Based equipment
  - The equipment can switch dynamically between Frame Based and Load Based equipment
    - The CCA time implemented by the equipment: \_\_\_\_ μs
    - The value q as referred to in clause 4.3.2.5.2.2: .....
  - The equipment has implemented an non-LBT based DAA mechanism
  - The equipment can operate in more than one adaptive mode

**e) In case of non-adaptive Equipment:**

The maximum RF Output Power (e.i.r.p.): \_\_\_\_ dBm

The maximum (corresponding) Duty Cycle: \_\_\_\_ %

Equipment with dynamic behaviour, that behaviour is described here. (e.g. the different combinations of duty cycle and corresponding power levels to be declared):

**f) The worst case operational mode for each of the following tests:**

- RF Output Power 802.11b
- Power Spectral Density 802.11b
- Duty cycle, Tx-Sequence, Tx-gap ...
- Dwell time, Minimum Frequency Occupation & Hopping Sequence (only for FHSS equipment)  
...
- Hopping Frequency Separation (only for FHSS equipment) ...
- Medium Utilisation ...
- Adaptivity & Receiver Blocking 802.11b
- Occupied Channel Bandwidth 802.11n(HT40)
- Transmitter unwanted emissions in the OOB domain 802.11n(HT20)
- Transmitter unwanted emissions in the spurious domain 802.11b
- Receiver spurious emissions 802.11b

**g) The different transmit operating modes (tick all that apply):**

- Operating mode 1: Single Antenna Equipment
- Equipment with only 1 antenna
- Equipment with 2 diversity antennas but only 1 antenna active at any moment in time

Smart Antenna Systems with 2 or more antennas, but operating in a (legacy) mode where only 1 antenna is used. (e.g. IEEE 802.11™ [i.3] legacy mode in smart antenna systems)

Operating mode 2: Smart Antenna Systems - Multiple Antennas without beam forming

Single spatial stream / Standard throughput / (e.g. IEEE 802.11™ [i.3] legacy mode)

High Throughput (> 1 spatial stream) using Occupied Channel Bandwidth 1

High Throughput (> 1 spatial stream) using Occupied Channel Bandwidth 2

NOTE: Add more lines if more channel bandwidths are supported.

Operating mode 3: Smart Antenna Systems - Multiple Antennas with beam forming

Single spatial stream / Standard throughput (e.g. IEEE 802.11™ [i.3] legacy mode)

High Throughput (> 1 spatial stream) using Occupied Channel Bandwidth 1

High Throughput (> 1 spatial stream) using Occupied Channel Bandwidth 2

NOTE: Add more lines if more channel bandwidths are supported.

#### **h) In case of Smart Antenna Systems:**

- The number of Receive chains: .....

- The number of Transmit chains: .....

Symmetrical power distribution

asymmetrical power distribution

In case of beam forming, the maximum beam forming gain: .....

NOTE: Beam forming gain does not include the basic gain of a single antenna.

#### **i) Operating Frequency Range(s) of the equipment:**

- Operating Frequency Range 1: 2412 MHz to 2472 MHz

- Operating Frequency Range 2: 2422 MHz to 2462 MHz

NOTE: Add more lines if more Frequency Ranges are supported.

#### **j) Occupied Channel Bandwidth(s):**

- Occupied Channel Bandwidth 1: 36.325 MHz

- Occupied Channel Bandwidth 2: ..... MHz

NOTE: Add more lines if more channel bandwidths are supported.

#### **k) Type of Equipment (stand-alone, combined, plug-in radio device, etc.):**

Stand-alone

Combined Equipment (Equipment where the radio part is fully integrated within another type of equipment)

Plug-in radio device (Equipment intended for a variety of host systems)

Other.....

#### **l) The extreme operating conditions that apply to the equipment:**

Operating temperature range: -20 ° C to +55 ° C

Operating voltage range: 3.0 V to 3.6 V  AC  DC

Details provided are for the:  stand-alone equipment

combined (or host) equipment

test jig

#### **m) The intended combination(s) of the radio equipment power settings and one or more antenna assemblies and their corresponding e.i.r.p levels:**

- Antenna Type:

Integral Antenna

Ceramic Antenna: 2.09 dBi, Flex antenna: 3.2 dBi, whip antenna: 4.0 dBi

If applicable, additional beamforming gain (excluding basic antenna gain): \_\_\_\_ dB

Temporary RF connector provided

No temporary RF connector provided

Dedicated Antennas (equipment with antenna connector)

Single power level with corresponding antenna(s)

Multiple power settings and corresponding antenna(s) Number of different

Power Levels: ...

Power Level 1: \_\_\_\_ dBm

Power Level 2: \_\_\_\_ dBm

Power Level 3: \_\_\_\_ dBm

NOTE 1: Add more lines in case the equipment has more power levels.

NOTE 2: These power levels are conducted power levels (at antenna connector).

- For each of the Power Levels, provide the intended antenna assemblies, their corresponding gains (G) and the resulting e.i.r.p. levels also taking into account the beamforming gain (Y) if applicable

**Power Level 1:** \_\_\_\_ dBm

Number of antenna assemblies provided for this power level: .....

Assembly #	Gain (dBi)	e.i.r.p. (dBm)	Part number or model name
1			
2			
3			
4			

**Power Level 2:** \_\_\_\_ dBm

Number of antenna assemblies provided for this power level: .....

Assembly #	Gain (dBi)	e.i.r.p. (dBm)	Part number or model name
1			
2			
3			
4			

**Power Level 3:** \_\_\_\_ dBm

Number of antenna assemblies provided for this power level: .....

Assembly #	Gain (dBi)	e.i.r.p. (dBm)	Part number or model name
1			
2			
3			
4			

**n) The nominal voltages of the stand-alone radio equipment or the nominal voltages of the combined (host) equipment or test jig in case of plug-in devices:**

Details provided are for the:  stand-alone equipment  
 combined (or host) equipment  
 test jig

Supply Voltage  AC mains State AC voltage \_\_\_\_ V  
 DC State DC voltage 3.3 V

In case of DC, indicate the type of power source

- Internal Power Supply  
 External Power Supply or AC/DC adapter  
 Battery  
 Other: \_\_\_\_\_

**o) Describe the test modes available which can facilitate testing:**

Continuous transmitting mode control in engineer mode.

**p) The equipment type (e.g. Bluetooth®, IEEE 802.11™ [i.3], proprietary, etc.): IEEE 802.11**

# Configuration for testing

From all combinations of conducted power settings and intended antenna assembly(ies) specified in clause 5.4.1 m), specify the combination resulting in the highest e.i.r.p. for the radio equipment.

Unless otherwise specified in EN 300 328, this power setting is to be used for testing against the requirements of EN 300 328. In case there is more than one such conducted power setting resulting in the same (highest) e.i.r.p. level, the highest power setting is to be used for testing. See also EN 300 328, clause 5.3.2.3.

Highest overall e.i.r.p. value: 19.98 dBm

Corresponding Antenna assembly gain: 3.20 dBi

Antenna Assembly #: 1

Corresponding conducted power setting: 16.78 dBm

Listed as Power Setting #: 19

(also the power level to be used for testing)

Additional information provided by the applicant

## Modulation:

ITU Class(es) of emission: DSSS

Can the transmitter operate unmodulated?  yes  no

## Duty Cycle

The transmitter is intended for:

Continuous duty

Intermittent duty

Continuous operation possible for testing purposes

## About the UUT

- The equipment submitted are representative production models
  - If not, the equipment submitted are pre-production models?
  - If pre-production equipment are submitted, the final production equipment will be identical in all respects with the equipment tested
  - If not, supply full details

.....

  - The equipment submitted is CE marked
  - In addition to the CE mark, the Class-II identifier (Alert Sign) is affixed.

Additional items and/or supporting equipment provided

- Spare batteries (e.g. for portable equipment)
  - Battery charging device
  - External Power Supply or AC/DC adapter
  - Test Jig or interface box
  - RF test fixture (for equipment with integrated antennas)
  - Host System    Manufacturer: .....  
                        Model #: .....  
                        Model name: .....
  - Combined equipment Manufacturer: .....  
                        Model #: .....  
                        Model name: .....
  - User Manual
  - Technical documentation (Handbook and circuit diagrams)

-----End of report-----