

DC common mode choke coil

WCNFC322524/DS



Features


- Special very low profile and small size SMD design.
- Wound Chip constructure with standard 0805 to 1812 size.
- Best EMI suppression effect but least impact to data signal wave form.
- Very high Self-resonance frequency enables high cut-off frequency.
- Excellent Solderability.
- L x W x H: 3.4x2.7x2.4mm Max.
- Moisture sensitivity level: MSL.1.
- RoHs & Halogen free compliance
- Operation temperature range: -40°C ~ 125 °C(Including coil's self heat)
- Storage temperature range: -40°C ~ 125 °C



Applications

- For common mode noise suppression in high-speed differential signal lines: USB 2.0, IEEE1394, LVDS, etc..
- High Speed differential signal lines for HDMI, DVI, etc..
- Audio lines.
- For USB 3.x application.
- Best for NB, DSC, mobile device design.
- Multimedia system and Ethernet(100BASE-T1).
- Common mode noise filter for power line.
- For LAN module application.

Dimensions (mm)

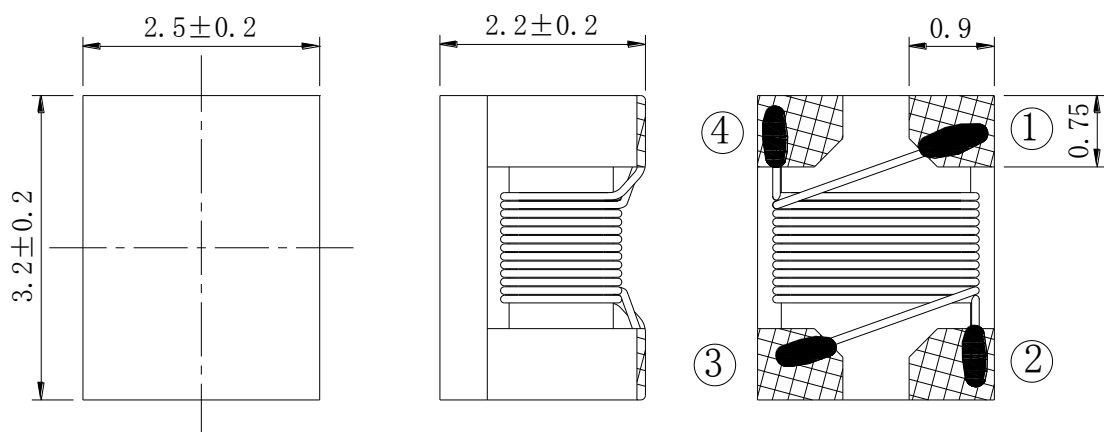


Note : This specification is subject to change without notice. Please contact your nearest sales office for updated information when placing an order.


DC common mode choke coil WCNFC322524/DS



Land patterns (mm)

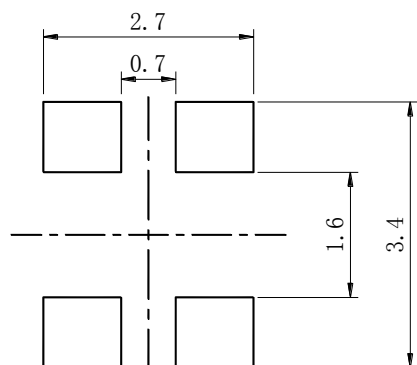

Terminal Connection

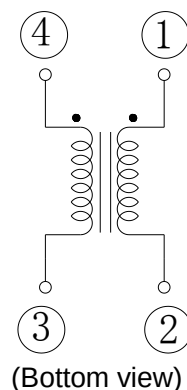

Electrical specifications

Part No.	Common mode Impedance (Ω) Within 1-2 (3-4)	D.C.R (mΩ) Max. (Typ.) (1-2)OR (3-4)	Insulation resistance (MΩ) Min. (1-2)-(3-4)	Rated Voltage (Vdc) Max.	Temperature rise current (mA) ※1 Max. (1-2) OR (3-4)
	100MHz,0.5V	at 25°C	DC100V,60S		
WCNFC322524DS-900	90±25%	40(32)	10	50	1800
WCNFC322524DS-101	100±25%	40(32)	10	50	1800
WCNFC322524DS-121	120±25%	40(32)	10	50	1800
WCNFC322524DS-201	200±25%	51(41)	10	50	1570
WCNFC322524DS-501	500±25%	100(80)	10	50	1100
WCNFC322524DS-601	600±25%	100(80)	10	50	1100
WCNFC322524DS-102	1000±25%	100(80)	10	50	1100
WCNFC322524DS-122	1200±25%	220(176)	10	50	750
WCNFC322524DS-142	1400±25%	220(176)	10	50	750
WCNFC322524DS-242	2400±25%	220(176)	10	50	750

※1 Temperature rise current: The actual value of DC current when temperature of coil rise is $\Delta T=40^{\circ}\text{C}$ ($T_a=25^{\circ}\text{C}$)

(Test board condition:FR4,Copper=70 μ m,four-layer PWB t=1.6mm)


Note : This specification is subject to change without notice. Please contact your nearest sales office for updated information when placing an order.

DC common mode choke coil WCNFC322524/DS




Common mode Impedance Characteristics

Impedance vs. frequency Common mode

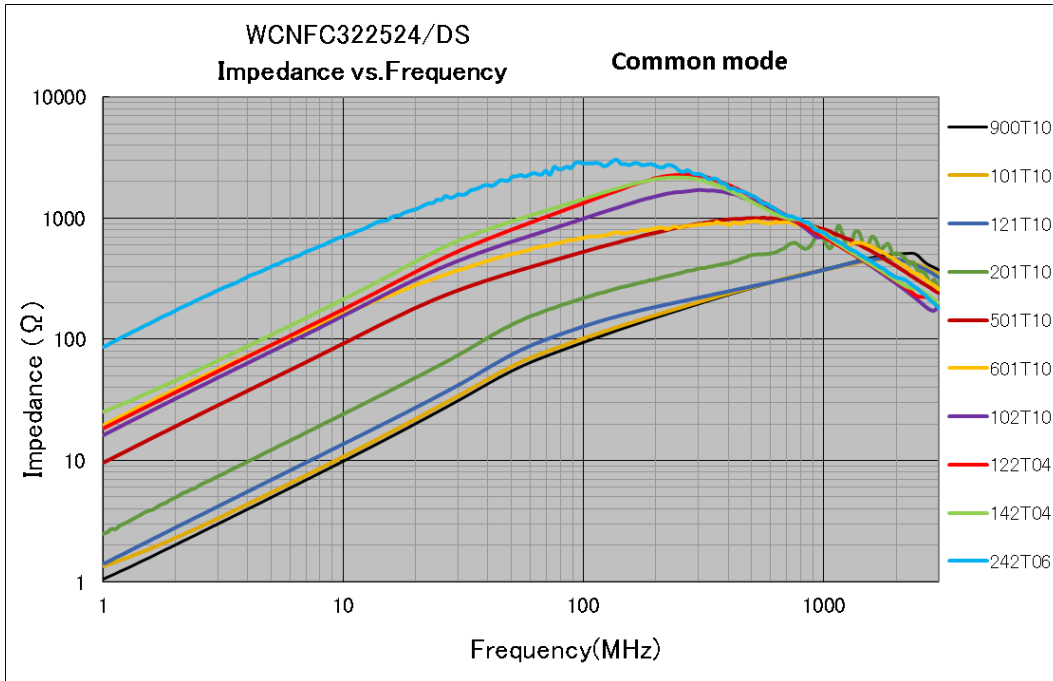

Impedance vs. frequency Differential mode

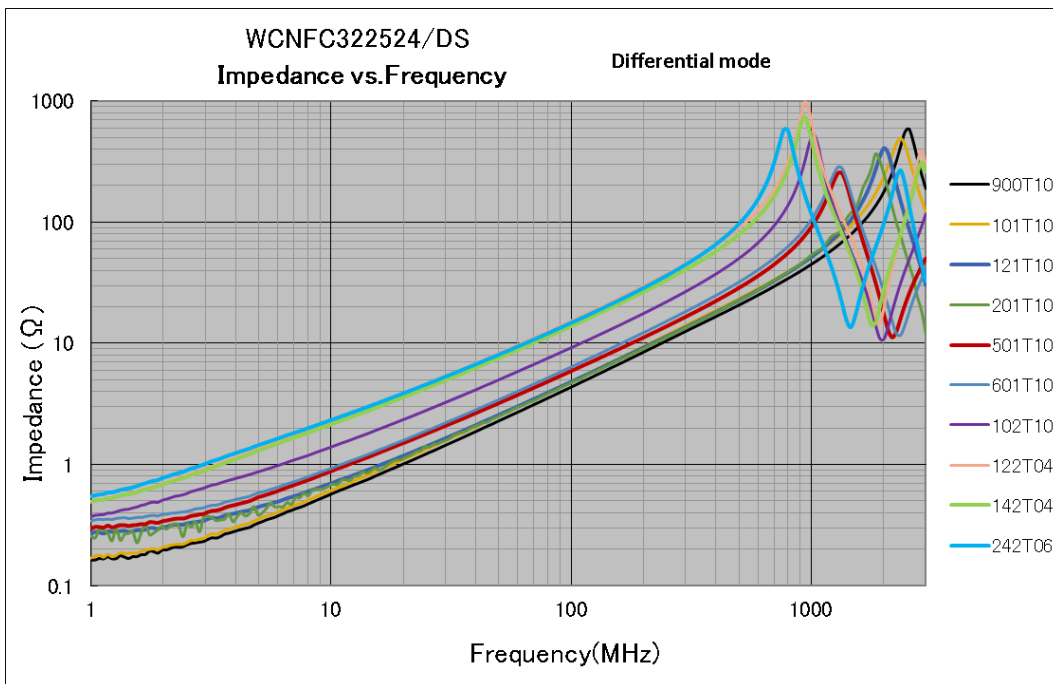

For sales office information, please [click here](#) to visit our website.

Note : This specification is subject to change without notice. Please contact your nearest sales office for updated information when placing an order.