

Features

Regulated Converters

- 4:1 Wide Input Range
- 3kVAC Reinforced Insulation for 110Vin
2.25kVDC Basic Insulation for 24Vin & 48Vin
- Efficiency up to 91%
- No Minimum Load Required
- UL60950-1 Certified
- EN50155, IEC/EN60950-1 Pending



RP180H-RW

**180 Watt
Half Brick
Single Output**




Description

The half-brick RP180H series DC/DC converters are designed for railway rolling stock and high voltage battery applications. Each series has three 4:1 input voltage range options to cover all input voltages from 9VDC up to 160VDC with isolated and regulated 5V to 48VDC outputs. The converters have high efficiencies and metal base-plates to permit a wide operating temperature range from -40°C to +85°C (when mounted on a suitable heatsink). The case is fitted with threaded inserts to allow secure mounting to the PCB or bulkhead for use in high shock and vibration environments. The converters are EN50155, UL60950 and IEC/EN60950 certified. The RP180H-RW series have a three year warranty.

Selection Guide

| Part Number | Input Voltage Range [VDC] | Output Voltage [VDC] | Output Current [mA] | Input ⁽¹⁾ Current [mA] | Output Power [W] | Efficiency ⁽¹⁾ typ. [%] | Max. Capacitive Load [µF] |
|-----------------|---------------------------|----------------------|---------------------|-----------------------------------|------------------|------------------------------------|---------------------------|
| RP180H-2405SRW | 9-36 | 5 | 28000 | 6481 | 140 | 90 | 56000 |
| RP180H-2412SRW | 9-36 | 12 | 12000 | 6666 | 144 | 90 | 10000 |
| RP180H-2415SRW | 9-36 | 15 | 9500 | 6525 | 142.5 | 91 | 6300 |
| RP180H-2424SRW | 9-36 | 24 | 6000 | 6666 | 144 | 90 | 2500 |
| RP180H-2448SRW | 9-36 | 48 | 3000 | 6666 | 144 | 90 | 620 |
| RP180H-4805SRW | 16.5-75 | 5 | 30000 | 3434 | 150 | 91 | 60000 |
| RP180H-4812SRW | 16.5-75 | 12 | 13000 | 3571 | 156 | 91 | 10800 |
| RP180H-4815SRW | 16.5-75 | 15 | 10000 | 3434 | 150 | 91 | 6600 |
| RP180H-4824SRW | 16.5-75 | 24 | 6500 | 3571 | 156 | 91 | 2700 |
| RP180H-4848SRW | 16.5-75 | 48 | 3200 | 3516 | 153.5 | 91 | 660 |
| RP180H-11005SRW | 43-160 | 5 | 32000 | 1616 | 160 | 90 | 64000 |
| RP180H-11012SRW | 43-160 | 12 | 15000 | 1818 | 180 | 90 | 12500 |
| RP180H-11015SRW | 43-160 | 15 | 12000 | 1818 | 180 | 90 | 8000 |
| RP180H-11024SRW | 43-160 | 24 | 7500 | 2000 | 180 | 90 | 3100 |
| RP180H-11048SRW | 43-160 | 48 | 3800 | 2027 | 182 | 90 | 790 |

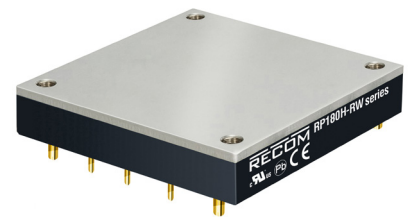


EN50155 Pending
IEC/EN60950-1 Pending
UL60950-1 Certified

Notes:

Note1: Efficiency is tested by nominal Vin, full load and at 25°C.

Model Numbering

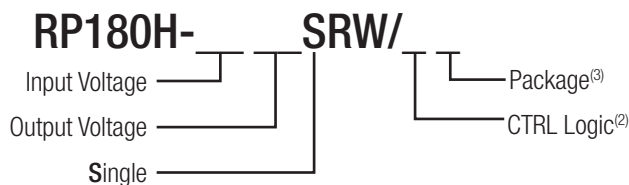

Ordering Examples

- RP180H-2405SRW/N = 24V Input, 5V Output, Single, Neg. CTRL function
- RP180H-11012SRW/P = 110V Input, 12V Output, Single, Pos. CTRL function
- RP180H-2405SRW/N-HC = 24V Input, 5V Output, Single, Neg. CTRL function with premounted Heat-sink



Notes:

- Note2: standard part is with suffix "P" for positive logic (1=ON, 0=OFF) or add suffix "N" instead for negative logic (0=ON, 1=OFF)
- Note3: add suffix "-HC" for premounted Heat-sink (compatible with all other suffixes)

Specifications measured @ $t_a = 25^\circ\text{C}$, resistive load, nominal V_{in} and rated lout unless otherwise noted

| BASIC CHARACTERISTICS | | | | | |
|------------------------------|---|--|--------------------------|--|---------------------------|
| Parameter | Condition | | Min. | Typ. | Max. |
| Internal Input Filter | Pi-Type | | | | |
| Input Voltage Range | nom $V_{in} = 24\text{V}$ nom $V_{in} = 48\text{V}$ nom $V_{in} = 110\text{V}$ | | 9VDC 16.5VDC 43VDC | 24VDC 48VDC 110VDC | 36VDC 75VDC 160VDC |
| Input Surge Voltage | $V_{in} = 24\text{V}$, 1s max. $V_{in} = 48\text{V}$, 1s max. $V_{in} = 110\text{V}$, 1s max. | | | | 50VDC 100VDC 185VDC |
| Quiescent Current | $V_{in} = 24\text{V}$ $V_{in} = 48\text{V}$ $V_{in} = 110\text{V}$ | | 25mA 15mA | 10mA | 35mA 25mA |
| Start-up time | constant resistive load | Power up Remote ON/OFF | | 75ms 75ms | |
| Internal Operating Frequency | | | 225kHz | 250kHz | 275kHz |
| Minimum Load | | | 0% | | |
| Ripple and Noise | Measured by 20MHz BW with a $1\mu\text{F}/25\text{V}$ X7R MLCC & a $22\mu\text{F}/25\text{V}$ POS Cap with a $1\mu\text{F}/25\text{V}$ X7R MLCC & a $22\mu\text{F}/25\text{V}$ POS Cap with a $4.7\mu\text{F}/50\text{V}$ X7R MLCC with a $2.2\mu\text{F}/100\text{V}$ X7R MLCC | 5 Vout 12, 15Vout 24Vout 48Vout | | 75mVp-p 100mVp-p 200mVp-p 300mVp-p | |
| Under Voltage Lockout (UVLO) | $V_{in} = 24\text{V}$ | DC-DC ON DC-DC OFF | 7.3VDC | | 9VDC 8.1VDC |
| | $V_{in} = 48\text{V}$ | DC-DC ON DC-DC OFF | 15.5VDC | | 18VDC 16.3VDC |
| | $V_{in} = 110\text{V}$ | DC-DC ON DC-DC OFF | 33.0VDC | | 43VDC 36.0VDC |
| ON/OFF Control | Positive Logic | DC-DC ON DC-DC OFF | | Open or $3.0\text{V} < V_r < 12\text{V}$ Short or $0\text{V} < V_r < 1.2\text{V}$ | |
| | Negative Logic | DC-DC ON DC-DC OFF | | Short or $0\text{V} < V_r < 1.2\text{V}$ Open or $3.0\text{V} < V_r < 12\text{V}$ | |
| Input Current of CTRL pin | | | -0.5mA | | 1mA |
| Standby Current | | | | 3mA | |
| Output Trim | | | -20% | | +10% |
| Remote Sense | % of set Vout | | | | 10% |

RP180H-2405SRW

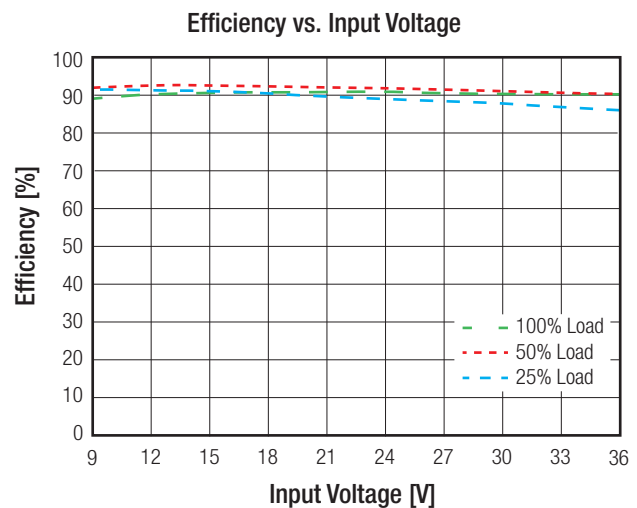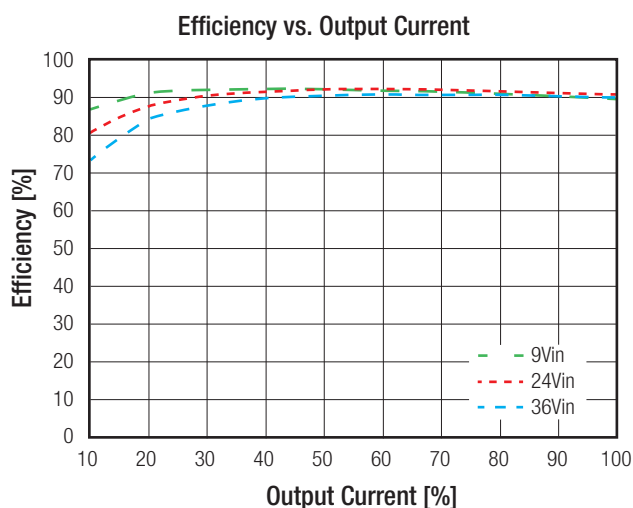


continued on next page


Specifications measured @ $t_a = 25^\circ\text{C}$, resistive load, nominal V_{in} and rated I_{out} unless otherwise noted

RP180H-2405SRW


Power Dissipation vs. Output Current

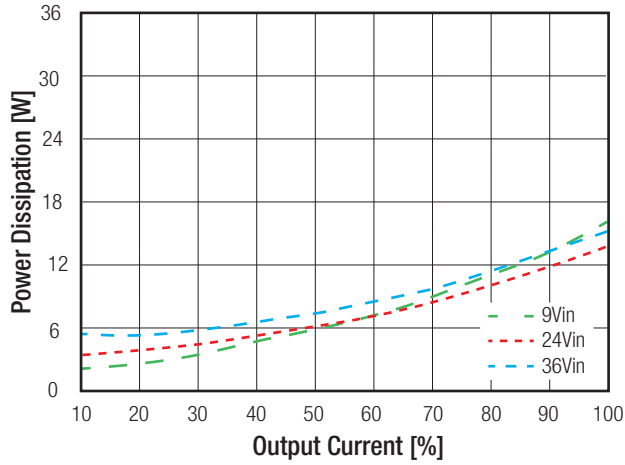


Typical Output Ripple and Noise/full load

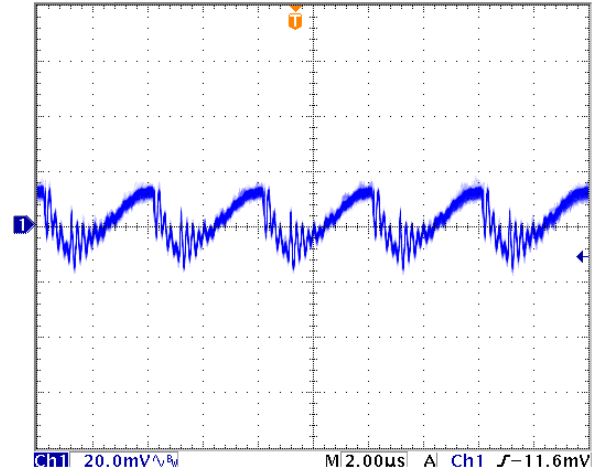

ON/OFF Control Start up Rise Characteristic

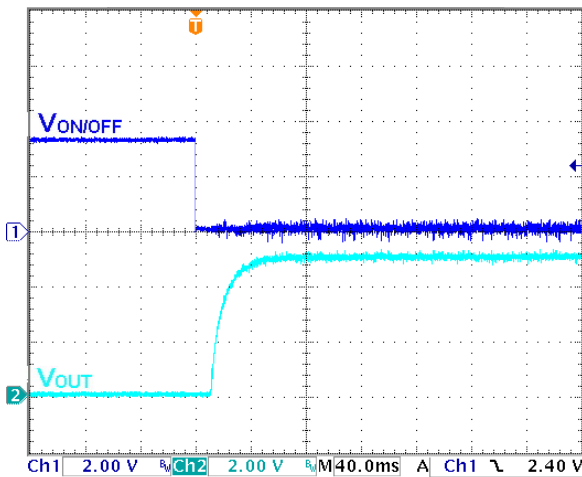


Power up Start-up Rise Characteristic

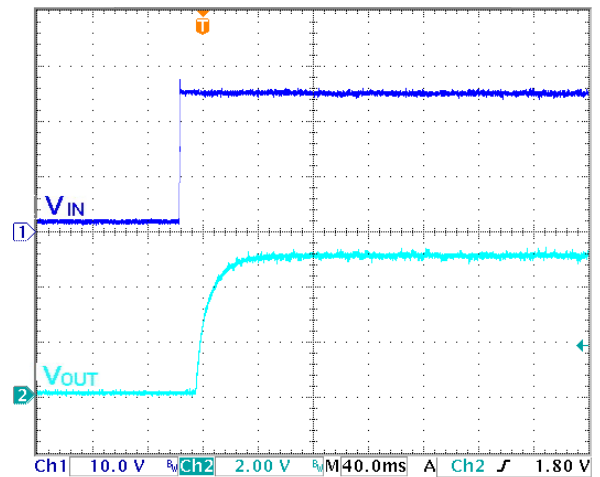


RP180H-4805SRW

Efficiency vs. Output Current

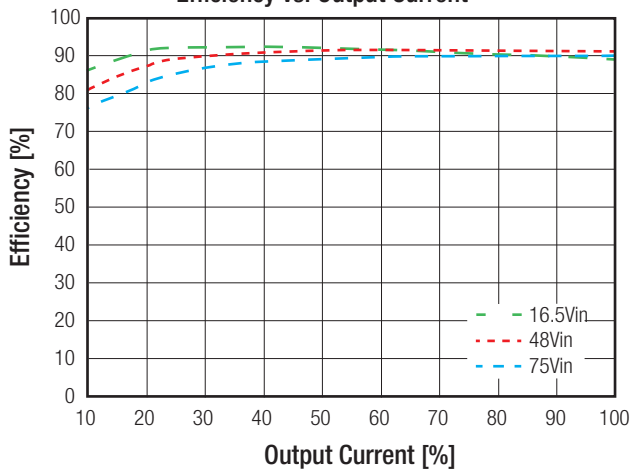

Efficiency vs. Input Voltage

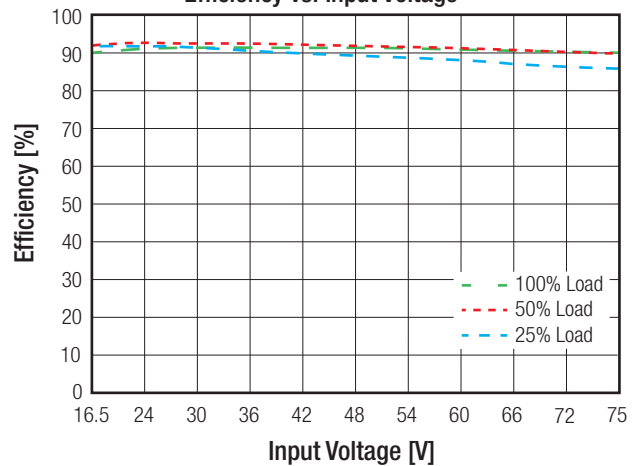


continued on next page


Specifications measured @ $t_a = 25^\circ\text{C}$, resistive load, nominal V_{in} and rated I_{out} unless otherwise noted

RP180H-4805SRW


Power Dissipation vs. Output Current

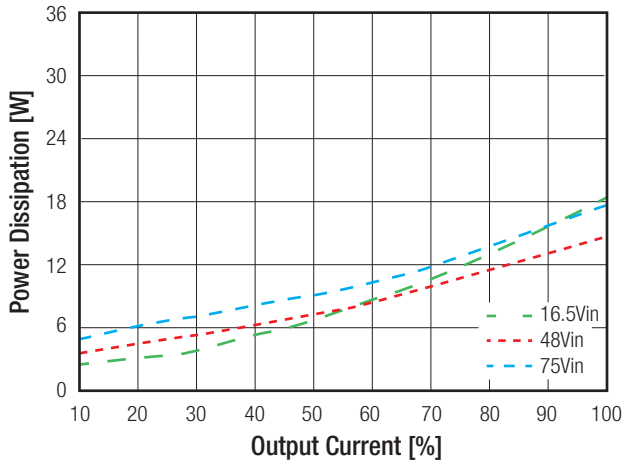


Typical Output Ripple and Noise/full load

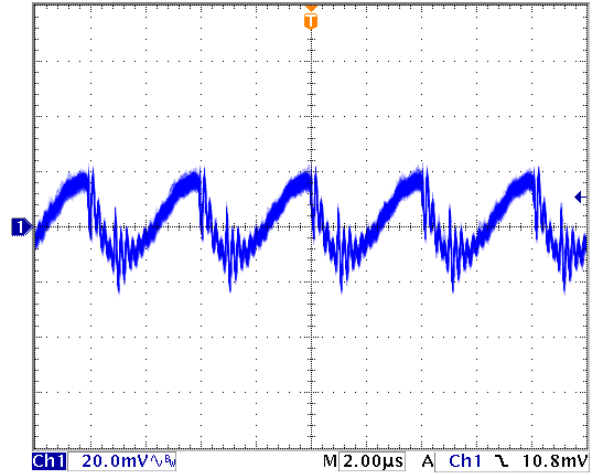

ON/OFF Control Start up Rise Characteristic

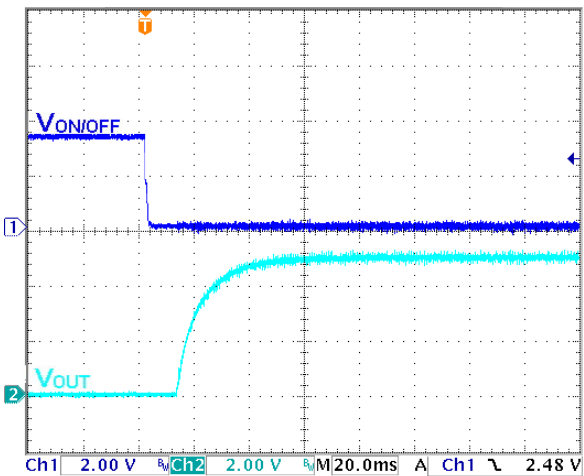


Power up Start-up Rise Characteristic

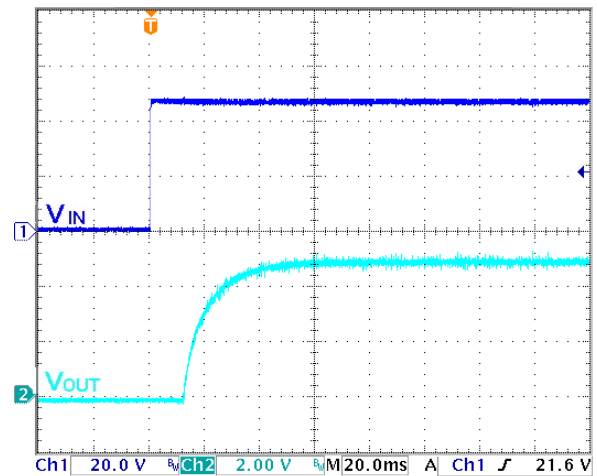


RP180H-11005SRW

Efficiency vs. Output Current

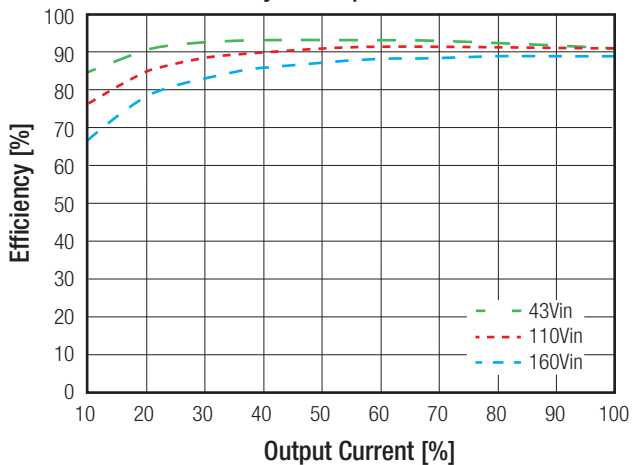

Efficiency vs. Input Voltage

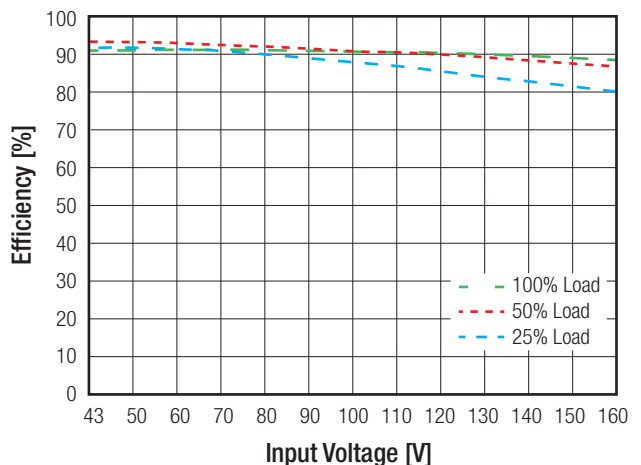


continued on next page


Specifications measured @ $t_a = 25^\circ\text{C}$, resistive load, nominal V_{in} and rated I_{out} unless otherwise noted

RP180H-11005SRW


Power Dissipation vs. Output Current

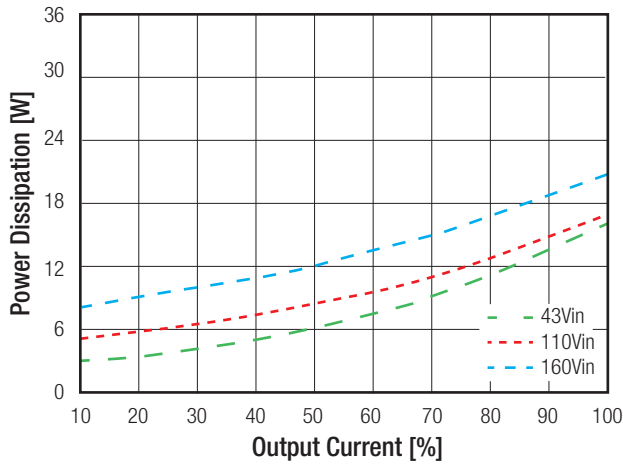


Typical Output Ripple and Noise/full load

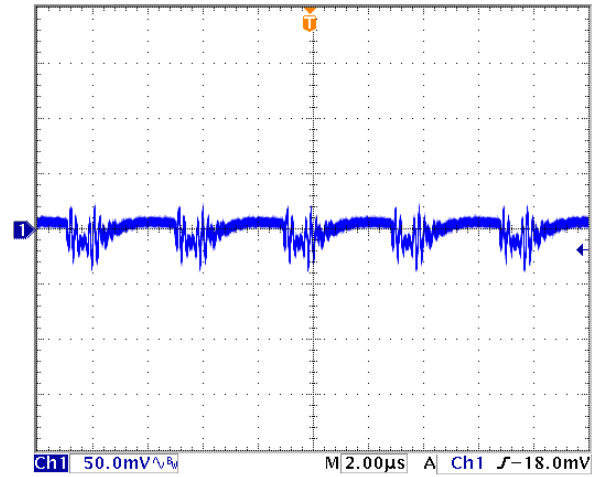

ON/OFF Control Start up Rise Characteristic

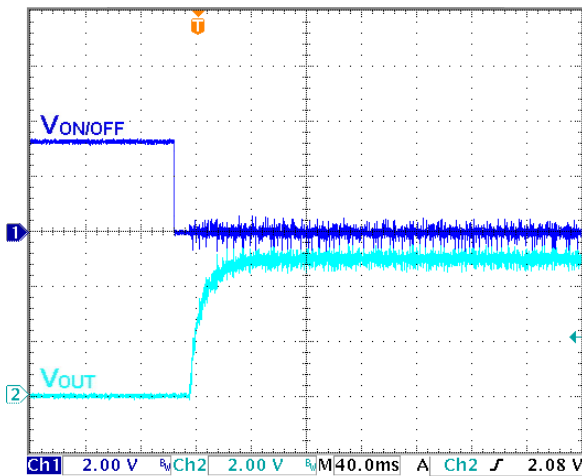


Power up Start-up Rise Characteristic

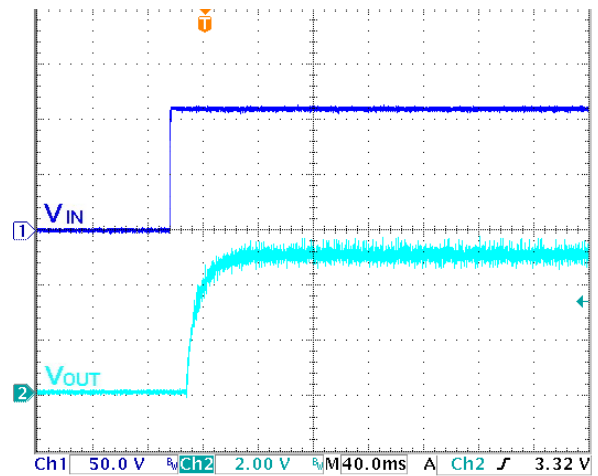

OUTPUT TRIM

Output Voltage Trimming

RP180H-RW converters offer the feature of trimming the output voltage over a certain range around the nominal value by using external trim resistors. The values for trim resistors shown in trim tables below are according to standard E96 values; therefore, the specified voltage may slightly vary; they also can be calculated with below shown equation.

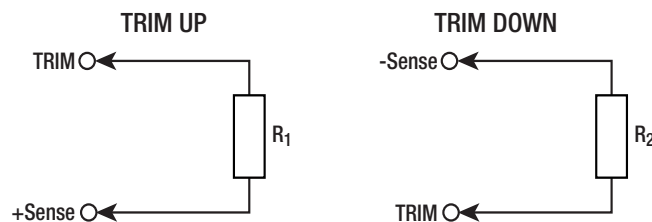

continued on next page

Specifications (measured @ ta= 25°C, nominal input voltage, full load and after warm-up)

OUTPUT TRIM

Trim Calculation

$$R_1 = \left[\frac{100 \cdot V_{out} + \Delta V_{out} \cdot V_{out}}{1.225 \cdot \Delta V_{out}} - \frac{(100 + 2 \Delta V_{out})}{\Delta V_{out}} \right] k\Omega$$

$$R_2 = \left[\frac{100}{\Delta V_{out}} - 2 \right] k\Omega$$

- Vout = Output Voltage
- ΔVout = Output Voltage Trim in %
- R1 = trim up resistor
- R2 = trim down resistor

Practical Example:

Trim Up:

Vout = 5V, ΔVout = 10% (5.5V)

$$R_1 = \left[\frac{100 \cdot V_{out} + \Delta V_{out} \cdot V_{out}}{1.225 \cdot \Delta V_{out}} - \frac{(100 + 2 \Delta V_{out})}{\Delta V_{out}} \right] k\Omega = \frac{100 \cdot 5 + 10 \cdot 5}{1.225 \cdot 10} - \frac{100 + 2 \cdot 10}{10} = 44.89 - 12 = 33.2 k\Omega$$

Trim down:

Vout = 5V, ΔVout = -10% (4.5V)

$$R_2 = \left[\frac{100}{\Delta V_{out}} - 2 \right] k\Omega = \frac{100}{10} - 2 = 8.06 k\Omega$$

RP180H-xx05SRW

| Trim up | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | % |
|------------------|------|------|------|------|------|------|------|------|------|------|-------|
| Vout = | 5.05 | 5.10 | 5.15 | 5.20 | 5.25 | 5.30 | 5.35 | 5.4 | 5.45 | 5.50 | Volts |
| R ₁ = | 309 | 158 | 105 | 78.7 | 63.4 | 53.6 | 46.4 | 40.2 | 36.5 | 33.2 | KOhms |

RP180H-xx12SRW

| Trim up | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | % |
|------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| Vout = | 12.12 | 12.24 | 12.36 | 12.48 | 12.60 | 12.72 | 12.84 | 12.96 | 13.08 | 13.20 | Volts |
| R ₁ = | 887 | 453 | 301 | 226 | 182 | 154 | 133 | 118 | 105 | 95.3 | KOhms |

RP180H-xx15SRW

| Trim up | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | % |
|------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| Vout = | 15.15 | 15.30 | 15.45 | 15.60 | 15.75 | 15.90 | 16.05 | 16.20 | 16.35 | 16.50 | Volts |
| R ₁ = | 1130 | 576 | 383 | 294 | 237 | 196 | 169 | 150 | 137 | 124 | KOhms |

RP180H-xx24SRW

| Trim up | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | % |
|------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| Vout = | 24.24 | 24.48 | 24.72 | 24.96 | 25.20 | 25.44 | 25.68 | 25.92 | 26.16 | 26.40 | Volts |
| R ₁ = | 1870 | 953 | 634 | 487 | 392 | 332 | 280 | 249 | 226 | 205 | KOhms |

RP180H-xx48SRW

| Trim up | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | % |
|------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| Vout = | 48.48 | 48.96 | 49.44 | 49.92 | 50.40 | 50.88 | 51.36 | 51.84 | 52.32 | 52.80 | Volts |
| R ₁ = | 3830 | 1960 | 1300 | 991 | 806 | 681 | 576 | 511 | 464 | 422 | KOhms |


Trim Down all Vout's

| Trim down | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | % |
|------------------|------|------|------|------|------|------|------|------|------|------|-------|
| R ₂ = | 97.6 | 47.5 | 31.6 | 23.2 | 18.2 | 14.7 | 12.1 | 10.5 | 9.09 | 8.06 | KOhms |
| Trim down | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | % |
| R ₂ = | 7.15 | 6.34 | 5.76 | 5.11 | 4.64 | 4.22 | 3.92 | 3.57 | 3.24 | 3.01 | KOhms |

continued on next page

Specifications (measured @ $t_a = 25^\circ\text{C}$, nominal input voltage, full load and after warm-up)

Remote Sense

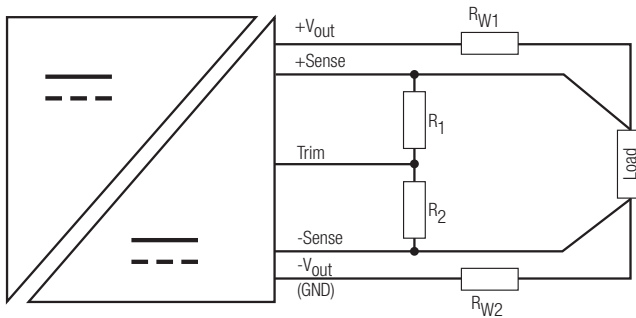




The output voltage can be adjusted by both trim and remote sense. The maximum combined adjustment range $\pm 10\%$. Derate the maximum output power if using the trim or sense function.

- R_{W1} ... wire losses +
- R_{W2} ... wire losses -
- R_1 ... trim up resistor
- R_2 ... trim down resistor

REGULATIONS

| Parameter | Condition | Value |
|--------------------|------------------------------------|--|
| Output Accuracy | | $\pm 1.0\%$ |
| Line Regulation | low line to high line at full load | $\pm 0.1\%$ |
| Load Regulation | 0% to 100% load | $\pm 0.1\%$ |
| Transient Response | 25% load step change | 200 μs typ.; 250 μs max. |

Transient Response to Dynamic Load Change from 100% to 75% to 100% of Full Load at nom. V_{in}

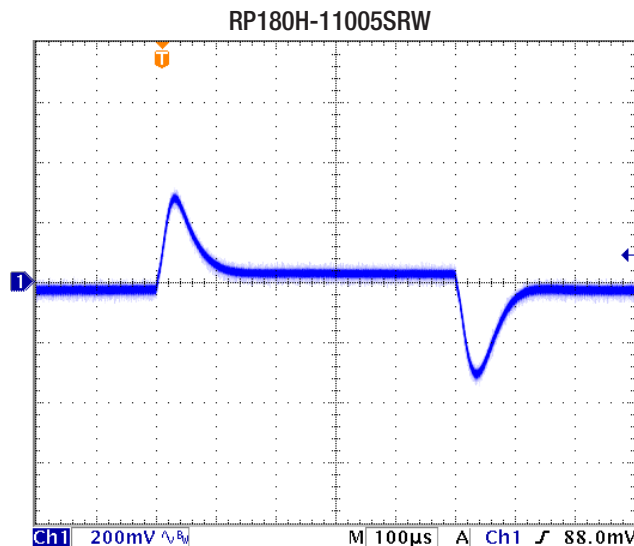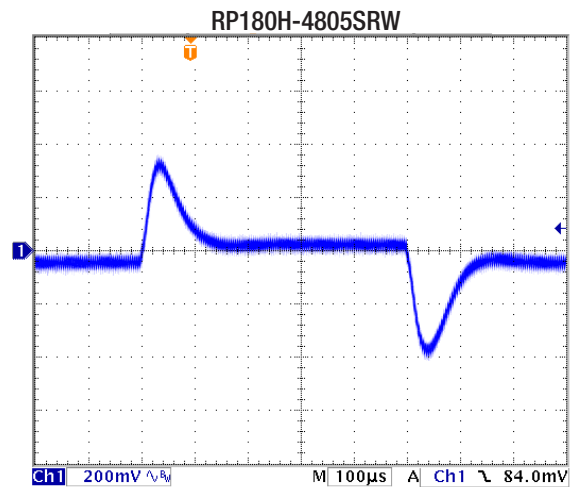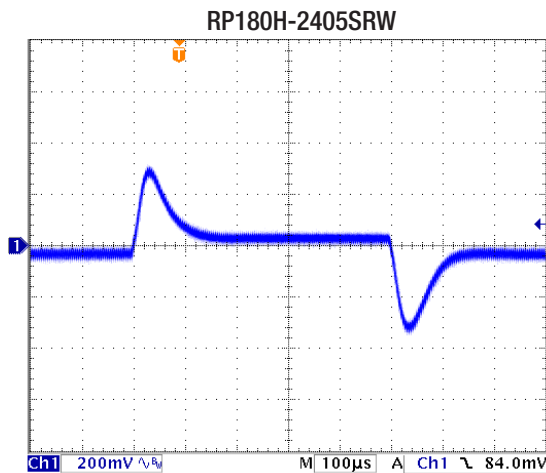

Specifications (measured @ ta= 25°C, nominal input voltage, full load and after warm-up)

| PROTECTIONS | | |
|--|----------------|---------------------------------------|
| Parameter | Condition | Value |
| Short Circuit Protection (SCP) | below 100mΩ | continuous, automatic recovery |
| Over Voltage Protection (OVP) | % of nom. Vout | 115%-130%, Hiccup Mode |
| Over Load Protection (OLP) | % Iout rated | 120%-150%, Hiccup Mode |
| Over Temperature Protection (OTP) | | +120°C |
| Isolation Voltage | 110Vin | I/P to O/P I/P or O/P to Baseplate |
| | 24Vin, 48Vin | I/P to O/P I/P or O/P to Baseplate |
| Isolation Resistance | 500 VDC | 1GΩ min. |
| Isolation Capacitance | | 2500pF max. |
| Isolation Grade | 110Vin | Reinforced Insulation |
| | 24Vin, 48Vin | Basic Insulation |
| Notes: | | |
| Note4: An input fuse is required if the mains supply isn't over-current protected. Recommended fuse: 24Vin: 20A slow blow, 48Vin: 10A slow blow and 110Vin: 7.5A slow blow. | | |

| ENVIRONMENTAL | | |
|-------------------------------------|---|---------------------------------------|
| Parameter | Condition | Value |
| Operating Case Temperature Range | Baseplate | -40°C to +115°C |
| Maximum Case Temperature | | 115°C |
| Temperature Coefficient | | ±0.02%/°C max. |
| Thermal Impedance | vertical direction by natural convection (0.1m/s) without Heat-sink | 6.1°C/W |
| | vertical direction by natural convection (0.1m/s) with Heat-sink | 4.6°C/W |
| Operating Humidity | | 5% - 95% RH |
| Pollution Degree | | PD2 |
| Shock | | according to EN61373 standard |
| Thermal Shock | | according to MIL-STD-810F standard |
| Vibration | | according to EN61373 standard |
| Fire protection on railway vehicles | | according to EN45545-2, 2013 standard |
| MTBF | according to MIL-HDBK-217F standard, 25°C | 350.0 x 10 ³ hours |

Thermal Calculation

$$R_{th\text{case-ambient}} = 6.1^{\circ}\text{C/W (vertical)}$$

$$R_{th\text{case-ambientHC}} = 4.6^{\circ}\text{C/W (vertical)}$$

$$R_{th\text{case-ambient}} = \frac{T_{\text{case}} - T_{\text{ambient}}}{P_{\text{dissipation}}}$$

$$P_{\text{dissipation}} = P_{\text{IN}} - P_{\text{OUT}} = \frac{P_{\text{OUTapp}}}{\eta} - P_{\text{OUTapp}}$$

- T_{case} = Case Temperature
- T_{ambient} = Environment Temperature
- P_{dissipation} = Internal losses
- P_{IN} = Input Power
- P_{OUT} = Output Power
- η = Efficiency under given Operating Conditions
- R_{thcase-ambient} = Thermal Impedance

Practical Example:

Take the RP180H-2405SRW with 9V input Voltage and 50% load. What is the maximum ambient operating temperature? Use converter vertical in application without airflow.

$$\text{Eff}_{\text{min}} = 90\% @ V_{\text{nom}}$$

$$P_{\text{OUT}} = 140\text{W}$$

$$P_{\text{OUTapp}} = 140 \times 0.5 = 70\text{W}$$

$$\eta = 91\% \text{ (Efficiency vs. Load Graph)}$$

$$P_{\text{dissipation}} = \frac{70}{0.91} - 70 = 6.92\text{W}$$

without Heat-sink

$$R_{\text{th}} = \frac{T_{\text{casemax}} - T_{\text{amb}}}{P_{\text{dissipation}}} \rightarrow 6.7^{\circ}\text{C/W} = \frac{115 - T_{\text{amb}}}{6.92\text{W}}$$

$$T_{\text{amb}} = 72^{\circ}\text{C}$$

with Heat-sink

$$R_{\text{thHC}} = \frac{T_{\text{casemax}} - T_{\text{amb}}}{P_{\text{dissipation}}} \rightarrow 4.7^{\circ}\text{C/W} = \frac{115 - T_{\text{amb}}}{6.92\text{W}}$$







$$T_{\text{ambHC}} = 83^{\circ}\text{C}$$

continued on next page

Specifications (measured @ $t_a = 25^\circ\text{C}$, nominal input voltage, full load and after warm-up)

Derating Graph⁽⁵⁾

(⁵ Chamber - tested with forced convection)

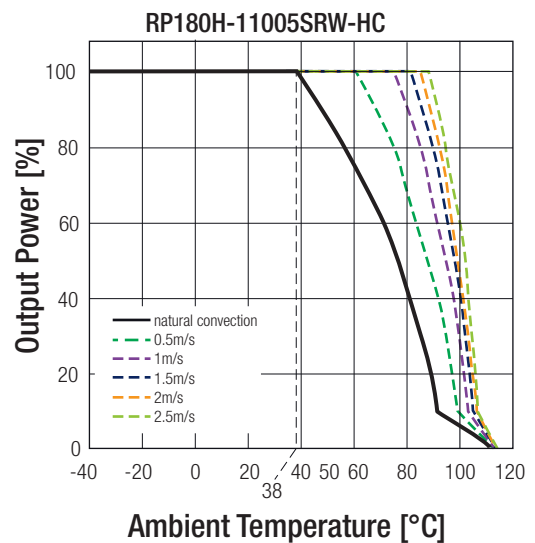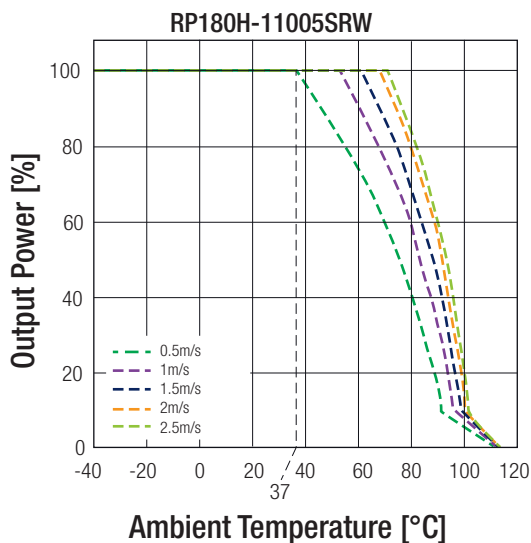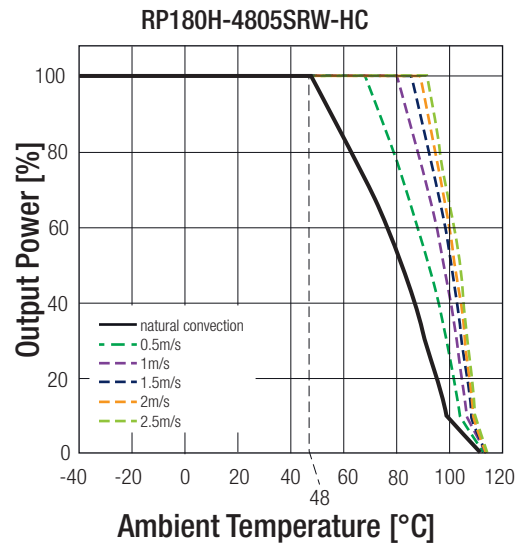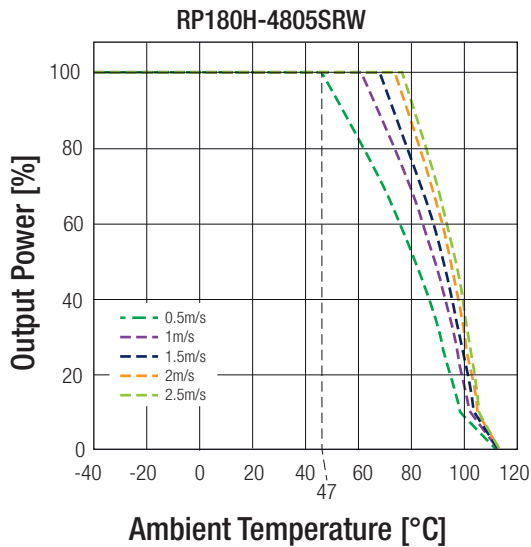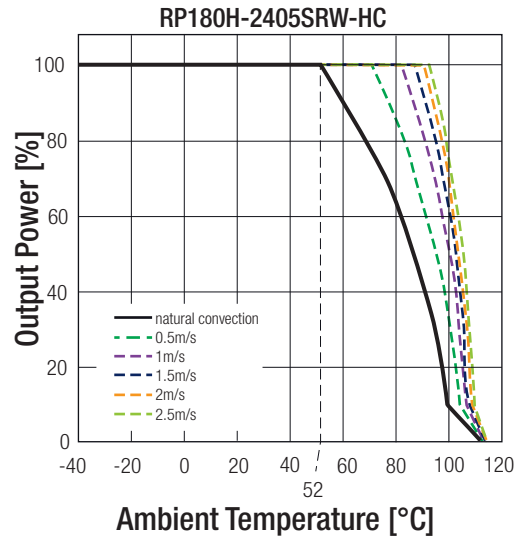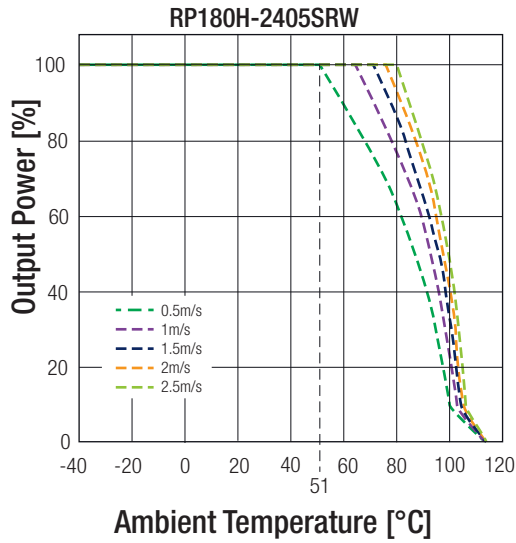

Notes:

Note5: Derating graphs are valid only for the shown part numbers. If you need detailed derating-information about a part-number not shown here please contact our technical support service at techsupportAT@recom-power.com

Specifications (measured @ $t_a = 25^\circ\text{C}$, nominal input voltage, full load and after warm-up)

SAFETY AND CERTIFICATIONS

| Certificate Type (Safety) | Report / File Number | Standard |
|---|----------------------|--|
| Information Technology Equipment, General Requirements for Safety | E196683 | UL60950-1, 2nd Edition CSA C22.2 No. 60950-1-07 |
| IEC/EN Information Technology Equipment - General Requirements for Safety | pending | IEC/EN60950-1 |
| Railway Applications - Electrical Equipment used on rolling stock | pending | EN50155 |

| EMI Compliance | Condition | Standard / Criterion |
|--|---|------------------------------|
| Information technology equipment - Radio disturbance characteristics - Limits and methods of measurement | with external components | EN55022, Class A and Class B |
| Industrial, scientific and medical equipment - Radio frequency disturbance characteristics - Limits and methods of measurement | | EN55011, Class A and Class B |
| ESD Electrostatic discharge immunity test | Air $\pm 8\text{kV}$ and Contact $\pm 6\text{kV}$ 20 V/m $\pm 2\text{kV}$ EN55024 & EN50155 $\pm 2\text{kV}$ 10 Vr.m.s 100A/m continuous; 1000A/m 1s | EN61000-4-2, Criteria A |
| Radiated, radio-frequency, electromagnetic field immunity test | | EN61000-4-3, Criteria A |
| Fast Transient and Burst Immunity ⁽⁶⁾ | | EN61000-4-4, Criteria A |
| Surge Immunity ⁽⁶⁾ | | EN61000-4-5, Criteria A |
| Immunity to conducted disturbances, induced by radio-frequency fields | | EN61000-4-6, Criteria A |
| Power Magnetic Field Immunity | | EN61000-4-8, Criteria A |


Notes:

Note6: An external input filter capacitor is required if the module has to meet EN61000-4-4 and EN61000-4-5.

The **24Vin** and **48Vin** version recommend 2pcs of aluminium electrolytic capacitor to connect in parallel.
Recom suggest: Nippon Chemi-con KY series, 220 μF /100V.

The **110Vin** version recommend 3pcs of aluminium electrolytic capacitor to connect in parallel.
Recom suggest: Rubycon BXF series, 100 μF /250V




EMI Filtering according to EN55022/11 Class A and EN50121-1

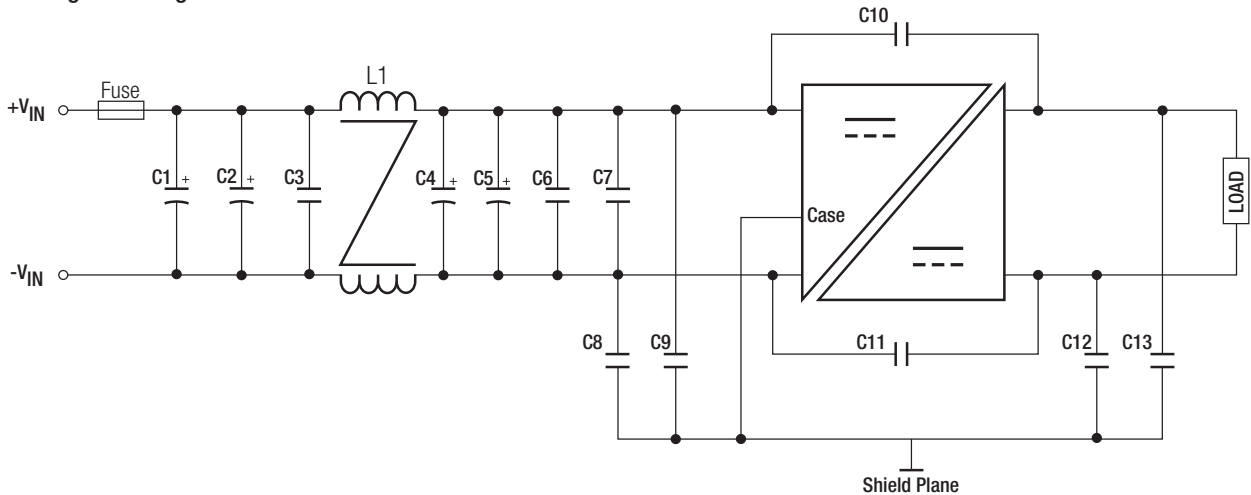

| MODEL | C1, C2, C4, C5 | C3, C6, C7 | C8, C9, C10, C11, C13 | C12 | L1 |
|-----------------|--|---------------------------------------|--------------------------|--------------------------|--------------------------|
| RP180H-24xxSRW | 470 μF , 50V Al cap. (lie down) Chemi-con KY | 4.7 μF , 50V 1812 MLCC | 1000pF, 3kV 1808 MLCC | 3300pF, 3kV 1808 MLCC | 156 μH CMC |
| RP180H-48xxSRW | 220 μF , 100V Al cap. (lie down) Chemi-con KY | 2.2 μF , 100V 1812 MLCC | | 1000pF, 3kV 1808 MLCC | 224 μH CMC |
| RP180H-110xxSRW | 150 μF , 200V Al cap. (lie down) Chemi-con KXJ | 1 μF , 250V 1812 MLCC | | | 521 μH CMC |


continued on next page

Specifications (measured @ $t_a = 25^\circ\text{C}$, nominal input voltage, full load and after warm-up)

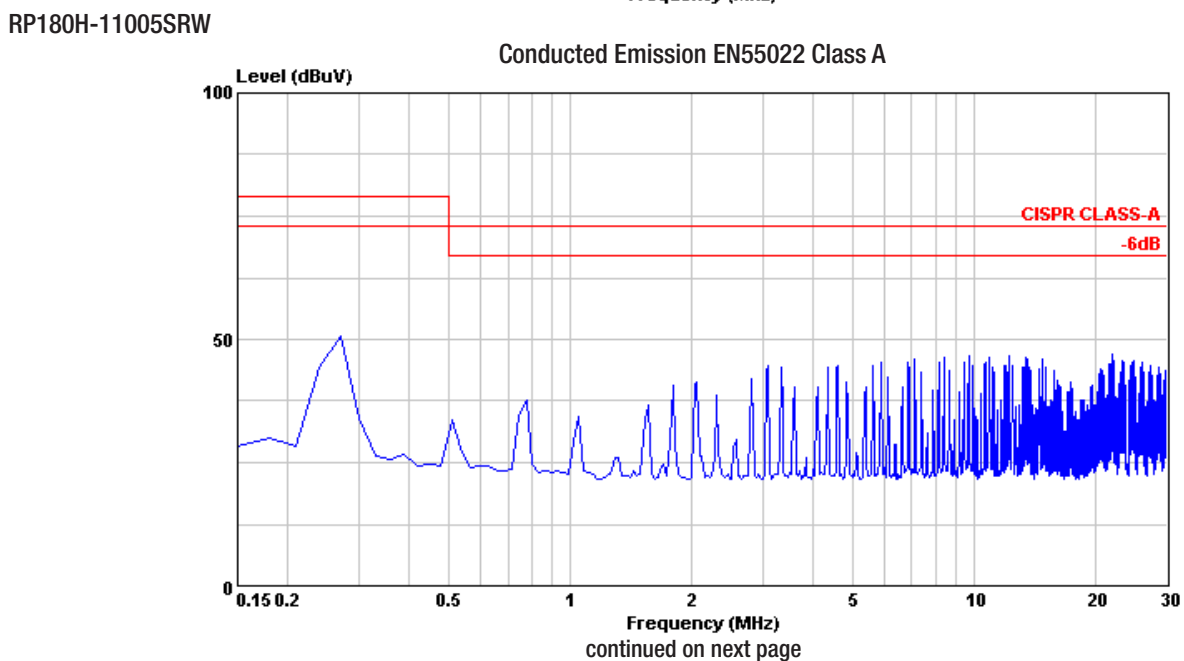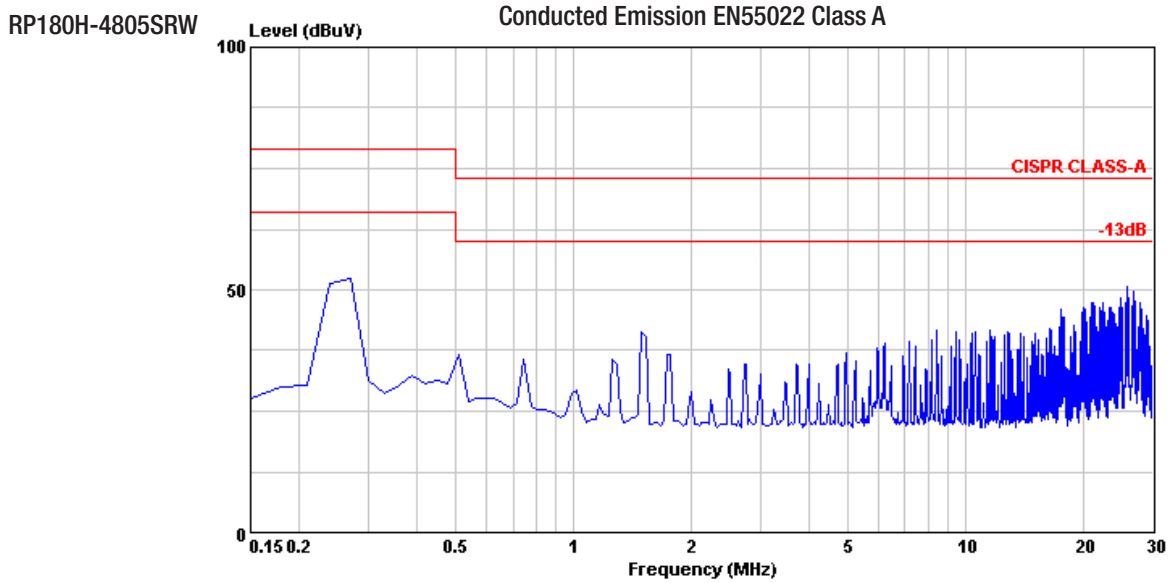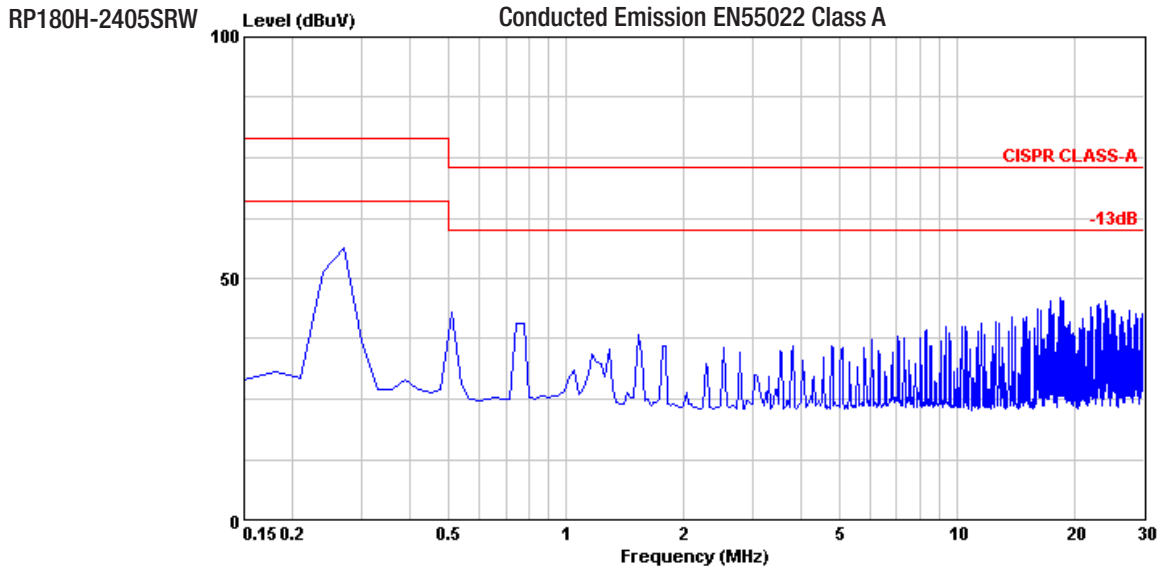

Specifications (measured @ $t_a = 25^\circ\text{C}$, nominal input voltage, full load and after warm-up)


EMI Filtering according to EN55022/11 Class B

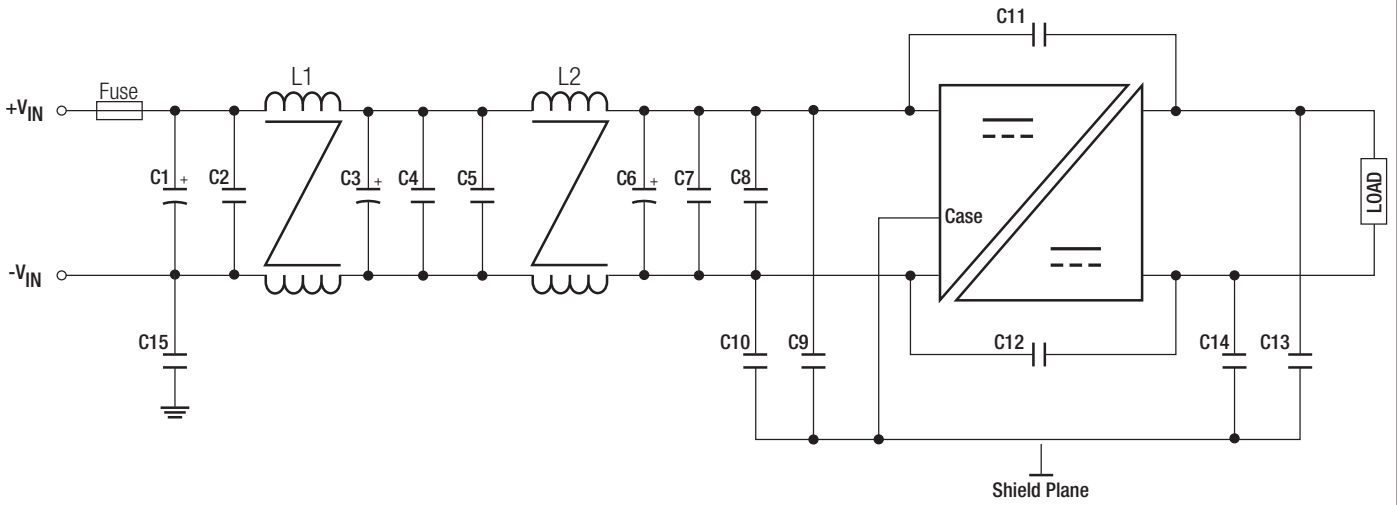

| MODEL | C1, C3, C6 | C2, C4, C5, C7, C8 | C9, C10 | C11 | C12 | C13, C14 | C15 | L1, L2 |
|-----------------|--|---------------------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|
| RP180H-24xxSRW | 470 μF , 50V Al cap. (lie down) Chemi-con KY | 4.7 μF , 50V 1812 MLCC | 10nF, 2kV 1812 MLCC | 1000pF, 3kV 1808 MLCC | 4700pF, 3kV 1812 MLCC | 10nF, 2kV 1812 MLCC | N/A | 156 μH CMC |
| RP180H-48xxSRW | 220 μF , 100V Al cap. (lie down) Chemi-con KY | 2.2 μF , 100V 1812 MLCC | | 2200pF, 3kV 1808 MLCC | | | 1000pF, 3kV 1808 MLCC | 224 μH CMC |
| RP180H-110xxSRW | 150 μF , 200V Al cap. (lie down) Chemi-con KXJ | 1 μF , 250V 1812 MLCC | 2200pF, 3kV 1808 MLCC | | 2200pF, 3kV 1808 MLCC | 1000pF, 3kV 1808 MLCC | | 521 μH CMC |

RP180H-2405SRW

Conducted Emission EN55022 Class B

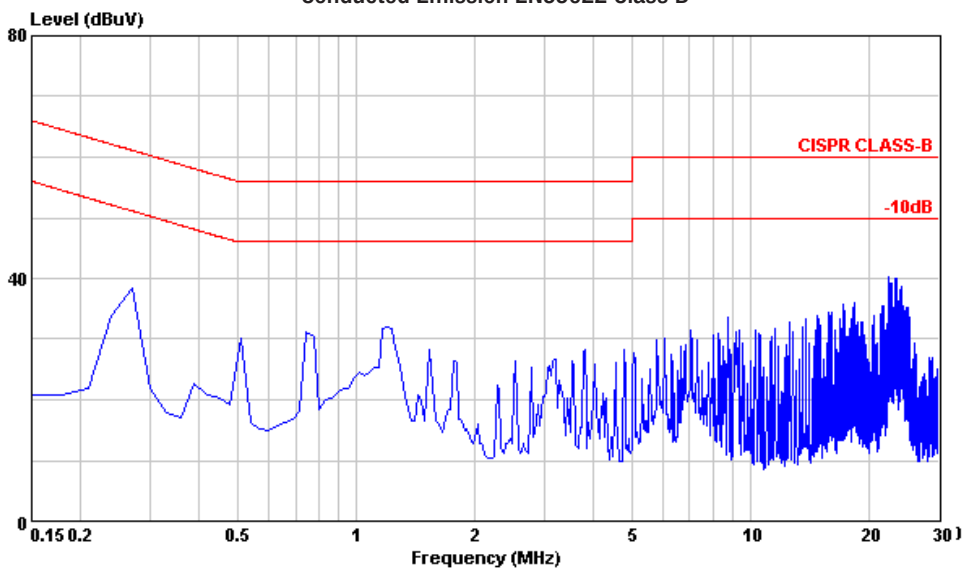


continued on next page

Specifications (measured @ ta= 25°C, nominal input voltage, full load and after warm-up)


RP180H-4805SRW

Conducted Emission EN55022 Class B

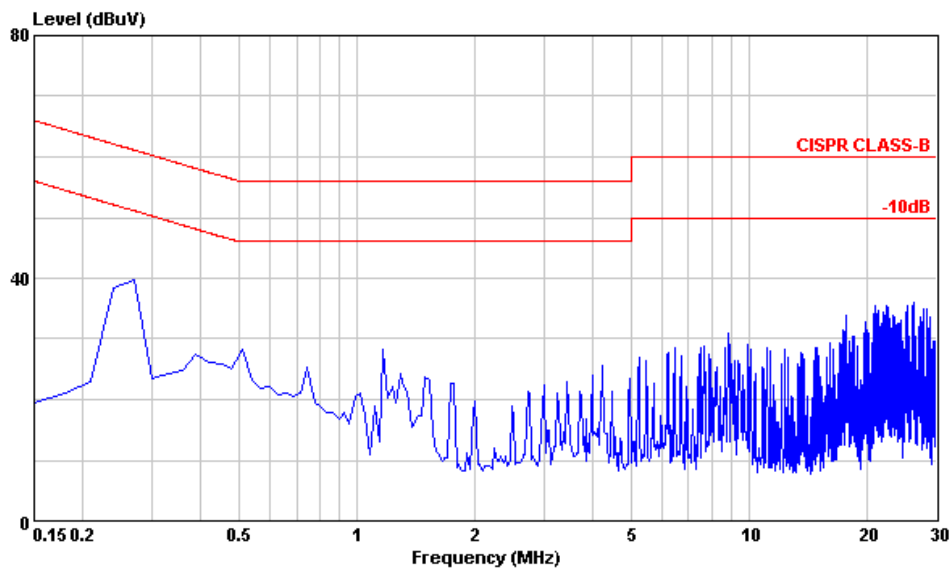

RP180H-11005SRW

Conducted Emission EN55022 Class B

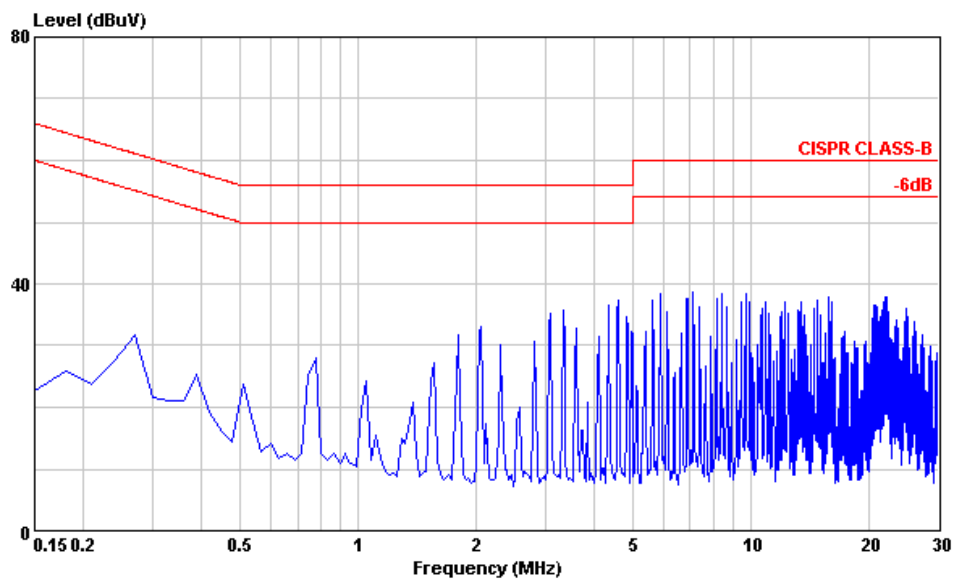

DIMENSIONS and PHYSICAL CHARACTERISTICS





| Parameter | Type | Value |
|------------------|-----------------------------|--|
| Material | Case | 24Vin, 48Vin 110Vin Metal Plastic |
| | Baseplate | 110Vin Aluminium |
| | Potting | Silicone (UL94 V-0) |
| | Packaging Dimension (LxWxH) | without Heat-sink with Heat-sink |
| Packaging Weight | without Heat-sink | 105g |
| | with Heat-sink | 157g |

continued on next page

Specifications (measured @ $t_a = 25^\circ\text{C}$, nominal input voltage, full load and after warm-up)

Dimension Drawing (mm)

24Vin, 48Vin

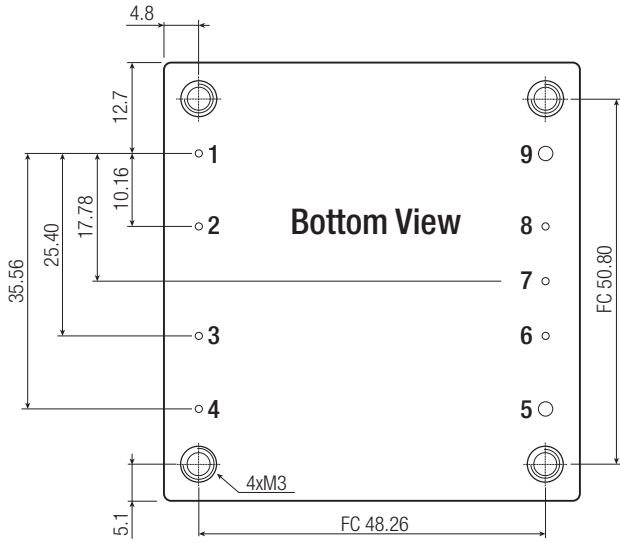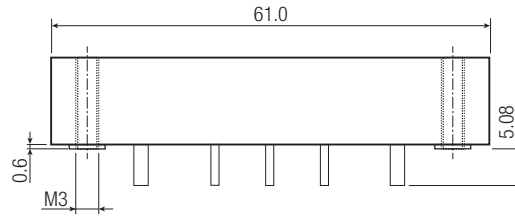
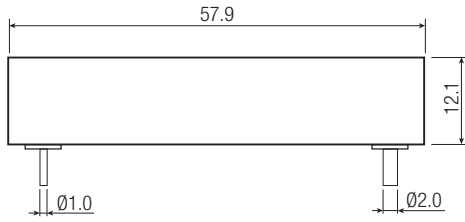



Pin Connections

| Pin # | Single |
|-------|--------|
| 1 | -Vin |
| 2 | Case |
| 3 | CTRL |
| 4 | +Vin |
| 5 | +Vout |
| 6 | +Sense |
| 7 | Trim |
| 8 | -Sense |
| 9 | -Vout |

FC= Fixing Centers for Heat Sink
 Pin Pitch Tolerance $\pm 0.25\text{mm}$
 Pin Dimension Tolerance $\pm 0.1\text{mm}$
 $\text{XX.X} \pm 0.5\text{mm}$
 $\text{XX.XX} \pm 0.25\text{mm}$

110Vin

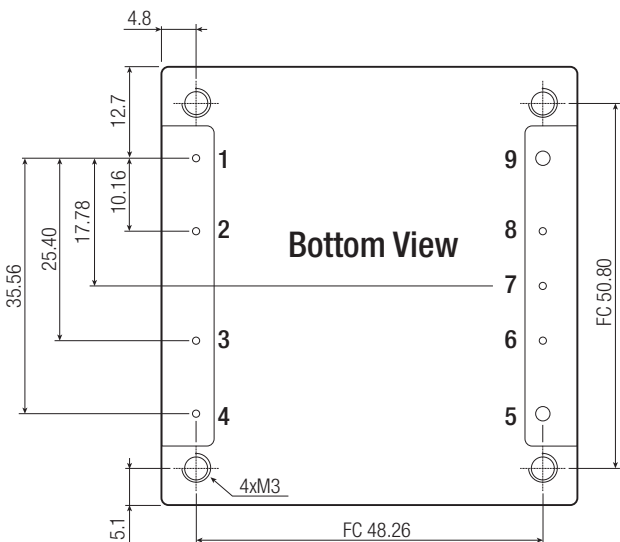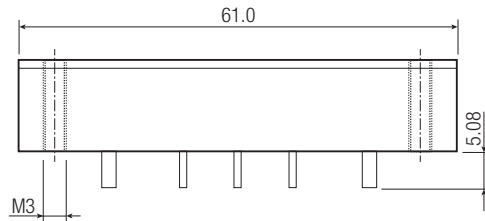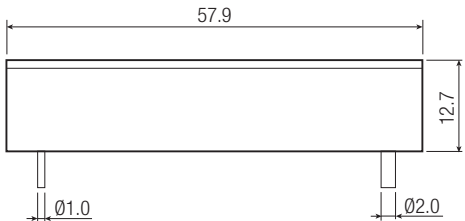


Pin Connections

| Pin # | Single |
|-------|--------|
| 1 | -Vin |
| 2 | Case |
| 3 | CTRL |
| 4 | +Vin |
| 5 | +Vout |
| 6 | +Sense |
| 7 | Trim |
| 8 | -Sense |
| 9 | -Vout |

FC= Fixing Centers for Heat Sink
 Pin Pitch Tolerance $\pm 0.25\text{mm}$
 Pin Dimension Tolerance $\pm 0.1\text{mm}$
 $\text{XX.X} \pm 0.5\text{mm}$
 $\text{XX.XX} \pm 0.25\text{mm}$

continued on next page

Specifications (measured @ ta= 25°C, nominal input voltage, full load and after warm-up)

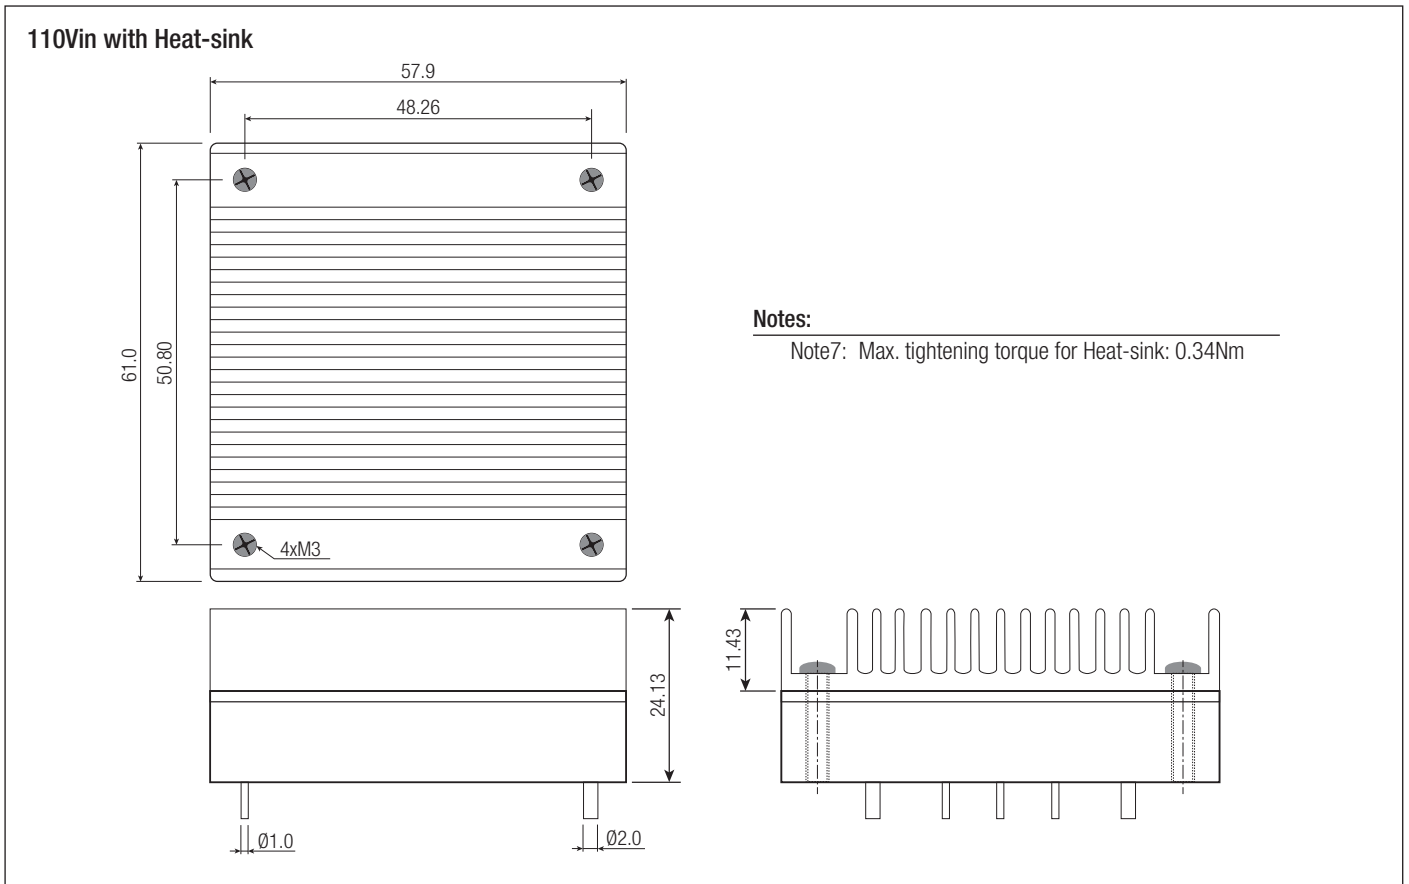

PACKAGING INFORMATION

| Parameter | Type | Value |
|---------------------------|------------------------|-----------------------|
| Packaging Dimension | Tray without Heat-sink | 157.0 x 88.0 x 12.8mm |
| | Tray with Heat-sink | 157.0 x 88.0 x 24.8mm |
| Packaging Quantity | | 2pcs. |
| Storage Temperature Range | | -55°C to +125°C |
| Storage Humidity | | 5% - 95% RH |



CODICO GmbH
Zwingenstraße 6-8, 2380 Perchtoldsdorf, Austria
Telefon: +43 1 86 305-0, Fax: +43 1 86 305-5000
e-mail: office@codico.com, www.codico.com
FN 436940i, Landesgericht Wr. Neustadt

Zertifiziert nach ISO 9001:2008

The product information and specifications are subject to change without prior notice. RECOM products are not authorized for use in safety-critical applications (such as life support) without RECOM's explicit written consent. A safety-critical application is defined as an application where a failure of a RECOM product may reasonably be expected to endanger or cause loss of life, inflict bodily harm or damage property. The buyer shall indemnify and hold harmless RECOM, its affiliated companies and its representatives against any damage claims in connection with the unauthorized use of RECOM products in such safety-critical applications.