

IC REPORT

(UNII)

Applicant: 8Devices

Address of Applicant: Gedimino 47, Kaunas, LT-44242, Lithuania

Equipment Under Test (EUT)

Product Name: Komikan

Model No.: Komikan

Canada IC: 11468A-KOM

Applicable standards: RSS-Gen Issue 5 March 2019 Amendment 1
RSS-247 Issue 2, February 2017

Date of sample receipt: 24 Mar., 2020

Date of Test: 24 Mar., to 06 May, 2020

Date of report issued: 03 Jun. 2020

Test Result: PASS*

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Bruce Zhang
Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the CCIS product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

2 Version

Version No.	Date	Description
00	07 May, 2020	Original
01	03 Jun. 2020	Update UNII band I test data and update page 7

Tested by: Mike.ou **Date:** 03 Jun. 2020
Test Engineer

Reviewed by: Winner Zhang **Date:** 03 Jun. 2020
Project Engineer

3 Contents

Page

1	COVER PAGE	1
2	VERSION	2
3	CONTENTS	3
4	TEST SUMMARY	4
5	GENERAL INFORMATION	5
	5.1 CLIENT INFORMATION.....	5
	5.2 GENERAL DESCRIPTION OF E.U.T.....	5
	5.3 TEST ENVIRONMENT AND TEST MODE	7
	5.4 DESCRIPTION OF SUPPORT UNITS.....	7
	5.5 MEASUREMENT UNCERTAINTY.....	7
	5.6 ADDITIONS TO, DEVIATIONS, OR EXCLUSIONS FROM THE METHOD	7
	5.7 RELATED SUBMITTAL(S) / GRANT (S)	7
	5.8 LABORATORY FACILITY	8
	5.9 LABORATORY LOCATION	8
	5.10 TEST INSTRUMENTS LIST	9
6	TEST RESULTS AND MEASUREMENT DATA	10
	6.1 CONDUCTED EMISSION	10
	6.2 CONDUCTED OUTPUT POWER	13
	6.3 OCCUPY BANDWIDTH	30
	6.4 POWER SPECTRAL DENSITY	59
	6.5 BAND EDGE	76
	6.6 SPURIOUS EMISSION.....	119
	6.6.1 Restricted Band	119
	6.6.2 Unwanted Emissions out of the Restricted Bands	120
	6.7 FREQUENCY STABILITY.....	166
7	TEST SETUP PHOTO	168
8	EUT CONSTRUCTIONAL DETAILS	171

4 Test Summary

Test Item	Section	Test Result
AC Power Line Conducted Emission	RSS-GEN Section 8.8	Pass
Conducted Peak Output Power	RSS-247 Section 6.2.1.1 RSS-247 Section 6.2.4.1	Pass
99% Occupied Bandwidth 26dB Occupied Bandwidth 6dB Emission Bandwidth	RSS-GEN Section 6.7 RSS-247 Section 6.2.1.2 RSS-247 Section 6.2.4.1	Pass
Power Spectral Density	RSS-247 Section 6.2.1.1 RSS-247 Section 6.2.4.1	Pass
Band Edge	RSS-GEN Section 8.10 RSS-247 Section 6.2.1.2 RSS-247 Section 6.2.4.2	Pass
Spurious Emission	RSS-GEN Section 6.13 RSS-247 Section 6.2.1.2 RSS-247 Section 6.2.4.2	Pass
Frequency Stability	RSS-Gen section 6.11	Pass
<p>Remark:</p> <ol style="list-style-type: none"> 1. Pass: The EUT complies with the essential requirements in the standard. 2. N/A: Not Applicable. 3. The cable insertion loss used by "RF Output Power" and other conduction measurement items is 1.0dB (provided by the customer). 		
Test Method:	ANSI C63.4-2014 ANSI C63.10-2013 KDB 789033 D02 General UNII Test Procedures New Rules v02r01	

5 General Information

5.1 Client Information

Applicant:	8Devices
Address:	Gedimino 47, Kaunas, LT-44242, Lithuania
Manufacturer/ Factory:	8Devices
Address:	Gedimino 47, Kaunas, LT-44242, Lithuania

5.2 General Description of E.U.T.

Product Name:	Komikan
Model No.:	Komikan
Operation Frequency:	Band 1: 5150MHz-5250MHz, Band 4: 5725MHz-5825MHz
Channel numbers:	Band 1: 802.11a/802.11n/ac20: 4, 802.11n/ac40: 2, 802.11ac80: 1 Band 4: 802.11a/802.11n/ac20: 5, 802.11n/ac40: 2, 802.11ac80: 1
Channel separation:	802.11a/802.11n20: 20MHz, 802.11n40: 40MHz, 802.11ac: 80MHz
Modulation technology (IEEE 802.11a):	BPSK, QPSK, 16-QAM, 64-QAM
Modulation technology (IEEE 802.11n):	BPSK, QPSK, 16-QAM, 64-QAM
Modulation technology (IEEE 802.11ac):	BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM
Data speed (IEEE 802.11a):	6Mbps, 9Mbps,12Mbps,18Mbps, 24Mbps, 36Mbps, 48Mbps, 54Mbps
Data speed (IEEE 802.11n20):	MCS0: 6.5Mbps, MCS1:13Mbps,MCS2:19.5Mbps, MCS3:26Mbps, MCS4:39Mbps, MCS5:52Mbps, MCS6:58.5Mbps, MCS7:65Mbps
Data speed (IEEE 802.11n40):	MCS0:15Mbps, MCS1:30Mbps, MCS2:45Mbps, MCS3:60Mbps, MCS4:90Mbps, MCS5:120Mbps, MCS6:135Mbps, MCS7:150Mbps
Data speed (IEEE 802.11ac):	Up to 433.3Mbps
Antenna Type:	Ceramic Antenna, Whip Antenna, Flex Antenna
Antenna gain:	Ceramic Antenna: Band 1 and Band 4: 4.32dBi Flex Antenna: Band 1 and Band 4: 4.75dBi Whip Antenna: Band 1: 4.5dBi, Band 4: 5dBi
Power supply:	DC 3.3V
Test Sample Condition:	The test samples were provided in good working order with no visible defects.

Operation Frequency each of channel					
Band 1					
802.11a/802.11n/ac20		802.11n/ac40		802.11ac80	
Channel	Frequency	Channel	Frequency	Channel	Frequency
36	5180MHz	38	5190MHz	42	5210MHz
40	5200MHz	46	5230MHz		
44	5220MHz				
48	5240MHz				
Band 4					
802.11a/802.11n/ac20		802.11n/ac40		802.11ac80	
Channel	Frequency	Channel	Frequency	Channel	Frequency
149	5745MHz	151	5755MHz	155	5775MHz
153	5765MHz	159	5795MHz		
157	5785MHz				
161	5805MHz				
165	5825MHz				

Note: Regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Band 1					
802.11a/802.11n/ac20		802.11n/ac40		802.11ac80	
Channel	Frequency	Channel	Frequency	Channel	Frequency
Lowest	5180MHz	Lowest	5190MHz	Middle	5210MHz
Middle	5200MHz	Highest	5230MHz		
Highest	5240MHz				
Band 4					
802.11a/802.11n/ac20		802.11n/ac40		802.11ac80	
Channel	Frequency	Channel	Frequency	Channel	Frequency
Lowest	5745MHz	Lowest	5755MHz	Middle	5775MHz
Middle	5785MHz	Highest	5795MHz		
Highest	5825MHz				

5.3 Test environment and test mode

Operating Environment:	
Temperature:	24.0 °C
Humidity:	54 % RH
Atmospheric Pressure:	1010 mbar
Test mode:	
Continuously transmitting mode	Keep the EUT in 100% duty cycle transmitting with modulation.
We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:	
Per-scan all kind of data rate, and found the follow list were the worst case.	
Mode	Data rate
802.11a	6 Mbps
802.11n20	6.5 Mbps
802.11n40	13.5 Mbps
802.11ac	29.3 Mbps

5.4 Description of Support Units

Manufacturer	Description	Model	Serial Number	FCC ID/DoC
DELL	PC	OPTIPLEX7070	2J8XSZ2	DoC
DELL	MONITOR	SE2018HR	3M7QPY2	DoC
DELL	KEYBOARD	KB216d	N/A	DoC
DELL	MOUSE	MS116t1	N/A	DoC

Test Software:	RTL819x3.4- 2016/01/15	Power setting: (Power index)	Band 1	Band4
			802.11a=52	802.11a=59
			802.11n/ac20=44	802.11n/ac20=55
			802.11n/ac40=45	802.11n/ac40=52
			802.11ac80=45	802.11ac80=55

5.5 Measurement Uncertainty

Parameters	Expanded Uncertainty
Conducted Emission (9kHz ~ 30MHz)	±1.60 dB (k=2)
Radiated Emission (9kHz ~ 30MHz)	±3.12 dB (k=2)
Radiated Emission (30MHz ~ 1000MHz)	±4.32 dB (k=2)
Radiated Emission (1GHz ~ 18GHz)	±5.38 dB (k=2)
Radiated Emission (18GHz ~ 40GHz)	±3.36 dB (k=2)

5.6 Additions to, deviations, or exclusions from the method

No

5.7 Related Submittal(s) / Grant (s)

This is an original grant, no related submittals and grants.
--

5.8 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

● **FCC - Designation No.: CN1211**

Shenzhen Zhongjian Nanfang Testing Co., Ltd. has been accredited as a testing laboratory by FCC(Federal Communications Commission). The test firm Registration No. is 727551.

● **ISED – CAB identifier.: CN0021**

The 3m Semi-anechoic chamber of Shenzhen Zhongjian Nanfang Testing Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1.

● **CNAS - Registration No.: CNAS L6048**

Shenzhen Zhongjian Nanfang Testing Co., Ltd. is accredited to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L6048.

● **A2LA - Registration No.: 4346.01**

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 General requirements for the competence of testing and calibration laboratories. The test scope can be found as below link: <https://portal.a2la.org/scopepdf/4346-01.pdf>

5.9 Laboratory Location

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
Address: No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Tel: +86-755-23118282, Fax: +86-755-23116366
Email: info@ccis-cb.com, Website: <http://www.ccis-cb.com>

5.10 Test Instruments list

Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
3m SAC	SAEMC	9m*6m*6m	966	07-22-2017	07-21-2020
BiConiLog Antenna	SCHWARZBECK	VULB9163	497	03-07-2020	03-06-2021
Biconical Antenna	SCHWARZBECK	VUBA9117	359	06-22-2017	06-21-2020
Horn Antenna	SCHWARZBECK	BBHA9120D	916	03-07-2020	03-06-2021
Horn Antenna	SCHWARZBECK	BBHA9120D	1805	06-22-2017	06-21-2020
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170582	11-18-2019	11-17-2020
EMI Test Software	AUDIX	E3	Version: 6.110919b		
Pre-amplifier	HP	8447D	2944A09358	03-07-2020	03-06-2021
Pre-amplifier	CD	PAP-1G18	11804	03-07-2020	03-06-2021
Spectrum analyzer	Rohde & Schwarz	FSP30	101454	03-05-2020	03-04-2021
Spectrum analyzer	Rohde & Schwarz	FSP40	100363	11-18-2019	11-17-2020
EMI Test Receiver	Rohde & Schwarz	ESRP7	101070	03-05-2020	03-04-2021
Spectrum Analyzer	Agilent	N9020A	MY50510123	11-18-2019	11-17-2020
Signal Generator	Rohde & Schwarz	SMX	835454/016	03-05-2020	03-04-2021
Signal Generator	R&S	SMR20	1008100050	03-05-2020	03-04-2021
RF Switch Unit	MWRFTTEST	MW200	N/A	N/A	N/A
Test Software	MWRFTTEST	MTS8200	Version: 2.0.0.0		
Cable	ZDECL	Z108-NJ-NJ-81	1608458	03-07-2020	03-06-2021
Cable	MICRO-COAX	MFR64639	K10742-5	03-07-2020	03-06-2021
Cable	SUHNER	SUCOFLEX100	58193/4PE	03-07-2020	03-06-2021
DC Power Supply	XinNuoEr	WYK-10020K	1409050110020	09-25-2019	09-24-2020
Temperature Humidity Chamber	HengPu	HPGDS-500	20140828008	11-01-2019	10-31-2020
Simulated Station	Rohde & Schwarz	CMW500	140493	07-22-2019	07-21-2020

Conducted Emission:					
Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
EMI Test Receiver	Rohde & Schwarz	ESCI	101189	03-05-2020	03-04-2021
Pulse Limiter	SCHWARZBECK	OSRAM 2306	9731	03-05-2020	03-04-2021
LISN	CHASE	MN2050D	1447	03-05-2020	03-04-2021
LISN	Rohde & Schwarz	ESH3-Z5	8438621/010	07-21-2017	07-20-2020
Cable	HP	10503A	N/A	03-05-2020	03-04-2021
EMI Test Software	AUDIX	E3	Version: 6.110919b		


6 Test results and Measurement Data

6.1 Conducted Emission

Test Requirement:	RSS-GEN Section 8.8		
Test Frequency Range:	150kHz to 30MHz		
Class / Severity:	Class B		
Receiver setup:	RBW=9kHz, VBW=30kHz		
Limit:	Frequency range (MHz)	Limit (dBuV)	
	0.15-0.5	Quasi-peak 66 to 56*	0.15-0.5
	0.5-5	56	0.5-5
	5-30	60	5-30
* Decreases with the logarithm of the frequency.			
Test procedure	<ol style="list-style-type: none"> The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). It provides a 50ohm/50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4(latest version) on conducted measurement. 		
Test setup:	<p><i>Remark</i> E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</p>		
Test Instruments:	Refer to section 5.10 for details		
Test mode:	Refer to section 5.3 for details.		
Test results:	Passed		

Measurement Data:

Product name:	Komikan	Product model:	Komikan
Test by:	Mike	Test mode:	5G Wi-Fi Tx mode
Test frequency:	150 kHz ~ 30 MHz	Phase:	Line
Test voltage:	AC 120 V/60 Hz	Environment:	Temp: 22.5°C Huni: 55%

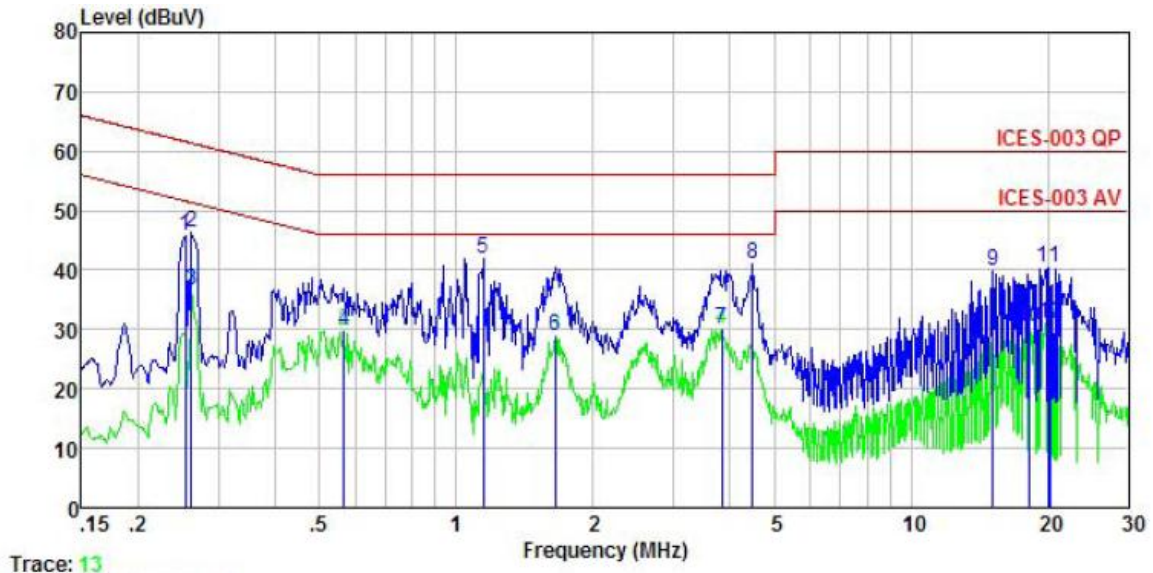


Trace: 13

	Freq	Read Level	LISN Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1	0.253	35.62	-0.40	-0.22	10.75	45.75	61.64	-15.89	QP
2	0.262	36.13	-0.39	-0.23	10.75	46.26	61.38	-15.12	QP
3	0.262	26.37	-0.39	-0.23	10.75	36.50	51.38	-14.88	Average
4	0.567	19.76	-0.39	-0.37	10.76	29.76	46.00	-16.24	Average
5	1.147	31.21	-0.39	0.30	10.89	42.01	56.00	-13.99	QP
6	1.654	18.43	-0.40	-0.11	10.94	28.86	46.00	-17.14	Average
7	3.840	19.76	-0.46	-0.07	10.89	30.12	46.00	-15.88	Average
8	4.478	30.48	-0.47	0.02	10.87	40.90	56.00	-15.10	QP
9	15.146	26.08	-0.69	3.53	10.90	39.82	60.00	-20.18	QP
10	18.232	18.48	-0.88	1.74	10.92	30.26	50.00	-19.74	Average
11	20.056	29.52	-0.97	0.89	10.93	40.37	60.00	-19.63	QP
12	20.270	20.11	-0.97	0.90	10.93	30.97	50.00	-19.03	Average

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Aux Factor + Cable Loss.

Product name:	Komikan	Product model:	Komikan
Test by:	Mike	Test mode:	5G Wi-Fi Tx mode
Test frequency:	150 kHz ~ 30 MHz	Phase:	Neutral
Test voltage:	AC 120 V/60 Hz	Environment:	Temp: 22.5°C Humi: 55%

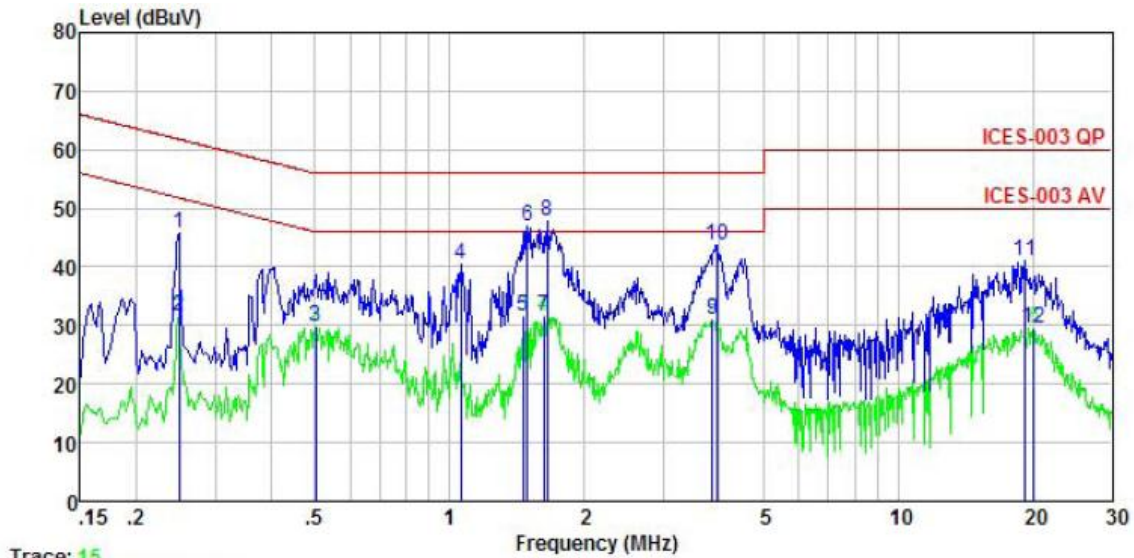


Trace: 15

	Read	LISN	Aux	Cable	Limit	Over		
Freq	Level	Factor	Factor	Loss	Level	Line	Limit	Remark
MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1	0.249	35.77	-0.66	0.01	10.75	45.87	61.78	-15.91 QP
2	0.249	21.59	-0.66	0.01	10.75	31.69	51.78	-20.09 Average
3	0.502	19.80	-0.65	0.03	10.76	29.94	46.00	-16.06 Average
4	1.060	30.20	-0.63	0.09	10.88	40.54	56.00	-15.46 QP
5	1.456	21.12	-0.65	0.13	10.92	31.52	46.00	-14.48 Average
6	1.487	36.66	-0.65	0.13	10.92	47.06	56.00	-8.94 QP
7	1.619	21.09	-0.66	0.14	10.93	31.50	46.00	-14.50 Average
8	1.654	37.43	-0.66	0.15	10.94	47.86	56.00	-8.14 QP
9	3.860	20.26	-0.69	0.49	10.89	30.95	46.00	-15.05 Average
10	3.964	33.10	-0.70	0.50	10.89	43.79	56.00	-12.21 QP
11	19.224	30.79	-1.33	0.64	10.93	41.03	60.00	-18.97 QP
12	20.056	19.79	-1.41	0.23	10.93	29.54	50.00	-20.46 Average

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Aux Factor + Cable Loss.

6.2 Conducted Output Power

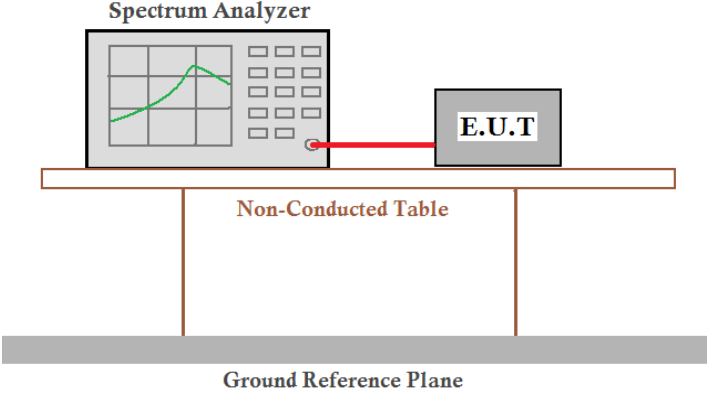Test Requirement:	RSS-247 Section 6.2.1.1, RSS-247 Section 6.2.4.1
Limit:	Band 1: see section 6.2.1.1 Band 4: see section 6.2.4.1
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which sits on a Ground Reference Plane.</p>
Test Instruments:	Refer to section 5.10 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Measurement Data:

Remark: The EUT belong other device.

Ceramic Antenna:

Band 1								
Mode	Test CH		Conducted Output power (dBm)	Total power (dBm)	Ant. gain (dBi)	Total EIRP (dBm)	EIRP Limit (dBm)	Result
802.11a	Lowest	TX0	15.54	15.54	4.32	19.86	22.27	Pass
		TX1	15.78	15.78		20.10		
	Middle	TX0	15.49	15.49		19.81		
		TX1	15.62	15.62		19.94		
	Highest	TX0	15.66	15.66		19.98		
		TX1	15.62	15.62		19.94		
802.11n20	Lowest	TX0	10.27	13.73	7.32	21.05	22.49	Pass
		TX1	11.12			20.95		
	Middle	TX0	10.16	13.63		21.44		
		TX1	11.03	14.12		21.44		
	Highest	TX0	10.97	14.12		21.44		
		TX1	11.24	14.12		21.44		
802.11n40	Lowest	TX0	11.63	14.67	7.32	21.99	23.00	Pass
		TX1	11.68			22.20		
	Highest	TX0	11.95	14.88		22.20		
		TX1	11.79			22.20		
802.11ac20	Lowest	TX0	10.12	13.49	7.32	20.81	22.50	Pass
		TX1	10.81			21.21		
	Middle	TX0	10.74	13.89		21.56		
		TX1	11.01	14.24		21.56		
	Highest	TX0	10.98	14.24		21.56		
		TX1	11.47	14.24		21.56		
802.11ac40	Lowest	TX0	11.61	14.45	7.32	21.77	23.00	Pass
		TX1	11.27			22.23		
	Highest	TX0	11.91	14.91		22.23		
		TX1	11.89			22.23		
802.11ac80	Middle	TX0	11.58	14.79	7.32	22.11	23.00	Pass
		TX1	11.98			22.11		

Remark:

- For 802.11a mode, the 99% occupied bandwidth Minimum value is 16.85MHz, so limit is 22.27dBm
- For 802.11n-HT20 mode, the 99% occupied bandwidth Minimum value is 17.76 MHz, so limit is 22.49 dBm
- For 802.11n-HT40 mode, the 99% occupied bandwidth Minimum value is 37.26 MHz, so limit is 23dBm
- For 802.11ac-HT20 mode, the 99% occupied bandwidth Minimum value is 17.78 MHz, so limit is 22.50dBm
- For 802.11ac-HT40 mode, the 99% occupied bandwidth Minimum value is 37.22 MHz, so limit is 23dBm
- For 802.11ac-HT80 mode, the 99% occupied bandwidth Minimum value is 75.80 MHz, so limit is 23dBm
- Because transmit signals are correlated, Directional gain = GANT + 10 log(NANT) dBi.
So Ceramic Antenna: The Directional gain=4.32 + 10 log(2)=7.32dBi (for 802.11n/ac);
- EIRP= Antenna gain + Conducted Output power

Flex Antenna:

		Band 1						
Mode	Test CH	Conducted Output power (dBm)	Total power (dBm)	Ant. gain (dBi)	Total EIRP (dBm)	EIRP Limit (dBm)	Result	
802.11a	Lowest	TX0	15.54	4.75	20.29	22.27	Pass	
		TX1	15.78		20.53			
	Middle	TX0	15.49		20.24			
		TX1	15.62		20.37			
	Highest	TX0	15.66		20.41			
		TX1	15.62		20.37			
802.11n20	Lowest	TX0	10.27	7.75	21.48	22.49	Pass	
		TX1	11.12		13.73			
	Middle	TX0	10.16		13.63			21.38
		TX1	11.03		14.12			
	Highest	TX0	10.97		14.12			21.87
		TX1	11.24		14.88			
802.11n40	Lowest	TX0	11.63	7.75	22.42	23.00	Pass	
		TX1	11.68		14.67			
	Highest	TX0	11.95		14.88			22.63
		TX1	11.79		14.24			
802.11ac20	Lowest	TX0	10.12	7.75	21.24	22.50	Pass	
		TX1	10.81		13.49			
	Middle	TX0	10.74		13.89			21.64
		TX1	11.01		14.24			
	Highest	TX0	10.98		14.24			21.99
		TX1	11.47		14.45			
802.11ac40	Lowest	TX0	11.61	7.75	22.20	23.00	Pass	
		TX1	11.27		14.45			
	Highest	TX0	11.91		14.91			22.66
		TX1	11.89		14.79			
802.11ac80	Middle	TX0	11.58	7.75	22.54	23.00	Pass	
		TX1	11.98		14.79			

Remark:

- For 802.11a mode, the 99% occupied bandwidth Minimum value is 16.85MHz, so limit is 22.27dBm
- For 802.11n-HT20 mode, the 99% occupied bandwidth Minimum value is 17.76 MHz, so limit is 22.49 dBm
- For 802.11n-HT40 mode, the 99% occupied bandwidth Minimum value is 37.26 MHz, so limit is 23dBm
- For 802.11ac-HT20 mode, the 99% occupied bandwidth Minimum value is 17.78 MHz, so limit is 22.50dBm
- For 802.11ac-HT40 mode, the 99% occupied bandwidth Minimum value is 37.22 MHz, so limit is 23dBm
- For 802.11ac-HT80 mode, the 99% occupied bandwidth Minimum value is 75.80 MHz, so limit is 23dBm
- Because transmit signals are correlated, Directional gain = GANT + 10 log(NANT) dBi.
So Flex Antenna: The Directional gain=4.75 + 10 log(2)=7.75dBi (for 802.11n/ac);
- EIRP= Antenna gain + Conducted Output power

Whip antenna:

		Band 1					
Mode	Test CH	Conducted Output power (dBm)	Total power (dBm)	Ant. gain (dBi)	Total EIRP (dBm)	EIRP Limit (dBm)	Result
802.11a	Lowest	TX0	15.54	4.5	20.04	22.27	Pass
		TX1	15.78		20.28		
	Middle	TX0	15.49		19.99		
		TX1	15.62		20.12		
	Highest	TX0	15.66		20.16		
		TX1	15.62		20.12		
802.11n20	Lowest	TX0	10.27	7.5	21.23	22.49	Pass
		TX1	11.12		13.73		
	Middle	TX0	10.16		13.63		
		TX1	11.03		21.13		
	Highest	TX0	10.97		14.12		
		TX1	11.24		21.62		
802.11n40	Lowest	TX0	11.63	7.5	22.17	23.00	Pass
		TX1	11.68		14.67		
	Highest	TX0	11.95		14.88		
		TX1	11.79		22.38		
802.11ac20	Lowest	TX0	10.12	7.5	20.99	22.50	Pass
		TX1	10.81		13.49		
	Middle	TX0	10.74		13.89		
		TX1	11.01		21.39		
	Highest	TX0	10.98		14.24		
		TX1	11.47		21.74		
802.11ac40	Lowest	TX0	11.61	7.5	21.95	23.00	Pass
		TX1	11.27		14.45		
	Highest	TX0	11.91		14.91		
		TX1	11.89		22.41		
802.11ac80	Middle	TX0	11.58	7.5	22.29	23.00	Pass
		TX1	11.98		14.79		


Remark:

- For 802.11a mode, the 99% occupied bandwidth Minimum value is 16.85MHz, so limit is 22.27dBm
- For 802.11n-HT20 mode, the 99% occupied bandwidth Minimum value is 17.76 MHz, so limit is 22.49 dBm
- For 802.11n-HT40 mode, the 99% occupied bandwidth Minimum value is 37.26 MHz, so limit is 23dBm
- For 802.11ac-HT20 mode, the 99% occupied bandwidth Minimum value is 17.78 MHz, so limit is 22.50dBm
- For 802.11ac-HT40 mode, the 99% occupied bandwidth Minimum value is 37.22 MHz, so limit is 23dBm
- For 802.11ac-HT80 mode, the 99% occupied bandwidth Minimum value is 75.80 MHz, so limit is 23dBm
- Because transmit signals are correlated, Directional gain = GANT + 10 log(NANT) dBi.
So Whip Antenna:: The Directional gain=4.5 + 10 log(2)=7.5dBi (for 802.11n/ac).
- EIRP= Antenna gain + Conducted Output power


Band 4						
Mode	Test CH	Ant. Port	Conducted Output power(dBm)	Total power (dBm)	Limit (dBm)	Result
802.11a	Lowest	TX0	17.80	/	30.00	Pass
		TX1	18.34			
	Middle	TX0	17.60			
		TX1	18.28			
	Highest	TX0	17.46			
		TX1	18.10			
802.11n20	Lowest	TX0	15.53	18.43	Ceramic Antenna:28.68 Flex Antenna:28.25 Whip Antenna:28.0	Pass
		TX1	15.30			
	Middle	TX0	15.44	18.31		
		TX1	15.15			
	Highest	TX0	15.39	18.40		
		TX1	15.38			
802.11n40	Lowest	TX0	15.15	18.26	Ceramic Antenna:28.68 Flex Antenna:28.25 Whip Antenna:28.0	Pass
		TX1	15.34			
	Highest	TX0	15.12	18.20		
		TX1	15.26			
802.11ac20	Lowest	TX0	15.21	18.21	Ceramic Antenna:28.68 Flex Antenna:28.25 Whip Antenna:28.0	Pass
		TX1	15.18			
	Middle	TX0	15.26	18.29		
		TX1	15.30			
	Highest	TX0	15.38	18.21		
		TX1	15.02			
802.11ac40	Lowest	TX0	15.03	18.09	Ceramic Antenna:28.68 Flex Antenna:28.25 Whip Antenna:28.0	Pass
		TX1	15.13			
	Highest	TX0	15.05	18.09		
		TX1	15.11			
802.11ac80	Middle	TX0	15.15	18.17	Ceramic Antenna:28.68 Flex Antenna:28.25 Whip Antenna:28.0	Pass
		TX1	15.17			

1. Because transmit signals are correlated, Directional gain = $G_{ANT} + 10 \log(N_{ANT})$ dBi.
2. So Ceramic Antenna: The Directional gain= $4.32 + 10 \log(2)=7.32$ dBi, The directional Gain of antenna is greater than 6 dBi, so the limit of power is 28.68 dBm (for 802.11n/ac).
Flex Antenna: The Directional gain= $4.75 + 10 \log(2)=7.75$ dBi, The directional Gain of antenna is greater than 6 dBi, so the limit of power is 28.25 dBm (for 802.11n/ac).
Whip Antenna: The Directional gain= $5 + 10 \log(2)=8.0$ dBi, The directional Gain of antenna is greater than 6dBi, so the limit of power is 28.0 dBm (for 802.11n/ac).

**Test plot as follows: TX0:
Band 1:**

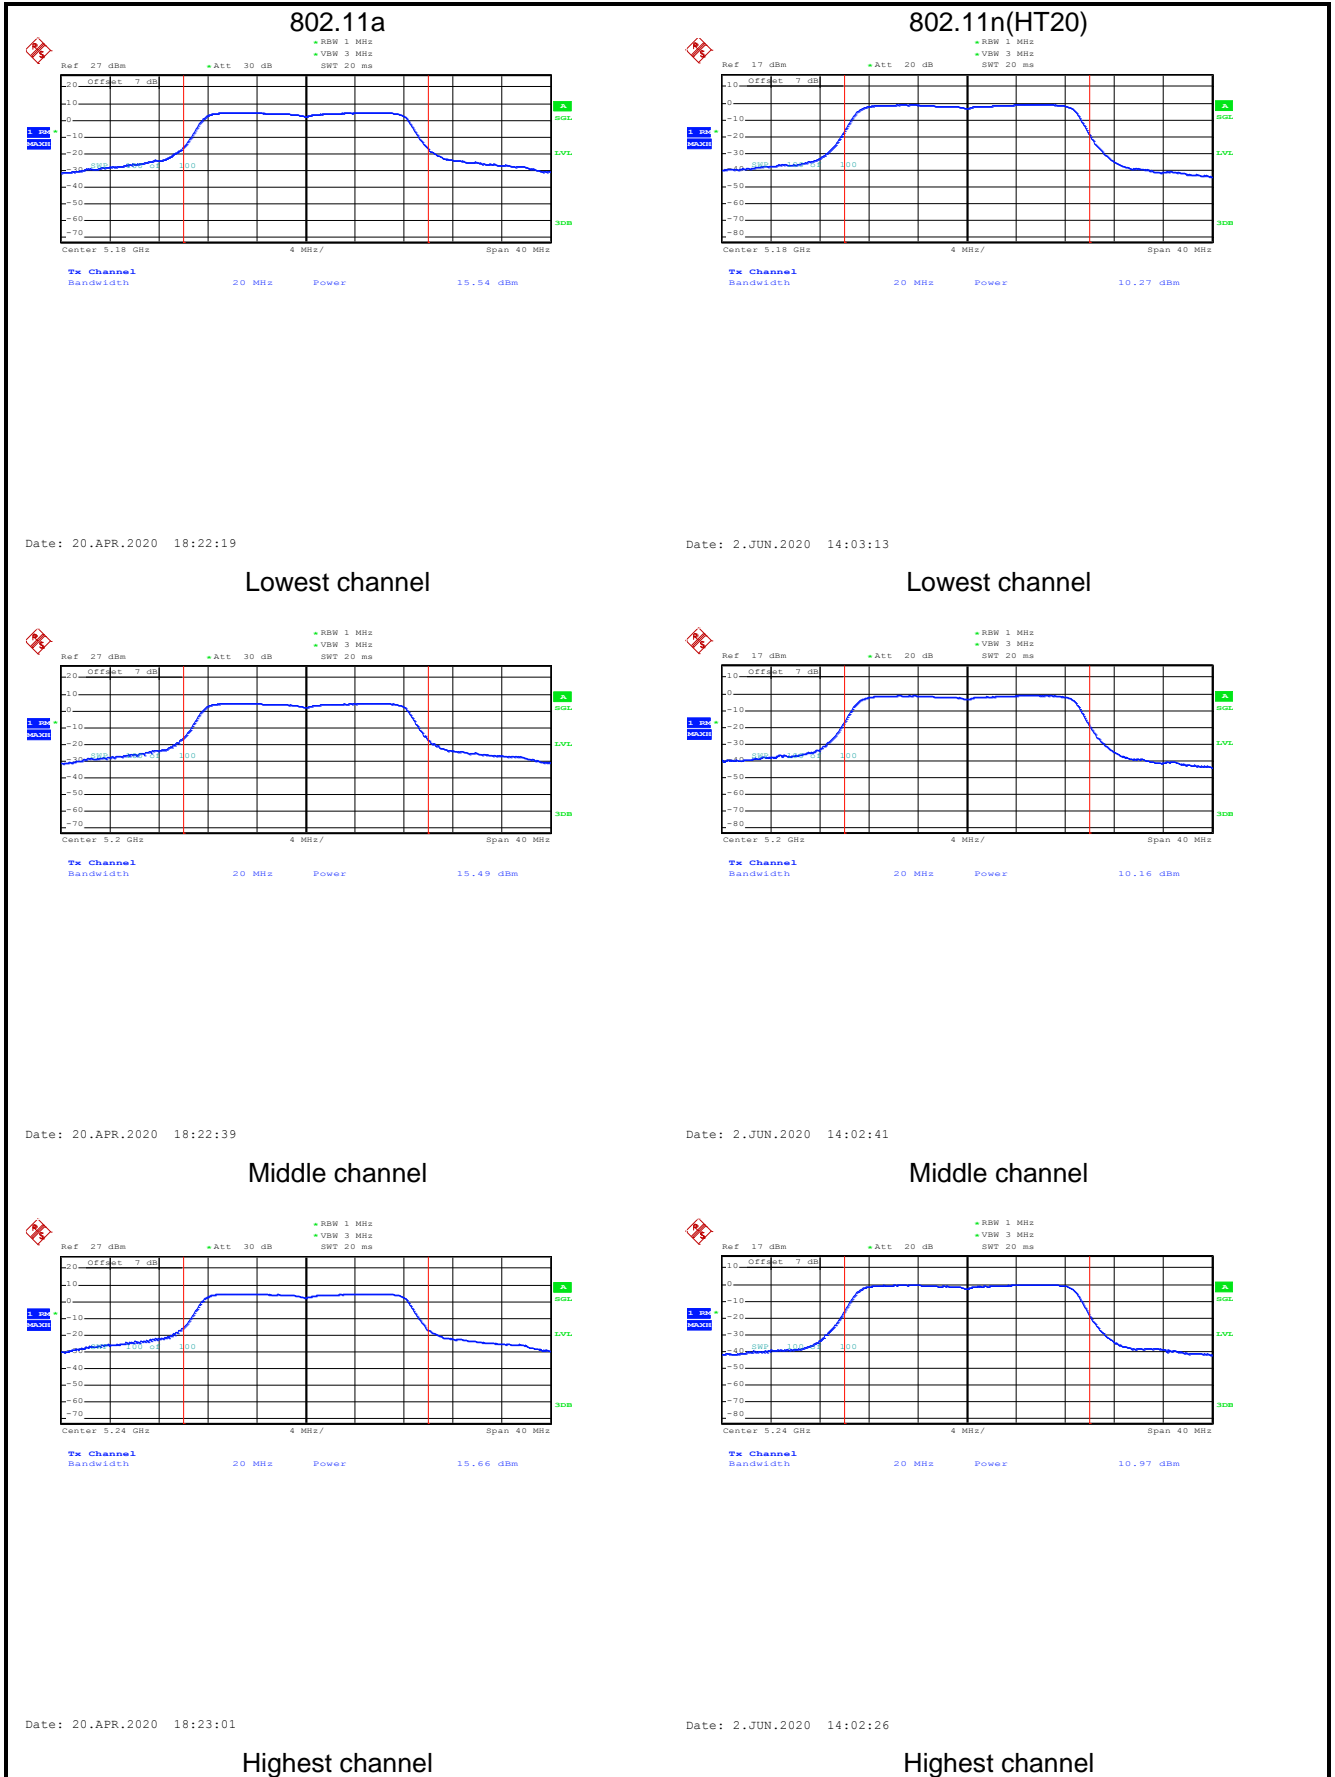


802.11n(HT40)

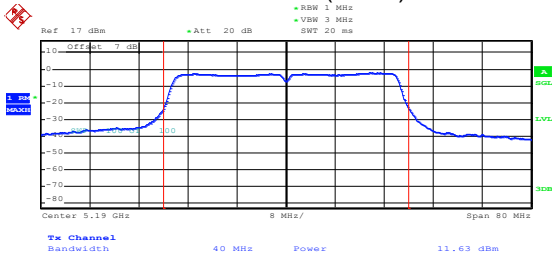


Date: 2.JUN.2020 12:01:31

802.11ac(HT20)

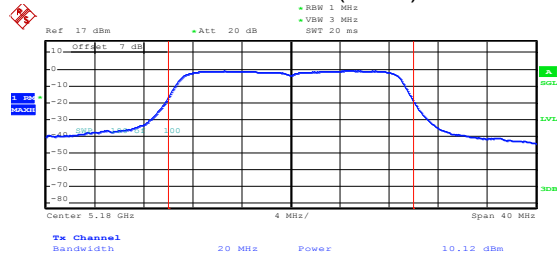


Date: 2.JUN.2020 14:01:08

Lowest channel

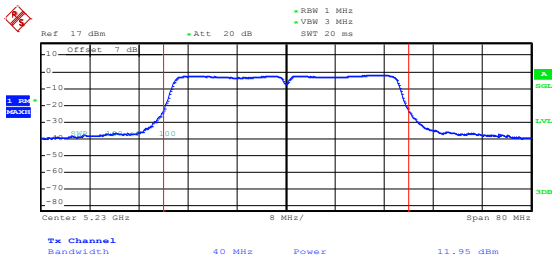

Date: 2.JUN.2020 12:00:52


Lowest channel

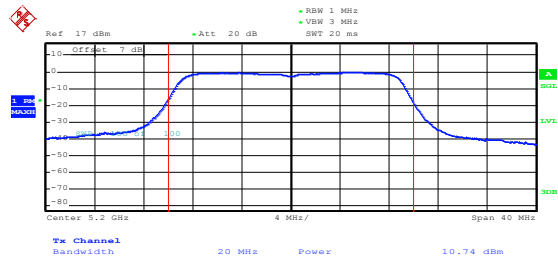

Date: 2.JUN.2020 14:01:24

Highest channel


Middle channel

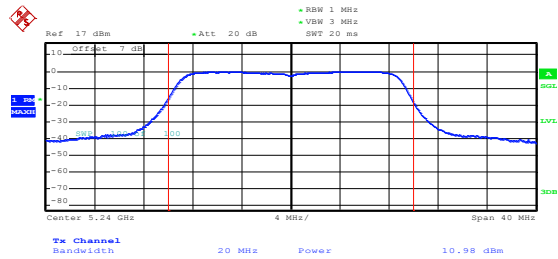

Date: 2.JUN.2020 14:02:03


Highest channel

802.11ac(HT40)

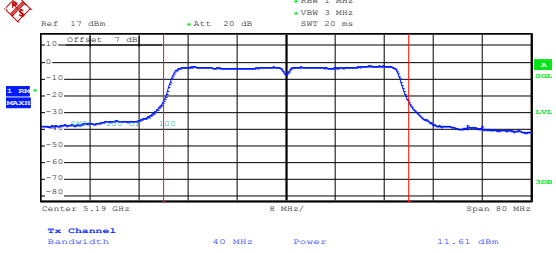


Date: 2.JUN.2020 12:00:04

802.11ac(HT80)

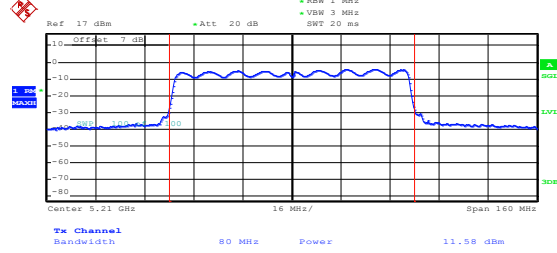

Date: 2.JUN.2020 11:59:16

Lowest channel

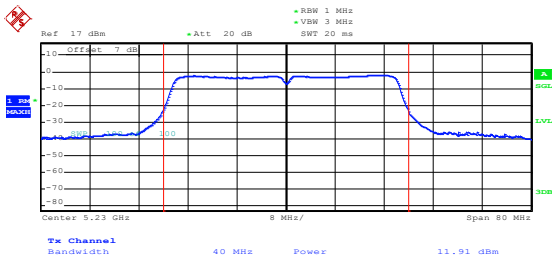


Date: 2.JUN.2020 12:00:31

Middle channel

Highest channel


Band 4:

802.11a

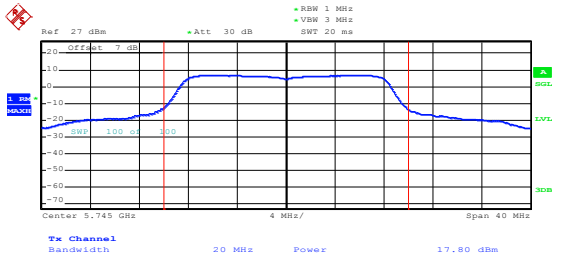


Date: 13.APR.2020 18:00:55

802.11n(HT20)

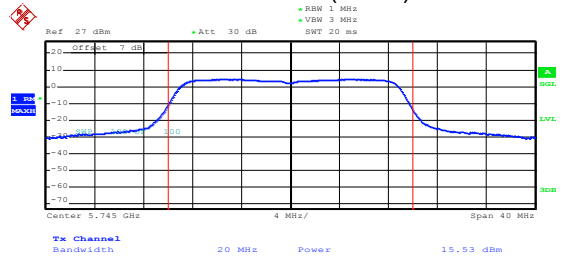


Date: 13.APR.2020 18:04:18

Lowest channel

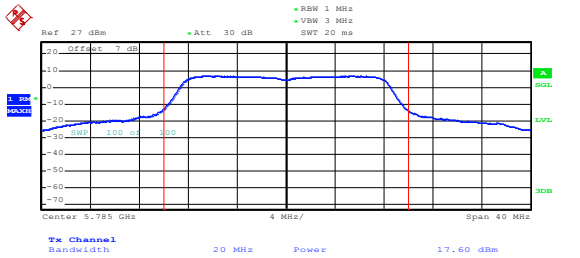


Date: 13.APR.2020 18:01:26

Lowest channel

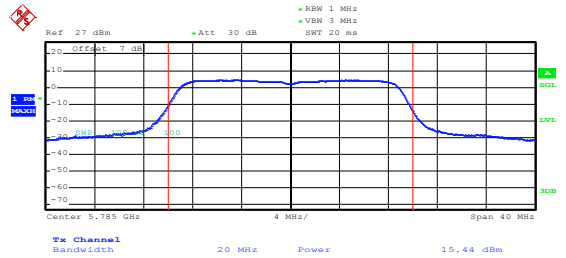


Date: 13.APR.2020 18:03:41

Middle channel

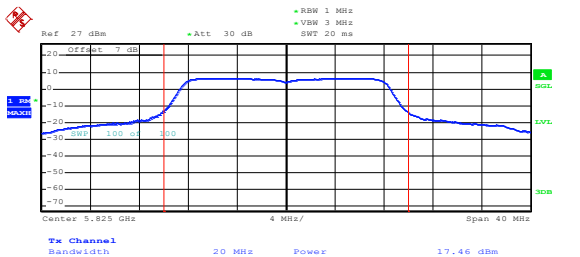

Date: 13.APR.2020 18:01:55

Middle channel

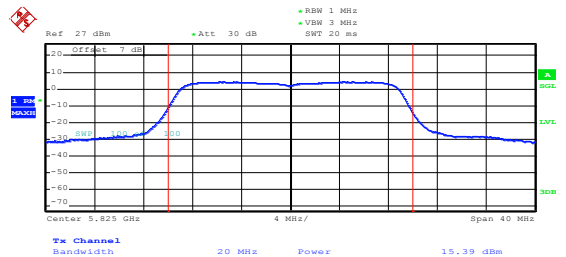


Date: 13.APR.2020 18:03:11

Highest channel


Highest channel

802.11n(HT40)

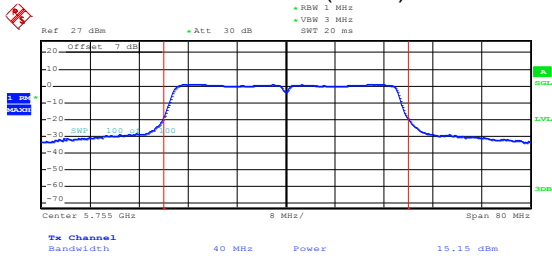


Date: 13.APR.2020 18:08:14

802.11ac(HT20)

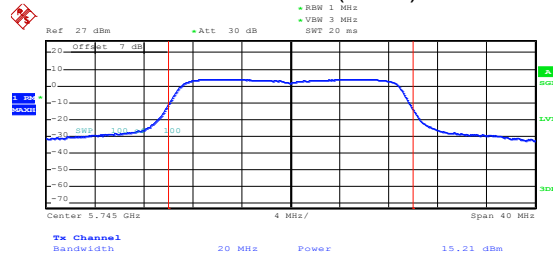


Date: 13.APR.2020 18:04:53

Lowest channel

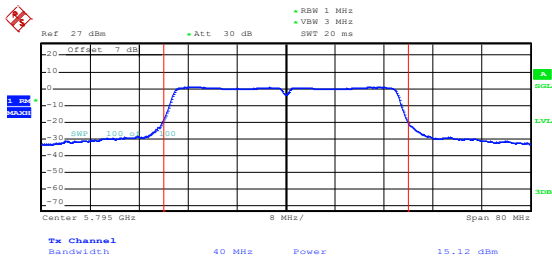

Date: 13.APR.2020 18:08:59

Lowest channel

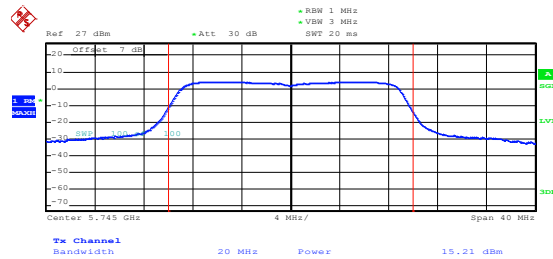


Date: 13.APR.2020 18:05:21

Highest channel

Highest channel


Middle channel

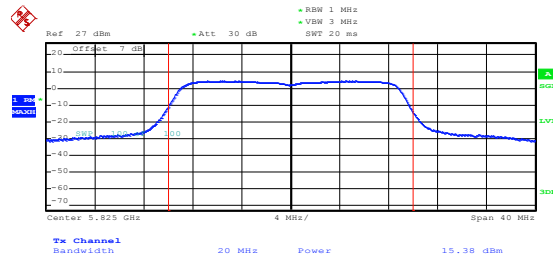

Date: 13.APR.2020 18:06:41


Highest channel

802.11ac(HT40)

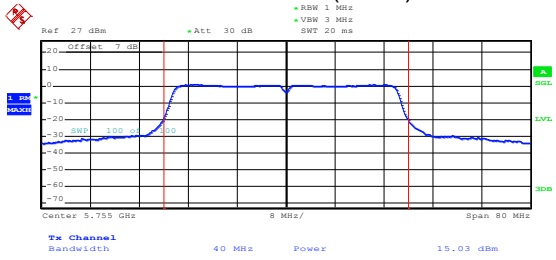


Date: 13.APR.2020 18:17:19

802.11ac(HT80)

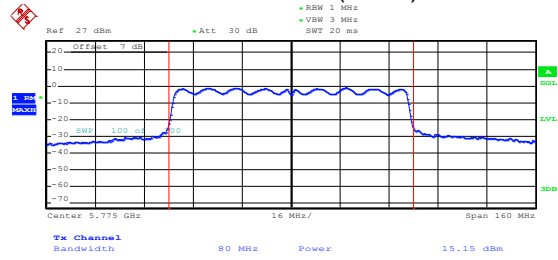

Date: 13.APR.2020 18:21:00

Lowest channel

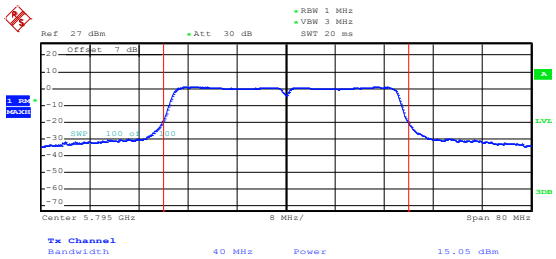


Date: 13.APR.2020 17:24:30


Middle channel

Highest channel

**TX1:
Band 1:**

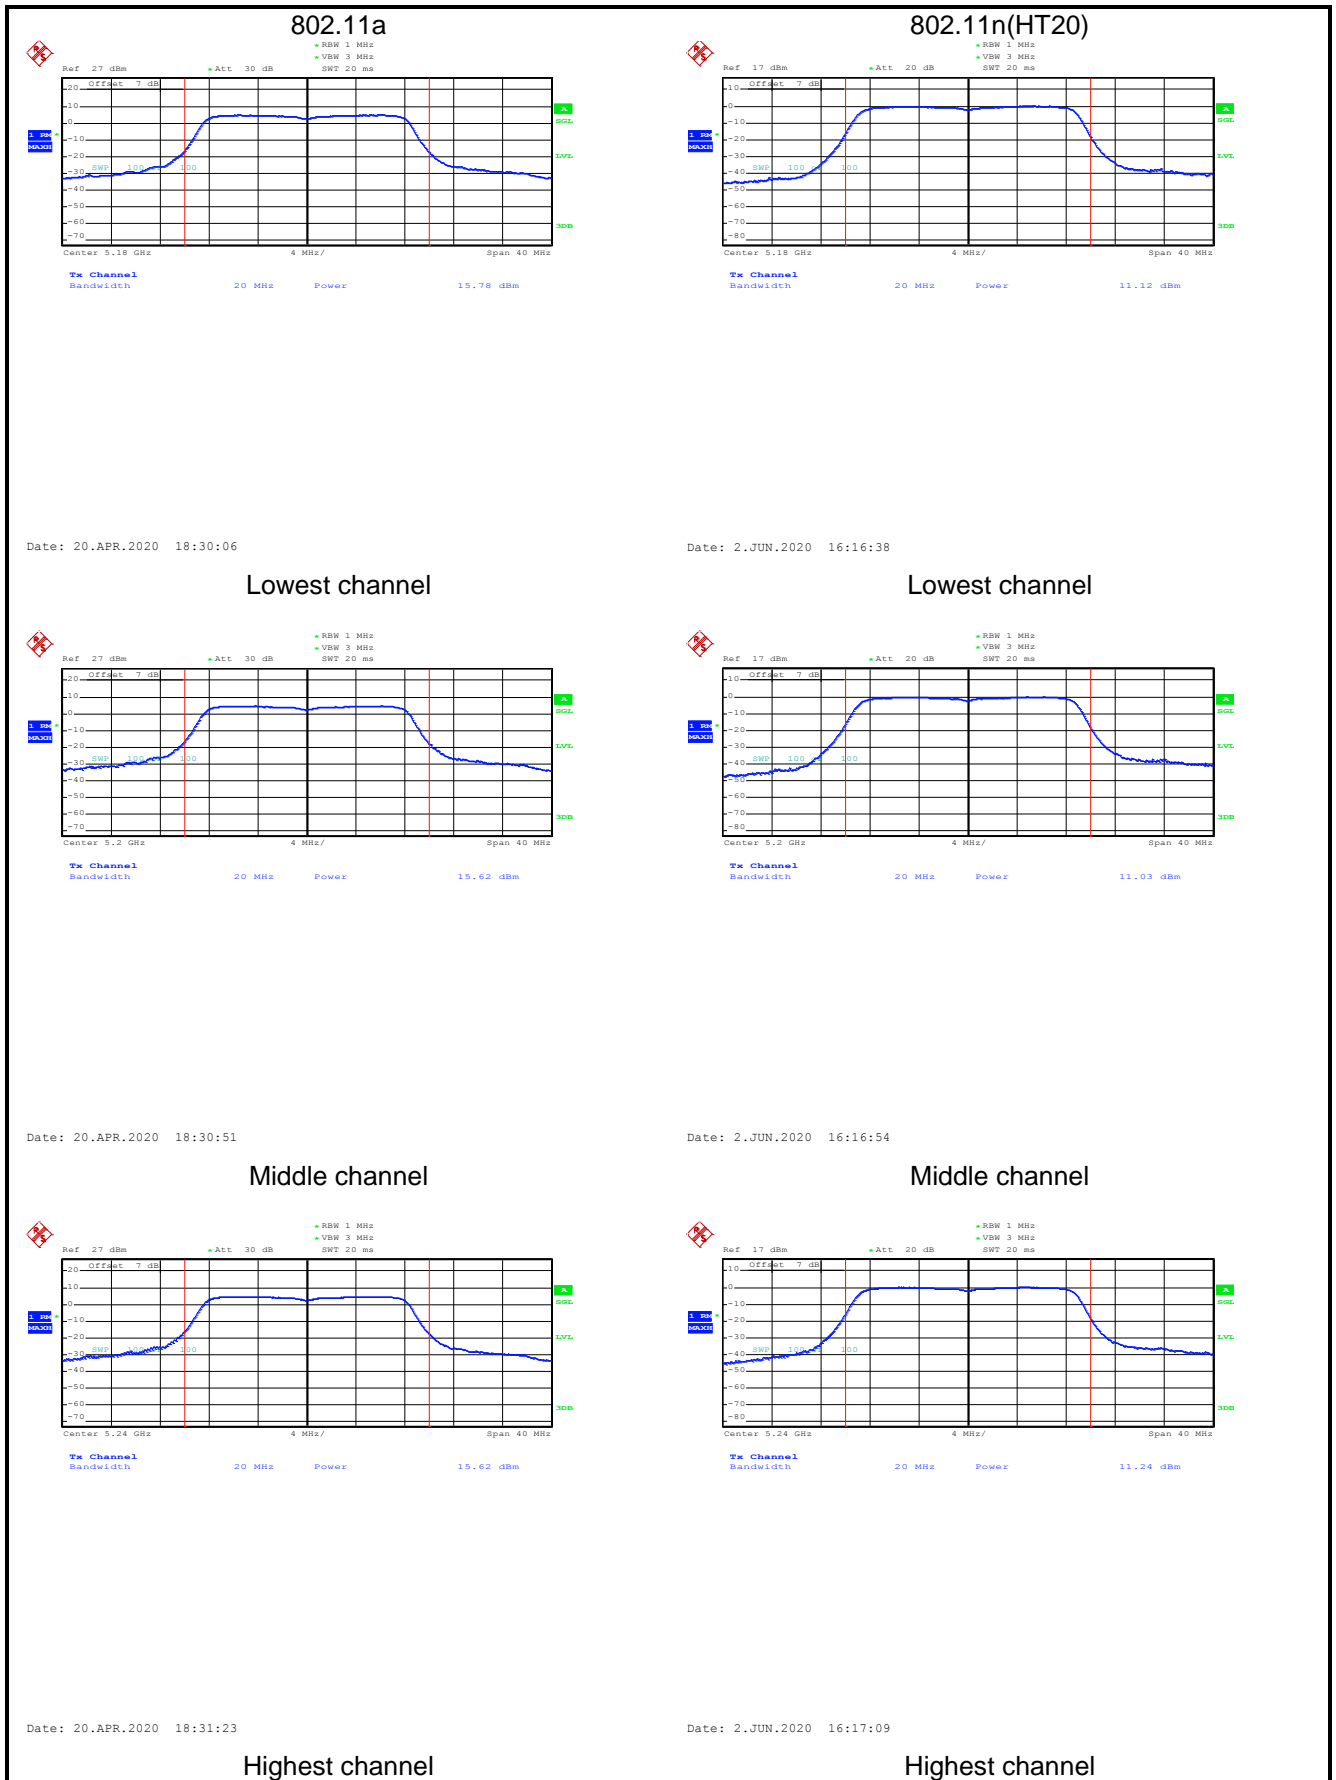


802.11n(HT40)

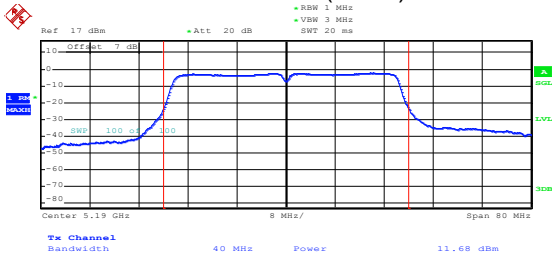


Date: 2.JUN.2020 16:19:40

802.11ac(HT20)

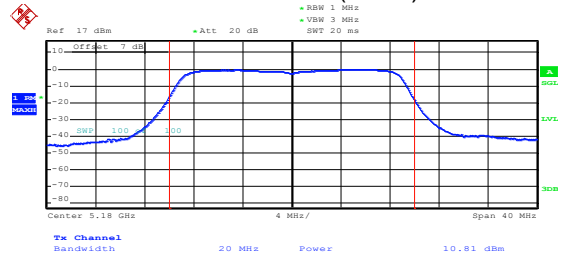


Date: 2.JUN.2020 16:18:10

Lowest channel

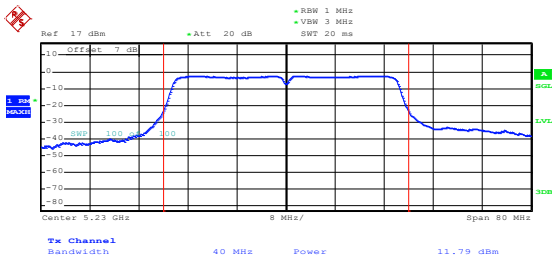

Date: 2.JUN.2020 16:19:56


Lowest channel

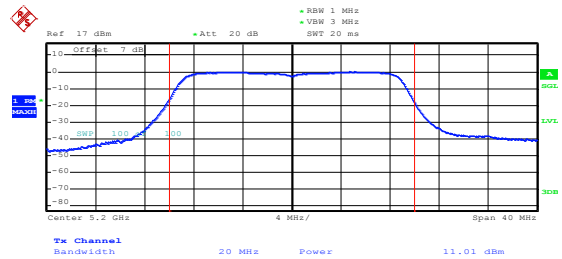

Date: 2.JUN.2020 16:17:35

Highest channel


Middle channel

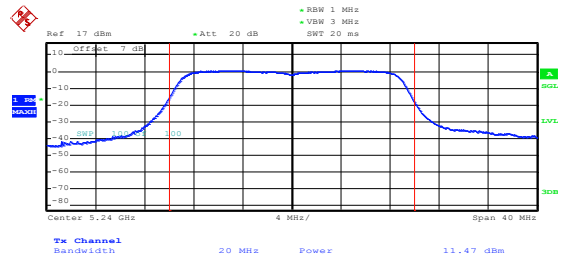

Date: 2.JUN.2020 16:17:22


Highest channel

802.11ac(HT40)

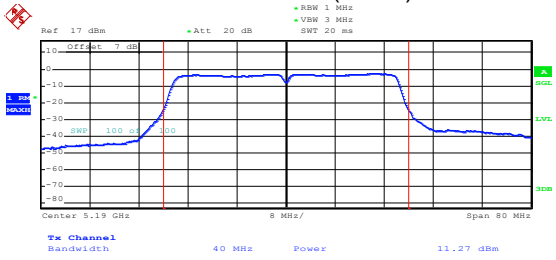


Date: 2.JUN.2020 16:20:28

802.11ac(HT80)

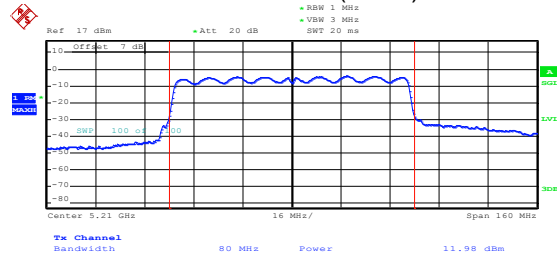

Date: 2.JUN.2020 16:21:13

Lowest channel

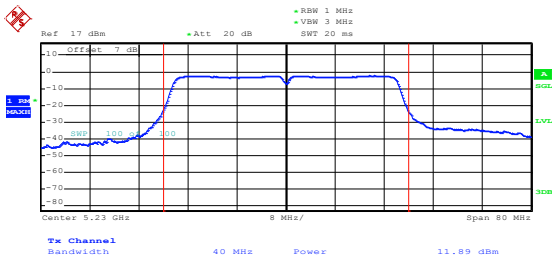


Date: 2.JUN.2020 16:20:15

Middle channel

Highest channel


Band 4:

802.11a

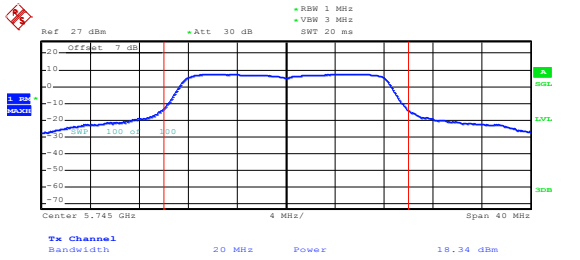


Date: 13.APR.2020 18:37:10

802.11n(HT20)

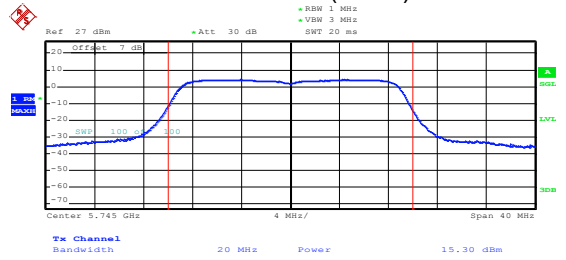


Date: 13.APR.2020 18:40:21

Lowest channel

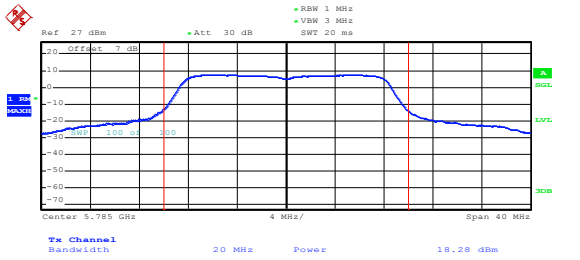


Date: 13.APR.2020 18:37:45

Lowest channel

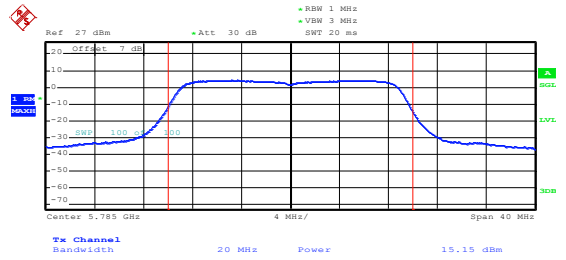


Date: 13.APR.2020 18:39:34

Middle channel

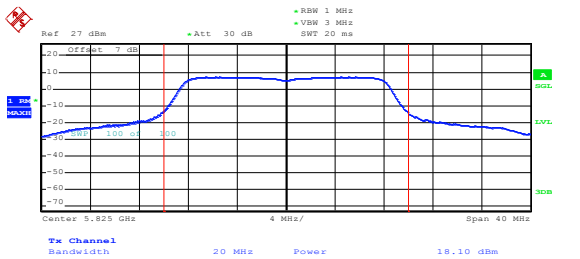

Date: 13.APR.2020 18:38:10

Middle channel

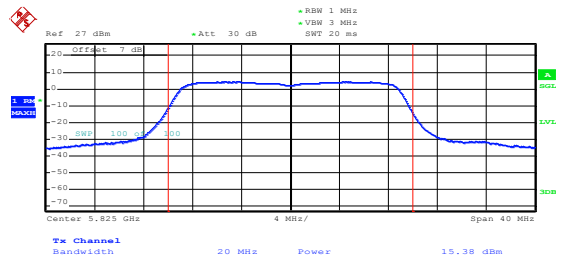


Date: 13.APR.2020 18:39:03

Highest channel


Highest channel

802.11n(HT40)

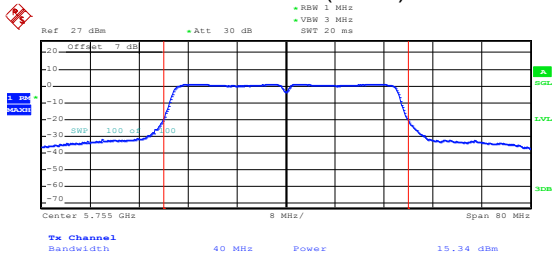


Date: 18.APR.2020 18:04:15

802.11ac(HT20)

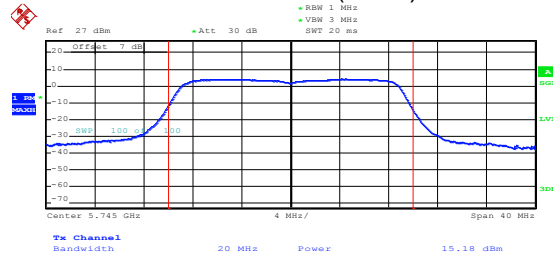


Date: 13.APR.2020 18:41:04

Lowest channel

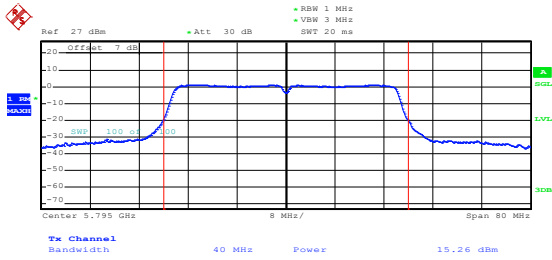


Date: 18.APR.2020 18:04:57

Lowest channel

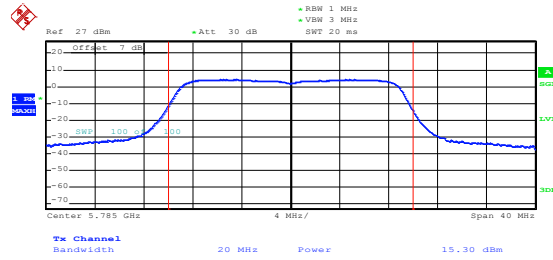

Date: 13.APR.2020 18:41:38


Highest channel

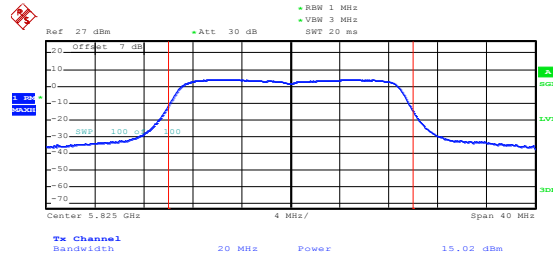

Date: 13.APR.2020 18:42:02


Highest channel

802.11ac(HT40)

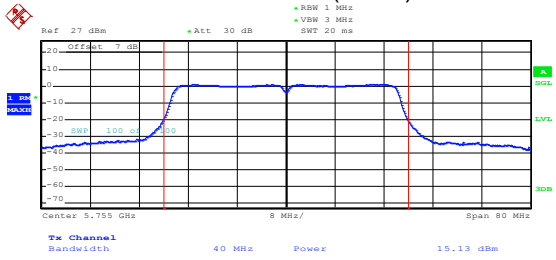


Date: 13.APR.2020 18:44:10

802.11ac(HT80)

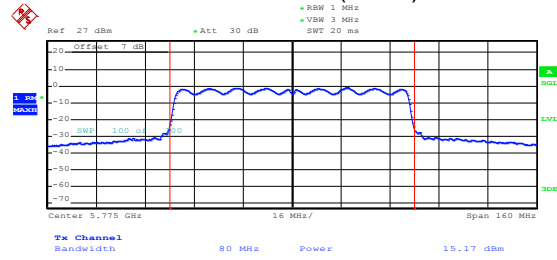

Date: 13.APR.2020 18:23:36

Lowest channel

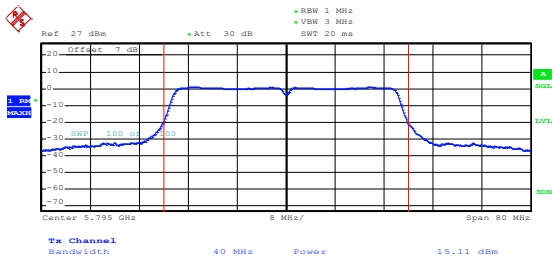


Date: 13.APR.2020 18:44:53

Middle channel

Highest channel

6.3 Occupy Bandwidth

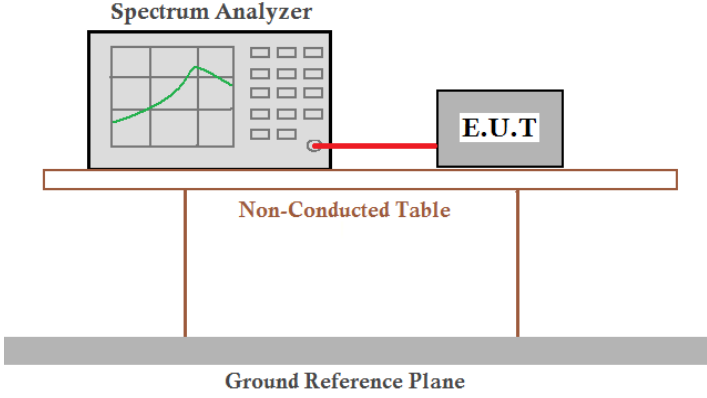Test Requirement:	RSS-GEN Section 6.7, RSS-247 Section 6.2.1.2, RSS-247 Section 6.2.2.1, RSS-247 Section 6.2.3.1, RSS-247 Section 6.2.4.1
Limit:	Band 1/2/3/4: N/A (26dB Emission Bandwidth and 99% Occupy Bandwidth) Band 4: >500kHz (6dB Bandwidth)
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected via a red cable to an E.U.T. (Equipment Under Test). Both are placed on a Non-Conducted Table. Below the table is a Ground Reference Plane.</p>
Test Instruments:	Refer to section 5.10 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Measurement Data:

TX0:

Band 1:

Test Channel	26dB Emission Bandwidth (MHz)						Limit	Result
	802.11a	802.11n (HT20)	802.11n (HT40)	802.11ac (HT20)	802.11ac (HT40)	802.11ac (HT80)		
Lowest	21.80	21.01	43.56	21.18	43.20	---	N/A	PASS
Middle	21.56	20.81	---	20.94	---	79.84		
Highest	20.12	20.10	40.00	19.97	39.54	---		
Test Channel	99% Occupy Bandwidth (MHz)						Limit	Result
	802.11a	802.11n (HT20)	802.11n (HT40)	802.11ac (HT20)	802.11ac (HT40)	802.11ac (HT80)		
Lowest	16.96	17.82	37.38	17.84	37.38	---	N/A	PASS
Middle	17.01	17.81	---	17.84	---	75.96		
Highest	17.11	17.78	37.38	17.84	37.38	---		

Band 4:

Test Channel	26dB Emission Bandwidth (MHz)						Limit	Result
	802.11a	802.11n (HT20)	802.11n (HT40)	802.11ac (HT20)	802.11ac (HT40)	802.11ac (HT80)		
Lowest	21.51	21.46	44.48	21.45	44.30	---	N/A	PASS
Middle	21.78	21.57	---	21.58	---	83.28		
Highest	22.31	21.62	44.34	21.17	44.30	---		
Test Channel	99% Occupy Bandwidth (MHz)						Limit	Result
	802.11a	802.11n (HT20)	802.11n (HT40)	802.11ac (HT20)	802.11ac (HT40)	802.11ac (HT80)		
Lowest	17.39	17.99	37.60	18.02	37.58	---	N/A	PASS
Middle	17.41	17.96	---	17.98	---	76.52		
Highest	17.37	17.96	37.56	17.97	37.58	---		
Test Channel	6dB Emission Bandwidth (MHz)						Limit	Result
	802.11a	802.11n (HT20)	802.11n (HT40)	802.11ac (HT20)	802.11ac (HT40)	802.11ac (HT80)		
Lowest	16.56	17.68	36.64	17.68	36.64	---	>500kHz	PASS
Middle	16.64	17.68	---	17.68	---	76.48		
Highest	16.64	17.76	36.64	17.68	36.64	---		

TX1:


Band 1:

Test Channel	26dB Emission Bandwidth (MHz)						Limit	Result
	802.11a	802.11n (HT20)	802.11n (HT40)	802.11ac (HT20)	802.11ac (HT40)	802.11ac (HT80)		
Lowest	20.83	20.96	44.42	21.05	43.50	---	N/A	PASS
Middle	20.94	20.72	---	21.08	---	79.72		
Highest	19.84	19.97	40.42	19.96	39.84	---		
Test Channel	99% Occupy Bandwidth (MHz)						Limit	Result
	802.11a	802.11n (HT20)	802.11n (HT40)	802.11ac (HT20)	802.11ac (HT40)	802.11ac (HT80)		
Lowest	16.85	17.76	37.26	17.78	37.22	---	N/A	PASS
Middle	16.85	17.76	---	17.79	---	75.80		
Highest	16.86	17.77	37.32	17.81	37.36	---		

Band 4:


Test Channel	26dB Emission Bandwidth (MHz)						Limit	Result
	802.11a	802.11n (HT20)	802.11n (HT40)	802.11ac (HT20)	802.11ac (HT40)	802.11ac (HT80)		
Lowest	21.99	21.38	44.04	21.09	44.06	---	N/A	PASS
Middle	21.70	21.29	---	21.20	---	83.56		
Highest	21.48	21.08	43.48	21.04	43.78	---		
Test Channel	99% Occupy Bandwidth (MHz)						Limit	Result
	802.11a	802.11n (HT20)	802.11n (HT40)	802.11ac (HT20)	802.11ac (HT40)	802.11ac (HT80)		
Lowest	17.11	17.80	37.38	17.81	37.28	---	N/A	PASS
Middle	17.07	17.81	---	17.81	---	75.96		
Highest	17.09	17.80	37.32	17.83	37.38	---		
Test Channel	6dB Emission Bandwidth (MHz)						Limit	Result
	802.11a	802.11n (HT20)	802.11n (HT40)	802.11ac (HT20)	802.11ac (HT40)	802.11ac (HT80)		
Lowest	16.48	17.68	36.64	17.52	36.64	---	>500kHz	PASS
Middle	16.48	17.68	---	17.68	---	76.16		
Highest	16.48	17.68	36.64	17.68	36.64	---		

Test plot as follows: TX0:
Band 1:

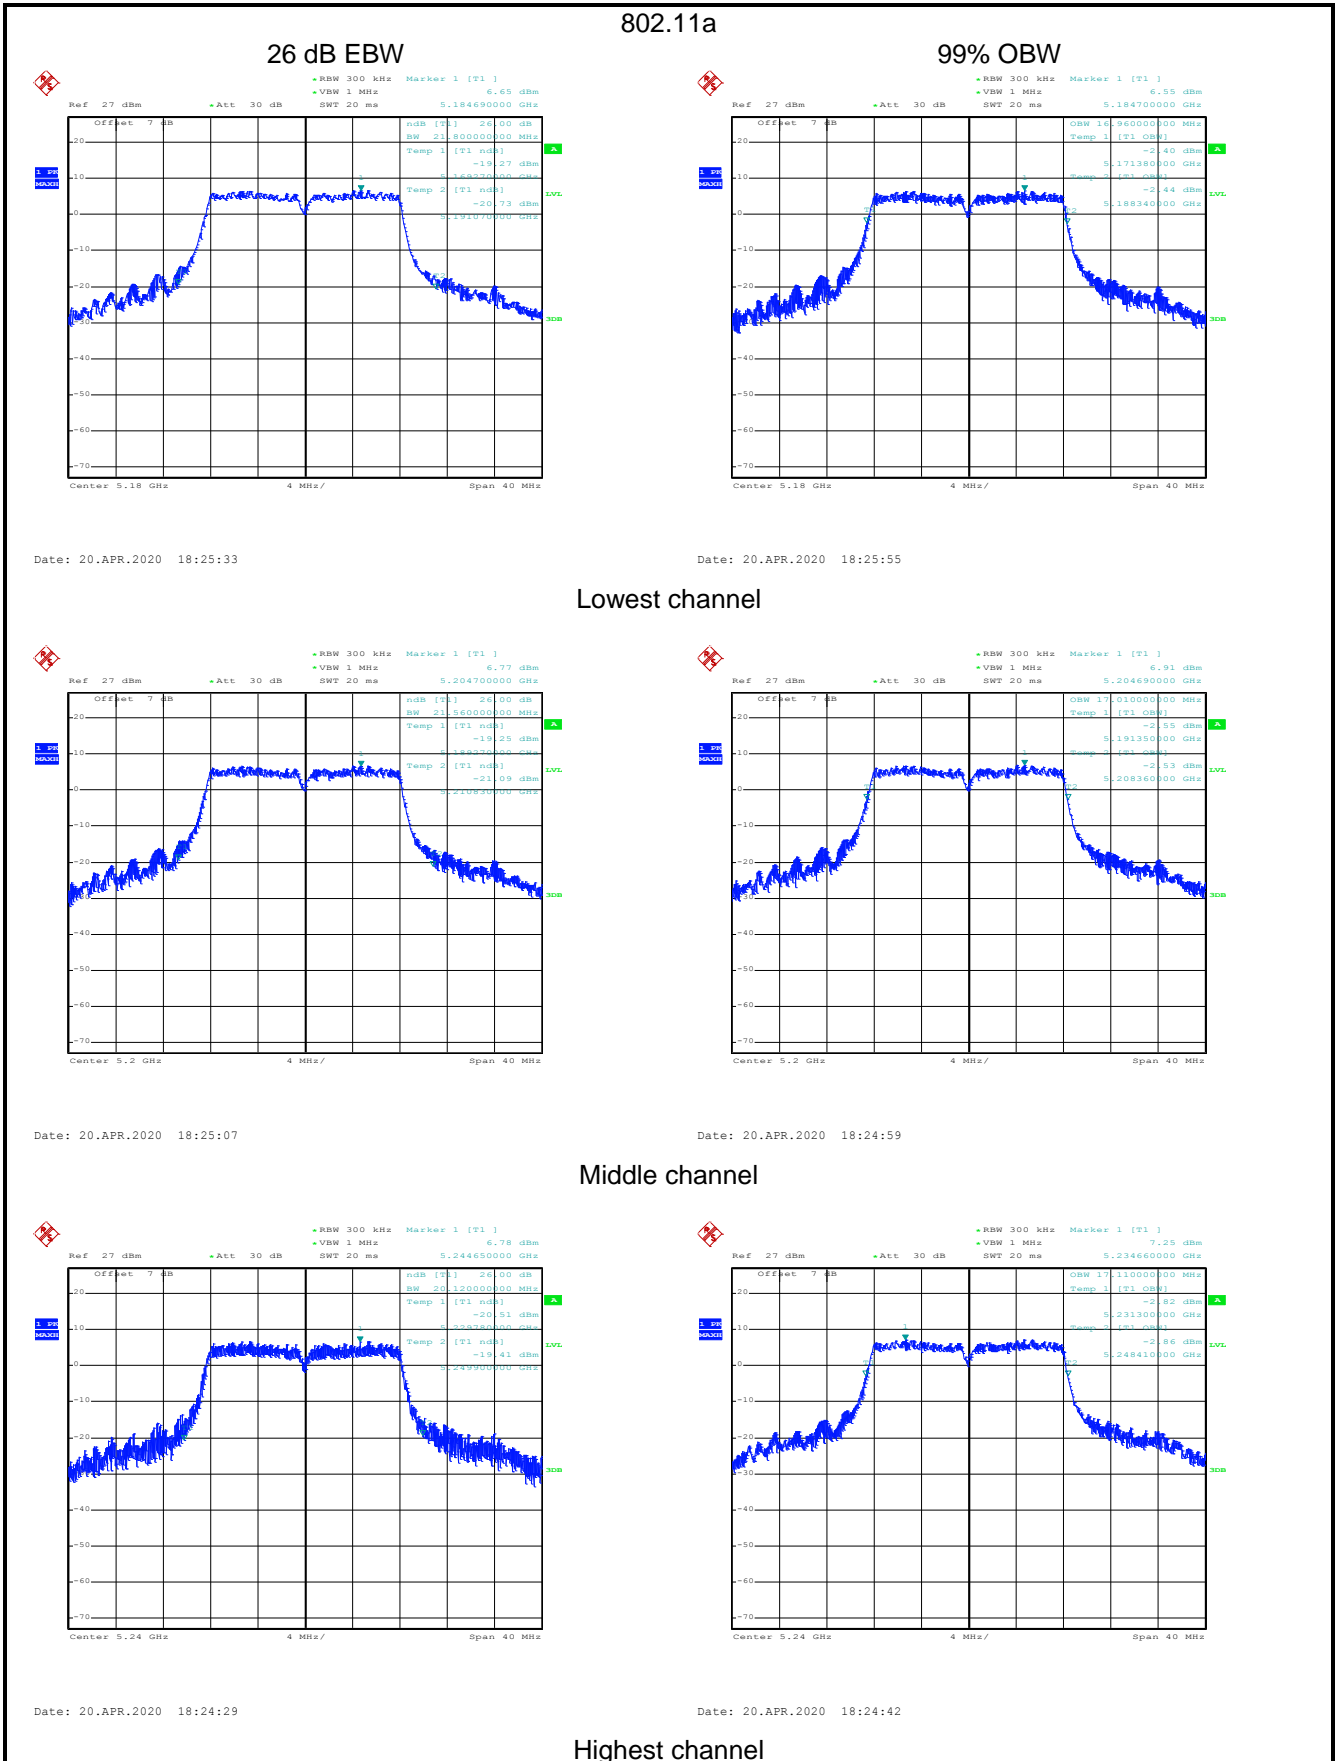


802.11n(HT20)

26 dB EBW

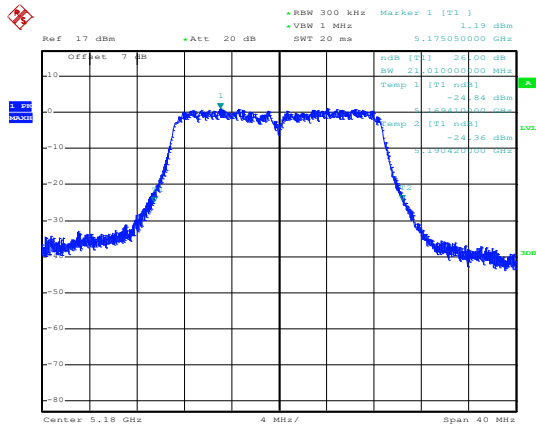


Date: 2.JUN.2020 14:03:49

99% OBW

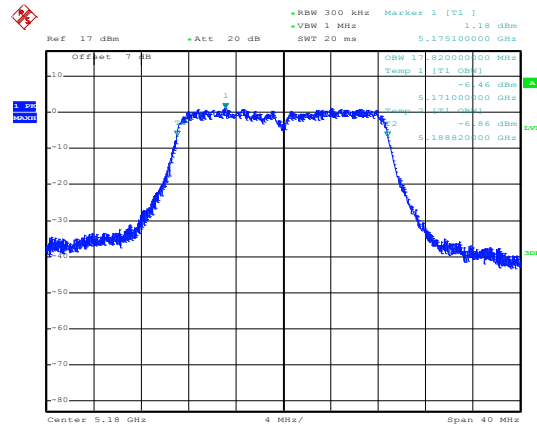


Date: 2.JUN.2020 14:03:42

Lowest channel

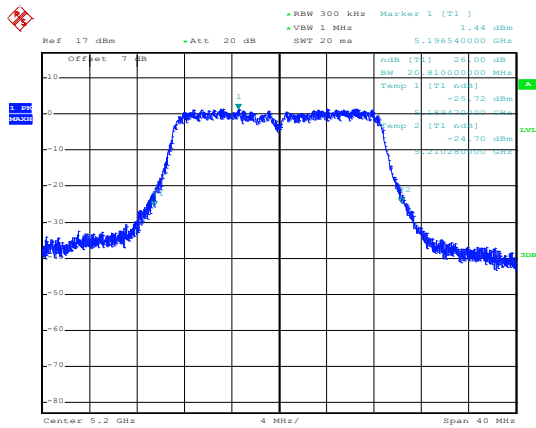


Date: 2.JUN.2020 14:04:02

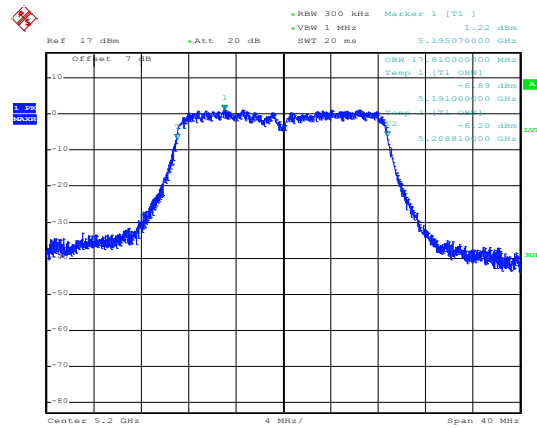


Date: 2.JUN.2020 14:04:10

Middle channel

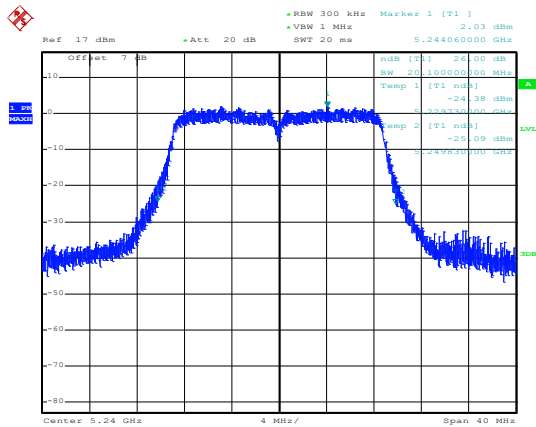

Date: 2.JUN.2020 14:04:37

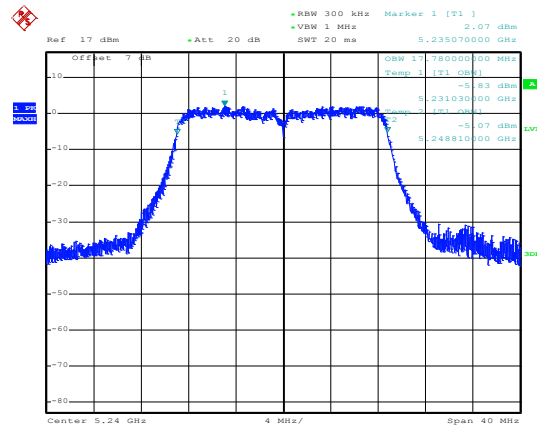


Date: 2.JUN.2020 14:04:24

Highest channel


802.11n(HT40)

26 dB EBW

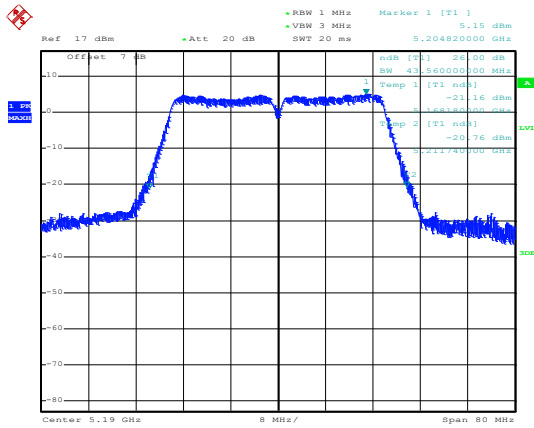


Date: 2.JUN.2020 13:38:21

99% OBW

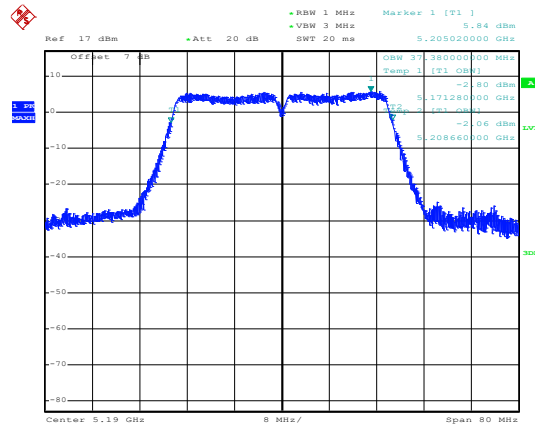


Date: 2.JUN.2020 13:38:15

Lowest channel

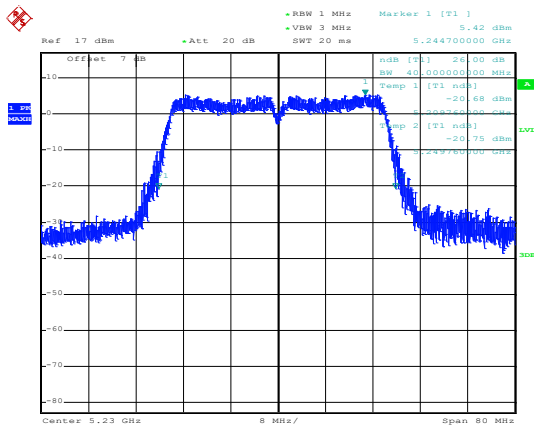

Date: 2.JUN.2020 13:38:40

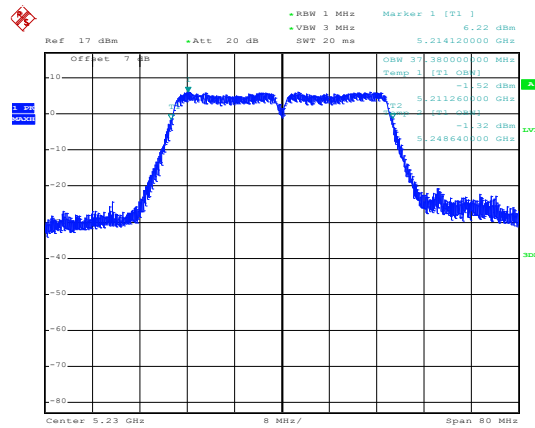



Date: 2.JUN.2020 13:38:48

Highest channel

802.11ac(HT20)

26 dB EBW



99% OBW

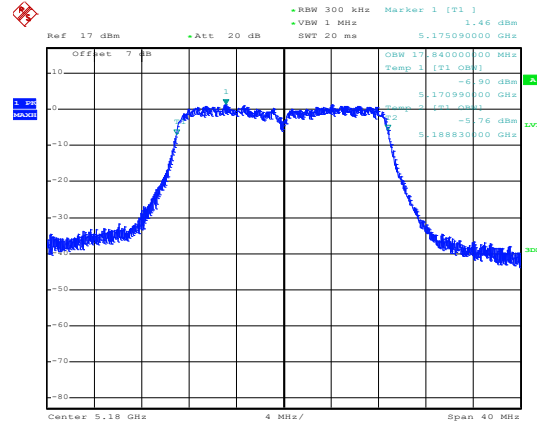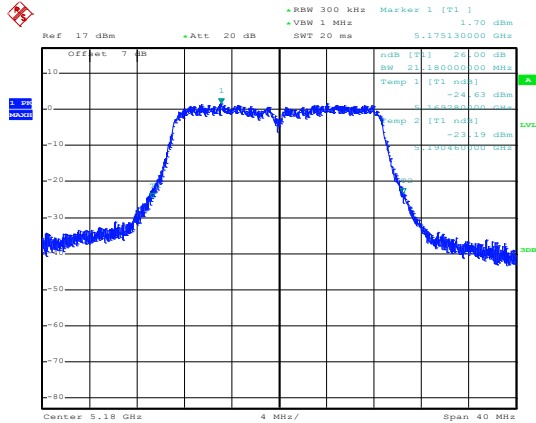

Date: 2.JUN.2020 14:05:38

Date: 2.JUN.2020 14:05:45



Lowest channel

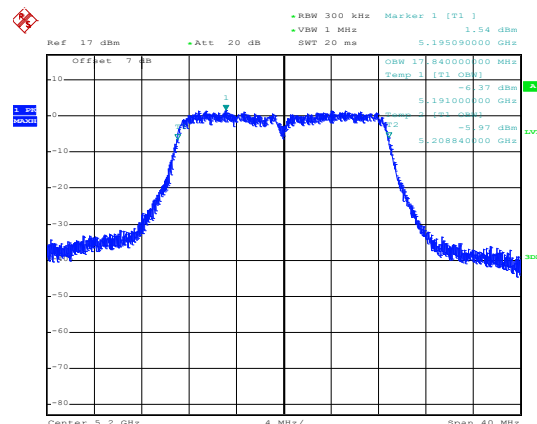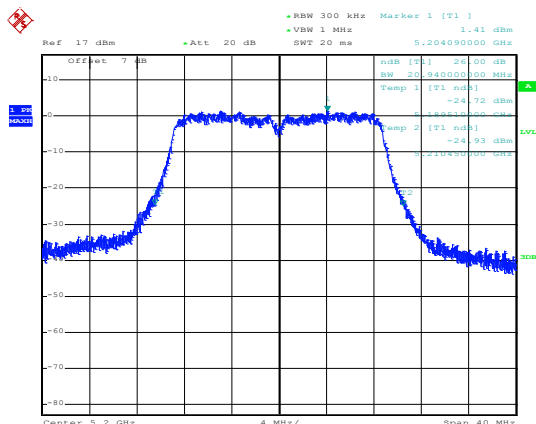

Date: 2.JUN.2020 14:05:20

Date: 2.JUN.2020 14:05:14

Middle channel

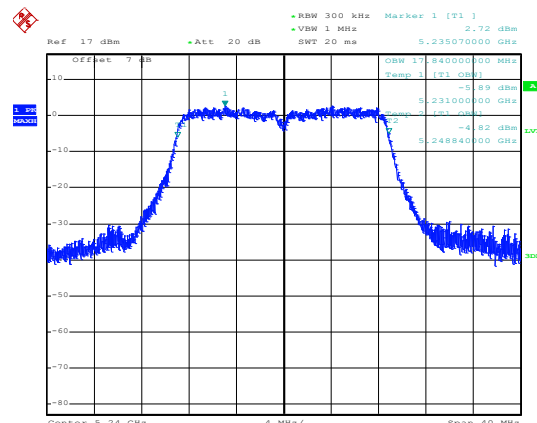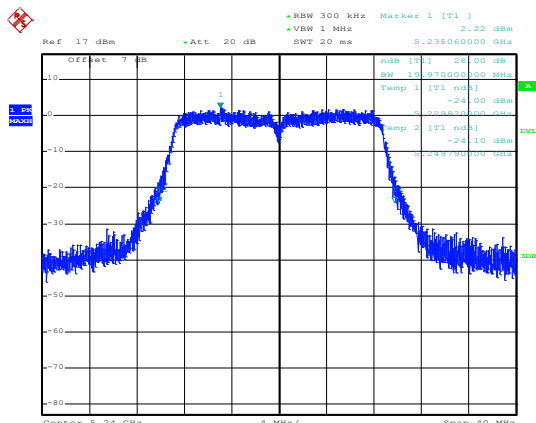


Date: 2.JUN.2020 14:04:55

Date: 2.JUN.2020 14:05:04

Highest channel


802.11ac(HT40)

26 dB EBW

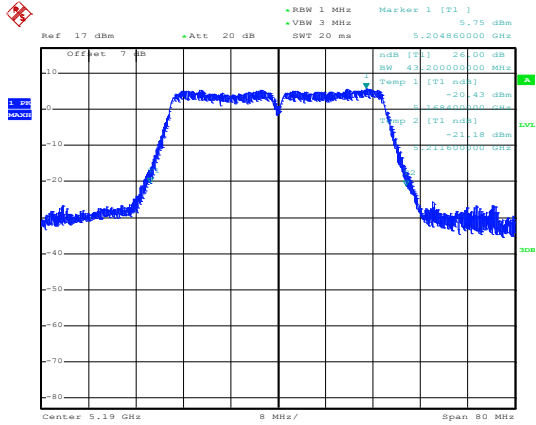


Date: 2.JUN.2020 13:40:14

99% OBW

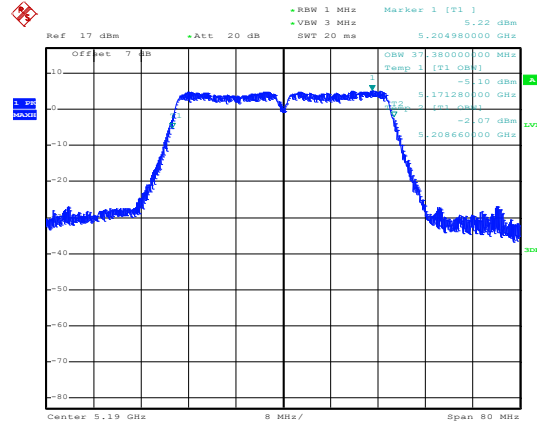


Date: 2.JUN.2020 13:40:23

Lowest channel

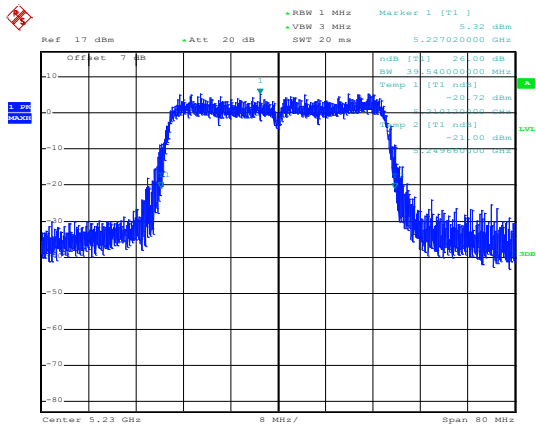


Date: 2.JUN.2020 13:40:01

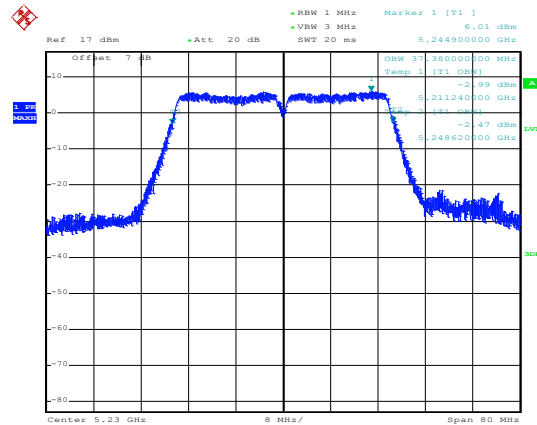


Date: 2.JUN.2020 13:39:01

Highest channel

802.11ac(HT80)

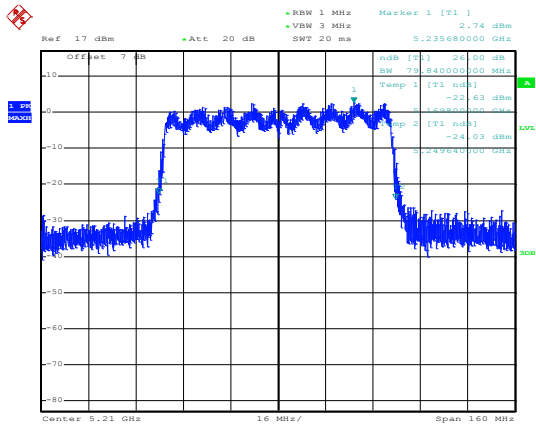

Date: 2.JUN.2020 13:41:13

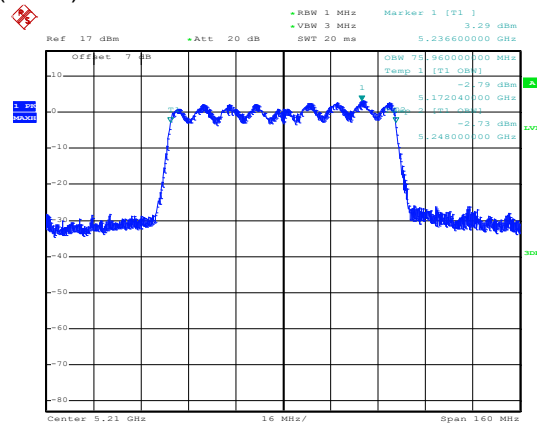


Date: 2.JUN.2020 13:40:54

Middle channel

Band 4:


802.11a

26 dB EBW

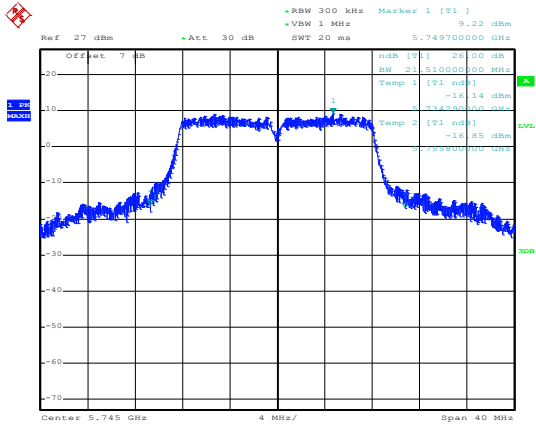


Date: 18.APR.2020 19:42:59

99% OBW

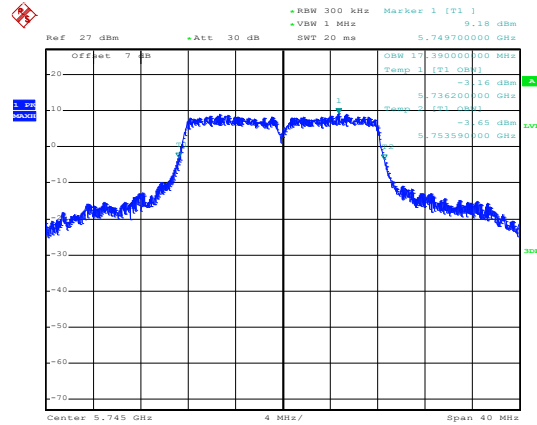


Date: 18.APR.2020 19:42:47

Lowest channel

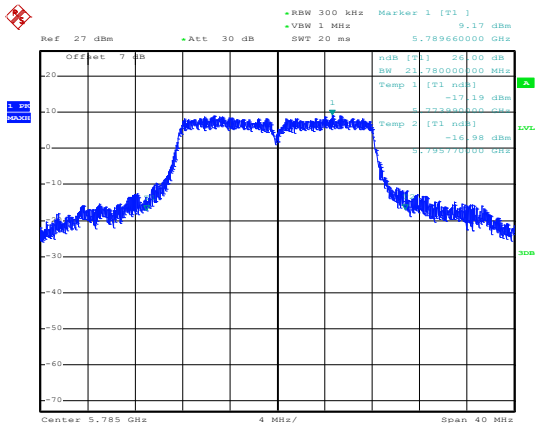


Date: 18.APR.2020 19:43:24

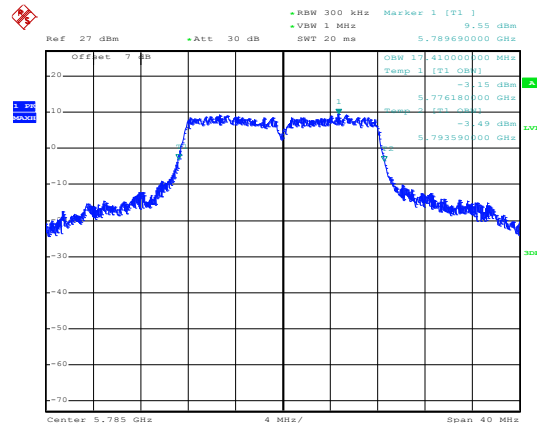


Date: 18.APR.2020 19:43:36

Middle channel

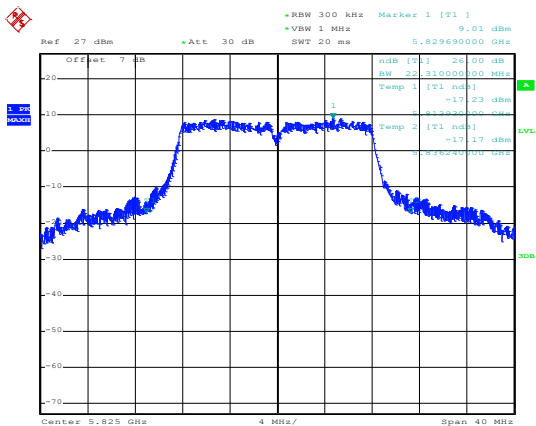

Date: 18.APR.2020 19:44:10

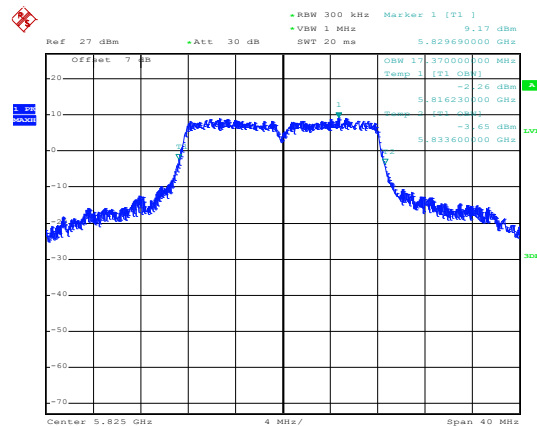



Date: 18.APR.2020 19:43:54

Highest channel

802.11n(HT20)

26 dB EBW



99% OBW

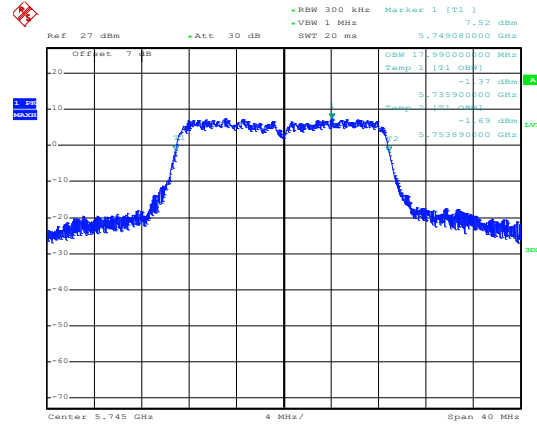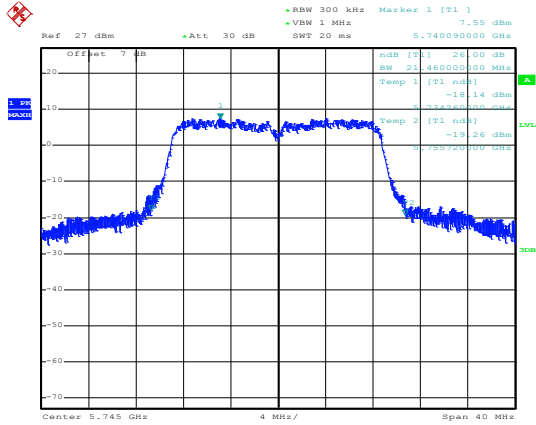

Date: 18.APR.2020 19:45:36

Date: 18.APR.2020 19:45:46



Lowest channel

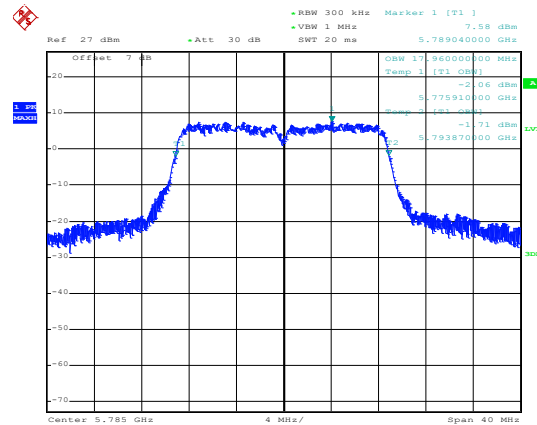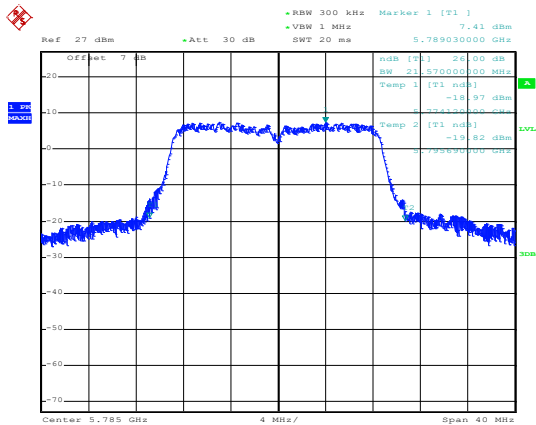

Date: 18.APR.2020 19:45:17

Date: 18.APR.2020 19:45:04

Middle channel

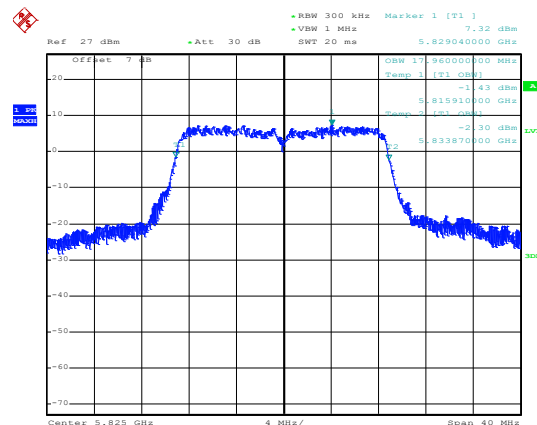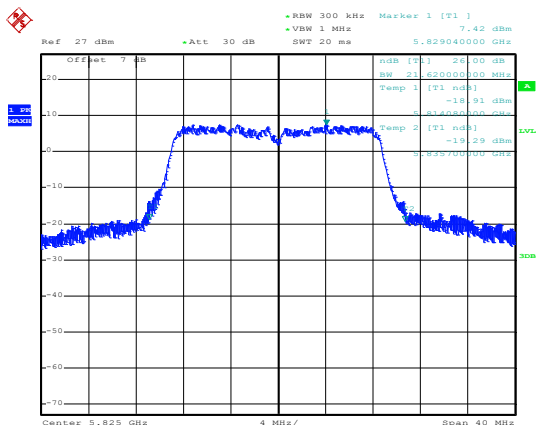


Date: 18.APR.2020 19:44:36

Date: 18.APR.2020 19:44:45

Highest channel


802.11n(HT40)

26 dB EBW

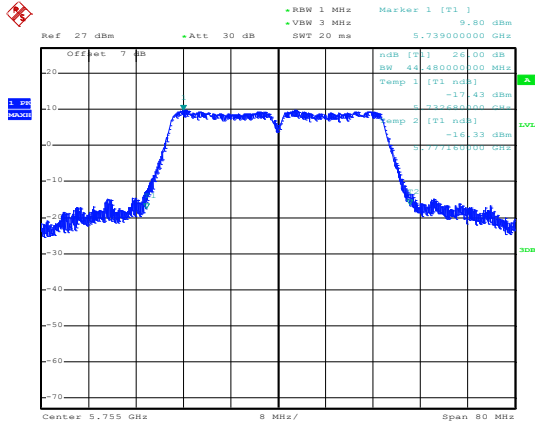


Date: 18.APR.2020 19:55:06

99% OBW

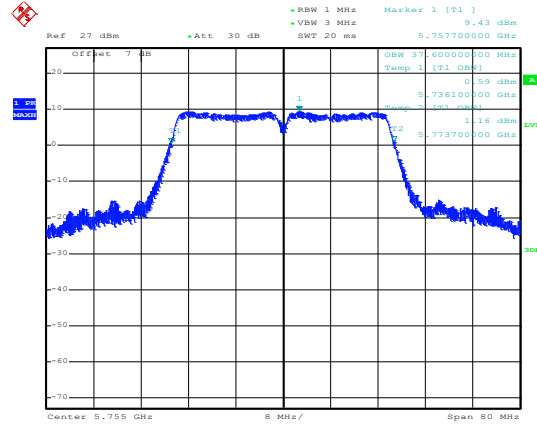


Date: 18.APR.2020 19:55:17

Lowest channel

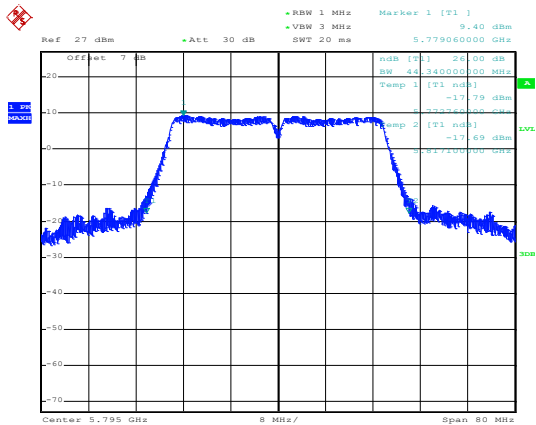

Date: 18.APR.2020 19:55:48

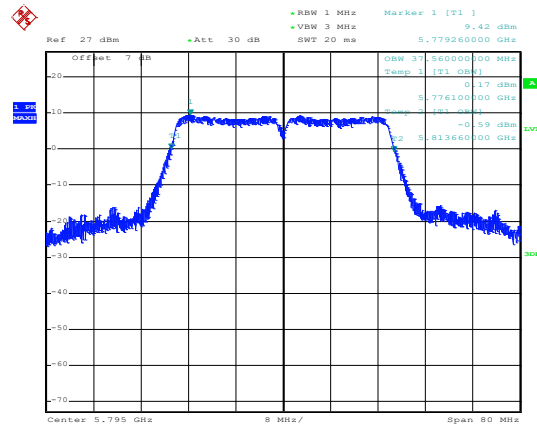


Date: 18.APR.2020 19:55:40

Highest channel


802.11ac(HT20)

26 dB EBW

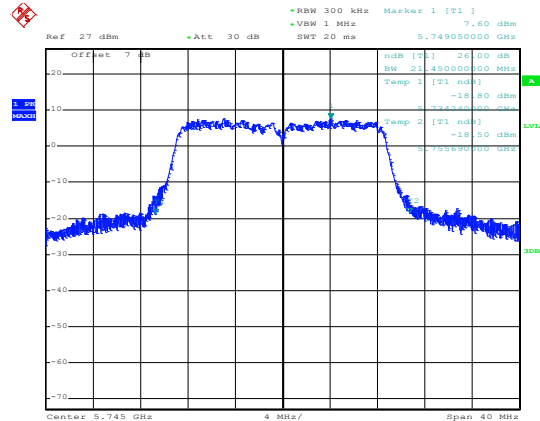


Date: 18.APR.2020 19:46:20

99% OBW

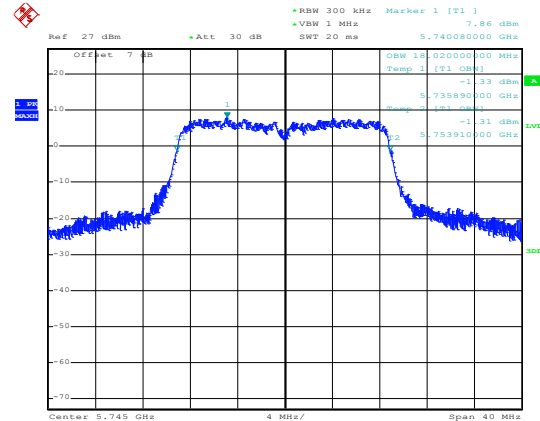


Date: 18.APR.2020 19:46:09

Lowest channel

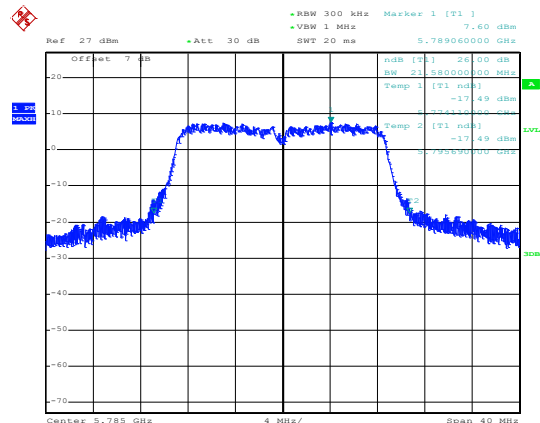


Date: 18.APR.2020 19:46:37

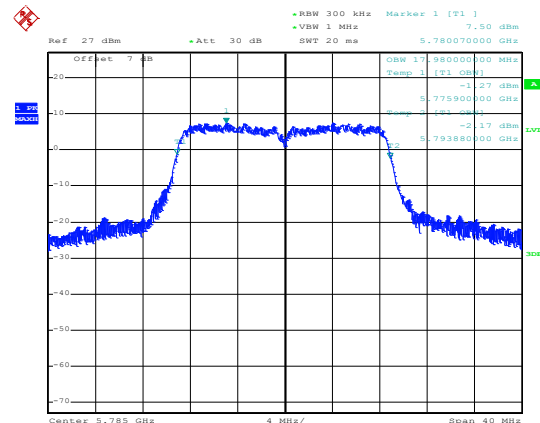


Date: 18.APR.2020 19:46:47

Middle channel

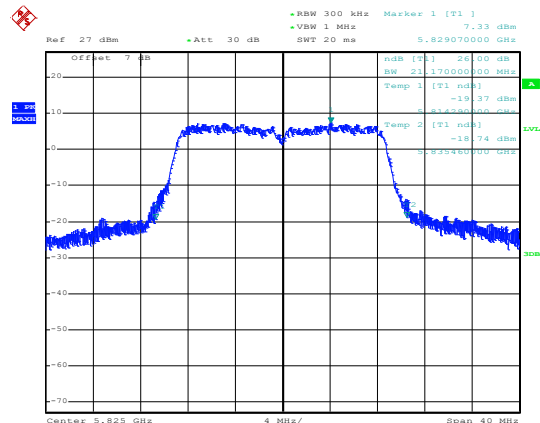

Date: 18.APR.2020 19:47:13

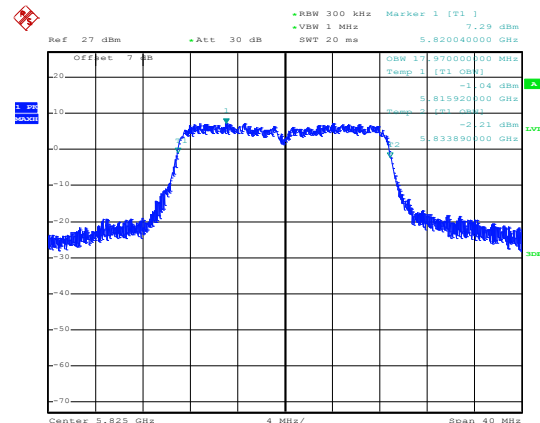


Date: 18.APR.2020 19:47:03

Highest channel


802.11ac(HT40)

26 dB EBW

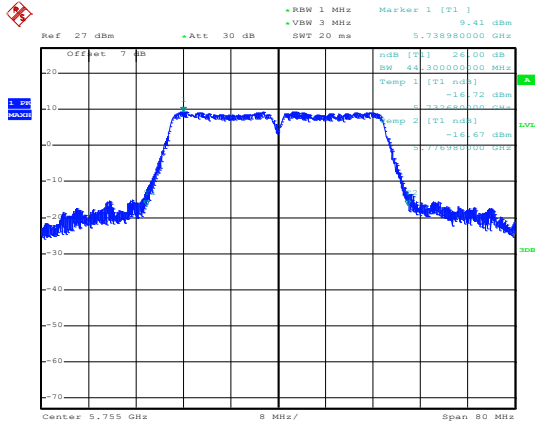


Date: 18.APR.2020 19:56:53

99% OBW

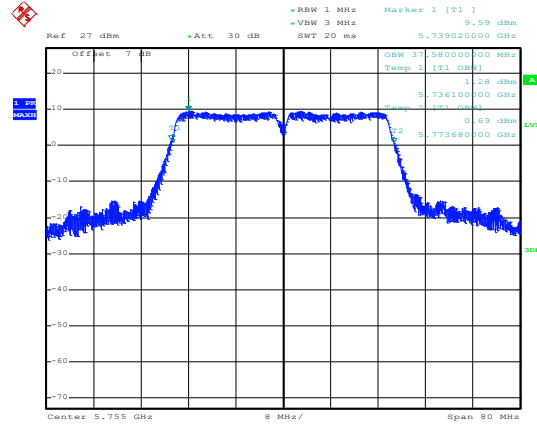


Date: 18.APR.2020 19:56:41

Lowest channel

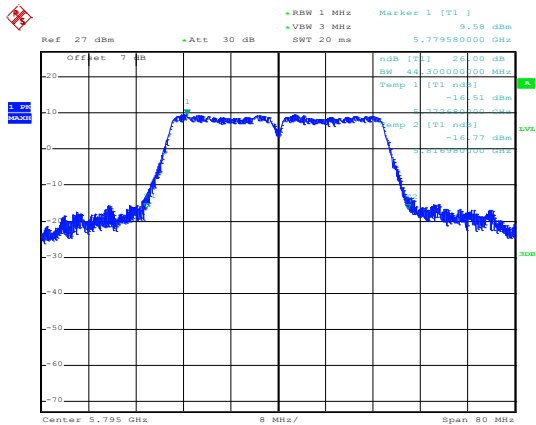


Date: 18.APR.2020 19:56:12

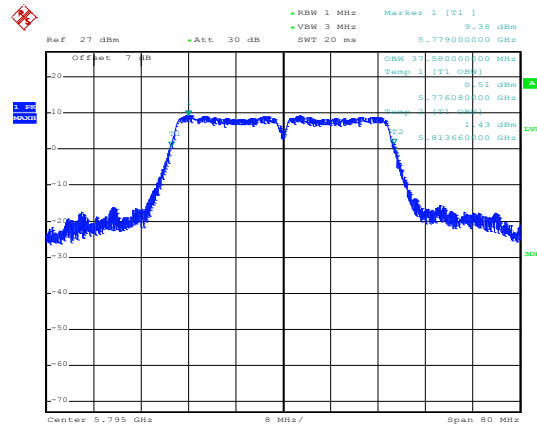


Date: 18.APR.2020 19:56:23

Highest channel

802.11ac(HT80)

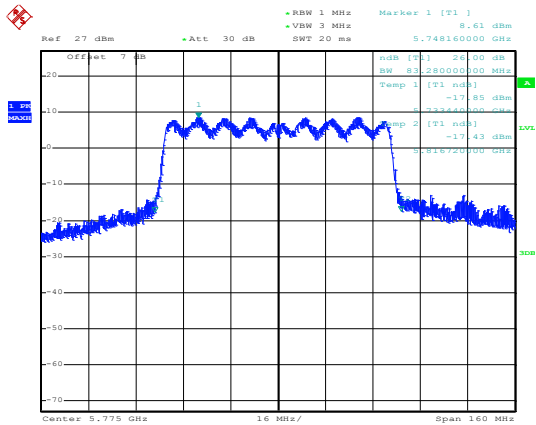


Date: 18.APR.2020 19:53:40

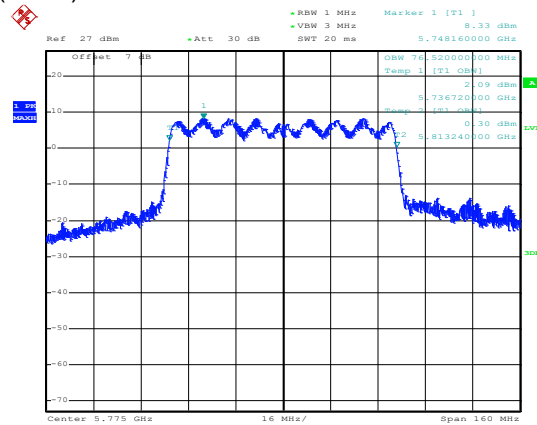


Date: 18.APR.2020 19:53:54

Middle channel

6dB BW

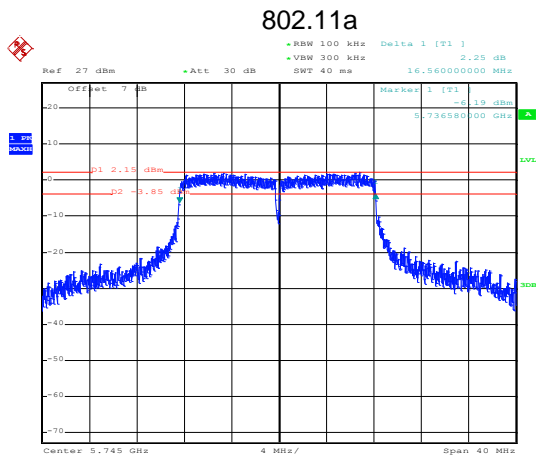


Date: 18.APR.2020 14:55:25

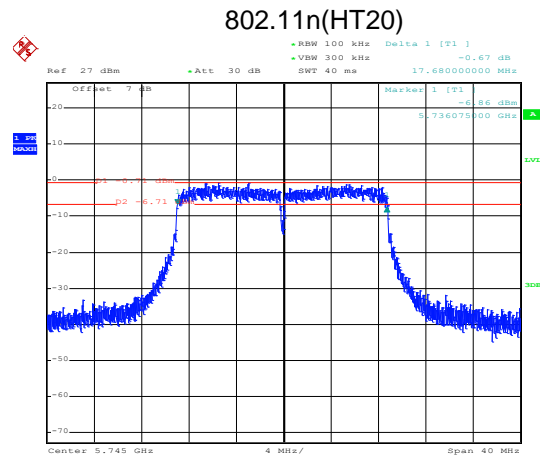


Date: 18.APR.2020 15:00:33

Lowest channel

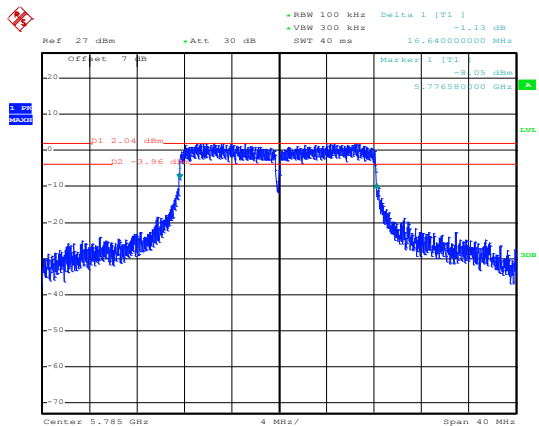


Date: 18.APR.2020 14:56:29

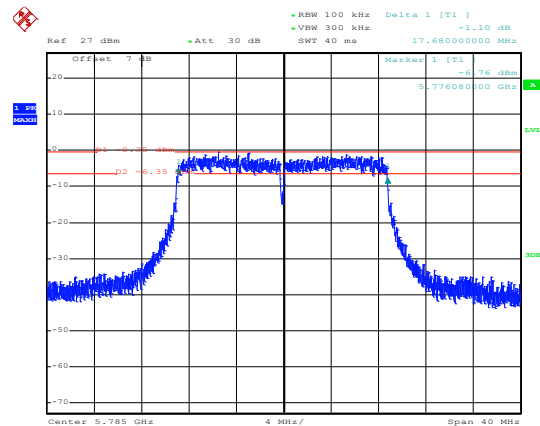


Date: 18.APR.2020 14:59:37

Middle channel

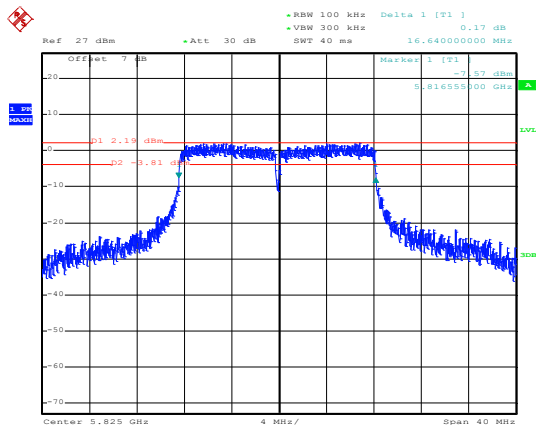

Date: 18.APR.2020 14:57:40

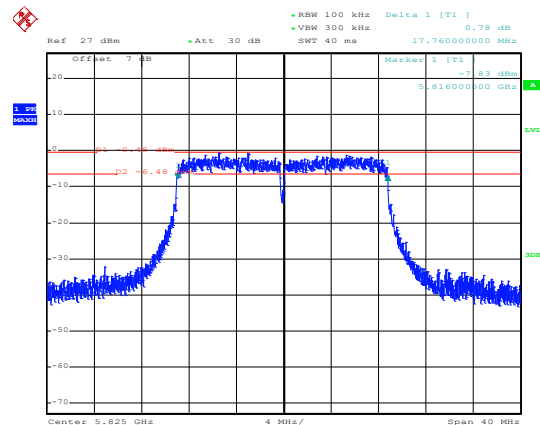


Date: 18.APR.2020 14:58:53

Highest channel

Highest channel


802.11n(HT40)

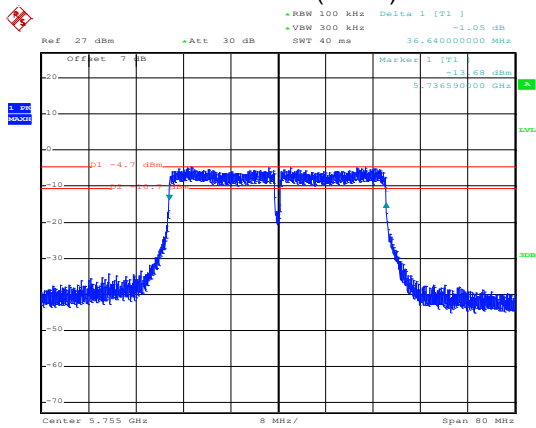

Date: 18.APR.2020 15:04:48


Lowest channel

802.11ac(HT20)

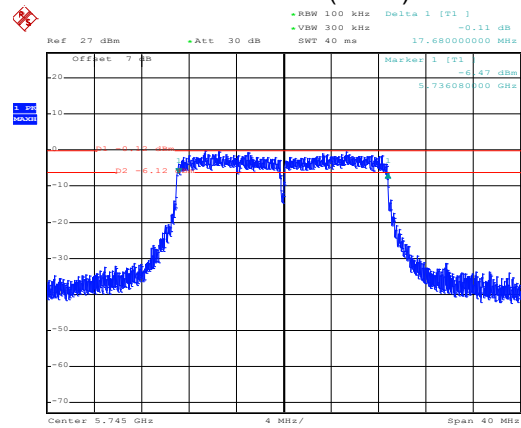


Date: 18.APR.2020 15:01:41

Lowest channel

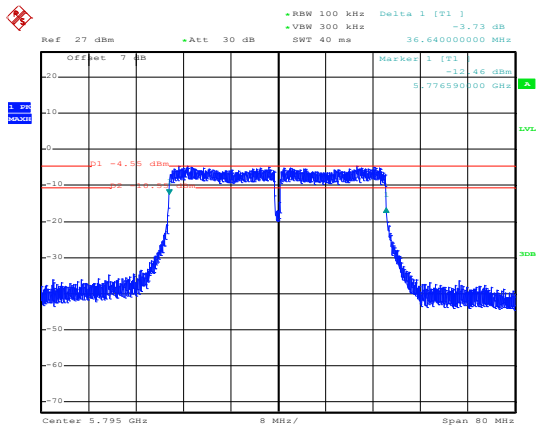


Date: 18.APR.2020 15:06:15

Highest channel

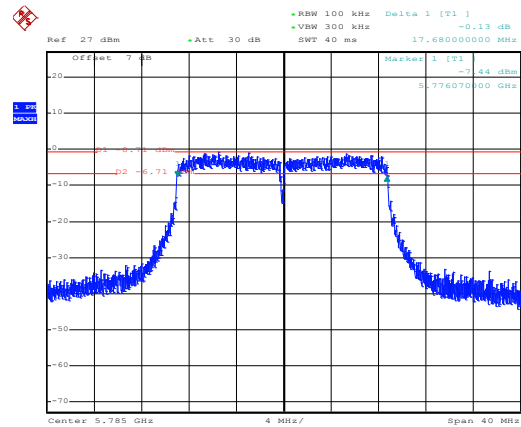


Date: 18.APR.2020 15:02:26

Middle channel

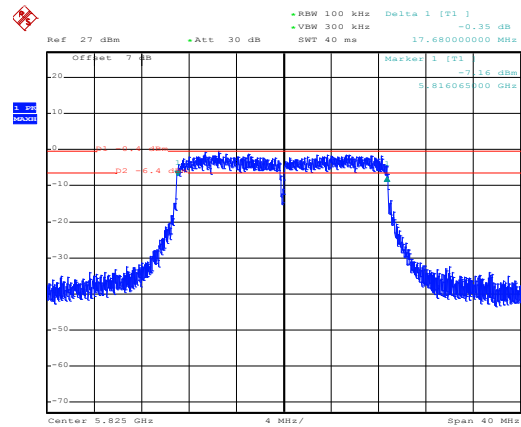


Date: 18.APR.2020 15:03:22

Highest channel

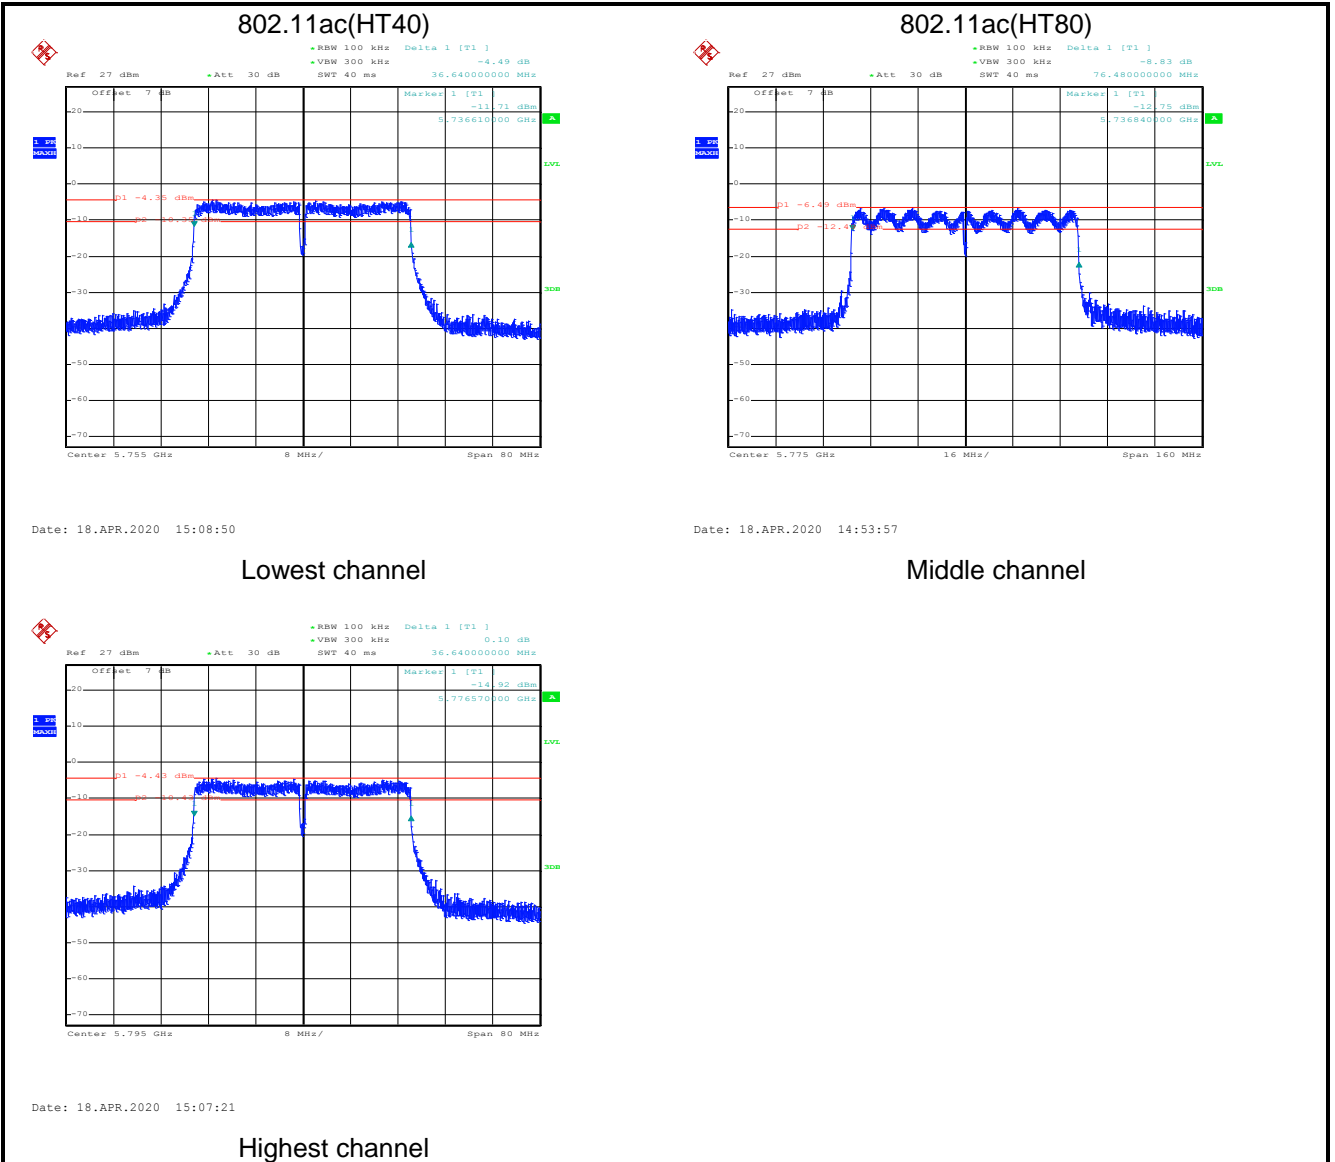


TX1:
Band 1:

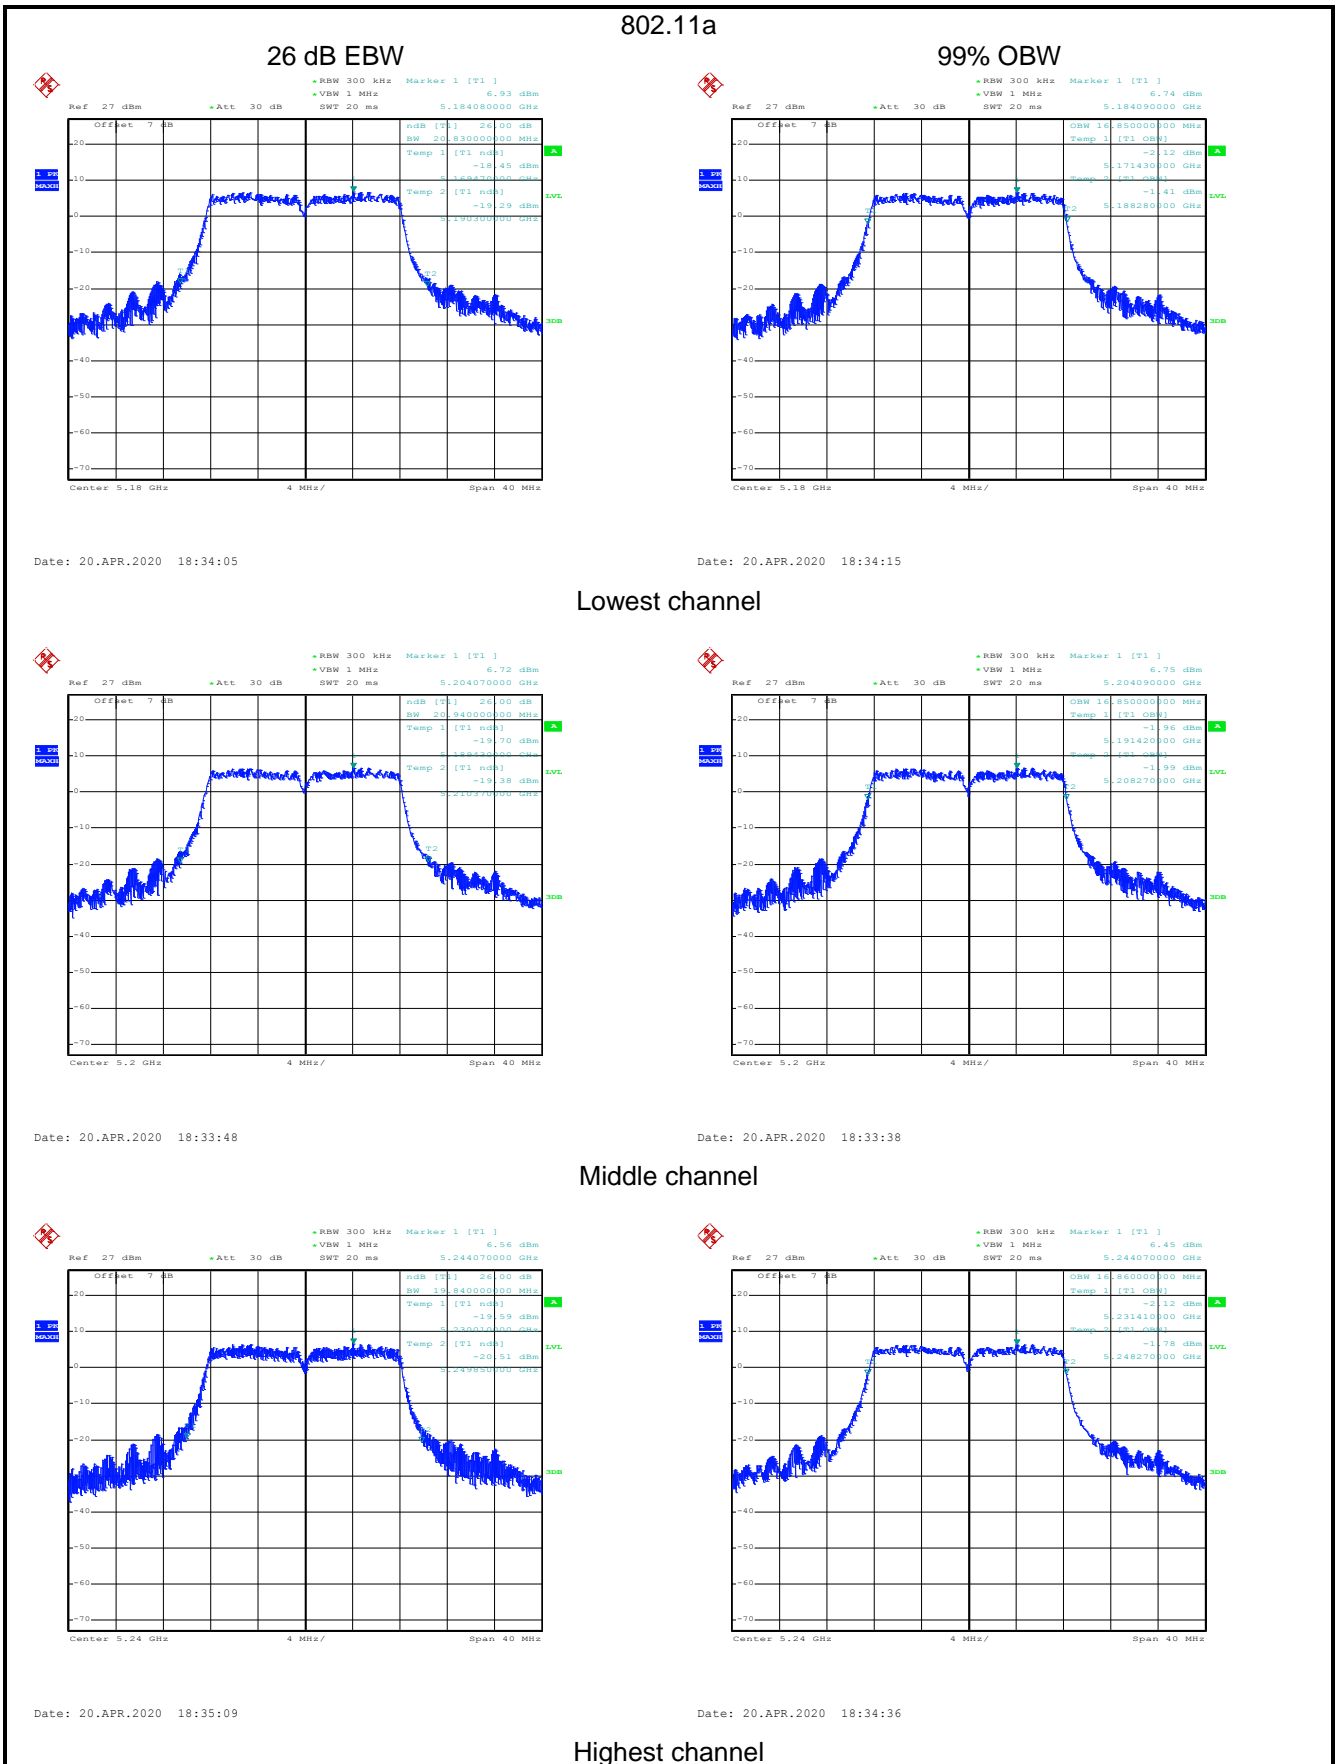


802.11n(HT20)

26 dB EBW

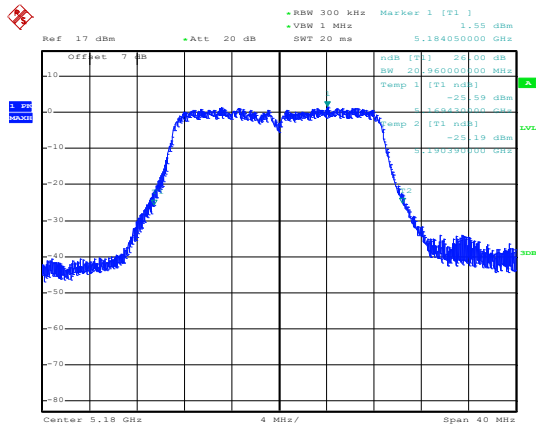


Date: 2.JUN.2020 16:30:01

99% OBW

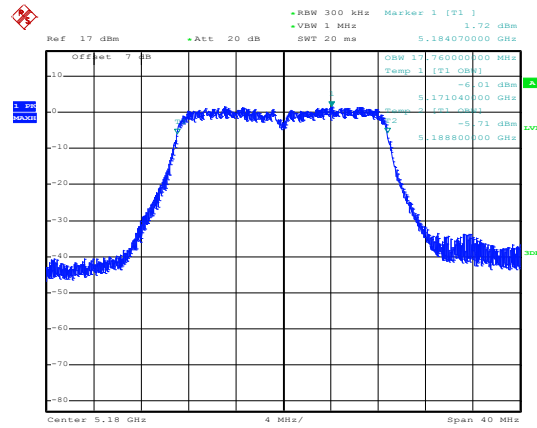


Date: 2.JUN.2020 16:29:54

Lowest channel

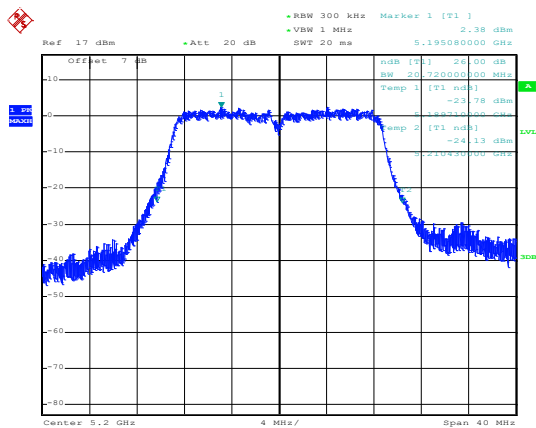


Date: 2.JUN.2020 16:29:37

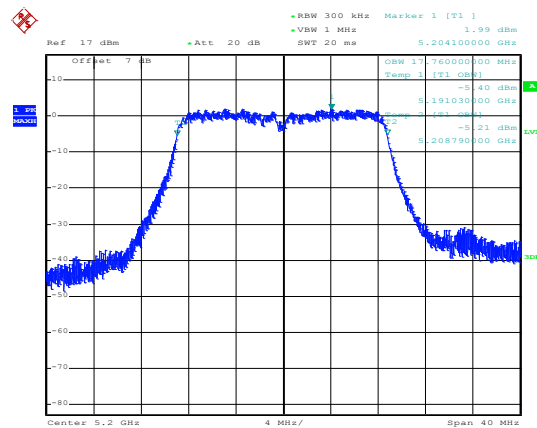


Date: 2.JUN.2020 16:29:44

Middle channel

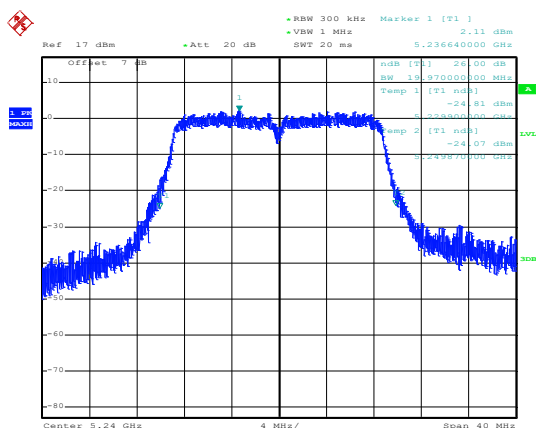

Date: 2.JUN.2020 16:29:27

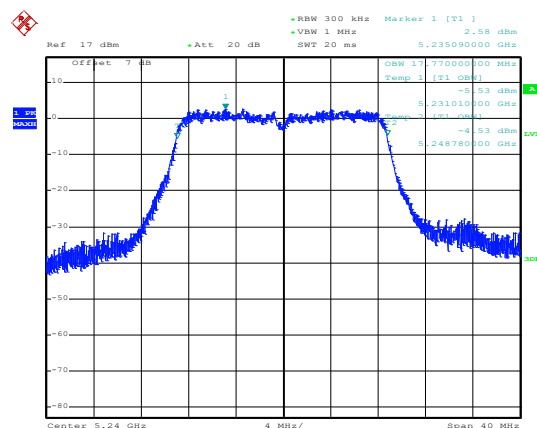


Date: 2.JUN.2020 16:29:18

Highest channel


802.11n(HT40)

26 dB EBW

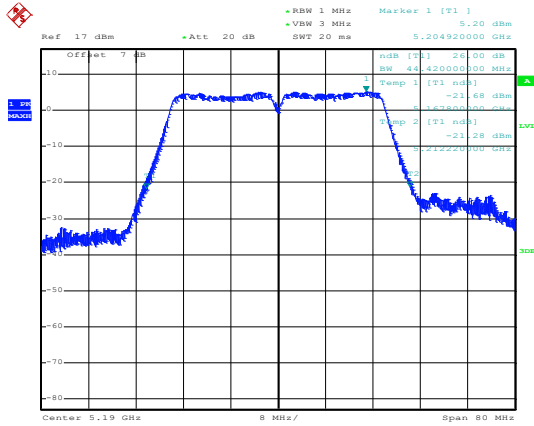


Date: 2.JUN.2020 16:23:39

99% OBW

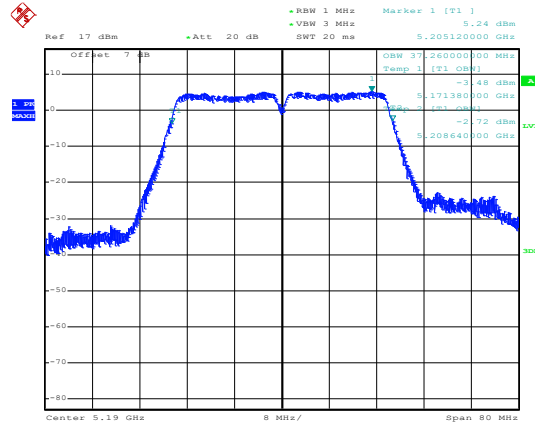


Date: 2.JUN.2020 16:23:26

Lowest channel

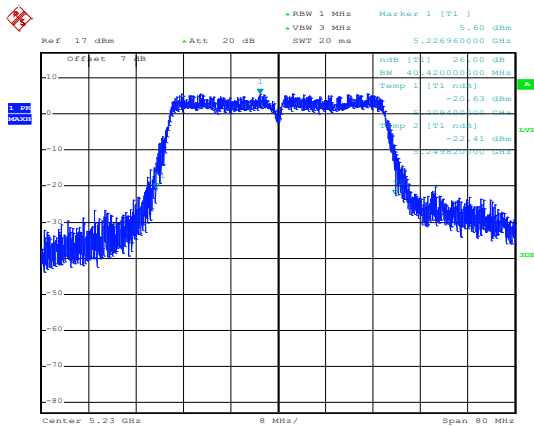

Date: 2.JUN.2020 16:24:54

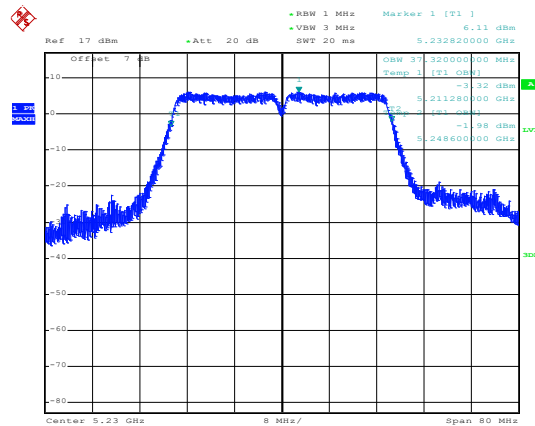



Date: 2.JUN.2020 16:25:03

Highest channel

802.11ac(HT20)

26 dB EBW



99% OBW

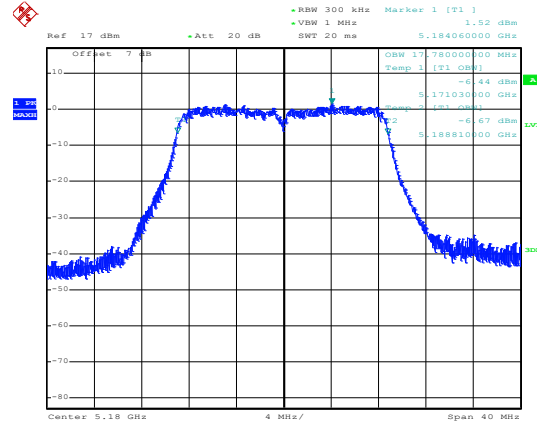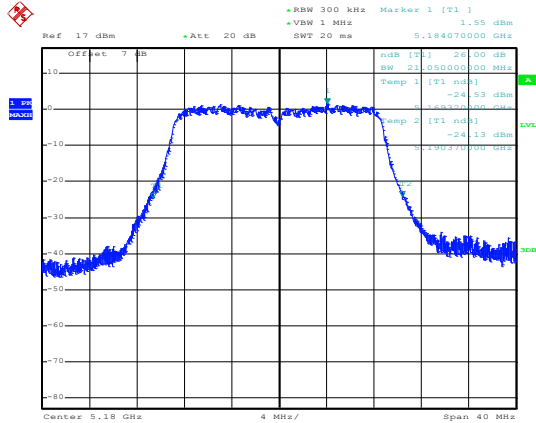

Date: 2.JUN.2020 16:27:20

Date: 2.JUN.2020 16:27:27



Lowest channel

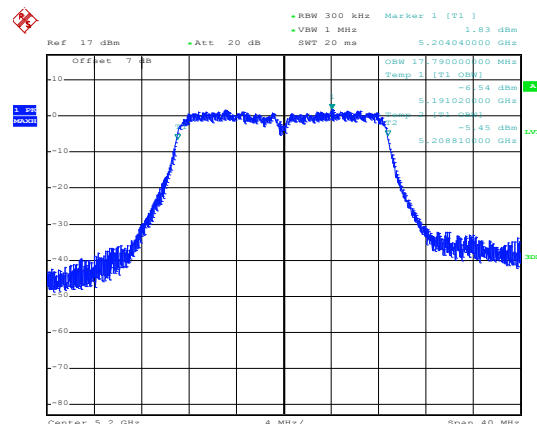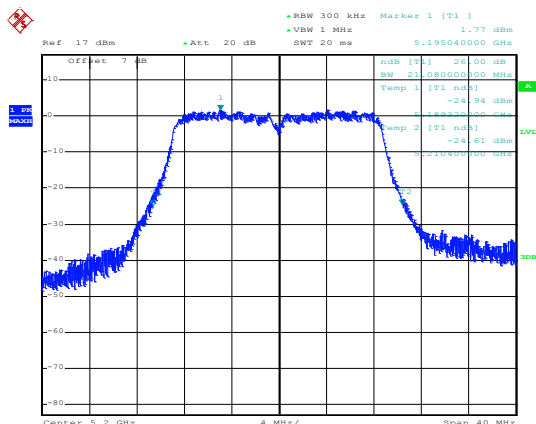

Date: 2.JUN.2020 16:27:44

Date: 2.JUN.2020 16:27:37

Middle channel

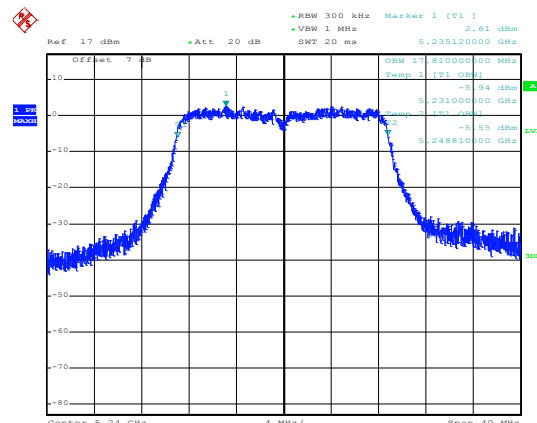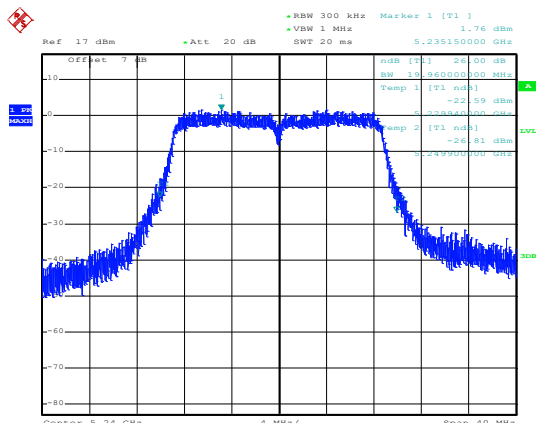


Date: 2.JUN.2020 16:28:56

Date: 2.JUN.2020 16:29:04

Highest channel


802.11ac(HT40)

26 dB EBW

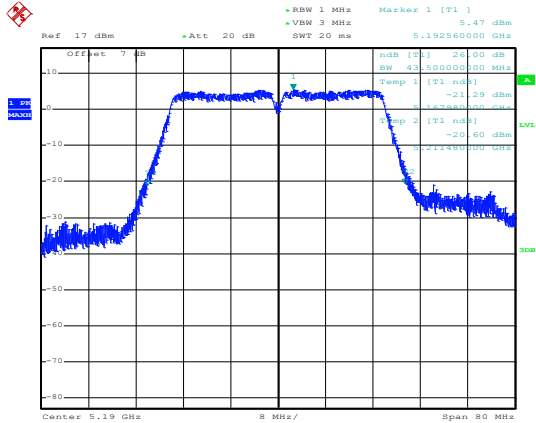


Date: 2.JUN.2020 16:25:49

99% OBW

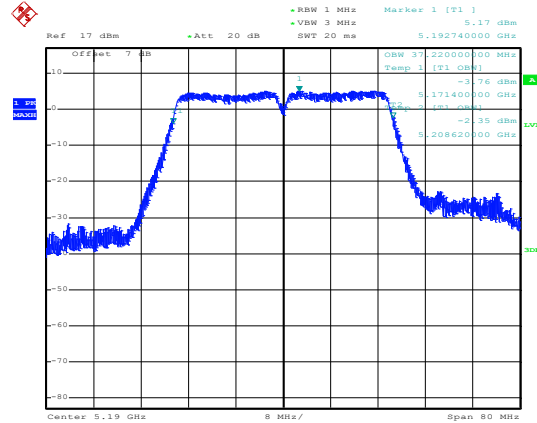


Date: 2.JUN.2020 16:25:55

Lowest channel

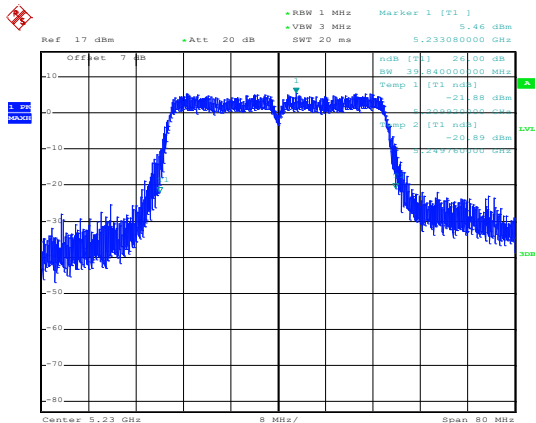


Date: 2.JUN.2020 16:25:35

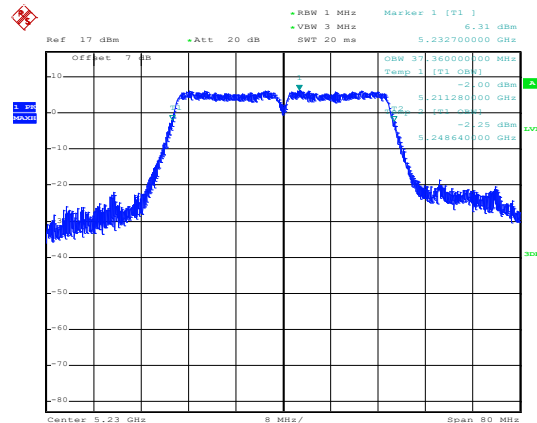


Date: 2.JUN.2020 16:25:21

Highest channel

802.11ac(HT80)

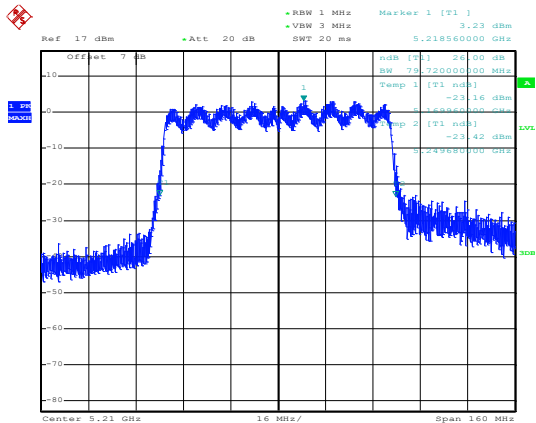

Date: 2.JUN.2020 16:26:47

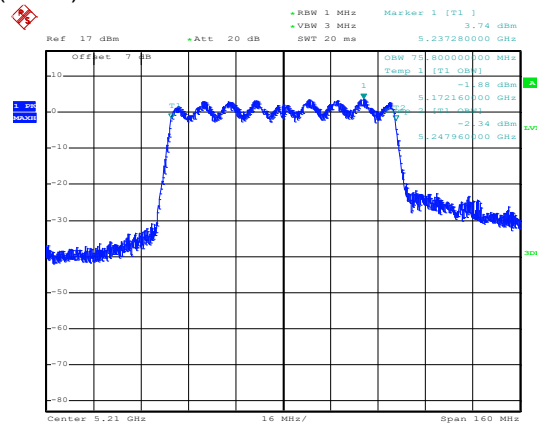


Date: 2.JUN.2020 16:26:16

Middle channel

Band 4:


802.11a

26 dB EBW

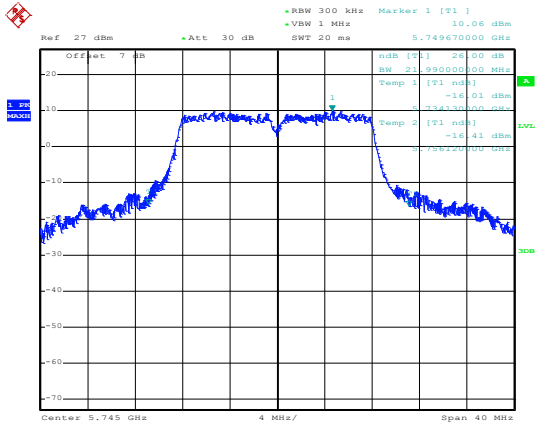


Date: 18.APR.2020 18:43:50

99% OBW

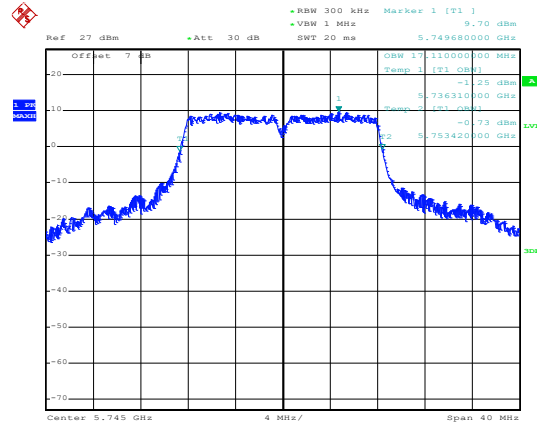


Date: 18.APR.2020 18:44:01

Lowest channel

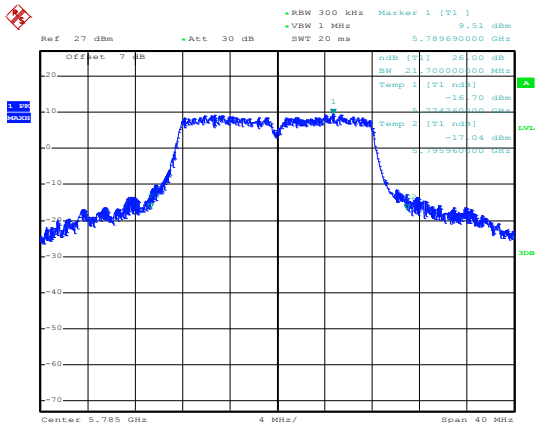


Date: 18.APR.2020 18:44:30

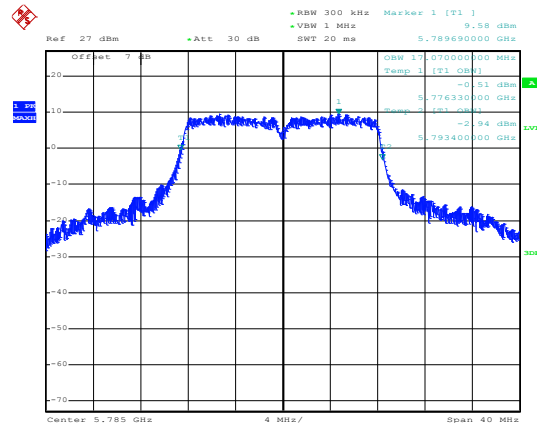


Date: 18.APR.2020 18:44:20

Middle channel

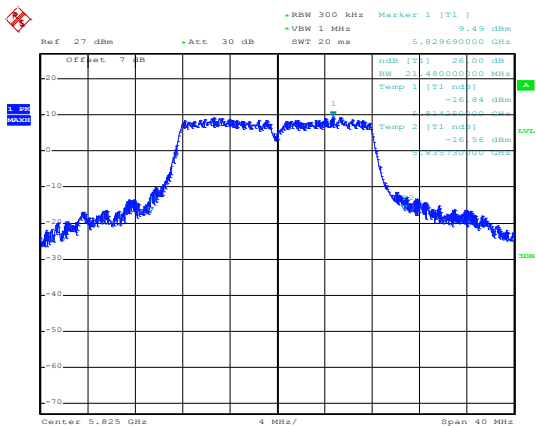

Date: 18.APR.2020 18:44:45

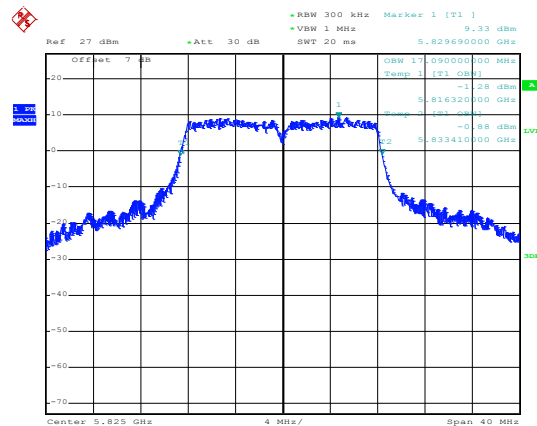


Date: 18.APR.2020 18:44:57

Highest channel


802.11n(HT20)

26 dB EBW

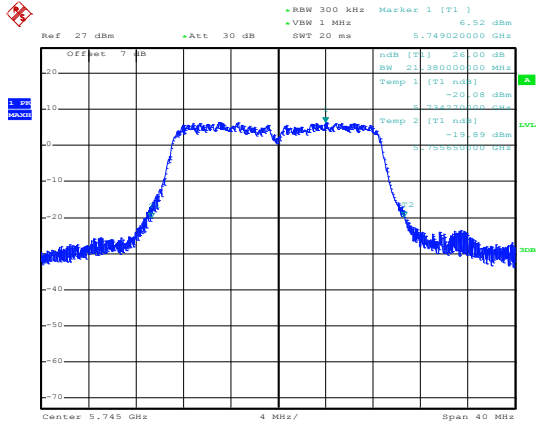


Date: 18.APR.2020 18:48:59

99% OBW

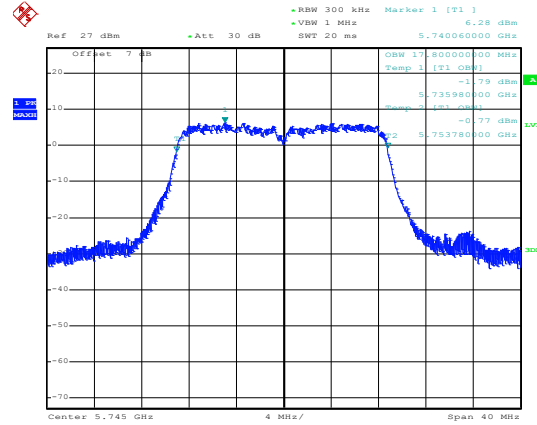


Date: 18.APR.2020 18:49:11

Lowest channel

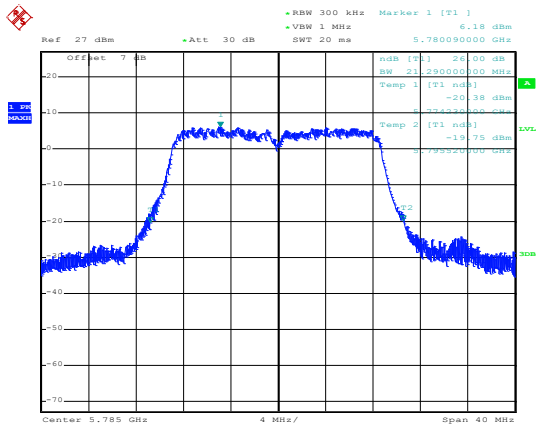


Date: 18.APR.2020 18:49:47

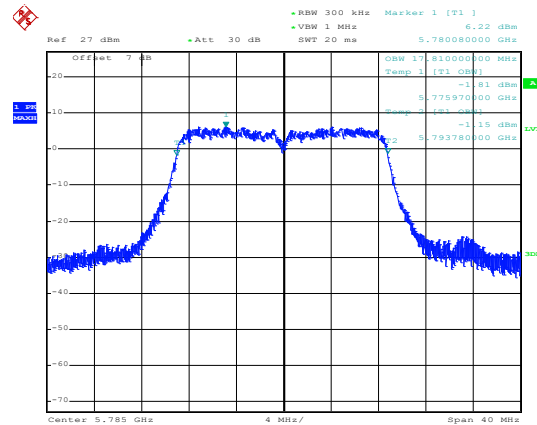


Date: 18.APR.2020 18:49:35

Middle channel

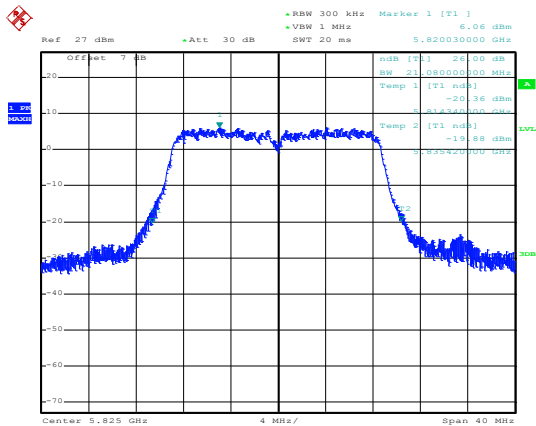

Date: 18.APR.2020 18:50:03

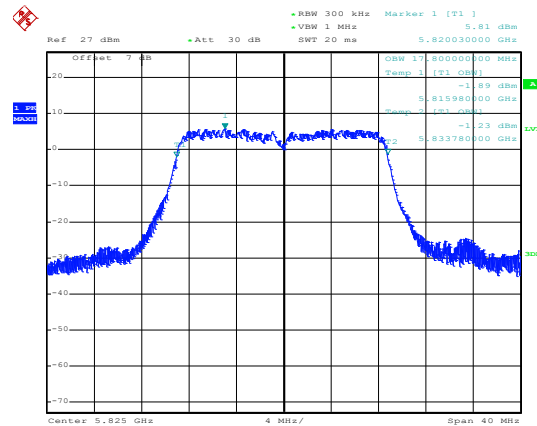


Date: 18.APR.2020 18:50:15

Highest channel


802.11n(HT40)

26 dB EBW

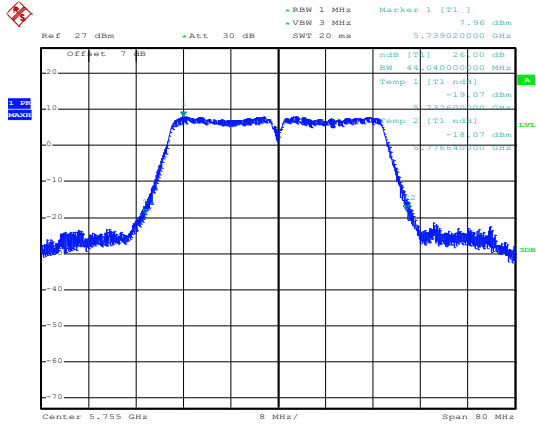


Date: 18.APR.2020 18:56:50

99% OBW

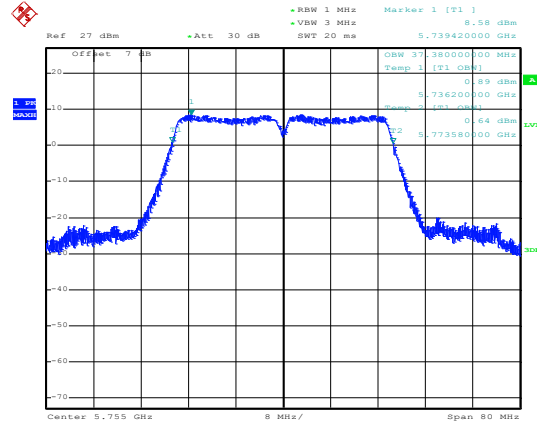


Date: 18.APR.2020 18:56:40

Lowest channel

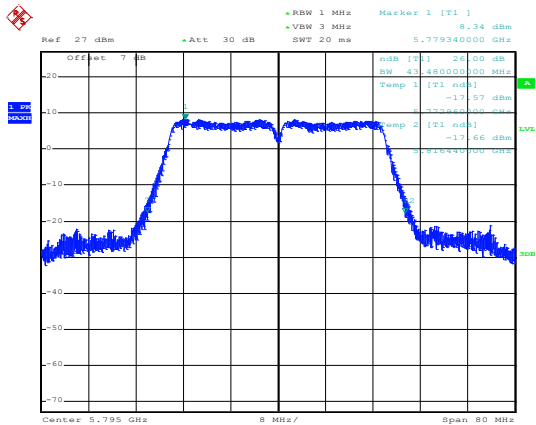

Date: 18.APR.2020 18:57:19

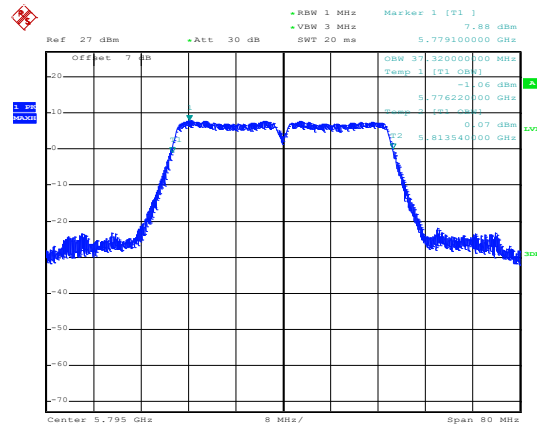


Date: 18.APR.2020 18:57:31

Highest channel


802.11ac(HT20)

26 dB EBW

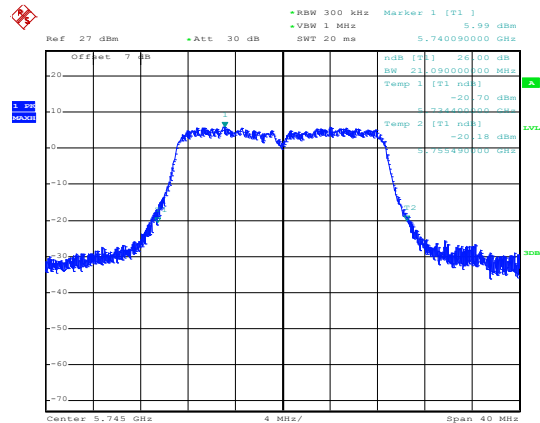


Date: 18.APR.2020 18:52:05

99% OBW

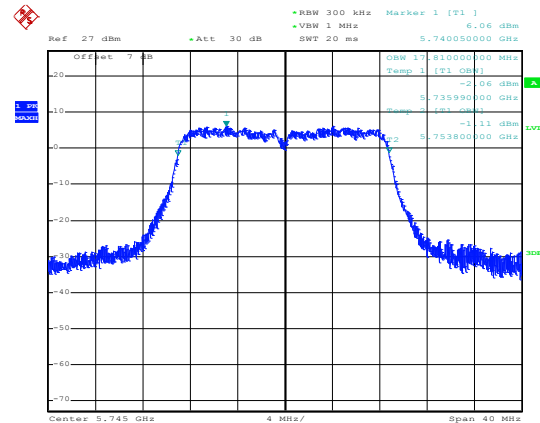


Date: 18.APR.2020 18:51:54

Lowest channel

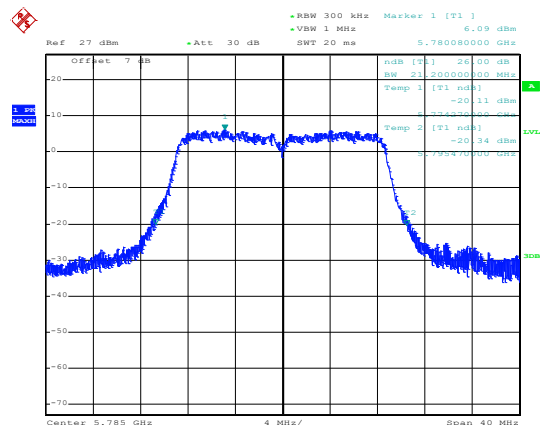


Date: 18.APR.2020 18:51:26

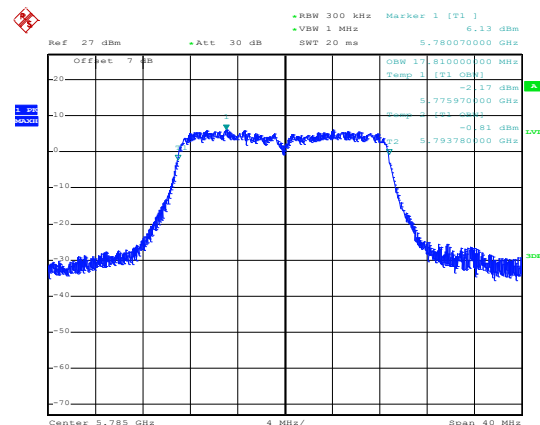


Date: 18.APR.2020 18:51:36

Middle channel

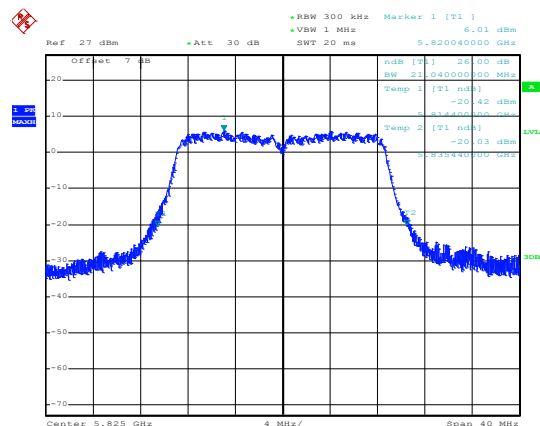

Date: 18.APR.2020 18:50:53

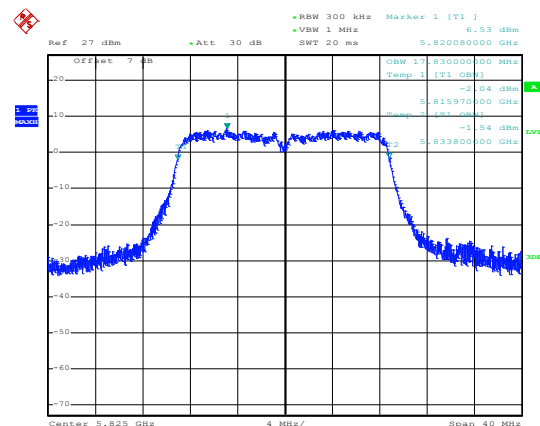



Date: 18.APR.2020 18:50:44

Highest channel

802.11ac(HT40)

26 dB EBW



99% OBW

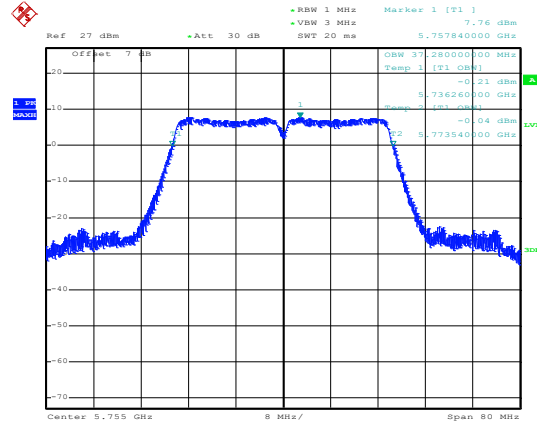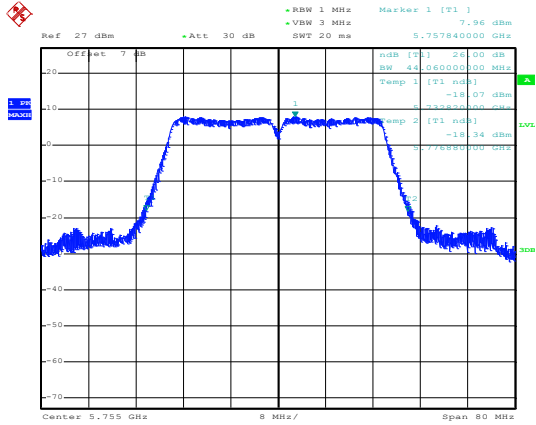

Date: 18.APR.2020 18:58:55

Date: 18.APR.2020 18:59:05

Lowest channel

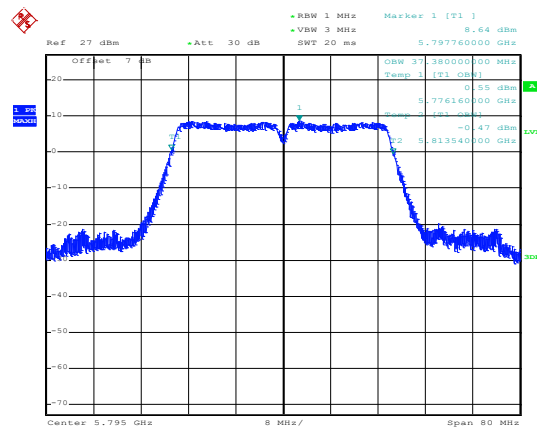
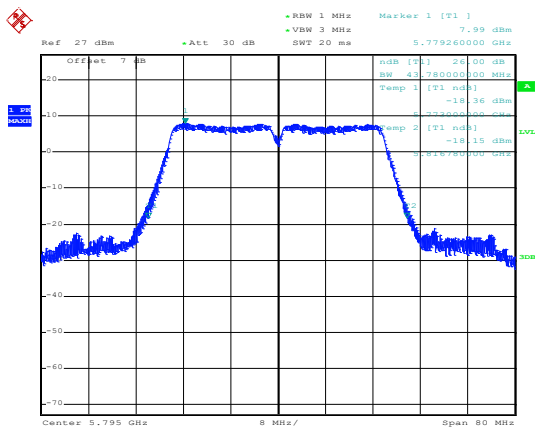


Date: 18.APR.2020 18:58:32

Date: 18.APR.2020 18:58:22

Highest channel

802.11ac(HT80)

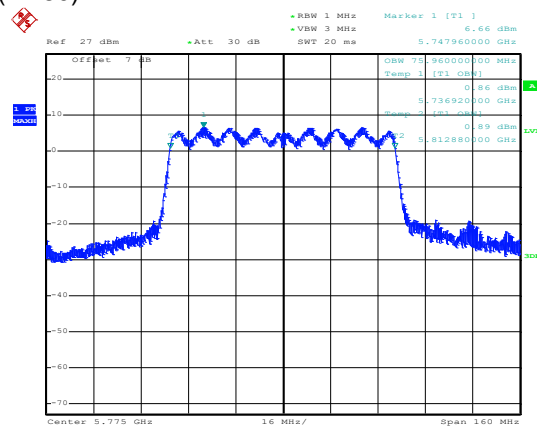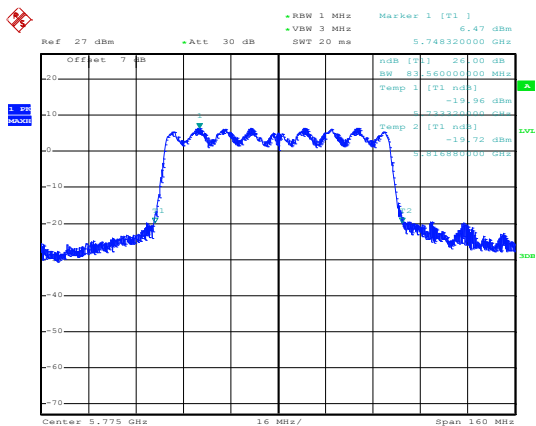


Date: 18.APR.2020 19:09:34

Date: 18.APR.2020 19:03:08


Middle channel

6dB BW

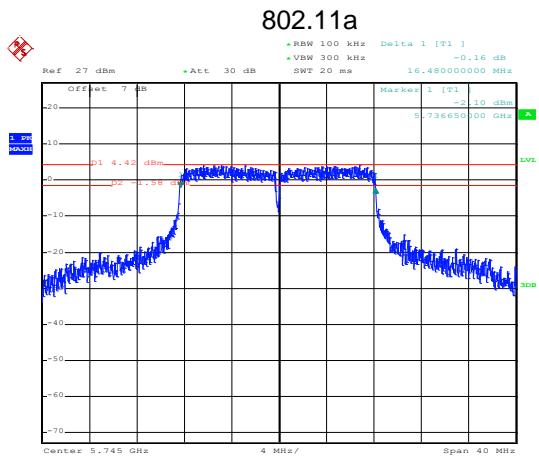


Date: 18.APR.2020 19:13:04

Lowest channel

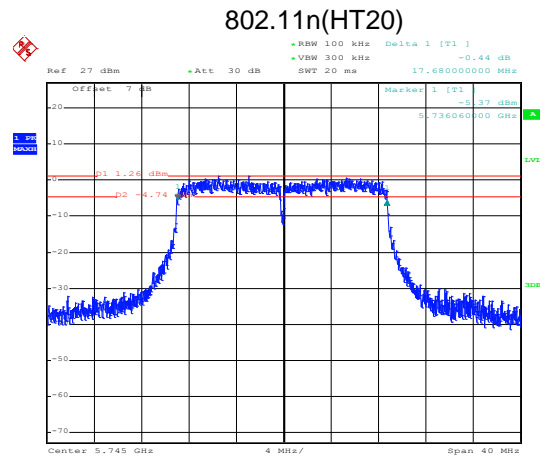


Date: 18.APR.2020 19:17:02

Lowest channel

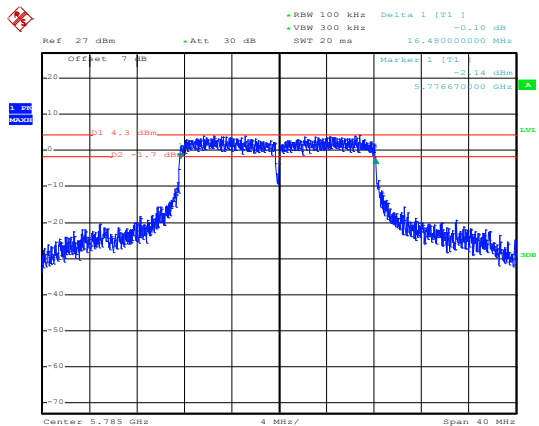


Date: 18.APR.2020 19:13:54

Middle channel

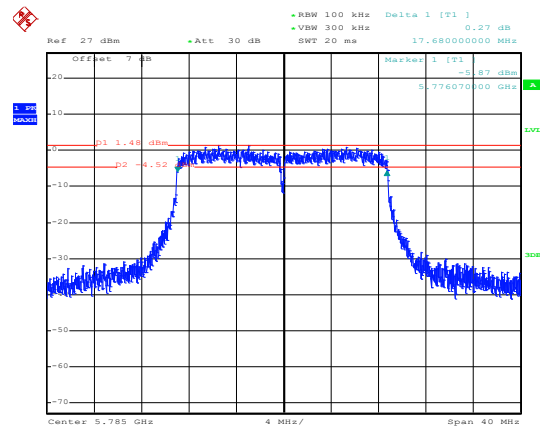


Date: 18.APR.2020 19:16:06

Middle channel

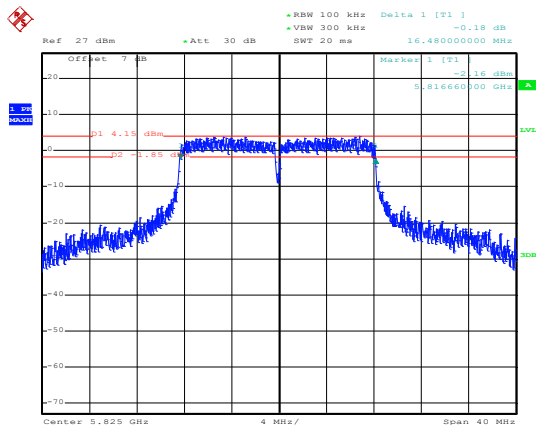

Date: 18.APR.2020 19:14:31


Highest channel

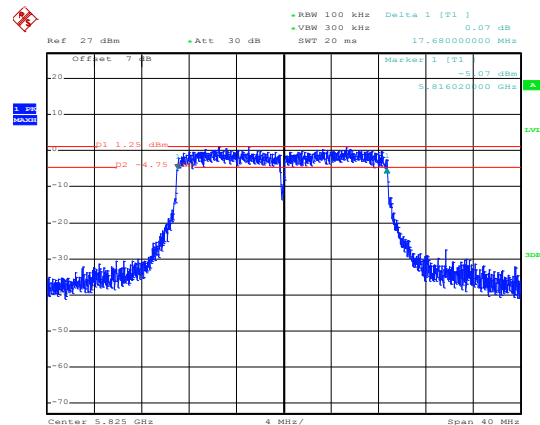

Date: 18.APR.2020 19:15:25


Highest channel

802.11n(HT40)

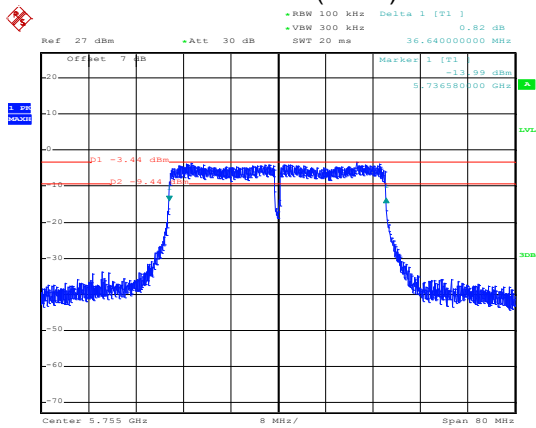


Date: 18.APR.2020 19:20:23

802.11ac(HT20)

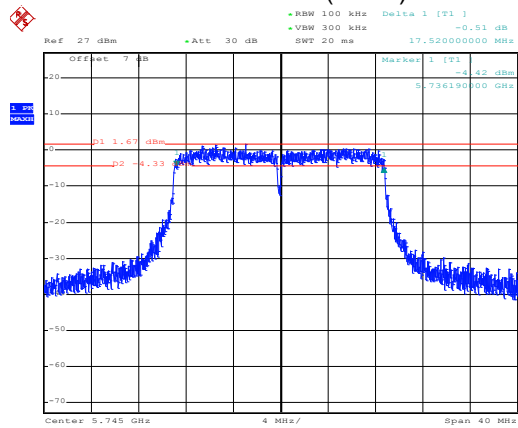


Date: 18.APR.2020 19:17:53

Lowest channel

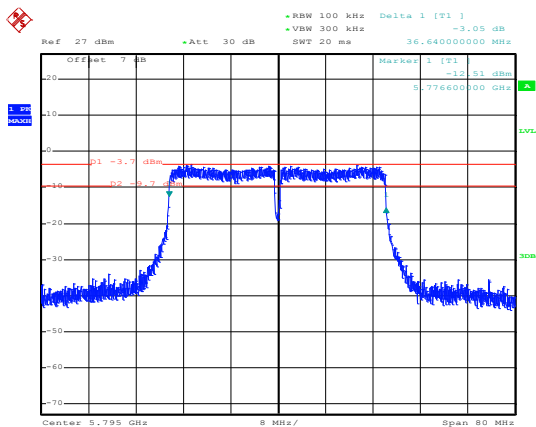


Date: 18.APR.2020 19:21:40

Lowest channel

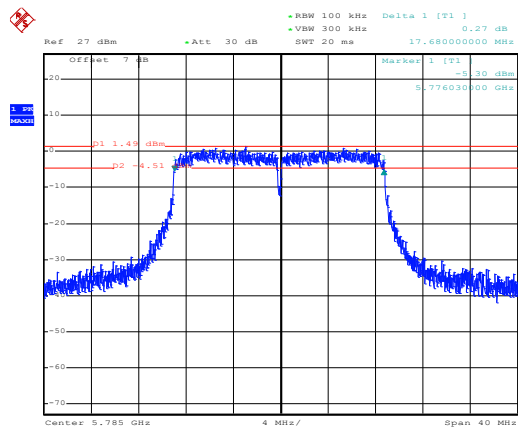


Date: 18.APR.2020 19:18:38

Highest channel

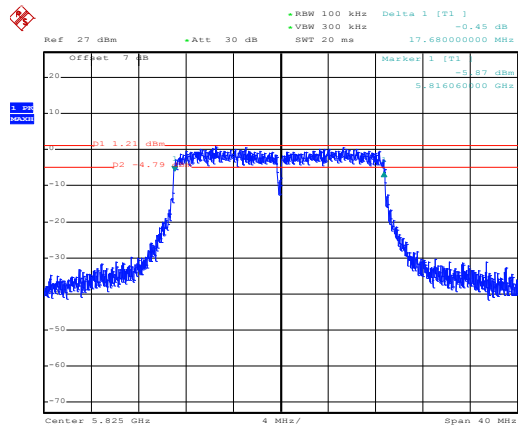


Date: 18.APR.2020 19:19:15

Highest channel

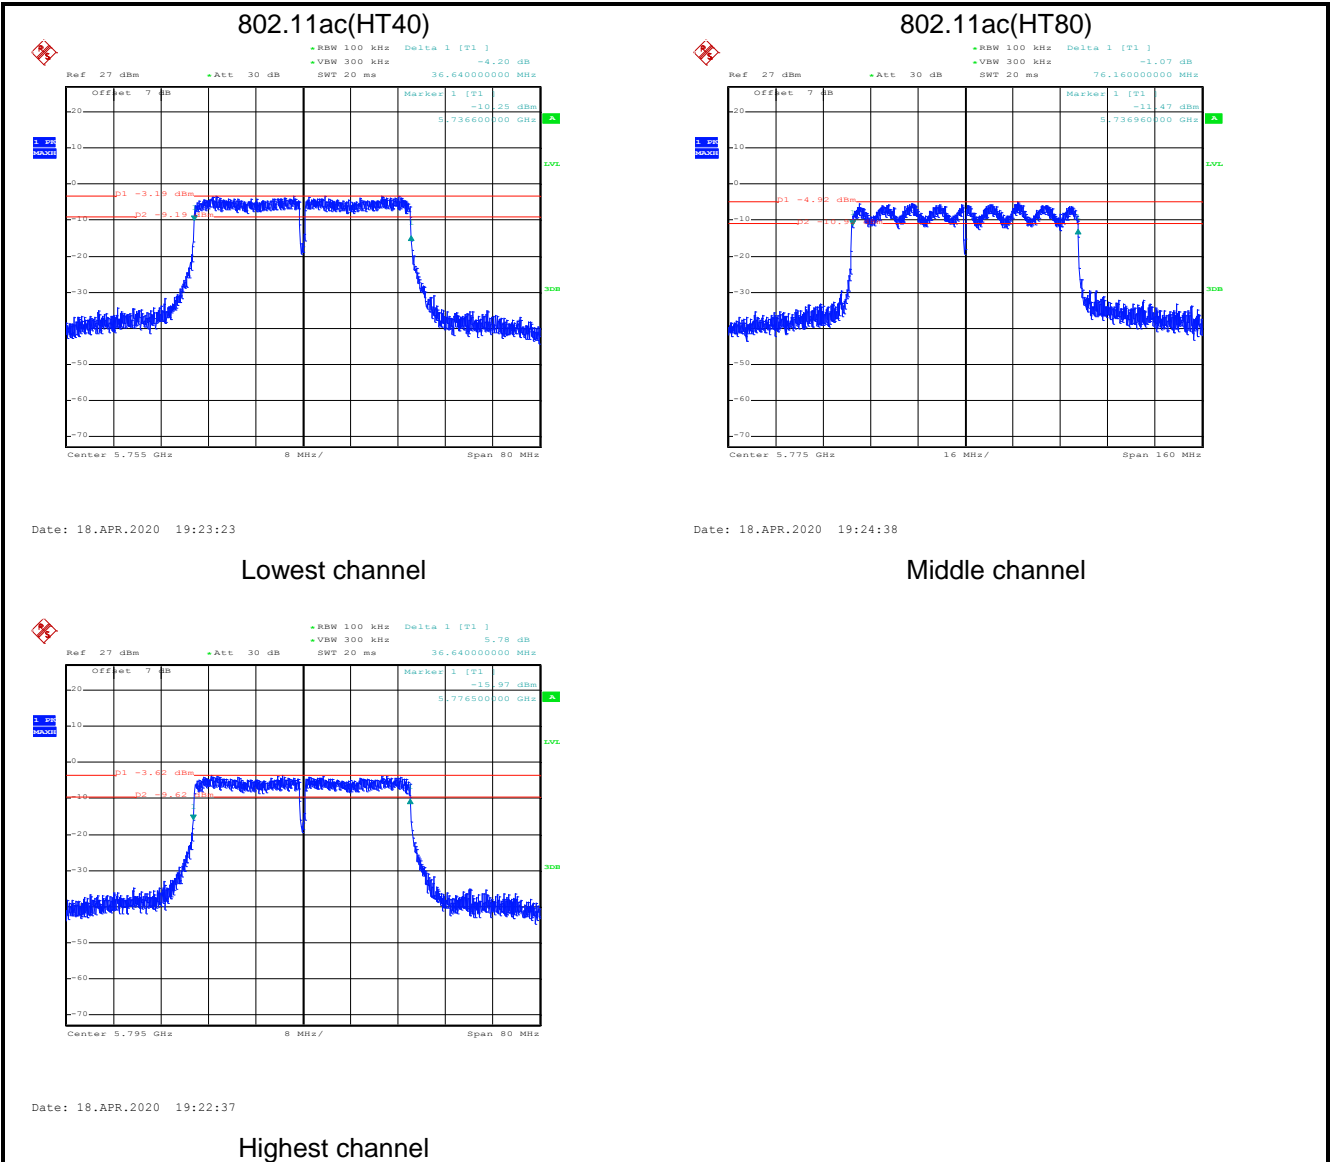

6.4 Power Spectral Density

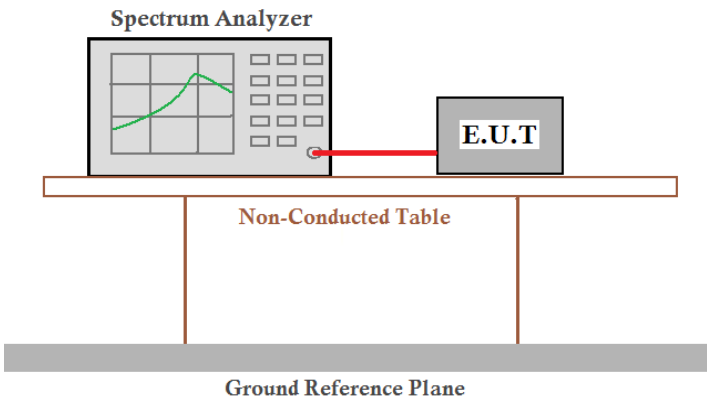Test Requirement:	RSS-247 Section 6.2.1.1, RSS-247 Section 6.2.4.1
Limit:	Band 1: see section 6.2.1.1 Band 4: 30 dBm/500kHz
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which is supported by a Ground Reference Plane.</p>
Test Instruments:	Refer to section 5.10 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Measurement Data:

Remark: The EUT belong other device.

Ceramic Antenna:

		Band 1						
Mode	Test CH	Conducted P.S.D (dBm)	Total P.S.D (dBm)	Ant. gain (dBi)	Total EIRP P.S.D (dBm)	EIRP Limit (dBm)	Result	
802.11a	Lowest	TX0	5.00	4.32	9.32	10.00	Pass	
		TX1	5.17		9.49			
	Middle	TX0	4.87		9.19			
		TX1	4.95		9.27			
	Highest	TX0	4.99		9.31			
		TX1	4.89		9.21			
802.11n20	Lowest	TX0	-0.80	7.32	9.50	10.00	Pass	
		TX1	-0.86		2.18			9.55
	Middle	TX0	-0.77		2.23			
		TX1	-0.79		9.56			
	Highest	TX0	-0.76		2.24			
		TX1	-0.78					
802.11n40	Lowest	TX0	-2.56	7.32	7.95	10.00	Pass	
		TX1	-2.20		0.63			8.19
	Highest	TX0	-2.19		0.87			
		TX1	-2.09					
802.11ac20	Lowest	TX0	-0.77	7.32	9.55	10.00	Pass	
		TX1	-0.79		2.23			9.46
	Middle	TX0	-0.99		2.14			
		TX1	-0.76		9.56			
	Highest	TX0	-0.76		2.24			
		TX1	-0.79					
802.11ac40	Lowest	TX0	-2.44	7.32	7.92	10.00	Pass	
		TX1	-2.38		0.60			8.18
	Highest	TX0	-1.95		0.86			
		TX1	-2.36					
802.11ac80	Middle	TX0	-5.29	7.32	5.38	10.00	Pass	
		TX1	-4.63		-1.94			

Remark:

- Because transmit signals are correlated, Directional gain = GANT + 10 log(NANT) dBi.
So Ceramic Antenna: The Directional gain=4.32 + 10 log(2)=7.32dBi (for 802.11n/ac);
- EIRP= Antenna gain + Conducted Output power

Flex antenna:

		Band 1						
Mode	Test CH	Conducted P.S.D (dBm)	Total P.S.D (dBm)	Ant. gain (dBi)	Total EIRP P.S.D (dBm)	EIRP Limit (dBm)	Result	
802.11a	Lowest	TX0	5.00	4.32	9.32	10.00	Pass	
		TX1	5.17		9.49			
	Middle	TX0	4.87		9.19			
		TX1	4.95		9.27			
	Highest	TX0	4.99		9.31			
		TX1	4.89		9.21			
802.11n20	Lowest	TX0	-0.80	7.75	9.93	10.00	Pass	
		TX1	-0.86		2.18			
	Middle	TX0	-0.77		2.23			9.98
		TX1	-0.79					
	Highest	TX0	-0.76		2.24			9.99
		TX1	-0.78					
802.11n40	Lowest	TX0	-2.56	7.75	8.38	10.00	Pass	
		TX1	-2.20		0.63			
	Highest	TX0	-2.19		0.87			8.62
		TX1	-2.09					
802.11ac20	Lowest	TX0	-0.77	7.75	9.98	10.00	Pass	
		TX1	-0.79		2.23			
	Middle	TX0	-0.99		2.14			9.89
		TX1	-0.76					
	Highest	TX0	-0.76		2.24			9.99
		TX1	-0.79					
802.11ac40	Lowest	TX0	-2.44	7.75	8.35	10.00	Pass	
		TX1	-2.38		0.60			
	Highest	TX0	-1.95		0.86			8.61
		TX1	-2.36					
802.11ac80	Middle	TX0	-5.29	7.75	5.38	10.00	Pass	
		TX1	-4.63					-1.94

Remark:

- Because transmit signals are correlated, Directional gain = GANT + 10 log(NANT) dBi.
So Flex Antenna: The Directional gain=4.75 + 10 log(2)=7.75dBi (for 802.11n/ac);.
- EIRP= Antenna gain + Conducted Output power

Whip Antenna:

		Band 1						
Mode	Test CH	Conducted P.S.D (dBm)	Total P.S.D (dBm)	Ant. gain (dBi)	Total EIRP P.S.D (dBm)	EIRP Limit (dBm)	Result	
802.11a	Lowest	TX0	5.00	4.32	9.32	10.00	Pass	
		TX1	5.17		9.49			
	Middle	TX0	4.87		9.19			
		TX1	4.95		9.27			
	Highest	TX0	4.99		9.31			
		TX1	4.89		9.21			
802.11n20	Lowest	TX0	-0.80	7.5	9.98	10.00	Pass	
		TX1	-0.86		2.18			
	Middle	TX0	-0.77		2.23			9.73
		TX1	-0.79		2.24			
	Highest	TX0	-0.76		2.24			9.74
		TX1	-0.78		2.24			9.74
802.11n40	Lowest	TX0	-2.56	7.5	8.13	10.00	Pass	
		TX1	-2.20		0.63			
	Highest	TX0	-2.19		0.87			8.37
		TX1	-2.09		0.87			8.37
802.11ac20	Lowest	TX0	-0.77	7.5	9.73	10.00	Pass	
		TX1	-0.79		2.23			
	Middle	TX0	-0.99		2.14			9.64
		TX1	-0.76		2.14			
	Highest	TX0	-0.76		2.24			9.74
		TX1	-0.79		2.24			9.74
802.11ac40	Lowest	TX0	-2.44	7.5	8.10	10.00	Pass	
		TX1	-2.38		0.60			
	Highest	TX0	-1.95		0.86			8.36
		TX1	-2.36		0.86			8.36
802.11ac80	Middle	TX0	-5.29	7.5	5.56	10.00	Pass	
		TX1	-4.63		-1.94			5.56


Remark:

- Because transmit signals are correlated, Directional gain = GANT + 10 log(NANT) dBi.
So Whip Antenna: The Directional gain=4.5 + 10 log(2)=7.5dBi (for 802.11n/ac);.
- EIRP= Antenna gain + Conducted Output power


Band 4						
Mode	Test CH	Ant. Port	Conducted P.S.D (dBm)	Total P.S.D (dBm)	Limit (dBm)	Result
802.11a	Lowest	TX0	8.03	/	30.00	Pass
		TX1	7.94			
	Middle	TX0	7.61			
		TX1	7.86			
	Highest	TX0	7.58			
		TX1	7.83			
802.11n20	Lowest	TX0	4.83	7.90	Ceramic Antenna:28.68 Flex Antenna:28.25 Whip Antenna:28.00	Pass
		TX1	4.94			
	Middle	TX0	4.97	7.85		
		TX1	4.70			
	Highest	TX0	4.66	8.11		
		TX1	5.50			
802.11n40	Lowest	TX0	0.35	3.42	Ceramic Antenna:28.68 Flex Antenna:28.25 Whip Antenna:28.0	Pass
		TX1	0.46			
	Highest	TX0	0.60	3.54		
		TX1	0.45			
802.11ac20	Lowest	TX0	4.94	8.39	Ceramic Antenna:28.68 Flex Antenna:28.25 Whip Antenna:28.0	Pass
		TX1	5.78			
	Middle	TX0	5.00	7.76		
		TX1	4.49			
	Highest	TX0	4.79	8.07		
		TX1	5.32			
802.11ac40	Lowest	TX0	1.19	3.92	Ceramic Antenna:28.68 Flex Antenna:28.25 Whip Antenna:28.00	Pass
		TX1	0.62			
	Highest	TX0	0.96	3.86		
		TX1	0.73			
802.11ac80	Lowest	TX0	-0.73	2.14	Ceramic Antenna:28.68 Flex Antenna:28.25 Whip Antenna:28.0	Pass
		TX1	-1.01			

1. Because transmit signals are correlated, Directional gain = $G_{ANT} + 10 \log(N_{ANT})$ dBi.
2. So Ceramic Antenna: The Directional gain= $4.32 + 10 \log(2)=7.32$ dBi, The directional Gain of antenna is greater than 6 dBi, so the limit of P.S.D is 28.68 dBm (for 802.11n/ac).
Flex Antenna: The Directional gain= $4.75 + 10 \log(2)=7.75$ dBi, The directional Gain of antenna is greater than 6 dBi, so the limit of P.S.D is 28.25 dBm (for 802.11n/ac).
Whip Antenna: The Directional gain= $5 + 10 \log(2)=8.0$ dBi, The directional Gain of antenna is greater than 6dBi, so the limit of P.S.D is 28.00 dBm (for 802.11n/ac).

Test plot as follows:
TX0:

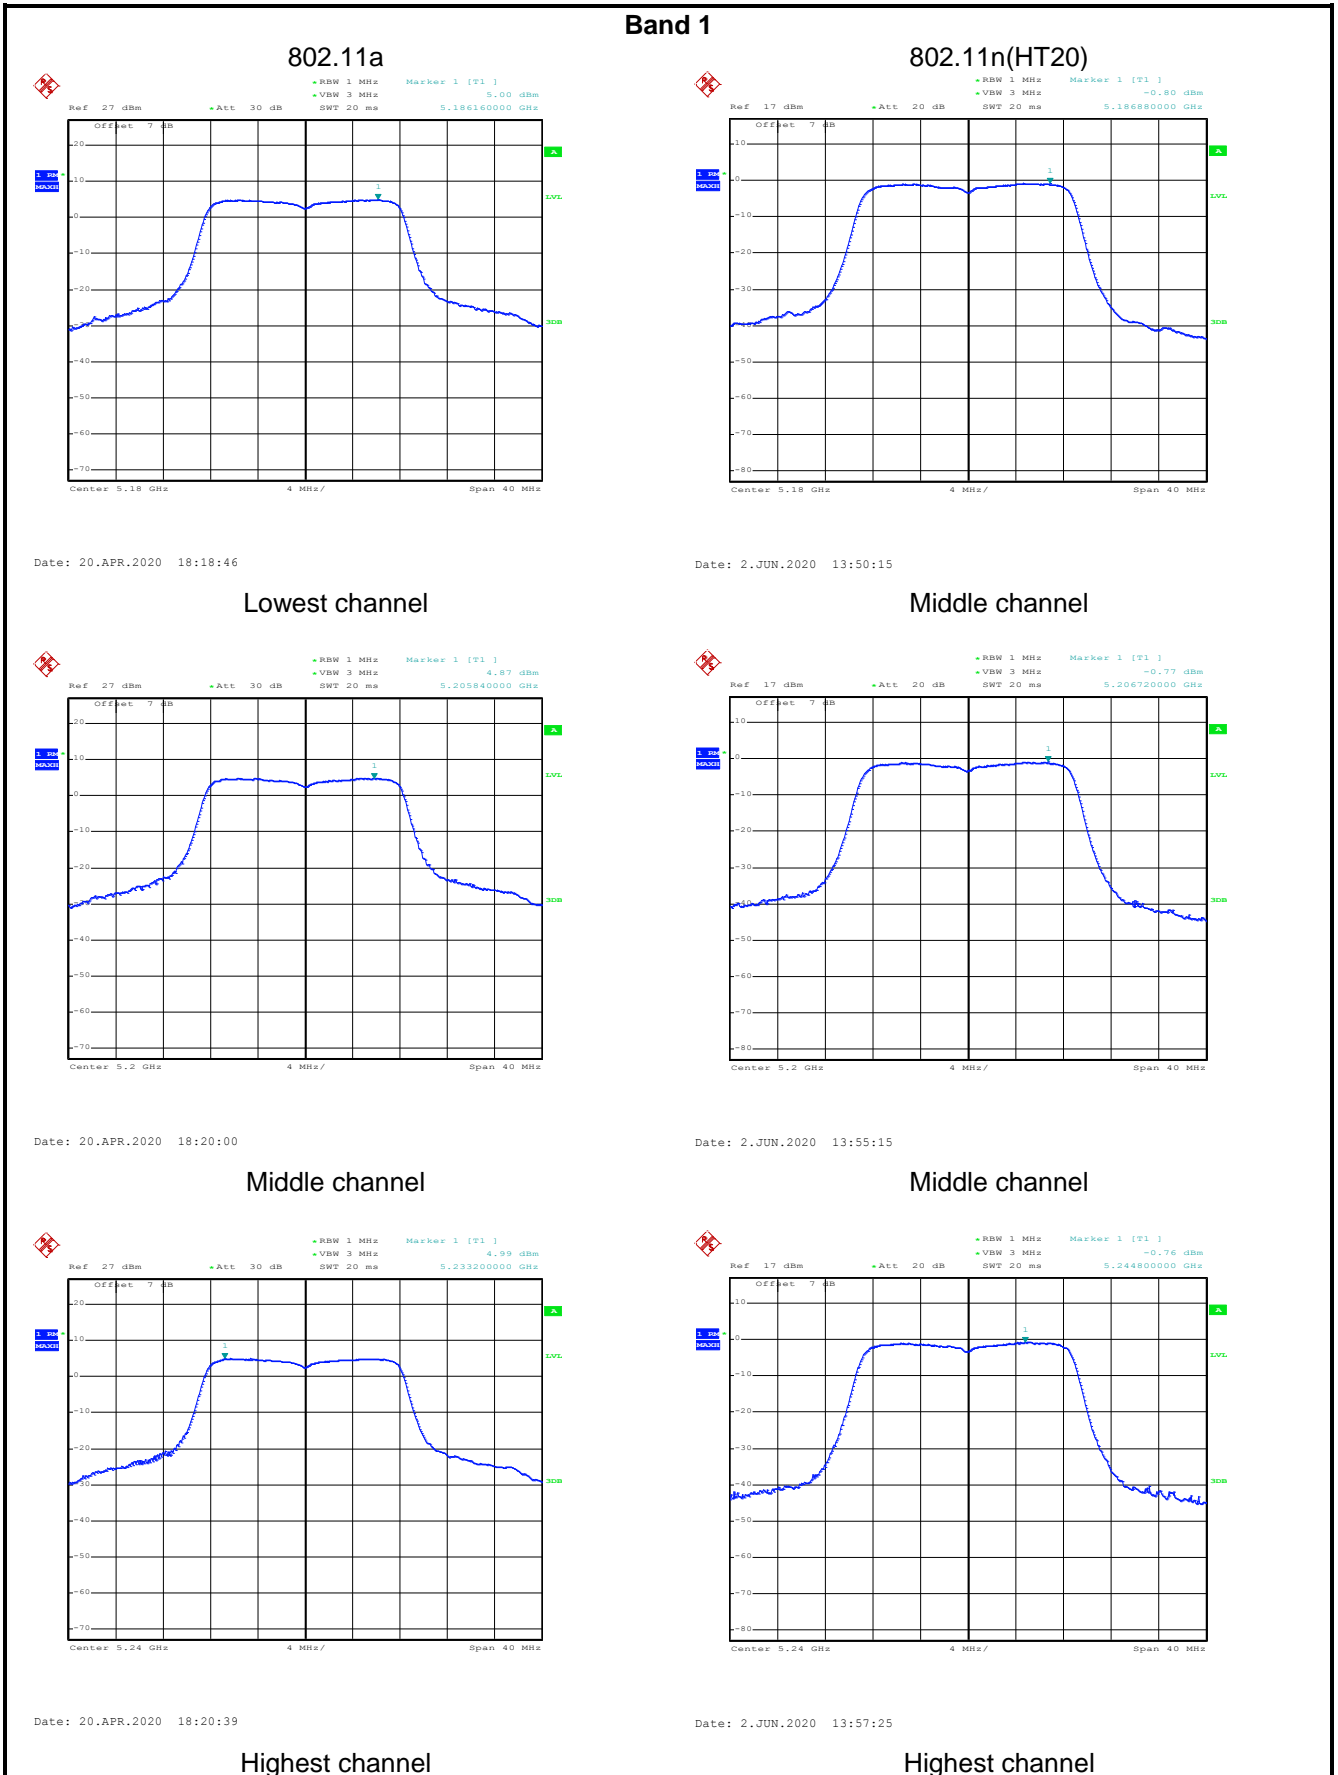


802.11n(HT40)

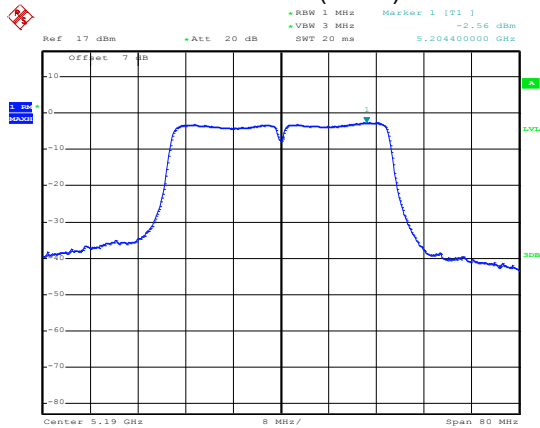

Date: 2.JUN.2020 13:45:50


Lowest channel

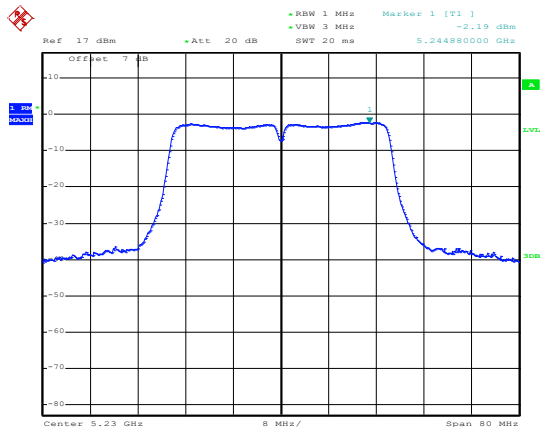

Date: 2.JUN.2020 13:45:38


Highest channel

802.11ac(HT20)

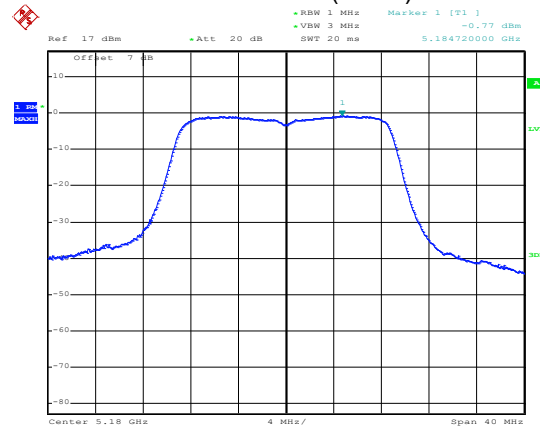


Date: 2.JUN.2020 14:00:35

Middle channel

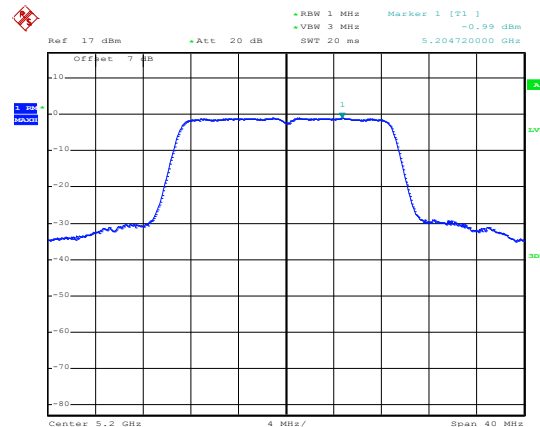

Date: 3.JUN.2020 10:18:17


Middle channel

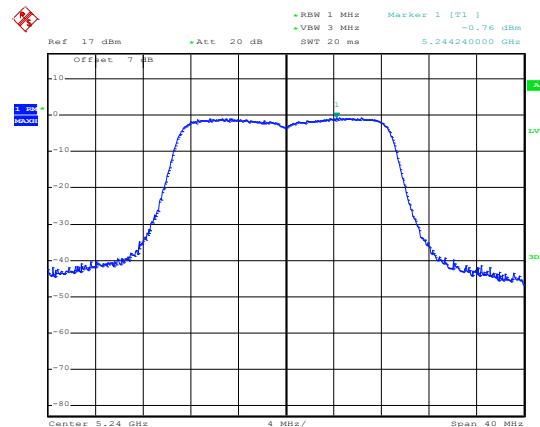

Date: 2.JUN.2020 13:58:42

Highest channel


802.11ac(HT40)

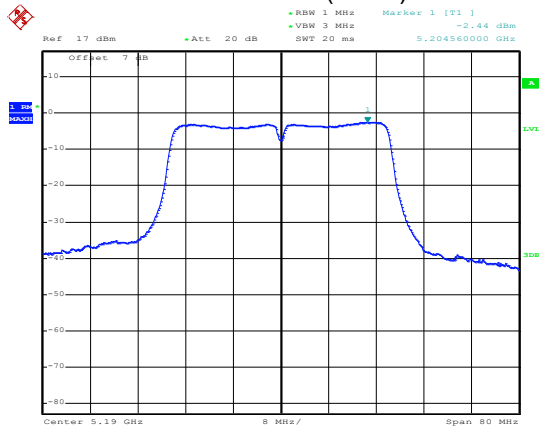

Date: 2.JUN.2020 13:45:07


Lowest channel

802.11ac(HT80)

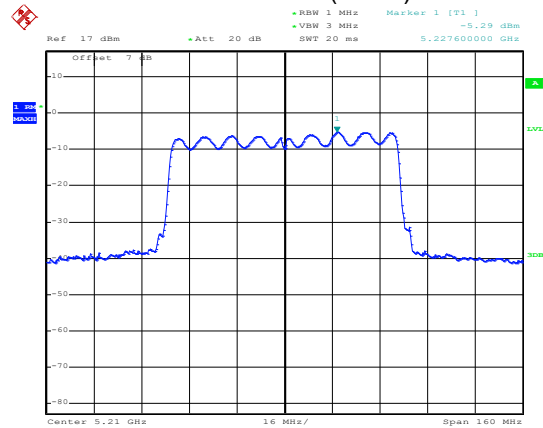


Date: 2.JUN.2020 13:44:39


Middle channel

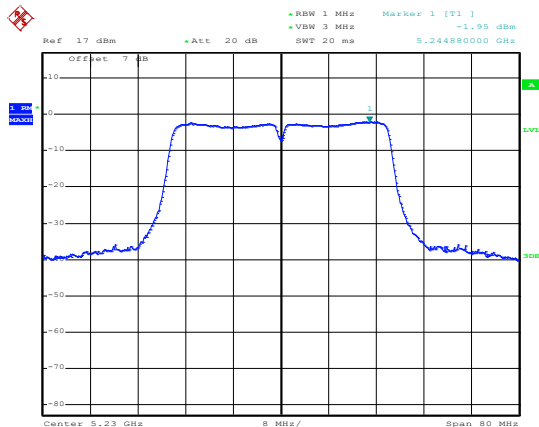


Date: 2.JUN.2020 13:45:17


Highest channel

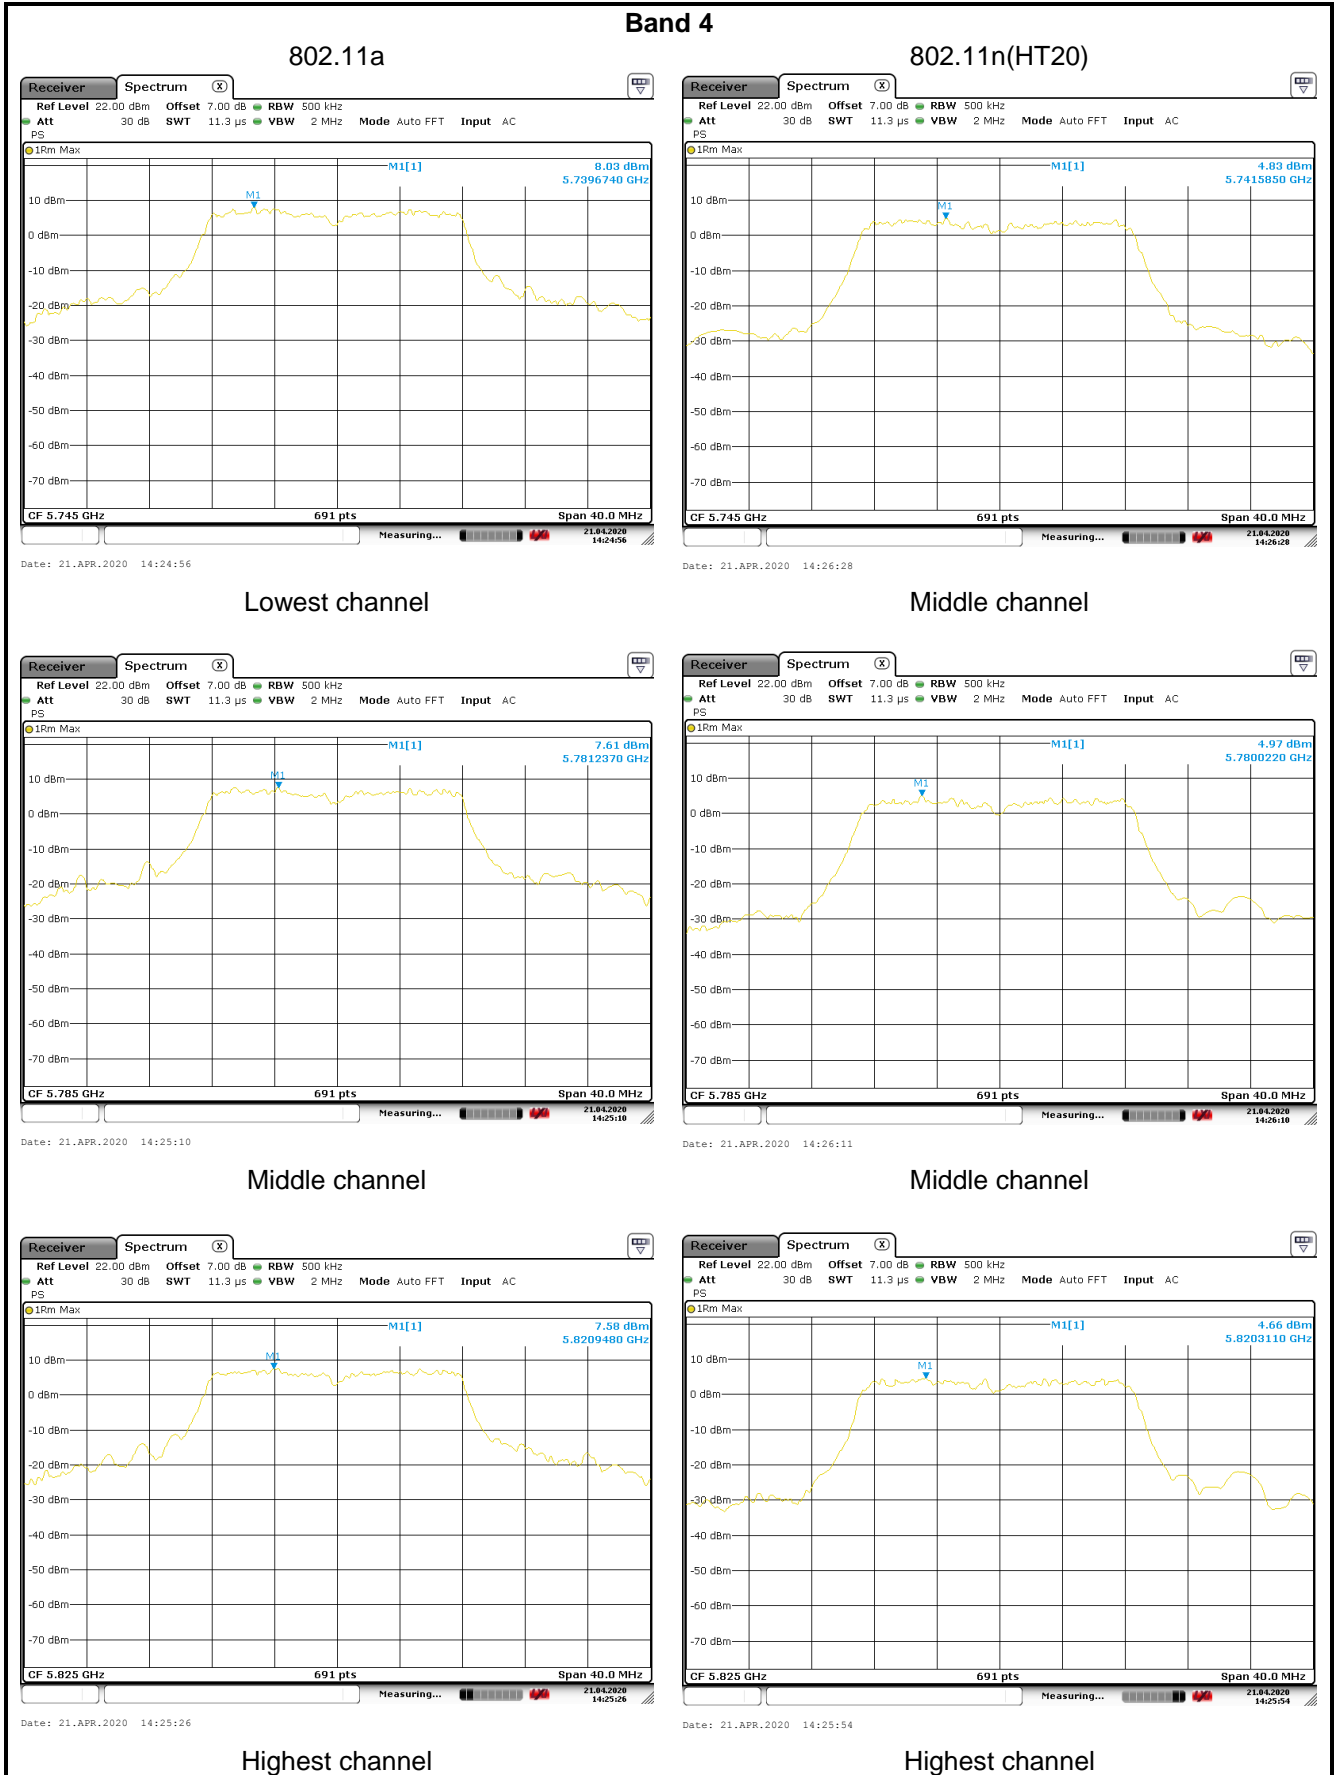

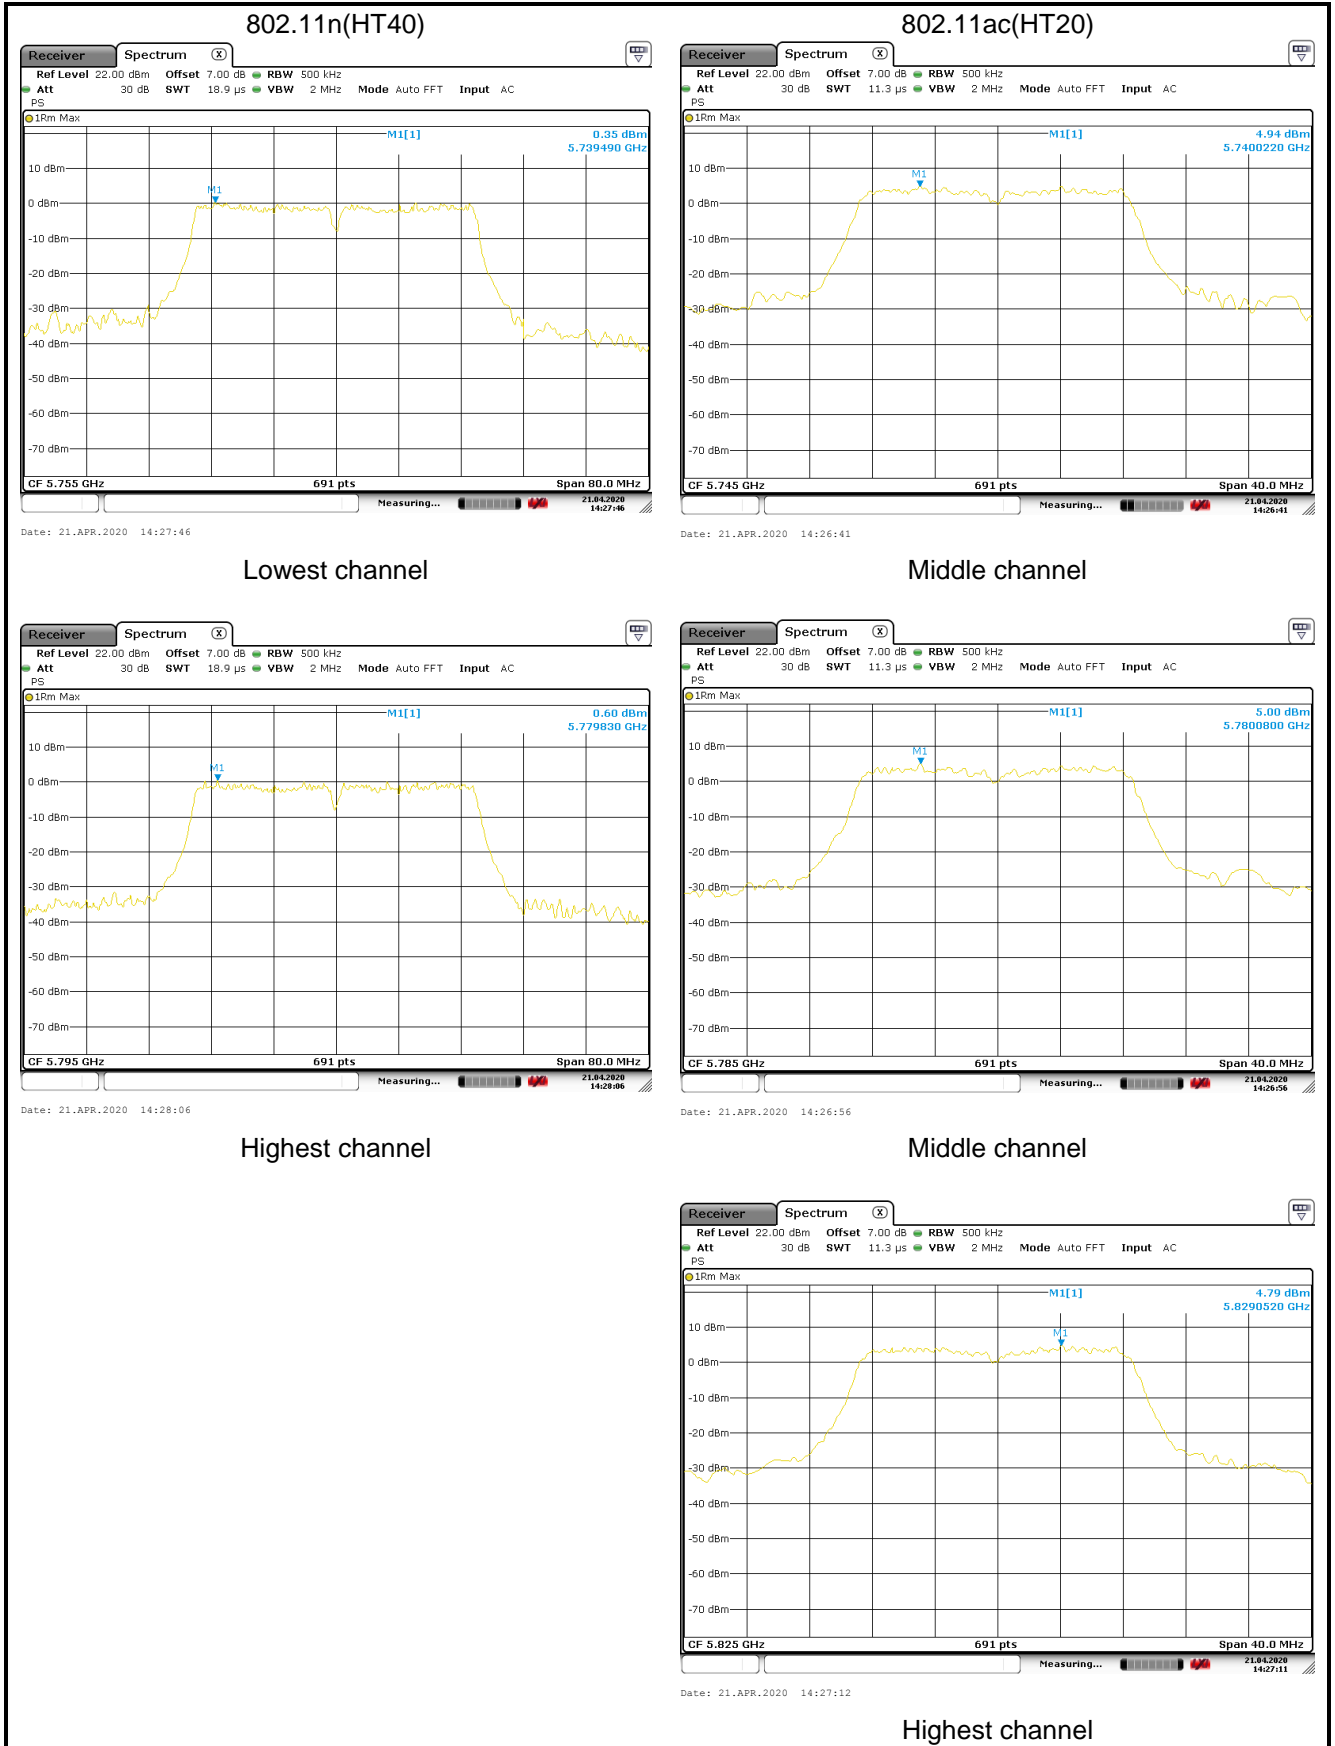


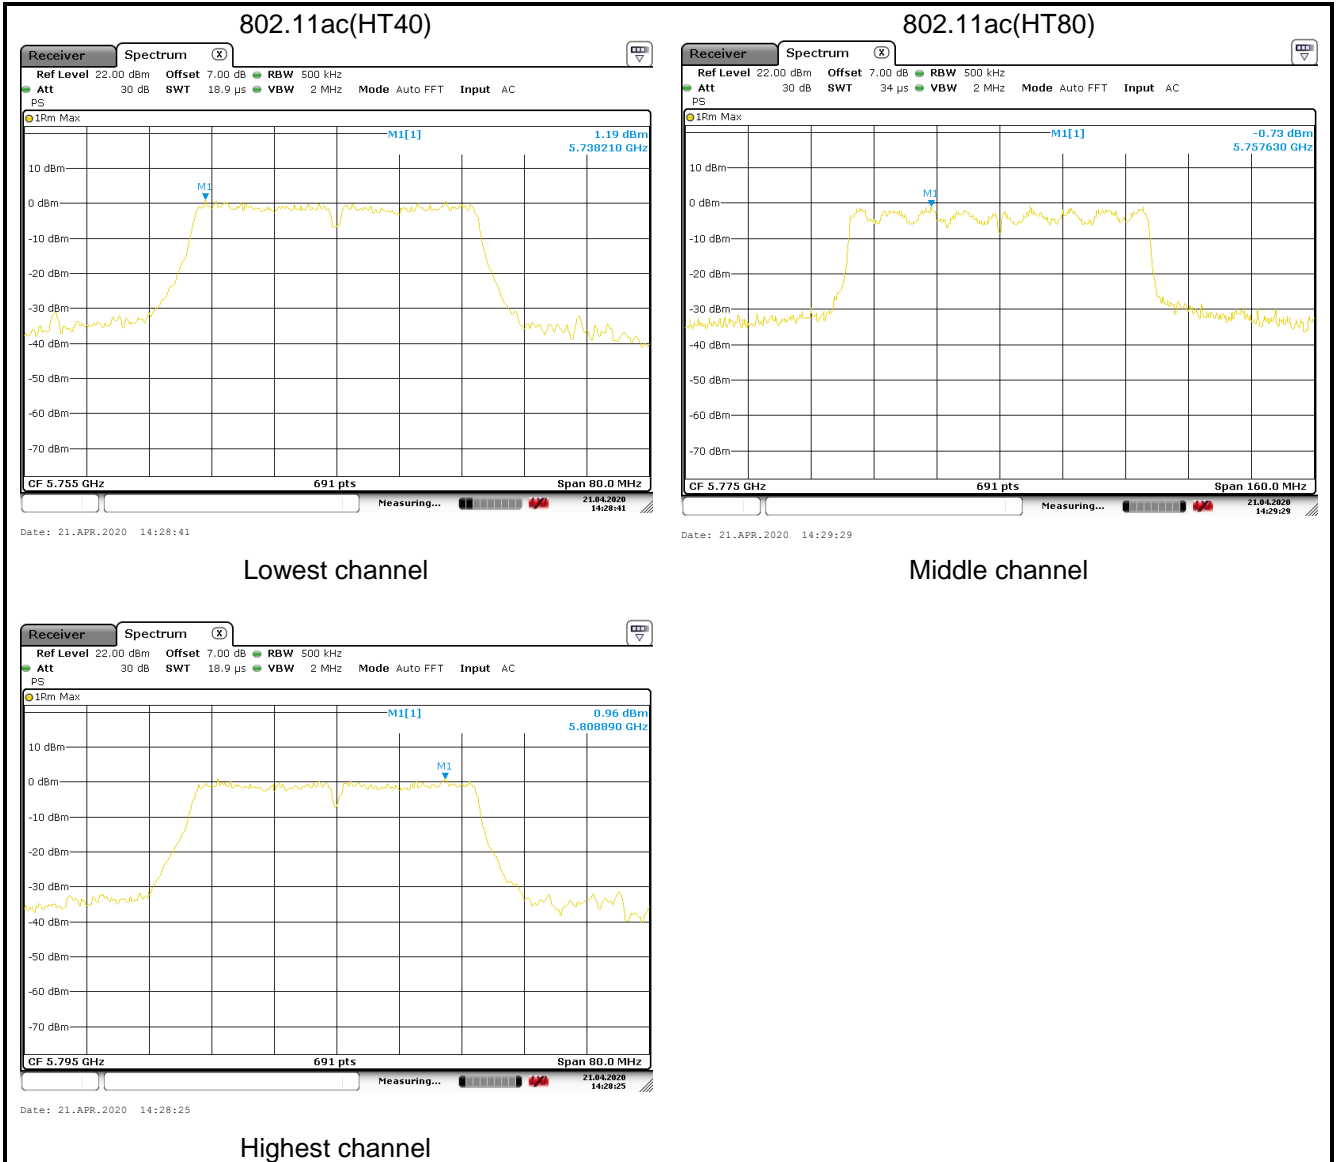

TX1:

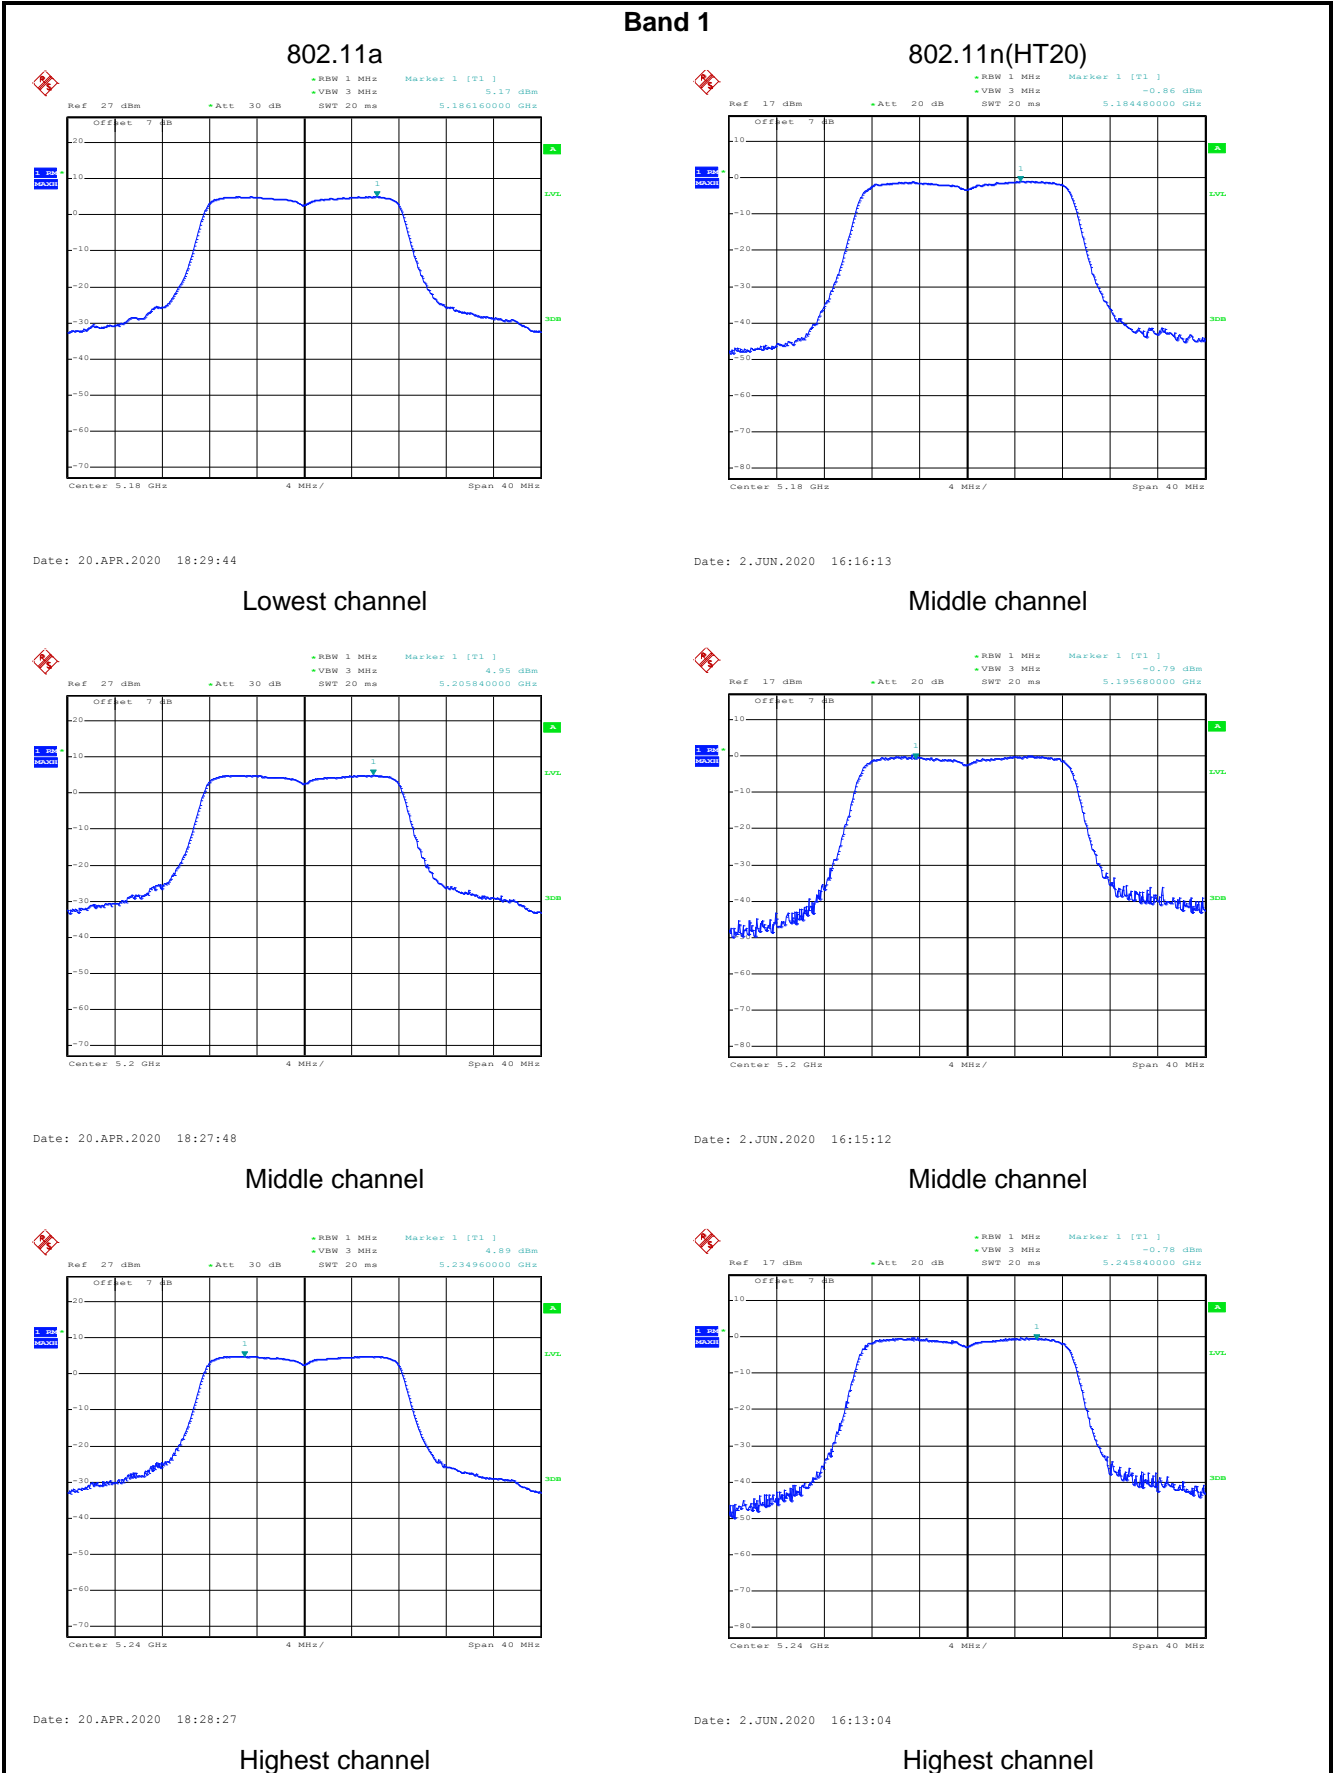


802.11n(HT40)

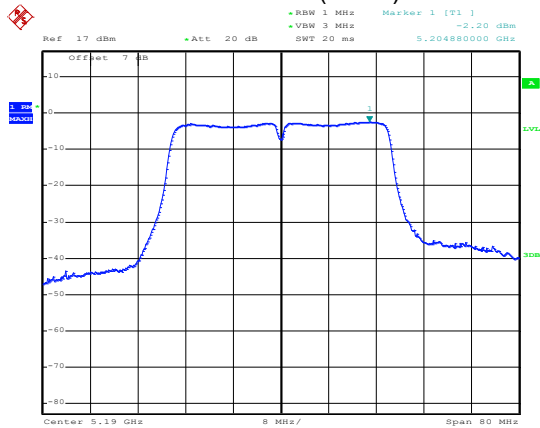


Date: 2.JUN.2020 16:22:45

802.11ac(HT20)

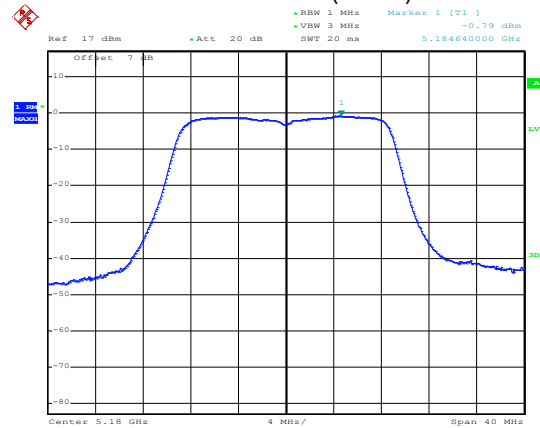


Date: 2.JUN.2020 16:07:23

Lowest channel

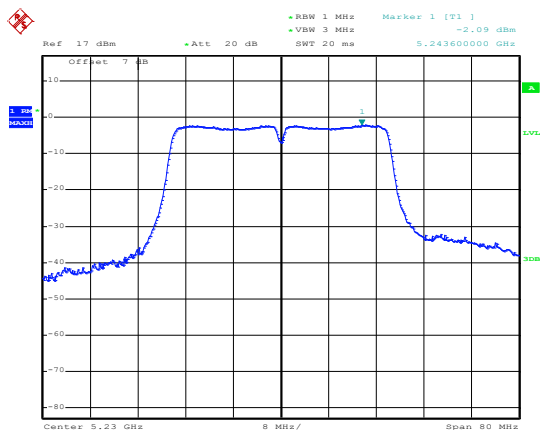


Date: 2.JUN.2020 16:22:34

Middle channel

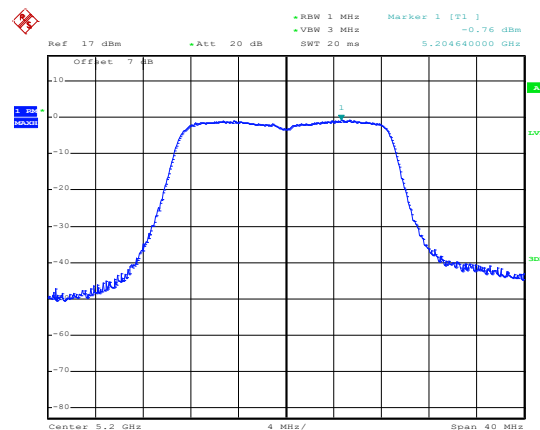

Date: 2.JUN.2020 16:07:50


Highest channel

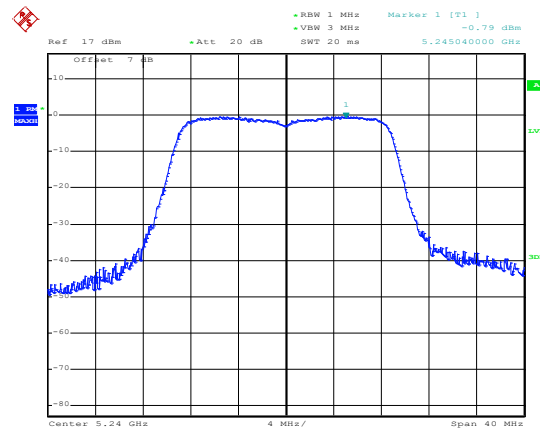

Date: 2.JUN.2020 16:09:30

Highest channel


802.11ac(HT40)

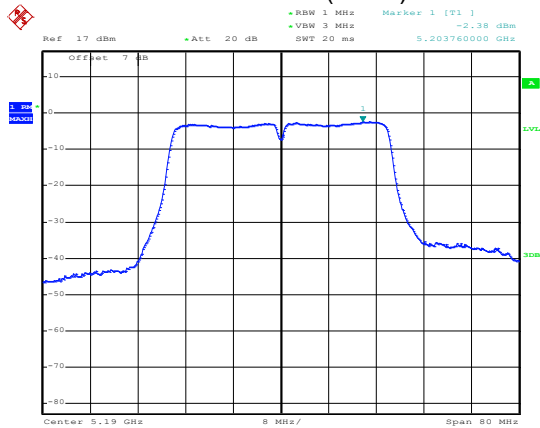

Date: 2.JUN.2020 16:22:07


Lowest channel

802.11ac(HT80)

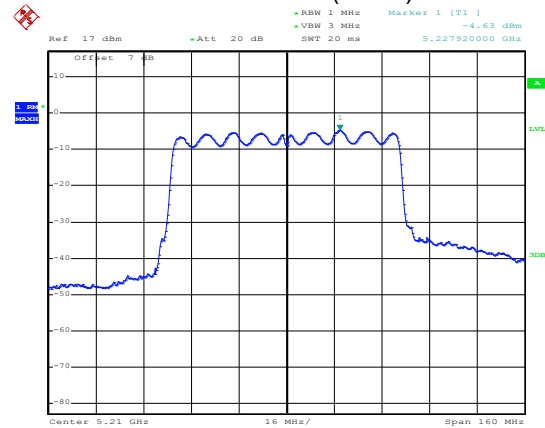


Date: 2.JUN.2020 16:21:40

Middle channel

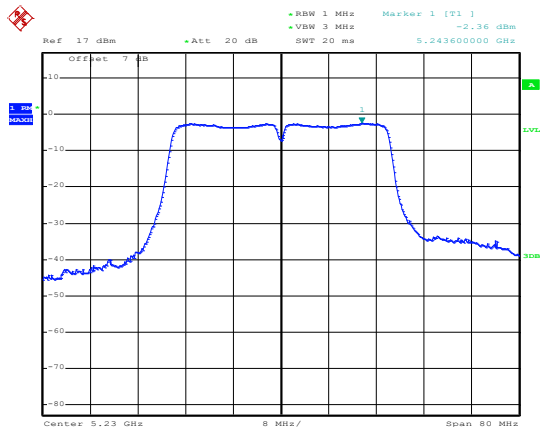


Date: 2.JUN.2020 16:22:18

Highest channel

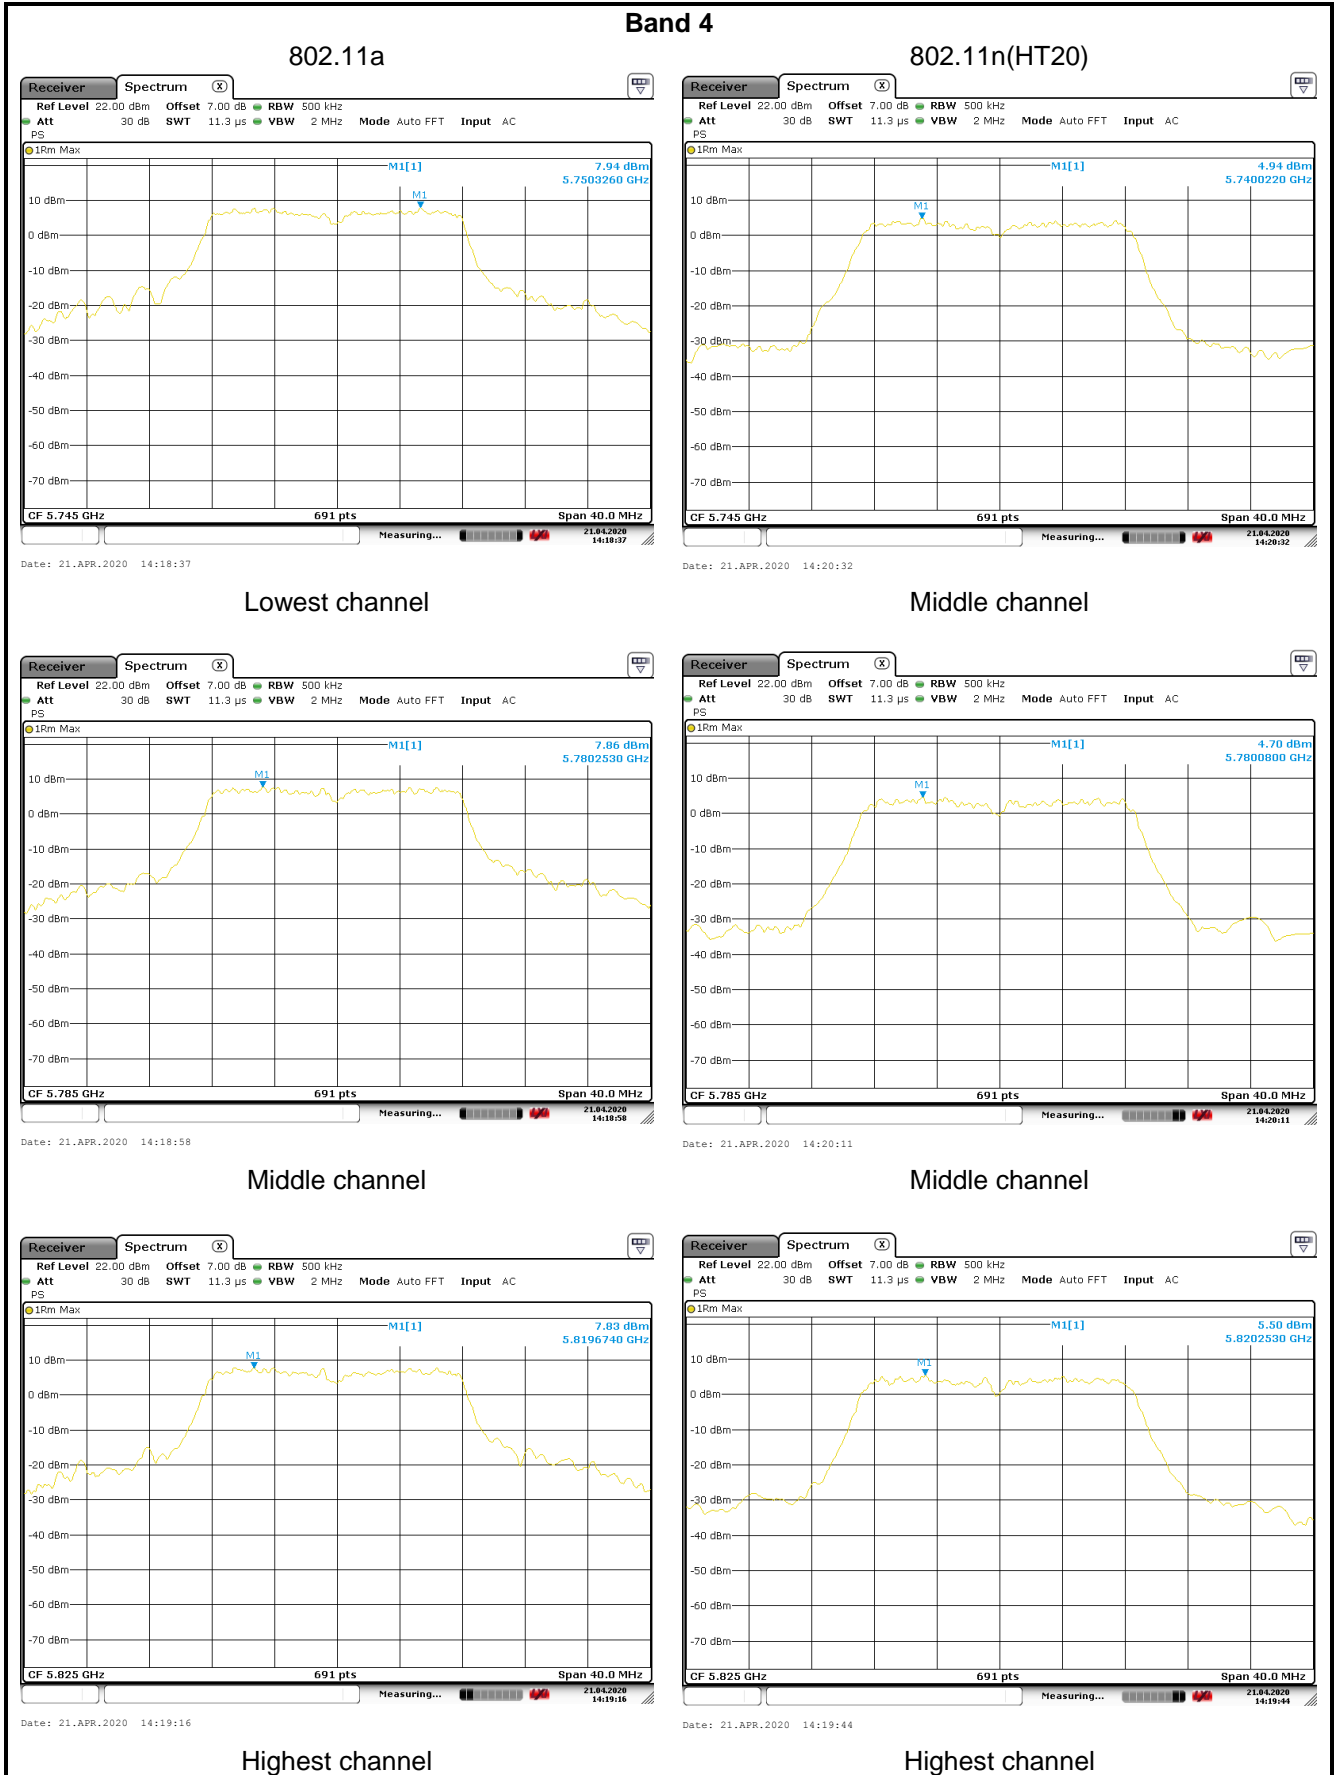



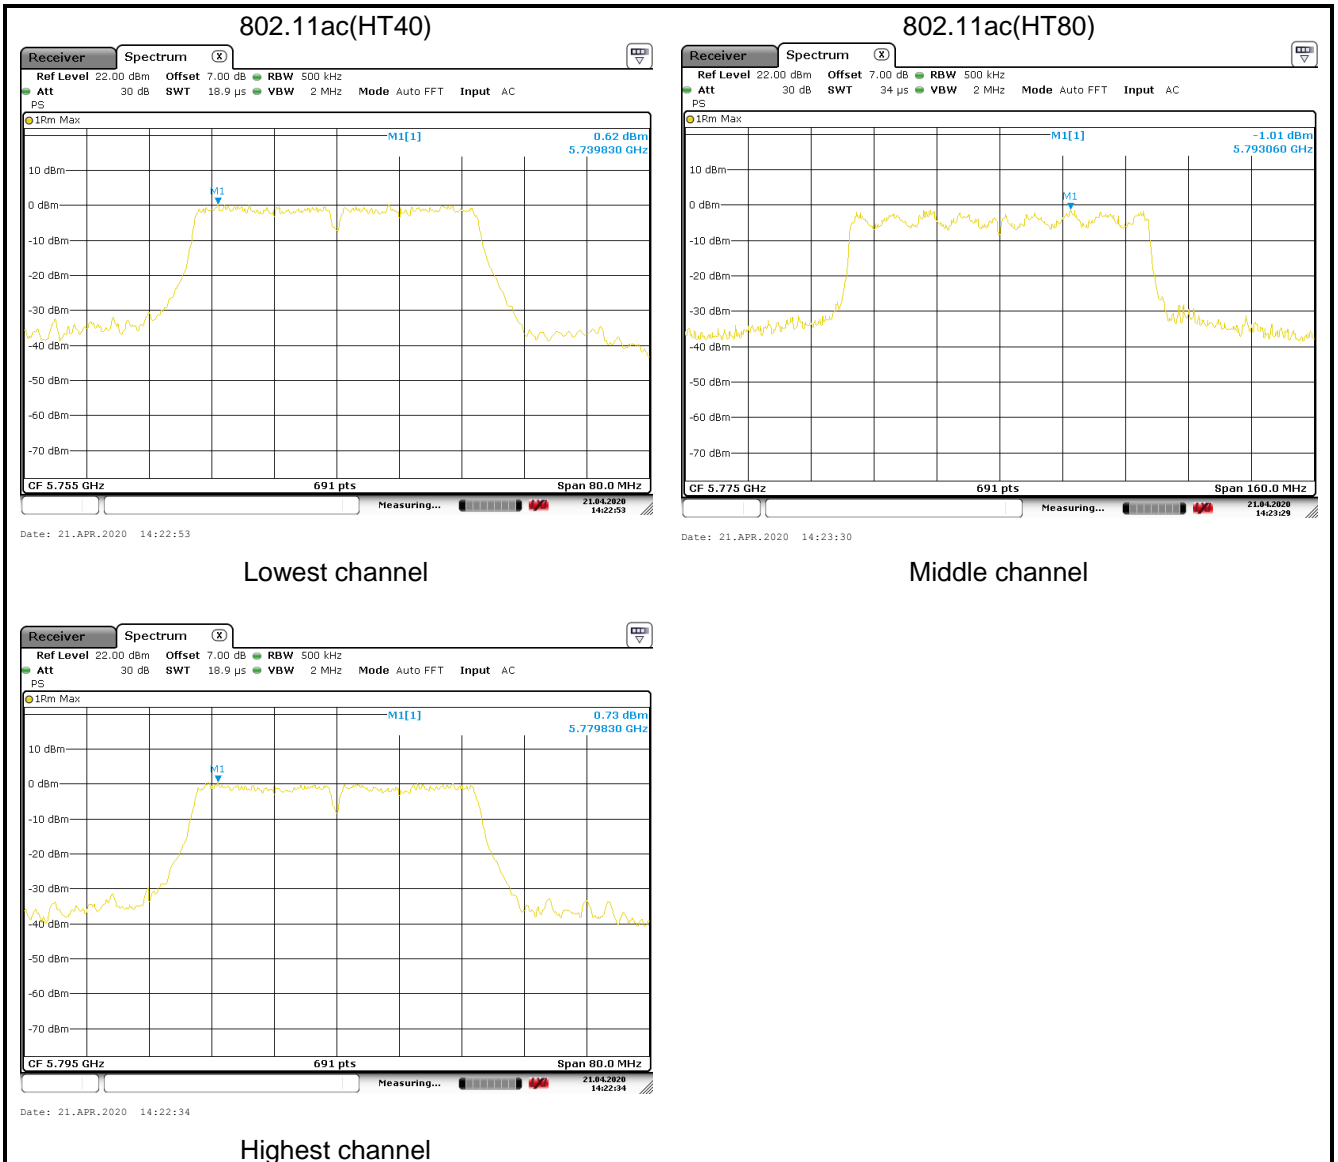

6.5 Band Edge

Test Requirement:	RSS-GEN Section 8.10, RSS-247 Section 6.2.1.2, RSS-247 Section 6.2.4.2			
Receiver setup:	Detector	RBW	VBW	Remark
	Quasi-peak	120kHz	300kHz	Quasi-peak Value
	RMS	1MHz	3MHz	Average Value
Limit:	Band	Limit (dBuV/m @3m)		Remark
	Band 1	68.20		Peak Value
		54.00		Average Value
	Band 4 limit: a) 27 dBm/MHz at frequencies from the band edges decreasing linearly to 15.6 dBm/MHz at 5 MHz above or below the band edges; b) 15.6 dBm/MHz at 5 MHz above or below the band edges decreasing linearly to 10 dBm/MHz at 25 MHz above or below the band edges; c) 10 dBm/MHz at 25 MHz above or below the band edges decreasing linearly to -27 dBm/MHz at 75 MHz above or below the band edges; and d) -27 dBm/MHz at frequencies more than 75 MHz above or below the band edges.			
Remark: 1. Band 1/2/3 limit: $E[dB\mu V/m] = EIRP[dBm] + 95.2 = 68.2 \text{ dBuV/m}$, for $EIPR[dBm] = -27 \text{ dBm}$. 2. Band 4 limit: $E[dB\mu V/m] = EIRP[dBm] + 95.2 = 68.2 \text{ dBuV/m}$, for $EIPR[dBm] = -27 \text{ dBm}$. $E[dB\mu V/m] = EIRP[dBm] + 95.2 = 105.2 \text{ dBuV/m}$, for $EIPR[dBm] = 10 \text{ dBm}$. $E[dB\mu V/m] = EIRP[dBm] + 95.2 = 110.8 \text{ dBuV/m}$, for $EIPR[dBm] = 15.6 \text{ dBm}$. $E[dB\mu V/m] = EIRP[dBm] + 95.2 = 122.2 \text{ dBuV/m}$, for $EIPR[dBm] = 27 \text{ dBm}$.				
Test Procedure:	<ol style="list-style-type: none"> The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. 			
Test setup:	<p>The diagram illustrates the test setup. On the left, an EUT (Equipment Under Test) is placed on a turntable at a height of 0.8m. The turntable is 3m away from a horn antenna mounted on an antenna tower. The antenna tower is positioned on a ground reference plane. The test receiver system, including a test receiver, pre-amplifier, and controller, is also on the ground reference plane. The antenna tower is connected to the test receiver system.</p>			
Test Instruments:	Refer to section 5.10 for details			
Test mode:	Refer to section 5.3 for details			
Test results:	Passed			

Measurement Data (worst case):

Ceramic Antenna:

Band 1:

Band 1 – 802.11a –TX0									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	49.92	31.77	7.05	2.54	41.93	49.35	68.20	-18.85	Horizontal
5150.00	45.35	31.77	7.05	2.54	41.93	44.78	68.20	-23.42	Vertical
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	42.21	31.77	7.05	2.54	41.93	41.64	54.00	-12.36	Horizontal
5150.00	39.68	31.77	7.05	2.54	41.93	39.11	54.00	-14.89	Vertical
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	50.15	32.24	7.11	2.61	41.89	50.22	68.20	-17.98	Horizontal
5350.00	50.00	32.24	7.11	2.61	41.89	50.07	68.20	-18.13	Vertical
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	40.01	32.24	7.11	2.61	41.89	40.08	54.00	-13.92	Horizontal
5350.00	41.87	32.24	7.11	2.61	41.89	41.94	54.00	-12.06	Vertical
Remark:									
1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor.									
2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 1 – 802.11a –TX1									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	49.80	31.77	7.05	2.54	41.93	49.23	68.20	-18.97	Horizontal
5150.00	50.15	31.77	7.05	2.54	41.93	49.58	68.20	-18.62	Vertical
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	42.01	31.77	7.05	2.54	41.93	41.44	54.00	-12.56	Horizontal
5150.00	40.48	31.77	7.05	2.54	41.93	39.91	54.00	-14.09	Vertical
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	50.12	32.24	7.11	2.61	41.89	50.19	68.20	-18.01	Horizontal
5350.00	50.06	32.24	7.11	2.61	41.89	50.13	68.20	-18.07	Vertical
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	40.07	32.24	7.11	2.61	41.89	40.14	54.00	-13.86	Horizontal
5350.00	41.39	32.24	7.11	2.61	41.89	41.46	54.00	-12.54	Vertical
Remark:									
1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor.									
2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 1 – 802.11n-HT20(MIMO)									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	49.72	31.77	7.05	2.54	41.93	49.15	68.20	-19.05	Horizontal
5150.00	51.14	31.77	7.05	2.54	41.93	50.57	68.20	-17.63	Vertical
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	41.91	31.77	7.05	2.54	41.93	41.34	54.00	-12.66	Horizontal
5150.00	43.38	31.77	7.05	2.54	41.93	42.81	54.00	-11.19	Vertical
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	49.81	32.24	7.11	2.61	41.89	49.88	68.20	-18.32	Horizontal
5350.00	50.25	32.24	7.11	2.61	41.89	50.32	68.20	-17.88	Vertical
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	39.95	32.24	7.11	2.61	41.89	40.02	54.00	-13.98	Horizontal
5350.00	41.38	32.24	7.11	2.61	41.89	41.45	54.00	-12.55	Vertical
<p><i>Remark:</i></p> <ol style="list-style-type: none"> <i>Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor.</i> <i>The emission levels of other frequencies are very lower than the limit and not show in test report.</i> 									

Band 1 – 802.11n-HT40(MIMO)									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	49.47	31.77	7.05	2.54	41.93	48.90	68.20	-19.30	Horizontal
5150.00	49.23	31.77	7.05	2.54	41.93	48.66	68.20	-19.54	Vertical
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	42.58	31.77	7.05	2.54	41.93	42.01	54.00	-11.99	Horizontal
5150.00	42.35	31.77	7.05	2.54	41.93	41.78	54.00	-12.22	Vertical
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	50.15	32.02	7.09	2.54	41.93	49.87	68.20	-18.33	Horizontal
5350.00	50.43	32.02	7.09	2.54	41.93	50.15	68.20	-18.05	Vertical
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	39.95	32.02	7.09	2.54	41.93	39.67	54.00	-14.33	Horizontal
5350.00	40.96	32.02	7.09	2.54	41.93	40.68	54.00	-13.32	Vertical
Remark:									
1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor.									
2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 1 – 802.11ac-HT20(MIMO)									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	51.81	31.77	7.05	2.54	41.93	51.24	68.20	-16.96	Horizontal
5150.00	49.28	31.77	7.05	2.54	41.93	48.71	68.20	-19.49	Vertical
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	43.17	31.77	7.05	2.54	41.93	42.60	54.00	-11.40	Horizontal
5150.00	44.24	31.77	7.05	2.54	41.93	43.67	54.00	-10.33	Vertical
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	49.96	32.24	7.11	2.61	41.89	50.03	68.20	-18.17	Horizontal
5350.00	49.44	32.24	7.11	2.61	41.89	49.51	68.20	-18.69	Vertical
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	39.82	32.24	7.11	2.61	41.89	39.89	54.00	-14.11	Horizontal
5350.00	41.51	32.24	7.11	2.61	41.89	41.58	54.00	-12.42	Vertical
Remark:									
1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor.									
2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 1 – 802.11ac-HT40(MIMO)									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	52.19	31.77	7.05	2.54	41.93	51.62	68.20	-16.58	Horizontal
5150.00	49.18	31.77	7.05	2.54	41.93	48.61	68.20	-19.59	Vertical
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	43.65	31.77	7.05	2.54	41.93	43.08	54.00	-10.92	Horizontal
5150.00	43.99	31.77	7.05	2.54	41.93	43.42	54.00	-10.58	Vertical
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	49.97	32.24	7.11	2.61	41.89	50.04	68.20	-18.16	Horizontal
5350.00	49.76	32.24	7.11	2.61	41.89	49.83	68.20	-18.37	Vertical
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	40.01	32.24	7.11	2.61	41.89	40.08	54.00	-13.92	Horizontal
5350.00	41.64	32.24	7.11	2.61	41.89	41.71	54.00	-12.29	Vertical
Remark:									
1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor.									
2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 1 – 802.11ac-HT80(MIMO)									
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	50.03	31.77	7.05	2.54	41.93	49.46	68.20	-18.74	Horizontal
5150.00	49.56	31.77	7.05	2.54	41.93	48.99	68.20	-19.21	Vertical
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	40.89	31.77	7.05	2.54	41.93	40.32	54.00	-13.68	Horizontal
5150.00	40.10	31.77	7.05	2.54	41.93	39.53	54.00	-14.47	Vertical
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	49.60	32.24	7.11	2.61	41.89	49.67	68.20	-18.53	Horizontal
5350.00	50.33	32.24	7.11	2.61	41.89	50.40	68.20	-17.80	Vertical
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	40.59	32.24	7.11	2.61	41.89	40.66	54.00	-13.34	Horizontal
5350.00	41.35	32.24	7.11	2.61	41.89	41.42	54.00	-12.58	Vertical
Remark:									
1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor.									
2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 4:

Band 4 – 802.11a –TX0									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBUV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBUV/m)	Limit Line (dBUV/m)	Over Limit (dB)	Polarization
5650.00	47.83	32.63	7.45	2.69	41.85	48.75	68.20	-19.45	Horizontal
5700.00	48.24	32.64	7.60	2.72	41.90	49.30	105.20	-55.90	Horizontal
5720.00	47.41	32.65	7.64	2.72	41.92	48.50	110.80	-62.30	Horizontal
5725.00	49.25	32.65	7.69	2.72	41.94	50.37	122.20	-71.83	Horizontal
5650.00	47.87	32.63	7.45	2.69	41.85	48.79	68.20	-19.41	Vertical
5700.00	48.48	32.64	7.60	2.72	41.90	49.54	105.20	-55.66	Vertical
5720.00	48.73	32.65	7.64	2.72	41.92	49.82	110.80	-60.98	Vertical
5725.00	55.22	32.65	7.69	2.72	41.94	56.34	122.20	-65.86	Vertical
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBUV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBUV/m)	Limit Line (dBUV/m)	Over Limit (dB)	Polarization
5850.00	48.47	32.67	7.90	2.69	42.03	49.70	122.20	-72.50	Horizontal
5855.00	47.73	32.67	7.90	2.72	42.03	48.99	110.80	-61.81	Horizontal
5875.00	47.92	32.68	7.91	2.72	42.03	49.20	105.20	-56.00	Horizontal
5925.00	46.21	32.69	7.92	2.72	42.04	47.50	68.20	-20.70	Horizontal
5850.00	50.07	32.67	7.90	2.69	42.03	51.30	122.20	-70.90	Vertical
5855.00	47.97	32.67	7.90	2.72	42.03	49.23	110.80	-61.57	Vertical
5875.00	46.98	32.68	7.91	2.72	42.03	48.26	105.20	-56.94	Vertical
5925.00	47.45	32.69	7.92	2.72	42.04	48.74	68.20	-19.46	Vertical
<p>Remark:</p> <ol style="list-style-type: none"> Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Pre-amplifier Factor. The emission levels of other frequencies are very lower than the limit and not show in test report. 									

Band 4 – 802.11a –TX1									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5650.00	47.09	32.63	7.45	2.69	41.85	48.01	68.20	-20.19	Horizontal
5700.00	46.90	32.64	7.60	2.72	41.90	47.96	105.20	-57.24	Horizontal
5720.00	47.88	32.65	7.64	2.72	41.92	48.97	110.80	-61.83	Horizontal
5725.00	48.40	32.65	7.69	2.72	41.94	49.52	122.20	-72.68	Horizontal
5650.00	46.88	32.63	7.45	2.69	41.85	47.80	68.20	-20.40	Vertical
5700.00	46.87	32.64	7.60	2.72	41.90	47.93	105.20	-57.27	Vertical
5720.00	48.78	32.65	7.64	2.72	41.92	49.87	110.80	-60.93	Vertical
5725.00	52.28	32.65	7.69	2.72	41.94	53.40	122.20	-68.80	Vertical
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5850.00	47.34	32.67	7.90	2.69	42.03	48.57	122.20	-73.63	Horizontal
5855.00	47.34	32.67	7.90	2.72	42.03	48.60	110.80	-62.20	Horizontal
5875.00	47.56	32.68	7.91	2.72	42.03	48.84	105.20	-56.36	Horizontal
5925.00	47.08	32.69	7.92	2.72	42.04	48.37	68.20	-19.83	Horizontal
5850.00	48.93	32.67	7.90	2.69	42.03	50.16	122.20	-72.04	Vertical
5855.00	47.94	32.67	7.90	2.72	42.03	49.20	110.80	-61.60	Vertical
5875.00	47.83	32.68	7.91	2.72	42.03	49.11	105.20	-56.09	Vertical
5925.00	48.83	32.69	7.92	2.72	42.04	50.12	68.20	-18.08	Vertical
<p>Remark:</p> <ol style="list-style-type: none"> Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. The emission levels of other frequencies are very lower than the limit and not show in test report. 									

Band 4 – 802.11n-HT20(MIMO)									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5650.00	46.67	32.63	7.45	2.69	41.85	47.59	68.20	-20.61	Horizontal
5700.00	46.55	32.64	7.60	2.72	41.90	47.61	105.20	-57.59	Horizontal
5720.00	46.89	32.65	7.64	2.72	41.92	47.98	110.80	-62.82	Horizontal
5725.00	48.87	32.65	7.69	2.72	41.94	49.99	122.20	-72.21	Horizontal
5650.00	47.69	32.63	7.45	2.69	41.85	48.61	68.20	-19.59	Vertical
5700.00	46.55	32.64	7.60	2.72	41.90	47.61	105.20	-57.59	Vertical
5720.00	47.64	32.65	7.64	2.72	41.92	48.73	110.80	-62.07	Vertical
5725.00	52.79	32.65	7.69	2.72	41.94	53.91	122.20	-68.29	Vertical
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5850.00	46.96	32.67	7.90	2.69	42.03	48.19	122.20	-74.01	Horizontal
5855.00	46.88	32.67	7.90	2.72	42.03	48.14	110.80	-62.66	Horizontal
5875.00	47.90	32.68	7.91	2.72	42.03	49.18	105.20	-56.02	Horizontal
5925.00	47.02	32.69	7.92	2.72	42.04	48.31	68.20	-19.89	Horizontal
5850.00	48.68	32.67	7.90	2.69	42.03	49.91	122.20	-72.29	Vertical
5855.00	47.51	32.67	7.90	2.72	42.03	48.77	110.80	-62.03	Vertical
5875.00	47.68	32.68	7.91	2.72	42.03	48.96	105.20	-56.24	Vertical
5925.00	48.88	32.69	7.92	2.72	42.04	50.17	68.20	-18.03	Vertical
<p>Remark:</p> <ol style="list-style-type: none"> Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Pre-amplifier Factor. The emission levels of other frequencies are very lower than the limit and not show in test report. 									

Band 4 – 802.11n-HT40(MIMO)									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5650.00	48.08	32.63	7.45	2.69	41.85	49.00	68.20	-19.20	Horizontal
5700.00	47.38	32.64	7.60	2.72	41.90	48.44	105.20	-56.76	Horizontal
5720.00	48.88	32.65	7.64	2.72	41.92	49.97	110.80	-60.83	Horizontal
5725.00	49.62	32.65	7.69	2.72	41.94	50.74	122.20	-71.46	Horizontal
5650.00	46.83	32.63	7.45	2.69	41.85	47.75	68.20	-20.45	Vertical
5700.00	46.90	32.64	7.60	2.72	41.90	47.96	105.20	-57.24	Vertical
5720.00	51.51	32.65	7.64	2.72	41.92	52.60	110.80	-58.20	Vertical
5725.00	54.68	32.65	7.69	2.72	41.94	55.80	122.20	-66.40	Vertical
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5850.00	46.48	32.67	7.90	2.69	42.03	47.71	122.20	-74.49	Horizontal
5855.00	46.74	32.67	7.90	2.72	42.03	48.00	110.80	-62.80	Horizontal
5875.00	47.48	32.68	7.91	2.72	42.03	48.76	105.20	-56.44	Horizontal
5925.00	47.48	32.69	7.92	2.72	42.04	48.77	68.20	-19.43	Horizontal
5850.00	48.65	32.67	7.90	2.69	42.03	49.88	122.20	-72.32	Vertical
5855.00	47.25	32.67	7.90	2.72	42.03	48.51	110.80	-62.29	Vertical
5875.00	47.37	32.68	7.91	2.72	42.03	48.65	105.20	-56.55	Vertical
5925.00	48.45	32.69	7.92	2.72	42.04	49.74	68.20	-18.46	Vertical
<p>Remark:</p> <ol style="list-style-type: none"> Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Pre-amplifier Factor. The emission levels of other frequencies are very lower than the limit and not show in test report. 									

Band 4 – 802.11ac-HT20(MIMO)									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5650.00	46.99	32.63	7.45	2.69	41.85	47.91	68.20	-20.29	Horizontal
5700.00	46.81	32.64	7.60	2.72	41.90	47.87	105.20	-57.33	Horizontal
5720.00	46.59	32.65	7.64	2.72	41.92	47.68	110.80	-63.12	Horizontal
5725.00	49.00	32.65	7.69	2.72	41.94	50.12	122.20	-72.08	Horizontal
5650.00	47.30	32.63	7.45	2.69	41.85	48.22	68.20	-19.98	Vertical
5700.00	46.26	32.64	7.60	2.72	41.90	47.32	105.20	-57.88	Vertical
5720.00	47.28	32.65	7.64	2.72	41.92	48.37	110.80	-62.43	Vertical
5725.00	52.41	32.65	7.69	2.72	41.94	53.53	122.20	-68.67	Vertical
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5850.00	47.45	32.67	7.90	2.69	42.03	48.68	122.20	-73.52	Horizontal
5855.00	46.65	32.67	7.90	2.72	42.03	47.91	110.80	-62.89	Horizontal
5875.00	48.08	32.68	7.91	2.72	42.03	49.36	105.20	-55.84	Horizontal
5925.00	47.06	32.69	7.92	2.72	42.04	48.35	68.20	-19.85	Horizontal
5850.00	48.9	32.67	7.90	2.69	42.03	50.13	122.20	-72.07	Vertical
5855.00	47.91	32.67	7.90	2.72	42.03	49.17	110.80	-61.63	Vertical
5875.00	47.99	32.68	7.91	2.72	42.03	49.27	105.20	-55.93	Vertical
5925.00	48.77	32.69	7.92	2.72	42.04	50.06	68.20	-18.14	Vertical
<p>Remark:</p> <ol style="list-style-type: none"> Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Pre-amplifier Factor. The emission levels of other frequencies are very lower than the limit and not show in test report. 									

Band 4 – 802.11ac-HT40(MIMO)									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5650.00	47.83	32.63	7.45	2.69	41.85	48.75	68.20	-19.45	Horizontal
5700.00	47.49	32.64	7.60	2.72	41.90	48.55	105.20	-56.65	Horizontal
5720.00	49.10	32.65	7.64	2.72	41.92	50.19	110.80	-60.61	Horizontal
5725.00	49.21	32.65	7.69	2.72	41.94	50.33	122.20	-71.87	Horizontal
5650.00	46.33	32.63	7.45	2.69	41.85	47.25	68.20	-20.95	Vertical
5700.00	47.20	32.64	7.60	2.72	41.90	48.26	105.20	-56.94	Vertical
5720.00	51.41	32.65	7.64	2.72	41.92	52.50	110.80	-58.30	Vertical
5725.00	54.76	32.65	7.69	2.72	41.94	55.88	122.20	-66.32	Vertical
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5850.00	46.36	32.67	7.90	2.69	42.03	47.59	122.20	-74.61	Horizontal
5855.00	46.60	32.67	7.90	2.72	42.03	47.86	110.80	-62.94	Horizontal
5875.00	47.26	32.68	7.91	2.72	42.03	48.54	105.20	-56.66	Horizontal
5925.00	47.97	32.69	7.92	2.72	42.04	49.26	68.20	-18.94	Horizontal
5850.00	49	32.67	7.90	2.69	42.03	50.23	122.20	-71.97	Vertical
5855.00	47.74	32.67	7.90	2.72	42.03	49.00	110.80	-61.80	Vertical
5875.00	47.46	32.68	7.91	2.72	42.03	48.74	105.20	-56.46	Vertical
5925.00	48.79	32.69	7.92	2.72	42.04	50.08	68.20	-18.12	Vertical
<p>Remark:</p> <ol style="list-style-type: none"> Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Pre-amplifier Factor. The emission levels of other frequencies are very lower than the limit and not show in test report. 									

Band 4 – 802.11ac-HT80(MIMO)									
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5650.00	46.89	32.63	7.45	2.69	41.85	47.81	68.20	-20.39	Horizontal
5700.00	47.77	32.64	7.60	2.72	41.90	48.83	105.20	-56.37	Horizontal
5720.00	47.61	32.65	7.64	2.72	41.92	48.70	110.80	-62.10	Horizontal
5725.00	47.82	32.65	7.69	2.72	41.94	48.94	122.20	-73.26	Horizontal
5650.00	47.37	32.63	7.45	2.69	41.85	48.29	68.20	-19.91	Vertical
5700.00	50.76	32.64	7.60	2.72	41.90	51.82	105.20	-53.38	Vertical
5720.00	50.87	32.65	7.64	2.72	41.92	51.96	110.80	-58.84	Vertical
5725.00	51.52	32.65	7.69	2.72	41.94	52.64	122.20	-69.56	Vertical
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5850.00	47.70	32.67	7.90	2.69	42.03	48.93	122.20	-73.27	Horizontal
5855.00	47.72	32.67	7.90	2.72	42.03	48.98	110.80	-61.82	Horizontal
5875.00	47.12	32.68	7.91	2.72	42.03	48.40	105.20	-56.80	Horizontal
5925.00	46.78	32.69	7.92	2.72	42.04	48.07	68.20	-20.13	Horizontal
5850.00	50.1	32.67	7.90	2.69	42.03	51.33	122.20	-70.87	Vertical
5855.00	48.87	32.67	7.90	2.72	42.03	50.13	110.80	-60.67	Vertical
5875.00	47.60	32.68	7.91	2.72	42.03	48.88	105.20	-56.32	Vertical
5925.00	47.28	32.69	7.92	2.72	42.04	48.57	68.20	-19.63	Vertical
Remark: 1. <i>Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Pre-amplifier Factor.</i> 2. <i>The emission levels of other frequencies are very lower than the limit and not show in test report.</i>									

Flex Antenna:

Band 1:

Band 1 – 802.11a –TX0									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	46.87	31.77	7.05	2.54	41.93	46.30	68.20	-21.90	Horizontal
5150.00	46.97	31.77	7.05	2.54	41.93	46.40	68.20	-21.80	Vertical
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	36.92	31.77	7.05	2.54	41.93	36.35	54.00	-17.65	Horizontal
5150.00	37.20	31.77	7.05	2.54	41.93	36.63	54.00	-17.37	Vertical
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	46.21	32.24	7.11	2.61	41.89	46.28	68.20	-21.92	Horizontal
5350.00	46.97	32.24	7.11	2.61	41.89	47.04	68.20	-21.16	Vertical
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	37.37	32.24	7.11	2.61	41.89	37.44	54.00	-16.56	Horizontal
5350.00	37.52	32.24	7.11	2.61	41.89	37.59	54.00	-16.41	Vertical
Remark:									
1. <i>Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Pre-amplifier Factor.</i>									
2. <i>The emission levels of other frequencies are very lower than the limit and not show in test report.</i>									

Band 1 – 802.11a –TX1									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	47.79	31.77	7.05	2.54	41.93	47.22	68.20	-20.98	Horizontal
5150.00	47.41	31.77	7.05	2.54	41.93	46.84	68.20	-21.36	Vertical
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	38.06	31.77	7.05	2.54	41.93	37.49	54.00	-16.51	Horizontal
5150.00	38.74	31.77	7.05	2.54	41.93	38.17	54.00	-15.83	Vertical
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	46.85	32.24	7.11	2.61	41.89	46.92	68.20	-21.28	Horizontal
5350.00	47.06	32.24	7.11	2.61	41.89	47.13	68.20	-21.07	Vertical
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	37.05	32.24	7.11	2.61	41.89	37.12	54.00	-16.88	Horizontal
5350.00	37.47	32.24	7.11	2.61	41.89	37.54	54.00	-16.46	Vertical
Remark:									
1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor.									
2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 1 – 802.11n-HT20(MIMO)									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	46.89	31.77	7.05	2.54	41.93	46.32	68.20	-21.88	Horizontal
5150.00	47.57	31.77	7.05	2.54	41.93	47.00	68.20	-21.20	Vertical
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	37.73	31.77	7.05	2.54	41.93	37.16	54.00	-16.84	Horizontal
5150.00	37.23	31.77	7.05	2.54	41.93	36.66	54.00	-17.34	Vertical
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	47.10	32.02	7.09	2.54	41.93	46.82	68.20	-21.38	Horizontal
5350.00	47.24	32.02	7.09	2.54	41.93	46.96	68.20	-21.24	Vertical
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	36.70	32.02	7.09	2.54	41.93	36.42	54.00	-17.58	Horizontal
5350.00	37.53	32.02	7.09	2.54	41.93	37.25	54.00	-16.75	Vertical
<p><i>Remark:</i></p> <ol style="list-style-type: none"> <i>Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor.</i> <i>The emission levels of other frequencies are very lower than the limit and not show in test report.</i> 									

Band 1 – 802.11n-HT40(MIMO)									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	46.82	31.77	7.05	2.54	41.93	46.25	68.20	-21.95	Horizontal
5150.00	51.99	31.77	7.05	2.54	41.93	51.42	68.20	-16.78	Vertical
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	37.66	31.77	7.05	2.54	41.93	37.09	54.00	-16.91	Horizontal
5150.00	42.95	31.77	7.05	2.54	41.93	42.38	54.00	-11.62	Vertical
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	47.15	32.24	7.11	2.61	41.89	47.22	68.20	-20.98	Horizontal
5350.00	47.10	32.24	7.11	2.61	41.89	47.17	68.20	-21.03	Vertical
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	36.59	32.24	7.11	2.61	41.89	36.66	54.00	-17.34	Horizontal
5350.00	37.61	32.24	7.11	2.61	41.89	37.68	54.00	-16.32	Vertical
Remark:									
1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor.									
2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 1 – 802.11ac-HT20(MIMO)									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	51.81	31.77	7.05	2.54	41.93	51.24	68.20	-16.96	Horizontal
5150.00	49.28	31.77	7.05	2.54	41.93	48.71	68.20	-19.49	Vertical
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	43.17	31.77	7.05	2.54	41.93	42.60	54.00	-11.40	Horizontal
5150.00	44.24	31.77	7.05	2.54	41.93	43.67	54.00	-10.33	Vertical
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	46.53	32.24	7.11	2.61	41.89	46.60	68.20	-21.60	Horizontal
5350.00	47.29	32.24	7.11	2.61	41.89	47.36	68.20	-20.84	Vertical
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	37.45	32.24	7.11	2.61	41.89	37.52	54.00	-16.48	Horizontal
5350.00	37.34	32.24	7.11	2.61	41.89	37.41	54.00	-16.59	Vertical
Remark:									
1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Pre-amplifier Factor.									
2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 1 – 802.11ac-HT40(MIMO)									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	52.19	31.77	7.05	2.54	41.93	51.62	68.20	-16.58	Horizontal
5150.00	49.18	31.77	7.05	2.54	41.93	48.61	68.20	-19.59	Vertical
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	43.65	31.77	7.05	2.54	41.93	43.08	54.00	-10.92	Horizontal
5150.00	43.99	31.77	7.05	2.54	41.93	43.42	54.00	-10.58	Vertical
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	46.21	32.24	7.11	2.61	41.89	46.28	68.20	-21.92	Horizontal
5350.00	47.14	32.24	7.11	2.61	41.89	47.21	68.20	-20.99	Vertical
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	37.55	32.24	7.11	2.61	41.89	37.62	54.00	-16.38	Horizontal
5350.00	37.71	32.24	7.11	2.61	41.89	37.78	54.00	-16.22	Vertical
Remark:									
1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor.									
2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 1 – 802.11ac-HT80(MIMO)									
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	46.95	31.77	7.05	2.54	41.93	46.38	68.20	-21.82	Horizontal
5150.00	52.06	31.77	7.05	2.54	41.93	51.49	68.20	-16.71	Vertical
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	37.86	31.77	7.05	2.54	41.93	37.29	54.00	-16.71	Horizontal
5150.00	42.67	31.77	7.05	2.54	41.93	42.10	54.00	-11.90	Vertical
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	46.81	32.24	7.11	2.61	41.89	46.88	68.20	-21.32	Horizontal
5350.00	46.54	32.24	7.11	2.61	41.89	46.61	68.20	-21.59	Vertical
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	37.06	32.24	7.11	2.61	41.89	37.13	54.00	-16.87	Horizontal
5350.00	37.89	32.24	7.11	2.61	41.89	37.96	54.00	-16.04	Vertical
Remark:									
1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor.									
2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 4:

Band 4 – 802.11a –TX0									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5650.00	49.81	32.63	7.45	2.69	41.85	50.73	68.20	-17.47	Horizontal
5700.00	50.92	32.64	7.60	2.72	41.90	51.98	105.20	-53.22	Horizontal
5720.00	52.89	32.65	7.64	2.72	41.92	53.98	110.80	-56.82	Horizontal
5725.00	58.93	32.65	7.69	2.72	41.94	60.05	122.20	-62.15	Horizontal
5650.00	49.35	32.63	7.45	2.69	41.85	50.27	68.20	-17.93	Vertical
5700.00	50.64	32.64	7.60	2.72	41.90	51.70	105.20	-53.50	Vertical
5720.00	50.44	32.65	7.64	2.72	41.92	51.53	110.80	-59.27	Vertical
5725.00	52.57	32.65	7.69	2.72	41.94	53.69	122.20	-68.51	Vertical
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5850.00	53.70	32.67	7.90	2.69	42.03	54.93	122.20	-67.27	Horizontal
5855.00	71.71	32.67	7.90	2.72	42.03	72.97	110.80	-37.83	Horizontal
5875.00	49.12	32.68	7.91	2.72	42.03	50.40	105.20	-54.80	Horizontal
5925.00	49.15	32.69	7.92	2.72	42.04	50.44	68.20	-17.76	Horizontal
5850.00	49.66	32.67	7.90	2.69	42.03	50.89	122.20	-71.31	Vertical
5855.00	49.28	32.67	7.90	2.72	42.03	50.54	110.80	-60.26	Vertical
5875.00	49.10	32.68	7.91	2.72	42.03	50.38	105.20	-54.82	Vertical
5925.00	49.36	32.69	7.92	2.72	42.04	50.65	68.20	-17.55	Vertical
<p>Remark:</p> <ol style="list-style-type: none"> Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Pre-amplifier Factor. The emission levels of other frequencies are very lower than the limit and not show in test report. 									

Band 4 – 802.11a –TX1									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5650.00	48.25	32.63	7.45	2.69	41.85	49.17	68.20	-19.03	Horizontal
5700.00	49.04	32.64	7.60	2.72	41.90	50.10	105.20	-55.10	Horizontal
5720.00	50.76	32.65	7.64	2.72	41.92	51.85	110.80	-58.95	Horizontal
5725.00	55.12	32.65	7.69	2.72	41.94	56.24	122.20	-65.96	Horizontal
5650.00	49.11	32.63	7.45	2.69	41.85	50.03	68.20	-18.17	Vertical
5700.00	49.76	32.64	7.60	2.72	41.90	50.82	105.20	-54.38	Vertical
5720.00	50.31	32.65	7.64	2.72	41.92	51.40	110.80	-59.40	Vertical
5725.00	50.02	32.65	7.69	2.72	41.94	51.14	122.20	-71.06	Vertical
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5850.00	53.45	32.67	7.90	2.69	42.03	54.68	122.20	-67.52	Horizontal
5855.00	49.68	32.67	7.90	2.72	42.03	50.94	110.80	-59.86	Horizontal
5875.00	49.80	32.68	7.91	2.72	42.03	51.08	105.20	-54.12	Horizontal
5925.00	49.66	32.69	7.92	2.72	42.04	50.95	68.20	-17.25	Horizontal
5850.00	49.79	32.67	7.90	2.69	42.03	51.02	122.20	-71.18	Vertical
5855.00	50.26	32.67	7.90	2.72	42.03	51.52	110.80	-59.28	Vertical
5875.00	50.30	32.68	7.91	2.72	42.03	51.58	105.20	-53.62	Vertical
5925.00	48.96	32.69	7.92	2.72	42.04	50.25	68.20	-17.95	Vertical
Remark: 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 4 – 802.11n-HT20(MIMO)									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5650.00	49.64	32.63	7.45	2.69	41.85	50.56	68.20	-17.64	Horizontal
5700.00	49.98	32.64	7.60	2.72	41.90	51.04	105.20	-54.16	Horizontal
5720.00	50.76	32.65	7.64	2.72	41.92	51.85	110.80	-58.95	Horizontal
5725.00	57.57	32.65	7.69	2.72	41.94	58.69	122.20	-63.51	Horizontal
5650.00	48.79	32.63	7.45	2.69	41.85	49.71	68.20	-18.49	Vertical
5700.00	50.49	32.64	7.60	2.72	41.90	51.55	105.20	-53.65	Vertical
5720.00	49.38	32.65	7.64	2.72	41.92	50.47	110.80	-60.33	Vertical
5725.00	51.28	32.65	7.69	2.72	41.94	52.40	122.20	-69.80	Vertical
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5850.00	53.59	32.67	7.90	2.69	42.03	54.82	122.20	-67.38	Horizontal
5855.00	49.80	32.67	7.90	2.72	42.03	51.06	110.80	-59.74	Horizontal
5875.00	49.74	32.68	7.91	2.72	42.03	51.02	105.20	-54.18	Horizontal
5925.00	49.79	32.69	7.92	2.72	42.04	51.08	68.20	-17.12	Horizontal
5850.00	49.78	32.67	7.90	2.69	42.03	51.01	122.20	-71.19	Vertical
5855.00	50.40	32.67	7.90	2.72	42.03	51.66	110.80	-59.14	Vertical
5875.00	50.51	32.68	7.91	2.72	42.03	51.79	105.20	-53.41	Vertical
5925.00	49.41	32.69	7.92	2.72	42.04	50.70	68.20	-17.50	Vertical
<p>Remark:</p> <ol style="list-style-type: none"> Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Pre-amplifier Factor. The emission levels of other frequencies are very lower than the limit and not show in test report. 									

Band 4 – 802.11n-HT40(MIMO)									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5650.00	49.34	32.63	7.45	2.69	41.85	50.26	68.20	-17.94	Horizontal
5700.00	49.66	32.64	7.60	2.72	41.90	50.72	105.20	-54.48	Horizontal
5720.00	49.32	32.65	7.64	2.72	41.92	50.41	110.80	-60.39	Horizontal
5725.00	50.61	32.65	7.69	2.72	41.94	51.73	122.20	-70.47	Horizontal
5650.00	49.61	32.63	7.45	2.69	41.85	50.53	68.20	-17.67	Vertical
5700.00	49.48	32.64	7.60	2.72	41.90	50.54	105.20	-54.66	Vertical
5720.00	48.84	32.65	7.64	2.72	41.92	49.93	110.80	-60.87	Vertical
5725.00	49.50	32.65	7.69	2.72	41.94	50.62	122.20	-71.58	Vertical
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5850.00	53.71	32.67	7.90	2.69	42.03	54.94	122.20	-67.26	Horizontal
5855.00	49.98	32.67	7.90	2.72	42.03	51.24	110.80	-59.56	Horizontal
5875.00	49.47	32.68	7.91	2.72	42.03	50.75	105.20	-54.45	Horizontal
5925.00	49.30	32.69	7.92	2.72	42.04	50.59	68.20	-17.61	Horizontal
5850.00	49.87	32.67	7.90	2.69	42.03	51.10	122.20	-71.10	Vertical
5855.00	49.97	32.67	7.90	2.72	42.03	51.23	110.80	-59.57	Vertical
5875.00	50.70	32.68	7.91	2.72	42.03	51.98	105.20	-53.22	Vertical
5925.00	49.67	32.69	7.92	2.72	42.04	50.96	68.20	-17.24	Vertical
<p>Remark:</p> <ol style="list-style-type: none"> Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Pre-amplifier Factor. The emission levels of other frequencies are very lower than the limit and not show in test report. 									

Band 4 – 802.11ac-HT20(MIMO)									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5650.00	46.12	32.63	7.45	2.69	41.85	47.04	68.20	-21.16	Horizontal
5700.00	45.94	32.64	7.60	2.72	41.90	47.00	105.20	-58.20	Horizontal
5720.00	45.35	32.65	7.64	2.72	41.92	46.44	110.80	-64.36	Horizontal
5725.00	50.22	32.65	7.69	2.72	41.94	51.34	122.20	-70.86	Horizontal
5650.00	46.69	32.63	7.45	2.69	41.85	47.61	68.20	-20.59	Vertical
5700.00	45.71	32.64	7.60	2.72	41.90	46.77	105.20	-58.43	Vertical
5720.00	47.97	32.65	7.64	2.72	41.92	49.06	110.80	-61.74	Vertical
5725.00	51.46	32.65	7.69	2.72	41.94	52.58	122.20	-69.62	Vertical
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5850.00	53.35	32.67	7.90	2.69	42.03	54.58	122.20	-67.62	Horizontal
5855.00	49.81	32.67	7.90	2.72	42.03	51.07	110.80	-59.73	Horizontal
5875.00	49.75	32.68	7.91	2.72	42.03	51.03	105.20	-54.17	Horizontal
5925.00	49.81	32.69	7.92	2.72	42.04	51.10	68.20	-17.10	Horizontal
5850.00	49.8	32.67	7.90	2.69	42.03	51.03	122.20	-71.17	Vertical
5855.00	50.17	32.67	7.90	2.72	42.03	51.43	110.80	-59.37	Vertical
5875.00	50.53	32.68	7.91	2.72	42.03	51.81	105.20	-53.39	Vertical
5925.00	49.44	32.69	7.92	2.72	42.04	50.73	68.20	-17.47	Vertical
<p>Remark:</p> <ol style="list-style-type: none"> Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. The emission levels of other frequencies are very lower than the limit and not show in test report. 									

Band 4 – 802.11ac-HT40(MIMO)									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5650.00	46.12	32.63	7.45	2.69	41.85	47.04	68.20	-21.16	Horizontal
5700.00	45.94	32.64	7.60	2.72	41.90	47.00	105.20	-58.20	Horizontal
5720.00	45.35	32.65	7.64	2.72	41.92	46.44	110.80	-64.36	Horizontal
5725.00	50.22	32.65	7.69	2.72	41.94	51.34	122.20	-70.86	Horizontal
5650.00	46.69	32.63	7.45	2.69	41.85	47.61	68.20	-20.59	Vertical
5700.00	45.71	32.64	7.60	2.72	41.90	46.77	105.20	-58.43	Vertical
5720.00	47.97	32.65	7.64	2.72	41.92	49.06	110.80	-61.74	Vertical
5725.00	51.46	32.65	7.69	2.72	41.94	52.58	122.20	-69.62	Vertical
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5850.00	53.57	32.67	7.90	2.69	42.03	54.80	122.20	-67.40	Horizontal
5855.00	50.06	32.67	7.90	2.72	42.03	51.32	110.80	-59.48	Horizontal
5875.00	49.80	32.68	7.91	2.72	42.03	51.08	105.20	-54.12	Horizontal
5925.00	49.66	32.69	7.92	2.72	42.04	50.95	68.20	-17.25	Horizontal
5850.00	50.24	32.67	7.90	2.69	42.03	51.47	122.20	-70.73	Vertical
5855.00	50.10	32.67	7.90	2.72	42.03	51.36	110.80	-59.44	Vertical
5875.00	51.01	32.68	7.91	2.72	42.03	52.29	105.20	-52.91	Vertical
5925.00	48.99	32.69	7.92	2.72	42.04	50.28	68.20	-17.92	Vertical

Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Pre-amplifier Factor.
- The emission levels of other frequencies are very lower than the limit and not show in test report.

Band 4 – 802.11ac-HT80(MIMO)									
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5650.00	49.59	32.63	7.45	2.69	41.85	50.51	68.20	-17.69	Horizontal
5700.00	53.29	32.64	7.60	2.72	41.90	54.35	105.20	-50.85	Horizontal
5720.00	53.82	32.65	7.64	2.72	41.92	54.91	110.80	-55.89	Horizontal
5725.00	56.67	32.65	7.69	2.72	41.94	57.79	122.20	-64.41	Horizontal
5650.00	49.36	32.63	7.45	2.69	41.85	50.28	68.20	-17.92	Vertical
5700.00	50.65	32.64	7.60	2.72	41.90	51.71	105.20	-53.49	Vertical
5720.00	50.52	32.65	7.64	2.72	41.92	51.61	110.80	-59.19	Vertical
5725.00	50.79	32.65	7.69	2.72	41.94	51.91	122.20	-70.29	Vertical
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5850.00	54.22	32.67	7.90	2.69	42.03	55.45	122.20	-66.75	Horizontal
5855.00	50.57	32.67	7.90	2.72	42.03	51.83	110.80	-58.97	Horizontal
5875.00	50.24	32.68	7.91	2.72	42.03	51.52	105.20	-53.68	Horizontal
5925.00	49.32	32.69	7.92	2.72	42.04	50.61	68.20	-17.59	Horizontal
5850.00	48.91	32.67	7.90	2.69	42.03	50.14	122.20	-72.06	Vertical
5855.00	49.08	32.67	7.90	2.72	42.03	50.34	110.80	-60.46	Vertical
5875.00	49.48	32.68	7.91	2.72	42.03	50.76	105.20	-54.44	Vertical
5925.00	49.86	32.69	7.92	2.72	42.04	51.15	68.20	-17.05	Vertical
<p>Remark:</p> <ol style="list-style-type: none"> Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Pre-amplifier Factor. The emission levels of other frequencies are very lower than the limit and not show in test report. 									

Whip Antenna:

Band 1:

Band 1 – 802.11a –TX0									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	48.39	31.77	7.05	2.54	41.93	47.82	68.20	-20.38	Horizontal
5150.00	47.81	31.77	7.05	2.54	41.93	47.24	68.20	-20.96	Vertical
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	39.62	31.77	7.05	2.54	41.93	39.05	54.00	-14.95	Horizontal
5150.00	38.00	31.77	7.05	2.54	41.93	37.43	54.00	-16.57	Vertical
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	47.11	32.24	7.11	2.61	41.89	47.18	68.20	-21.02	Horizontal
5350.00	46.81	32.24	7.11	2.61	41.89	46.88	68.20	-21.32	Vertical
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	38.07	32.24	7.11	2.61	41.89	38.14	54.00	-15.86	Horizontal
5350.00	37.81	32.24	7.11	2.61	41.89	37.88	54.00	-16.12	Vertical
Remark:									
1. <i>Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Pre-amplifier Factor.</i>									
2. <i>The emission levels of other frequencies are very lower than the limit and not show in test report.</i>									

Band 1 – 802.11a –TX1									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	45.60	31.77	7.05	2.54	41.93	45.03	68.20	-23.17	Horizontal
5150.00	46.00	31.77	7.05	2.54	41.93	45.43	68.20	-22.77	Vertical
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	36.20	31.77	7.05	2.54	41.93	35.63	54.00	-18.37	Horizontal
5150.00	37.04	31.77	7.05	2.54	41.93	36.47	54.00	-17.53	Vertical
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	46.65	32.24	7.11	2.61	41.89	46.72	68.20	-21.48	Horizontal
5350.00	47.27	32.24	7.11	2.61	41.89	47.34	68.20	-20.86	Vertical
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	38.52	32.24	7.11	2.61	41.89	38.59	54.00	-15.41	Horizontal
5350.00	37.66	32.24	7.11	2.61	41.89	37.73	54.00	-16.27	Vertical
Remark:									
1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor.									
2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 1 – 802.11n-HT20(MIMO)									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	47.42	31.77	7.05	2.54	41.93	46.85	68.20	-21.35	Horizontal
5150.00	47.08	31.77	7.05	2.54	41.93	46.51	68.20	-21.69	Vertical
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	37.19	31.77	7.05	2.54	41.93	36.62	54.00	-17.38	Horizontal
5150.00	38.05	31.77	7.05	2.54	41.93	37.48	54.00	-16.52	Vertical
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	46.15	32.24	7.11	2.61	41.89	46.22	68.20	-21.98	Horizontal
5350.00	46.86	32.24	7.11	2.61	41.89	46.93	68.20	-21.27	Vertical
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	38.38	32.24	7.11	2.61	41.89	38.45	54.00	-15.55	Horizontal
5350.00	37.73	32.24	7.11	2.61	41.89	37.80	54.00	-16.20	Vertical
<i>Remark:</i>									
1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor.									
2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 1 – 802.11n-HT40(MIMO)									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	48.22	31.77	7.05	2.54	41.93	47.65	68.20	-20.55	Horizontal
5150.00	46.35	31.77	7.05	2.54	41.93	45.78	68.20	-22.42	Vertical
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	38.63	31.77	7.05	2.54	41.93	38.06	54.00	-15.94	Horizontal
5150.00	37.00	31.77	7.05	2.54	41.93	36.43	54.00	-17.57	Vertical
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	47.03	32.24	7.11	2.61	41.89	47.10	68.20	-21.10	Horizontal
5350.00	46.39	32.24	7.11	2.61	41.89	46.46	68.20	-21.74	Vertical
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	38.13	32.24	7.11	2.61	41.89	38.20	54.00	-15.80	Horizontal
5350.00	37.86	32.24	7.11	2.61	41.89	37.93	54.00	-16.07	Vertical
Remark:									
1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor.									
2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 1 – 802.11ac-HT20(MIMO)									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	47.29	31.77	7.05	2.54	41.93	46.72	68.20	-21.48	Horizontal
5150.00	46.72	31.77	7.05	2.54	41.93	46.15	68.20	-22.05	Vertical
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	36.80	31.77	7.05	2.54	41.93	36.23	54.00	-17.77	Horizontal
5150.00	38.53	31.77	7.05	2.54	41.93	37.96	54.00	-16.04	Vertical
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	46.73	32.24	7.11	2.61	41.89	46.80	68.20	-21.40	Horizontal
5350.00	46.44	32.24	7.11	2.61	41.89	46.51	68.20	-21.69	Vertical
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	37.74	32.24	7.11	2.61	41.89	37.81	54.00	-16.19	Horizontal
5350.00	38.30	32.24	7.11	2.61	41.89	38.37	54.00	-15.63	Vertical
Remark:									
1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor.									
2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 1 – 802.11ac-HT40(MIMO)									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	48.18	31.77	7.05	2.54	41.93	47.61	68.20	-20.59	Horizontal
5150.00	46.26	31.77	7.05	2.54	41.93	45.69	68.20	-22.51	Vertical
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	38.98	31.77	7.05	2.54	41.93	38.41	54.00	-15.59	Horizontal
5150.00	36.60	31.77	7.05	2.54	41.93	36.03	54.00	-17.97	Vertical
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	46.80	32.24	7.11	2.61	41.89	46.87	68.20	-21.33	Horizontal
5350.00	46.17	32.24	7.11	2.61	41.89	46.24	68.20	-21.96	Vertical
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	37.66	32.24	7.11	2.61	41.89	37.73	54.00	-16.27	Horizontal
5350.00	38.14	32.24	7.11	2.61	41.89	38.21	54.00	-15.79	Vertical
Remark:									
1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor.									
2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 1 – 802.11ac-HT80(MIMO)									
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	48.61	31.77	7.05	2.54	41.93	48.04	68.20	-20.16	Horizontal
5150.00	47.91	31.77	7.05	2.54	41.93	47.34	68.20	-20.86	Vertical
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5150.00	39.70	31.77	7.05	2.54	41.93	39.13	54.00	-14.87	Horizontal
5150.00	38.75	31.77	7.05	2.54	41.93	38.18	54.00	-15.82	Vertical
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	46.52	32.24	7.11	2.61	41.89	46.59	68.20	-21.61	Horizontal
5350.00	47.04	32.24	7.11	2.61	41.89	47.11	68.20	-21.09	Vertical
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	37.19	32.24	7.11	2.61	41.89	37.26	54.00	-16.74	Horizontal
5350.00	38.69	32.24	7.11	2.61	41.89	38.76	54.00	-15.24	Vertical
Remark:									
1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor.									
2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 4:

Band 4 – 802.11a –TX0									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBUV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBUV/m)	Limit Line (dBUV/m)	Over Limit (dB)	Polarization
5650.00	46.33	32.63	7.45	2.69	41.85	47.25	68.20	-20.95	Horizontal
5700.00	45.08	32.64	7.60	2.72	41.90	46.14	105.20	-59.06	Horizontal
5720.00	53.81	32.65	7.64	2.72	41.92	54.90	110.80	-55.90	Horizontal
5725.00	57.88	32.65	7.69	2.72	41.94	59.00	122.20	-63.20	Horizontal
5650.00	46.56	32.63	7.45	2.69	41.85	47.48	68.20	-20.72	Vertical
5700.00	47.72	32.64	7.60	2.72	41.90	48.78	105.20	-56.42	Vertical
5720.00	49.78	32.65	7.64	2.72	41.92	50.87	110.80	-59.93	Vertical
5725.00	52.90	32.65	7.69	2.72	41.94	54.02	122.20	-68.18	Vertical
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBUV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBUV/m)	Limit Line (dBUV/m)	Over Limit (dB)	Polarization
5850.00	54.97	32.67	7.90	2.69	42.03	56.20	122.20	-66.00	Horizontal
5855.00	51.91	32.67	7.90	2.72	42.03	53.17	110.80	-57.63	Horizontal
5875.00	46.96	32.68	7.91	2.72	42.03	48.24	105.20	-56.96	Horizontal
5925.00	47.65	32.69	7.92	2.72	42.04	48.94	68.20	-19.26	Horizontal
5850.00	51.03	32.67	7.90	2.69	42.03	52.26	122.20	-69.94	Vertical
5855.00	49.19	32.67	7.90	2.72	42.03	50.45	110.80	-60.35	Vertical
5875.00	47.43	32.68	7.91	2.72	42.03	48.71	105.20	-56.49	Vertical
5925.00	47.41	32.69	7.92	2.72	42.04	48.70	68.20	-19.50	Vertical
<p>Remark:</p> <ol style="list-style-type: none"> Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Pre-amplifier Factor. The emission levels of other frequencies are very lower than the limit and not show in test report. 									

Band 4 – 802.11a –TX1									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5650.00	46.18	32.63	7.45	2.69	41.85	47.10	68.20	-21.10	Horizontal
5700.00	48.63	32.64	7.60	2.72	41.90	49.69	105.20	-55.51	Horizontal
5720.00	49.86	32.65	7.64	2.72	41.92	50.95	110.80	-59.85	Horizontal
5725.00	56.28	32.65	7.69	2.72	41.94	57.40	122.20	-64.80	Horizontal
5650.00	46.93	32.63	7.45	2.69	41.85	47.85	68.20	-20.35	Vertical
5700.00	47.00	32.64	7.60	2.72	41.90	48.06	105.20	-57.14	Vertical
5720.00	47.80	32.65	7.64	2.72	41.92	48.89	110.80	-61.91	Vertical
5725.00	48.40	32.65	7.69	2.72	41.94	49.52	122.20	-72.68	Vertical
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5850.00	51.34	32.67	7.90	2.69	42.03	52.57	122.20	-69.63	Horizontal
5855.00	48.57	32.67	7.90	2.72	42.03	49.83	110.80	-60.97	Horizontal
5875.00	46.64	32.68	7.91	2.72	42.03	47.92	105.20	-57.28	Horizontal
5925.00	46.59	32.69	7.92	2.72	42.04	47.88	68.20	-20.32	Horizontal
5850.00	47.33	32.67	7.90	2.69	42.03	48.56	122.20	-73.64	Vertical
5855.00	47.32	32.67	7.90	2.72	42.03	48.58	110.80	-62.22	Vertical
5875.00	47.46	32.68	7.91	2.72	42.03	48.74	105.20	-56.46	Vertical
5925.00	46.88	32.69	7.92	2.72	42.04	48.17	68.20	-20.03	Vertical

Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Pre-amplifier Factor.
- The emission levels of other frequencies are very lower than the limit and not show in test report.

Band 4 – 802.11n-HT20(MIMO)									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5650.00	47.11	32.63	7.45	2.69	41.85	48.03	68.20	-20.17	Horizontal
5700.00	46.73	32.64	7.60	2.72	41.90	47.79	105.20	-57.41	Horizontal
5720.00	50.48	32.65	7.64	2.72	41.92	51.57	110.80	-59.23	Horizontal
5725.00	57.80	32.65	7.69	2.72	41.94	58.92	122.20	-63.28	Horizontal
5650.00	47.95	32.63	7.45	2.69	41.85	48.87	68.20	-19.33	Vertical
5700.00	47.50	32.64	7.60	2.72	41.90	48.56	105.20	-56.64	Vertical
5720.00	48.21	32.65	7.64	2.72	41.92	49.30	110.80	-61.50	Vertical
5725.00	51.05	32.65	7.69	2.72	41.94	52.17	122.20	-70.03	Vertical
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5850.00	51.20	32.67	7.90	2.69	42.03	52.43	122.20	-69.77	Horizontal
5855.00	48.35	32.67	7.90	2.72	42.03	49.61	110.80	-61.19	Horizontal
5875.00	46.19	32.68	7.91	2.72	42.03	47.47	105.20	-57.73	Horizontal
5925.00	46.54	32.69	7.92	2.72	42.04	47.83	68.20	-20.37	Horizontal
5850.00	47.37	32.67	7.90	2.69	42.03	48.60	122.20	-73.60	Vertical
5855.00	47.19	32.67	7.90	2.72	42.03	48.45	110.80	-62.35	Vertical
5875.00	47.59	32.68	7.91	2.72	42.03	48.87	105.20	-56.33	Vertical
5925.00	47.21	32.69	7.92	2.72	42.04	48.50	68.20	-19.70	Vertical

Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Pre-amplifier Factor.
- The emission levels of other frequencies are very lower than the limit and not show in test report.

Band 4 – 802.11n-HT40(MIMO)									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5650.00	47.39	32.63	7.45	2.69	41.85	48.31	68.20	-19.89	Horizontal
5700.00	49.97	32.64	7.60	2.72	41.90	51.03	105.20	-54.17	Horizontal
5720.00	59.00	32.65	7.64	2.72	41.92	60.09	110.80	-50.71	Horizontal
5725.00	59.10	32.65	7.69	2.72	41.94	60.22	122.20	-61.98	Horizontal
5650.00	47.57	32.63	7.45	2.69	41.85	48.49	68.20	-19.71	Vertical
5700.00	47.23	32.64	7.60	2.72	41.90	48.29	105.20	-56.91	Vertical
5720.00	50.34	32.65	7.64	2.72	41.92	51.43	110.80	-59.37	Vertical
5725.00	51.61	32.65	7.69	2.72	41.94	52.73	122.20	-69.47	Vertical
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5850.00	51.01	32.67	7.90	2.69	42.03	52.24	122.20	-69.96	Horizontal
5855.00	48.15	32.67	7.90	2.72	42.03	49.41	110.80	-61.39	Horizontal
5875.00	45.74	32.68	7.91	2.72	42.03	47.02	105.20	-58.18	Horizontal
5925.00	46.83	32.69	7.92	2.72	42.04	48.12	68.20	-20.08	Horizontal
5850.00	47.51	32.67	7.90	2.69	42.03	48.74	122.20	-73.46	Vertical
5855.00	46.76	32.67	7.90	2.72	42.03	48.02	110.80	-62.78	Vertical
5875.00	47.40	32.68	7.91	2.72	42.03	48.68	105.20	-56.52	Vertical
5925.00	47.29	32.69	7.92	2.72	42.04	48.58	68.20	-19.62	Vertical

Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Pre-amplifier Factor.
- The emission levels of other frequencies are very lower than the limit and not show in test report.

Band 4 – 802.11ac-HT20(MIMO)									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5650.00	47.59	32.63	7.45	2.69	41.85	48.51	68.20	-19.69	Horizontal
5700.00	46.51	32.64	7.60	2.72	41.90	47.57	105.20	-57.63	Horizontal
5720.00	50.67	32.65	7.64	2.72	41.92	51.76	110.80	-59.04	Horizontal
5725.00	58.01	32.65	7.69	2.72	41.94	59.13	122.20	-63.07	Horizontal
5650.00	48.35	32.63	7.45	2.69	41.85	49.27	68.20	-18.93	Vertical
5700.00	47.10	32.64	7.60	2.72	41.90	48.16	105.20	-57.04	Vertical
5720.00	47.71	32.65	7.64	2.72	41.92	48.80	110.80	-62.00	Vertical
5725.00	51.11	32.65	7.69	2.72	41.94	52.23	122.20	-69.97	Vertical
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5850.00	51.55	32.67	7.90	2.69	42.03	52.78	122.20	-69.42	Horizontal
5855.00	48.39	32.67	7.90	2.72	42.03	49.65	110.80	-61.15	Horizontal
5875.00	46.20	32.68	7.91	2.72	42.03	47.48	105.20	-57.72	Horizontal
5925.00	46.23	32.69	7.92	2.72	42.04	47.52	68.20	-20.68	Horizontal
5850.00	47.46	32.67	7.90	2.69	42.03	48.69	122.20	-73.51	Vertical
5855.00	47.23	32.67	7.90	2.72	42.03	48.49	110.80	-62.31	Vertical
5875.00	47.33	32.68	7.91	2.72	42.03	48.61	105.20	-56.59	Vertical
5925.00	46.64	32.69	7.92	2.72	42.04	47.93	68.20	-20.27	Vertical

Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Pre-amplifier Factor.
- The emission levels of other frequencies are very lower than the limit and not show in test report.

Band 4 – 802.11ac-HT40(MIMO)									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5650.00	46.95	32.63	7.45	2.69	41.85	47.87	68.20	-20.33	Horizontal
5700.00	46.92	32.64	7.60	2.72	41.90	47.98	105.20	-57.22	Horizontal
5720.00	50.06	32.65	7.64	2.72	41.92	51.15	110.80	-59.65	Horizontal
5725.00	57.77	32.65	7.69	2.72	41.94	58.89	122.20	-63.31	Horizontal
5650.00	47.81	32.63	7.45	2.69	41.85	48.73	68.20	-19.47	Vertical
5700.00	47.15	32.64	7.60	2.72	41.90	48.21	105.20	-56.99	Vertical
5720.00	47.74	32.65	7.64	2.72	41.92	48.83	110.80	-61.97	Vertical
5725.00	50.77	32.65	7.69	2.72	41.94	51.89	122.20	-70.31	Vertical
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5850.00	51.12	32.67	7.90	2.69	42.03	52.35	122.20	-69.85	Horizontal
5855.00	48.28	32.67	7.90	2.72	42.03	49.54	110.80	-61.26	Horizontal
5875.00	47.06	32.68	7.91	2.72	42.03	48.34	105.20	-56.86	Horizontal
5925.00	46.44	32.69	7.92	2.72	42.04	47.73	68.20	-20.47	Horizontal
5850.00	47.66	32.67	7.90	2.69	42.03	48.89	122.20	-73.31	Vertical
5855.00	47.75	32.67	7.90	2.72	42.03	49.01	110.80	-61.79	Vertical
5875.00	47.82	32.68	7.91	2.72	42.03	49.10	105.20	-56.10	Vertical
5925.00	46.48	32.69	7.92	2.72	42.04	47.77	68.20	-20.43	Vertical

Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Pre-amplifier Factor.
- The emission levels of other frequencies are very lower than the limit and not show in test report.

Band 4 – 802.11ac-HT80(MIMO)									
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5650.00	47.39	32.63	7.45	2.69	41.85	48.31	68.20	-19.89	Horizontal
5700.00	53.77	32.64	7.60	2.72	41.90	54.83	105.20	-50.37	Horizontal
5720.00	55.83	32.65	7.64	2.72	41.92	56.92	110.80	-53.88	Horizontal
5725.00	55.88	32.65	7.69	2.72	41.94	57.00	122.20	-65.20	Horizontal
5650.00	47.54	32.63	7.45	2.69	41.85	48.46	68.20	-19.74	Vertical
5700.00	48.48	32.64	7.60	2.72	41.90	49.54	105.20	-55.66	Vertical
5720.00	50.95	32.65	7.64	2.72	41.92	52.04	110.80	-58.76	Vertical
5725.00	50.19	32.65	7.69	2.72	41.94	51.31	122.20	-70.89	Vertical
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5850.00	53.00	32.67	7.90	2.69	42.03	54.23	122.20	-67.97	Horizontal
5855.00	51.29	32.67	7.90	2.72	42.03	52.55	110.80	-58.25	Horizontal
5875.00	48.30	32.68	7.91	2.72	42.03	49.58	105.20	-55.62	Horizontal
5925.00	46.66	32.69	7.92	2.72	42.04	47.95	68.20	-20.25	Horizontal
5850.00	48.79	32.67	7.90	2.69	42.03	50.02	122.20	-72.18	Vertical
5855.00	49.44	32.67	7.90	2.72	42.03	50.70	110.80	-60.10	Vertical
5875.00	47.38	32.68	7.91	2.72	42.03	48.66	105.20	-56.54	Vertical
5925.00	47.37	32.69	7.92	2.72	42.04	48.66	68.20	-19.54	Vertical
<p>Remark:</p> <ol style="list-style-type: none"> Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Pre-amplifier Factor. The emission levels of other frequencies are very lower than the limit and not show in test report. 									

6.6 Spurious Emission

6.6.1 Restricted Band

Test Requirement:	RSS-GEN Section 8.10				
Test Frequency Range:	4.5 GHz to 5.15 GHz and 5.35GHz to 5.46GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Remark
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
RMS		1MHz	3MHz	Average Value	
Limit:	Frequency	Limit (dBuV/m @3m)		Remark	
	Above 1GHz	74.00		Peak Value	
54.00		Average Value			
Test Procedure:	<ol style="list-style-type: none"> 1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. 				
Test setup:	<p>The diagram illustrates the test setup within an anechoic chamber. An Equipment Under Test (EUT) is placed on a turntable at a height of 1.5 meters. The turntable is positioned 3 meters away from a horn antenna mounted on an antenna tower. The antenna tower is connected to a test receiver system, which includes a pre-amplifier and a controller. A ground reference plane is also indicated.</p>				
Test Instruments:	Refer to section 5.10 for details				
Test mode:	Refer to section 5.3 for details				
Test results:	Passed(Refer to section 6.6)				

6.6.2 Unwanted Emissions out of the Restricted Bands


Test Requirement:	RSS-GEN Section 6.13, RSS-247 Section 6.2.1.2, RSS-247 Section 6.2.2.2, RSS-247 Section 6.2.3.2, RSS-247 Section 6.2.4.2				
Test Frequency Range:	30MHz to 40GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Remark
	30MHz-1GHz	Quasi-peak	100kHz	300kHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
RMS		1MHz	3MHz	Average Value	
Limit:	Frequency	Limit (dBuV/m @3m)		Remark	
	30MHz-88MHz	40.0		Quasi-peak Value	
	88MHz-216MHz	43.5		Quasi-peak Value	
	216MHz-960MHz	46.0		Quasi-peak Value	
	Above 1GHz	68.20		Peak Value	
		54.00		Average Value	
<i>Remark:</i> <i>Above 1GHz limit:</i> $E[dBuV/m] = EIRP[dBm] + 95.2 = 68.2 \text{ dBuV/m}$, for $EIPR[dBm] = -27dBm$.					
Test Procedure:	<ol style="list-style-type: none"> The EUT was placed on the top of a rotating table 0.8m(below 1GHz)/1.5m(above 1GHz) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. 				
Test setup:	<p>Below 1GHz</p> <p>Above 1GHz</p>				

Test Instruments:	Refer to section 5.10 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Measurement Data (worst case):

Below 1GHz

Product Name:	Komikan	Product Model:	Komikan
Test By:	Mike	Test mode:	5G Wi-Fi Tx mode
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Humi: 57%

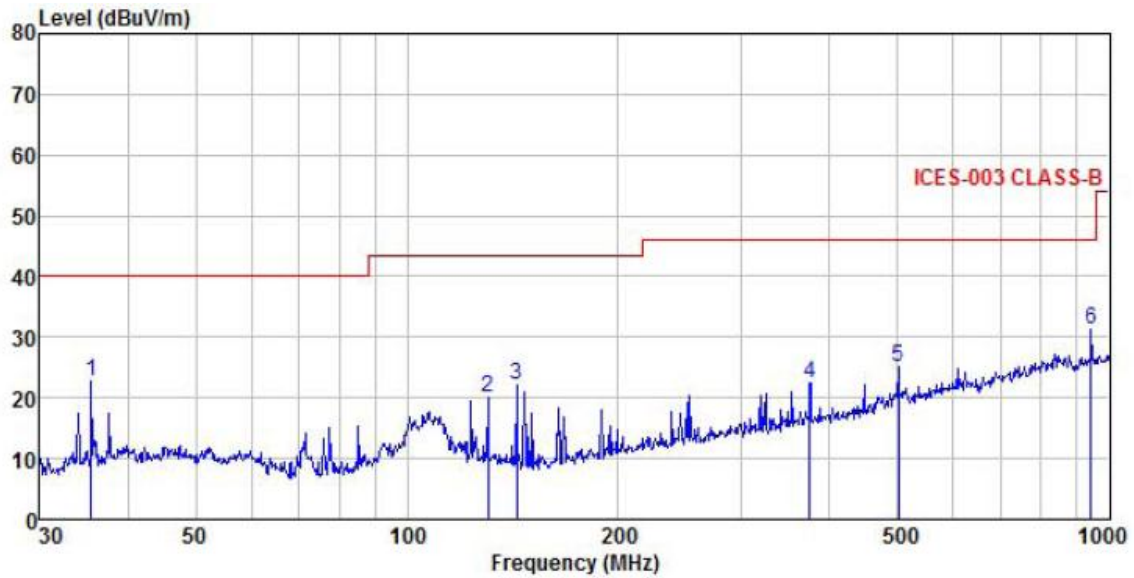


	ReadAntenna	Cable	Aux	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Factor	Level	Line	Limit	Remark
-----	-----	-----	-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	
1	35.499	40.38	11.31	1.07	0.00	29.94	22.82	40.00	-17.18 QP
2	130.379	36.85	10.14	2.29	0.00	29.33	19.95	43.50	-23.55 QP
3	143.326	39.72	9.31	2.44	0.00	29.25	22.22	43.50	-21.28 QP
4	374.623	33.03	14.95	3.09	0.00	28.67	22.40	46.00	-23.60 QP
5	501.179	32.34	18.20	3.63	0.00	28.96	25.21	46.00	-20.79 QP
6	942.131	32.15	22.67	4.13	0.00	27.75	31.20	46.00	-14.80 QP

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	Komikan	Product Model:	Komikan
Test By:	Mike	Test mode:	5G Wi-Fi Tx mode
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Huni: 57%

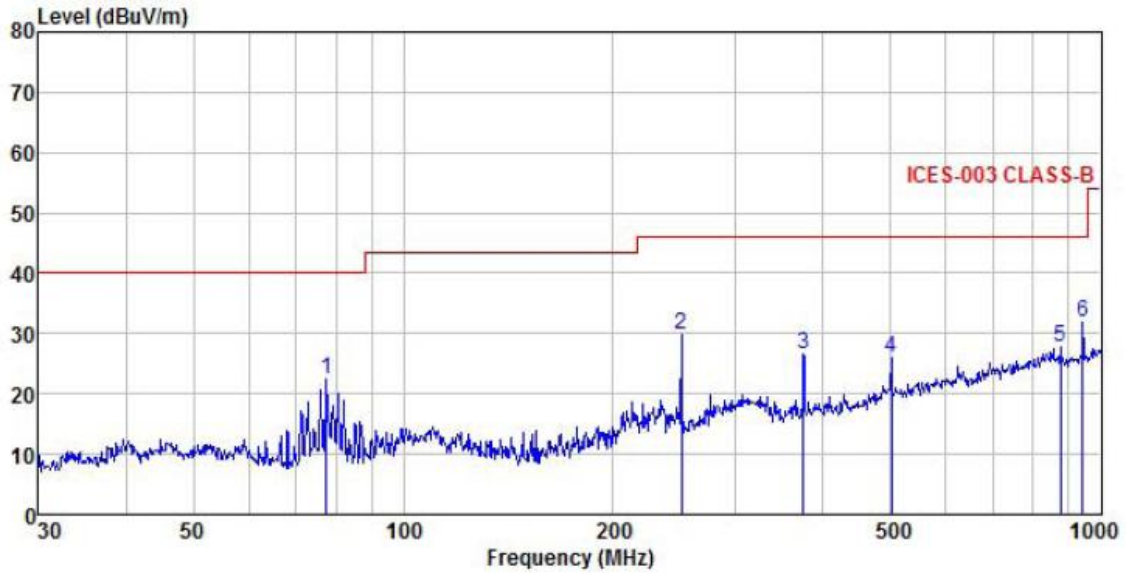

	Freq	ReadAntenna	Cable	Aux	Preamp	Level	Limit	Over	Remark
	MHz	Level	Loss	Factor	Factor	dBuV/m	dBuV/m	Limit	
		dBuV	dB		dB			dB	
1	77.593	42.80	7.70	1.64	0.00	29.66	22.48	40.00	-17.52 QP
2	250.301	42.94	12.70	2.81	0.00	28.54	29.91	46.00	-16.09 QP
3	374.623	37.08	14.95	3.09	0.00	28.67	26.45	46.00	-19.55 QP
4	501.179	33.23	18.20	3.63	0.00	28.96	26.10	46.00	-19.90 QP
5	875.247	29.25	22.55	3.95	0.00	27.94	27.81	46.00	-18.19 QP
6	942.131	32.96	22.67	4.13	0.00	27.75	32.01	46.00	-13.99 QP

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Above 1GHz:

Ceramic Antenna:

Band 1:

Band 1 – 802.11a –TX0									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10360.00	39.85	38.83	9.82	3.95	41.97	50.48	68.20	-17.72	Vertical
10360.00	39.64	38.83	9.82	3.95	41.97	50.27	68.20	-17.93	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10360.00	34.71	38.83	9.82	3.95	41.97	45.34	54.00	-8.66	Vertical
10360.00	34.60	38.83	9.82	3.95	41.97	45.23	54.00	-8.77	Horizontal
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10400.00	38.84	38.87	9.85	3.98	41.95	49.59	68.20	-18.61	Vertical
10400.00	38.06	38.87	9.85	3.98	41.95	48.81	68.20	-19.39	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10400.00	34.67	38.87	9.85	3.98	41.95	45.42	54.00	-8.58	Vertical
10400.00	34.12	38.87	9.85	3.98	41.95	44.87	54.00	-9.13	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10480.00	38.52	38.94	9.96	4.02	41.88	49.56	68.20	-18.64	Vertical
10480.00	37.85	38.94	9.96	4.02	41.88	48.89	68.20	-19.31	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10480.00	34.57	38.94	9.96	4.02	41.88	45.61	54.00	-8.39	Vertical
10480.00	34.23	38.94	9.96	4.02	41.88	45.27	54.00	-8.73	Horizontal
Remark:									
1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor.									
2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 1 – 802.11a –TX1									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10360.00	40.06	38.83	9.82	3.95	41.97	50.69	68.20	-17.51	Vertical
10360.00	39.78	38.83	9.82	3.95	41.97	50.41	68.20	-17.79	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10360.00	34.89	38.83	9.82	3.95	41.97	45.52	54.00	-8.48	Vertical
10360.00	34.19	38.83	9.82	3.95	41.97	44.82	54.00	-9.18	Horizontal
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10400.00	38.67	38.87	9.85	3.98	41.95	49.42	68.20	-18.78	Vertical
10400.00	37.71	38.87	9.85	3.98	41.95	48.46	68.20	-19.74	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10400.00	34.60	38.87	9.85	3.98	41.95	45.35	54.00	-8.65	Vertical
10400.00	34.25	38.87	9.85	3.98	41.95	45.00	54.00	-9.00	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10480.00	38.16	38.94	9.96	4.02	41.88	49.20	68.20	-19.00	Vertical
10480.00	37.48	38.94	9.96	4.02	41.88	48.52	68.20	-19.68	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10480.00	34.96	38.94	9.96	4.02	41.88	46.00	54.00	-8.00	Vertical
10480.00	34.63	38.94	9.96	4.02	41.88	45.67	54.00	-8.33	Horizontal
Remark:									
1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor.									
2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 1 – 802.11n-HT20(MIMO)									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10360.00	39.76	38.83	9.82	3.95	41.97	50.39	68.20	-17.81	Vertical
10360.00	39.91	38.83	9.82	3.95	41.97	50.54	68.20	-17.66	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10360.00	34.79	38.83	9.82	3.95	41.97	45.42	54.00	-8.58	Vertical
10360.00	34.36	38.83	9.82	3.95	41.97	44.99	54.00	-9.01	Horizontal
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10400.00	38.85	38.87	9.85	3.98	41.95	49.60	68.20	-18.60	Vertical
10400.00	37.23	38.87	9.85	3.98	41.95	47.98	68.20	-20.22	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10400.00	34.86	38.87	9.85	3.98	41.95	45.61	54.00	-8.39	Vertical
10400.00	34.59	38.87	9.85	3.98	41.95	45.34	54.00	-8.66	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10480.00	38.36	38.94	9.96	4.02	41.88	49.40	68.20	-18.80	Vertical
10480.00	37.64	38.94	9.96	4.02	41.88	48.68	68.20	-19.52	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10480.00	34.80	38.94	9.96	4.02	41.88	45.84	54.00	-8.16	Vertical
10480.00	34.83	38.94	9.96	4.02	41.88	45.87	54.00	-8.13	Horizontal

Remark:
 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor.
 2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Band 1 – 802.11n-HT40(MIMO)									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10380.00	38.21	38.25	9.85	3.95	41.95	48.31	68.20	-19.89	Vertical
10380.00	37.96	38.25	9.85	3.95	41.95	48.06	68.20	-20.14	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10380.00	34.96	38.25	9.85	3.95	41.95	45.06	54.00	-8.94	Vertical
10380.00	34.89	38.25	9.85	3.95	41.95	44.99	54.00	-9.01	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10460.00	38.37	38.92	9.92	3.98	41.90	49.29	68.20	-18.91	Vertical
10460.00	37.52	38.92	9.92	3.98	41.90	48.44	68.20	-19.76	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10460.00	34.36	38.92	9.92	3.98	41.90	45.28	54.00	-8.72	Vertical
10460.00	34.28	38.92	9.92	3.98	41.90	45.20	54.00	-8.80	Horizontal
Remark: 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 1 – 802.11ac-HT20(MIMO)									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10360.00	39.64	38.83	9.82	3.95	41.97	50.27	68.20	-17.93	Vertical
10360.00	39.78	38.83	9.82	3.95	41.97	50.41	68.20	-17.79	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10360.00	34.92	38.83	9.82	3.95	41.97	45.55	54.00	-8.45	Vertical
10360.00	34.14	38.83	9.82	3.95	41.97	44.77	54.00	-9.23	Horizontal
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10400.00	38.89	38.87	9.85	3.98	41.95	49.64	68.20	-18.56	Vertical
10400.00	38.04	38.87	9.85	3.98	41.95	48.79	68.20	-19.41	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10400.00	34.43	38.87	9.85	3.98	41.95	45.18	54.00	-8.82	Vertical
10400.00	34.29	38.87	9.85	3.98	41.95	45.04	54.00	-8.96	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10480.00	38.95	38.94	9.96	4.02	41.88	49.99	68.20	-18.21	Vertical
10480.00	38.12	38.94	9.96	4.02	41.88	49.16	68.20	-19.04	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10480.00	34.10	38.94	9.96	4.02	41.88	45.14	54.00	-8.86	Vertical
10480.00	33.98	38.94	9.96	4.02	41.88	45.02	54.00	-8.98	Horizontal
Remark: 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 1 – 802.11ac-HT40(MIMO)									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10380.00	39.29	38.25	9.85	3.95	41.95	49.39	68.20	-18.81	Vertical
10380.00	39.88	38.25	9.85	3.95	41.95	49.98	68.20	-18.22	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10380.00	35.19	38.25	9.85	3.95	41.95	45.29	54.00	-8.71	Vertical
10380.00	34.24	38.25	9.85	3.95	41.95	44.34	54.00	-9.66	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10460.00	37.90	38.92	9.92	3.98	41.90	48.82	68.20	-19.38	Vertical
10460.00	38.10	38.92	9.92	3.98	41.90	49.02	68.20	-19.18	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10460.00	34.51	38.92	9.92	3.98	41.90	45.43	54.00	-8.57	Vertical
10460.00	34.59	38.92	9.92	3.98	41.90	45.51	54.00	-8.49	Horizontal
Remark: 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 1 – 802.11ac-HT80(MIMO)									
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10420.00	38.46	38.89	9.89	3.98	41.93	49.29	68.20	-18.91	Vertical
10420.00	39.05	38.89	9.89	3.98	41.93	49.88	68.20	-18.32	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10420.00	34.18	38.89	9.89	3.98	41.93	45.01	54.00	-8.99	Vertical
10420.00	34.09	38.89	9.89	3.98	41.93	44.92	54.00	-9.08	Horizontal
Remark: 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 4:

Band 4 – 802.11a –TX0									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11490.00	38.03	39.50	10.81	4.21	42.29	46.05	74.00	-27.95	Vertical
11490.00	39.41	39.50	10.81	4.21	42.29	47.43	74.00	-26.57	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11490.00	34.12	39.50	10.81	4.21	42.29	42.14	54.00	-11.86	Vertical
11490.00	34.63	39.50	10.81	4.21	42.29	42.65	54.00	-11.35	Horizontal
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11570.00	38.09	39.52	10.78	4.21	42.27	46.12	74.00	-27.88	Vertical
11570.00	38.79	39.52	10.78	4.21	42.27	46.82	74.00	-27.18	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11570.00	33.45	39.52	10.78	4.21	42.27	41.48	54.00	-12.52	Vertical
11570.00	33.45	39.52	10.78	4.21	42.27	41.48	54.00	-12.52	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11650.00	38.69	39.53	10.76	4.21	42.26	46.72	74.00	-27.28	Vertical
11650.00	39.28	39.53	10.76	4.21	42.26	47.31	74.00	-26.69	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11650.00	33.45	39.53	10.76	4.21	42.26	41.48	54.00	-12.52	Vertical
11650.00	34.54	39.53	10.76	4.21	42.26	42.57	54.00	-11.43	Horizontal
<i>Remark:</i>									
1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor.									
2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 4 – 802.11a –TX1									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11490.00	37.93	39.50	10.81	4.21	42.29	45.95	74.00	-28.05	Vertical
11490.00	39.74	39.50	10.81	4.21	42.29	47.76	74.00	-26.24	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11490.00	33.74	39.50	10.81	4.21	42.29	41.76	54.00	-12.24	Vertical
11490.00	34.41	39.50	10.81	4.21	42.29	42.43	54.00	-11.57	Horizontal
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11570.00	38.61	39.52	10.78	4.21	42.27	46.64	74.00	-27.36	Vertical
11570.00	38.16	39.52	10.78	4.21	42.27	46.19	74.00	-27.81	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11570.00	33.37	39.52	10.78	4.21	42.27	41.40	54.00	-12.60	Vertical
11570.00	33.50	39.52	10.78	4.21	42.27	41.53	54.00	-12.47	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11650.00	39.28	39.53	10.76	4.21	42.26	47.31	74.00	-26.69	Vertical
11650.00	39.16	39.53	10.76	4.21	42.26	47.19	74.00	-26.81	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11650.00	34.21	39.53	10.76	4.21	42.26	42.24	54.00	-11.76	Vertical
11650.00	34.36	39.53	10.76	4.21	42.26	42.39	54.00	-11.61	Horizontal
<i>Remark:</i>									
3. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor.									
4. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 4 – 802.11n-HT20(MIMO)									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11490.00	38.25	39.50	10.81	4.21	42.29	46.27	74.00	-27.73	Vertical
11490.00	39.56	39.50	10.81	4.21	42.29	47.58	74.00	-26.42	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11490.00	34.12	39.50	10.81	4.21	42.29	42.14	54.00	-11.86	Vertical
11490.00	34.67	39.50	10.81	4.21	42.29	42.69	54.00	-11.31	Horizontal
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11570.00	37.98	39.52	10.78	4.21	42.27	46.01	74.00	-27.99	Vertical
11570.00	39.53	39.52	10.78	4.21	42.27	47.56	74.00	-26.44	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11570.00	34.82	39.52	10.78	4.21	42.27	42.85	54.00	-11.15	Vertical
11570.00	34.02	39.52	10.78	4.21	42.27	42.05	54.00	-11.95	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11650.00	37.97	39.53	10.76	4.21	42.26	46.00	74.00	-28.00	Vertical
11650.00	40.20	39.53	10.76	4.21	42.26	48.23	74.00	-25.77	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11650.00	34.45	39.53	10.76	4.21	42.26	42.48	54.00	-11.52	Vertical
11650.00	34.26	39.53	10.76	4.21	42.26	42.29	54.00	-11.71	Horizontal
Remark:									
1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor.									
2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 4 – 802.11n-HT40(MIMO)									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11510.00	39.26	39.50	10.81	4.21	42.29	47.28	74.00	-26.72	Vertical
11510.00	37.33	39.50	10.81	4.21	42.29	45.35	74.00	-28.65	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11510.00	29.65	39.50	10.81	4.21	42.29	37.67	54.00	-16.33	Vertical
11510.00	29.87	39.50	10.81	4.21	42.29	37.89	54.00	-16.11	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11590.00	39.36	39.52	10.77	4.21	42.27	47.38	74.00	-26.62	Vertical
11590.00	37.46	39.52	10.77	4.21	42.27	45.48	74.00	-28.52	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11590.00	29.36	39.52	10.77	4.21	42.27	37.38	54.00	-16.62	Vertical
11590.00	30.13	39.52	10.77	4.21	42.27	38.15	54.00	-15.85	Horizontal
Remark: 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 4 – 802.11ac-HT20(MIMO)									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11490.00	38.82	39.50	10.81	4.21	42.29	46.84	74.00	-27.16	Vertical
11490.00	39.18	39.50	10.81	4.21	42.29	47.20	74.00	-26.80	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11490.00	34.25	39.50	10.81	4.21	42.29	42.27	54.00	-11.73	Vertical
11490.00	35.23	39.50	10.81	4.21	42.29	43.25	54.00	-10.75	Horizontal
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11570.00	39.92	39.52	10.78	4.21	42.27	47.95	74.00	-26.05	Vertical
11570.00	37.53	39.52	10.78	4.21	42.27	45.56	74.00	-28.44	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11570.00	33.49	39.52	10.78	4.21	42.27	41.52	54.00	-12.48	Vertical
11570.00	33.98	39.52	10.78	4.21	42.27	42.01	54.00	-11.99	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11650.00	37.78	39.53	10.76	4.21	42.26	45.81	74.00	-28.19	Vertical
11650.00	39.29	39.53	10.76	4.21	42.26	47.32	74.00	-26.68	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11650.00	33.57	39.53	10.76	4.21	42.26	41.60	54.00	-12.40	Vertical
11650.00	34.81	39.53	10.76	4.21	42.26	42.84	54.00	-11.16	Horizontal
Remark: 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 4 – 802.11ac-HT40(MIMO)									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11510.00	38.55	39.50	10.81	4.21	42.29	46.57	74.00	-27.43	Vertical
11510.00	38.38	39.50	10.81	4.21	42.29	46.40	74.00	-27.60	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11510.00	34.34	39.50	10.81	4.21	42.29	42.36	54.00	-11.64	Vertical
11510.00	34.66	39.50	10.81	4.21	42.29	42.68	54.00	-11.32	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11590.00	39.14	39.52	10.77	4.21	42.27	47.16	74.00	-26.84	Vertical
11590.00	39.15	39.52	10.77	4.21	42.27	47.17	74.00	-26.83	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11590.00	34.48	39.52	10.77	4.21	42.27	42.50	54.00	-11.50	Vertical
11590.00	34.02	39.52	10.77	4.21	42.27	42.04	54.00	-11.96	Horizontal
Remark: 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 4 – 802.11ac-HT80(MIMO)									
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11550.00	38.71	39.51	10.80	4.21	42.28	46.74	74.00	-27.26	Vertical
11550.00	40.64	39.51	10.80	4.21	42.28	48.67	74.00	-25.33	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11550.00	34.72	39.51	10.80	4.21	42.28	42.75	54.00	-11.25	Vertical
11550.00	33.89	39.51	10.80	4.21	42.28	41.92	54.00	-12.08	Horizontal
<i>Remark:</i> 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Flex Antenna:

Band 1:

Band 1 – 802.11a –TX0									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10360.00	40.33	38.83	9.82	3.95	41.97	50.96	68.20	-17.24	Vertical
10360.00	39.30	38.83	9.82	3.95	41.97	49.93	68.20	-18.27	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10360.00	34.39	38.83	9.82	3.95	41.97	45.02	54.00	-8.98	Vertical
10360.00	34.97	38.83	9.82	3.95	41.97	45.60	54.00	-8.40	Horizontal
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10400.00	38.72	38.87	9.85	3.98	41.95	49.47	68.20	-18.73	Vertical
10400.00	38.10	38.87	9.85	3.98	41.95	48.85	68.20	-19.35	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10400.00	35.28	38.87	9.85	3.98	41.95	46.03	54.00	-7.97	Vertical
10400.00	35.00	38.87	9.85	3.98	41.95	45.75	54.00	-8.25	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10480.00	38.57	38.94	9.96	4.02	41.88	49.61	68.20	-18.59	Vertical
10480.00	37.67	38.94	9.96	4.02	41.88	48.71	68.20	-19.49	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10480.00	34.42	38.94	9.96	4.02	41.88	45.46	54.00	-8.54	Vertical
10480.00	34.45	38.94	9.96	4.02	41.88	45.49	54.00	-8.51	Horizontal
Remark:									
1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor.									
2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 1 – 802.11a –TX1									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10360.00	40.24	38.83	9.82	3.95	41.97	50.87	68.20	-17.33	Vertical
10360.00	39.78	38.83	9.82	3.95	41.97	50.41	68.20	-17.79	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10360.00	34.62	38.83	9.82	3.95	41.97	45.25	54.00	-8.75	Vertical
10360.00	34.92	38.83	9.82	3.95	41.97	45.55	54.00	-8.45	Horizontal
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10400.00	39.19	38.87	9.85	3.98	41.95	49.94	68.20	-18.26	Vertical
10400.00	38.23	38.87	9.85	3.98	41.95	48.98	68.20	-19.22	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10400.00	34.94	38.87	9.85	3.98	41.95	45.69	54.00	-8.31	Vertical
10400.00	34.58	38.87	9.85	3.98	41.95	45.33	54.00	-8.67	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10480.00	38.43	38.94	9.96	4.02	41.88	49.47	68.20	-18.73	Vertical
10480.00	37.76	38.94	9.96	4.02	41.88	48.80	68.20	-19.40	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10480.00	34.55	38.94	9.96	4.02	41.88	45.59	54.00	-8.41	Vertical
10480.00	34.69	38.94	9.96	4.02	41.88	45.73	54.00	-8.27	Horizontal

Remark:
 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor.
 2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Band 1 – 802.11n-HT20(MIMO)									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10360.00	39.94	38.83	9.82	3.95	41.97	50.57	68.20	-17.63	Vertical
10360.00	39.39	38.83	9.82	3.95	41.97	50.02	68.20	-18.18	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10360.00	35.03	38.83	9.82	3.95	41.97	45.66	54.00	-8.34	Vertical
10360.00	34.71	38.83	9.82	3.95	41.97	45.34	54.00	-8.66	Horizontal
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10400.00	39.28	38.87	9.85	3.98	41.95	50.03	68.20	-18.17	Vertical
10400.00	38.24	38.87	9.85	3.98	41.95	48.99	68.20	-19.21	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10400.00	35.00	38.87	9.85	3.98	41.95	45.75	54.00	-8.25	Vertical
10400.00	35.04	38.87	9.85	3.98	41.95	45.79	54.00	-8.21	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10480.00	37.95	38.94	9.96	4.02	41.88	48.99	68.20	-19.21	Vertical
10480.00	38.09	38.94	9.96	4.02	41.88	49.13	68.20	-19.07	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10480.00	34.43	38.94	9.96	4.02	41.88	45.47	54.00	-8.53	Vertical
10480.00	34.76	38.94	9.96	4.02	41.88	45.80	54.00	-8.20	Horizontal
Remark: 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 1 – 802.11n-HT40(MIMO)									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10380.00	38.54	38.25	9.85	3.95	41.95	48.64	68.20	-19.56	Vertical
10380.00	37.69	38.25	9.85	3.95	41.95	47.79	68.20	-20.41	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10380.00	34.29	38.25	9.85	3.95	41.95	44.39	54.00	-9.61	Vertical
10380.00	34.21	38.25	9.85	3.95	41.95	44.31	54.00	-9.69	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10460.00	39.00	38.92	9.92	3.98	41.90	49.92	68.20	-18.28	Vertical
10460.00	37.59	38.92	9.92	3.98	41.90	48.51	68.20	-19.69	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10460.00	34.70	38.92	9.92	3.98	41.90	45.62	54.00	-8.38	Vertical
10460.00	33.91	38.92	9.92	3.98	41.90	44.83	54.00	-9.17	Horizontal
Remark: 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 1 – 802.11ac-HT20(MIMO)									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10360.00	40.37	38.83	9.82	3.95	41.97	51.00	68.20	-17.20	Vertical
10360.00	39.27	38.83	9.82	3.95	41.97	49.90	68.20	-18.30	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10360.00	34.58	38.83	9.82	3.95	41.97	45.21	54.00	-8.79	Vertical
10360.00	35.58	38.83	9.82	3.95	41.97	46.21	54.00	-7.79	Horizontal
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10400.00	38.36	38.87	9.85	3.98	41.95	49.11	68.20	-19.09	Vertical
10400.00	38.28	38.87	9.85	3.98	41.95	49.03	68.20	-19.17	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10400.00	35.65	38.87	9.85	3.98	41.95	46.40	54.00	-7.60	Vertical
10400.00	34.87	38.87	9.85	3.98	41.95	45.62	54.00	-8.38	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10480.00	38.15	38.94	9.96	4.02	41.88	49.19	68.20	-19.01	Vertical
10480.00	37.86	38.94	9.96	4.02	41.88	48.90	68.20	-19.30	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10480.00	33.58	38.94	9.96	4.02	41.88	44.62	54.00	-9.38	Vertical
10480.00	33.65	38.94	9.96	4.02	41.88	44.69	54.00	-9.31	Horizontal
Remark: 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 1 – 802.11ac-HT40(MIMO)									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10380.00	39.01	38.25	9.85	3.95	41.95	49.11	68.20	-19.09	Vertical
10380.00	39.50	38.25	9.85	3.95	41.95	49.60	68.20	-18.60	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10380.00	34.88	38.25	9.85	3.95	41.95	44.98	54.00	-9.02	Vertical
10380.00	34.32	38.25	9.85	3.95	41.95	44.42	54.00	-9.58	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10460.00	37.59	38.92	9.92	3.98	41.90	48.51	68.20	-19.69	Vertical
10460.00	37.60	38.92	9.92	3.98	41.90	48.52	68.20	-19.68	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10460.00	34.56	38.92	9.92	3.98	41.90	45.48	54.00	-8.52	Vertical
10460.00	34.83	38.92	9.92	3.98	41.90	45.75	54.00	-8.25	Horizontal
Remark: 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 1 – 802.11ac-HT80(MIMO)									
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10420.00	38.49	38.89	9.89	3.98	41.93	49.32	68.20	-18.88	Vertical
10420.00	39.42	38.89	9.89	3.98	41.93	50.25	68.20	-17.95	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10420.00	34.28	38.89	9.89	3.98	41.93	45.11	54.00	-8.89	Vertical
10420.00	34.09	38.89	9.89	3.98	41.93	44.92	54.00	-9.08	Horizontal
<i>Remark:</i> 1. <i>Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor.</i> 2. <i>The emission levels of other frequencies are very lower than the limit and not show in test report.</i>									

Band 4:

Band 4 – 802.11a –TX0									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11490.00	38.40	39.50	10.81	4.21	42.29	46.42	74.00	-27.58	Vertical
11490.00	39.41	39.50	10.81	4.21	42.29	47.43	74.00	-26.57	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11490.00	33.78	39.50	10.81	4.21	42.29	41.80	54.00	-12.20	Vertical
11490.00	34.91	39.50	10.81	4.21	42.29	42.93	54.00	-11.07	Horizontal
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11570.00	38.54	39.52	10.78	4.21	42.27	46.57	74.00	-27.43	Vertical
11570.00	38.41	39.52	10.78	4.21	42.27	46.44	74.00	-27.56	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11570.00	33.79	39.52	10.78	4.21	42.27	41.82	54.00	-12.18	Vertical
11570.00	33.95	39.52	10.78	4.21	42.27	41.98	54.00	-12.02	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11650.00	38.20	39.53	10.76	4.21	42.26	46.23	74.00	-27.77	Vertical
11650.00	38.79	39.53	10.76	4.21	42.26	46.82	74.00	-27.18	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11650.00	33.93	39.53	10.76	4.21	42.26	41.96	54.00	-12.04	Vertical
11650.00	34.28	39.53	10.76	4.21	42.26	42.31	54.00	-11.69	Horizontal
<i>Remark:</i>									
1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor.									
2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 4 – 802.11a –TX1									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11490.00	37.93	39.50	10.81	4.21	42.29	45.95	74.00	-28.05	Vertical
11490.00	39.32	39.50	10.81	4.21	42.29	47.34	74.00	-26.66	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11490.00	34.06	39.50	10.81	4.21	42.29	42.08	54.00	-11.92	Vertical
11490.00	34.46	39.50	10.81	4.21	42.29	42.48	54.00	-11.52	Horizontal
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11570.00	38.99	39.52	10.78	4.21	42.27	47.02	74.00	-26.98	Vertical
11570.00	38.20	39.52	10.78	4.21	42.27	46.23	74.00	-27.77	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11570.00	33.59	39.52	10.78	4.21	42.27	41.62	54.00	-12.38	Vertical
11570.00	33.64	39.52	10.78	4.21	42.27	41.67	54.00	-12.33	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11650.00	38.91	39.53	10.76	4.21	42.26	46.94	74.00	-27.06	Vertical
11650.00	39.01	39.53	10.76	4.21	42.26	47.04	74.00	-26.96	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11650.00	34.11	39.53	10.76	4.21	42.26	42.14	54.00	-11.86	Vertical
11650.00	34.36	39.53	10.76	4.21	42.26	42.39	54.00	-11.61	Horizontal
Remark:									
1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor.									
2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 4 – 802.11n-HT20(MIMO)									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11490.00	37.90	39.50	10.81	4.21	42.29	45.92	74.00	-28.08	Vertical
11490.00	39.26	39.50	10.81	4.21	42.29	47.28	74.00	-26.72	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11490.00	34.37	39.50	10.81	4.21	42.29	42.39	54.00	-11.61	Vertical
11490.00	34.50	39.50	10.81	4.21	42.29	42.52	54.00	-11.48	Horizontal
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11570.00	38.00	39.52	10.78	4.21	42.27	46.03	74.00	-27.97	Vertical
11570.00	39.43	39.52	10.78	4.21	42.27	47.46	74.00	-26.54	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11570.00	34.53	39.52	10.78	4.21	42.27	42.56	54.00	-11.44	Vertical
11570.00	34.50	39.52	10.78	4.21	42.27	42.53	54.00	-11.47	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11650.00	38.19	39.53	10.76	4.21	42.26	46.22	74.00	-27.78	Vertical
11650.00	40.12	39.53	10.76	4.21	42.26	48.15	74.00	-25.85	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11650.00	33.96	39.53	10.76	4.21	42.26	41.99	54.00	-12.01	Vertical
11650.00	34.73	39.53	10.76	4.21	42.26	42.76	54.00	-11.24	Horizontal
Remark: 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 4 – 802.11n-HT40(MIMO)									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11510.00	39.30	39.50	10.81	4.21	42.29	47.32	74.00	-26.68	Vertical
11510.00	37.18	39.50	10.81	4.21	42.29	45.20	74.00	-28.80	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11510.00	29.59	39.50	10.81	4.21	42.29	37.61	54.00	-16.39	Vertical
11510.00	30.24	39.50	10.81	4.21	42.29	38.26	54.00	-15.74	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11590.00	39.36	39.52	10.77	4.21	42.27	47.38	74.00	-26.62	Vertical
11590.00	37.10	39.52	10.77	4.21	42.27	45.12	74.00	-28.88	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11590.00	29.60	39.52	10.77	4.21	42.27	37.62	54.00	-16.38	Vertical
11590.00	30.00	39.52	10.77	4.21	42.27	38.02	54.00	-15.98	Horizontal
Remark: 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 4 – 802.11ac-HT20(MIMO)									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11490.00	38.62	39.50	10.81	4.21	42.29	46.64	74.00	-27.36	Vertical
11490.00	38.92	39.50	10.81	4.21	42.29	46.94	74.00	-27.06	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11490.00	33.92	39.50	10.81	4.21	42.29	41.94	54.00	-12.06	Vertical
11490.00	34.83	39.50	10.81	4.21	42.29	42.85	54.00	-11.15	Horizontal
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11570.00	39.78	39.52	10.78	4.21	42.27	47.81	74.00	-26.19	Vertical
11570.00	37.91	39.52	10.78	4.21	42.27	45.94	74.00	-28.06	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11570.00	33.57	39.52	10.78	4.21	42.27	41.60	54.00	-12.40	Vertical
11570.00	34.20	39.52	10.78	4.21	42.27	42.23	54.00	-11.77	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11650.00	38.27	39.53	10.76	4.21	42.26	46.30	74.00	-27.70	Vertical
11650.00	39.12	39.53	10.76	4.21	42.26	47.15	74.00	-26.85	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11650.00	33.74	39.53	10.76	4.21	42.26	41.77	54.00	-12.23	Vertical
11650.00	34.58	39.53	10.76	4.21	42.26	42.61	54.00	-11.39	Horizontal
Remark:									
1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor.									
2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 4 – 802.11ac-HT40(MIMO)									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11510.00	38.92	39.50	10.81	4.21	42.29	46.94	74.00	-27.06	Vertical
11510.00	38.50	39.50	10.81	4.21	42.29	46.52	74.00	-27.48	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11510.00	34.37	39.50	10.81	4.21	42.29	42.39	54.00	-11.61	Vertical
11510.00	34.96	39.50	10.81	4.21	42.29	42.98	54.00	-11.02	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11590.00	38.83	39.52	10.77	4.21	42.27	46.85	74.00	-27.15	Vertical
11590.00	38.71	39.52	10.77	4.21	42.27	46.73	74.00	-27.27	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11590.00	34.44	39.52	10.77	4.21	42.27	42.46	54.00	-11.54	Vertical
11590.00	33.74	39.52	10.77	4.21	42.27	41.76	54.00	-12.24	Horizontal
Remark: 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 4 – 802.11ac-HT80(MIMO)									
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11550.00	39.05	39.51	10.80	4.21	42.28	47.08	74.00	-26.92	Vertical
11550.00	40.18	39.51	10.80	4.21	42.28	48.21	74.00	-25.79	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11550.00	34.37	39.51	10.80	4.21	42.28	42.40	54.00	-11.60	Vertical
11550.00	34.37	39.51	10.80	4.21	42.28	42.40	54.00	-11.60	Horizontal
<i>Remark:</i> 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Whip Antenna:

Band 1:

Band 1 – 802.11a –TX0									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10360.00	39.82	38.83	9.82	3.95	41.97	50.45	68.20	-17.75	Vertical
10360.00	39.64	38.83	9.82	3.95	41.97	50.27	68.20	-17.93	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10360.00	34.39	38.83	9.82	3.95	41.97	45.02	54.00	-8.98	Vertical
10360.00	34.69	38.83	9.82	3.95	41.97	45.32	54.00	-8.68	Horizontal
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10400.00	38.41	38.87	9.85	3.98	41.95	49.16	68.20	-19.04	Vertical
10400.00	38.45	38.87	9.85	3.98	41.95	49.20	68.20	-19.00	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10400.00	34.35	38.87	9.85	3.98	41.95	45.10	54.00	-8.90	Vertical
10400.00	33.99	38.87	9.85	3.98	41.95	44.74	54.00	-9.26	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10480.00	38.88	38.94	9.96	4.02	41.88	49.92	68.20	-18.28	Vertical
10480.00	38.03	38.94	9.96	4.02	41.88	49.07	68.20	-19.13	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10480.00	34.51	38.94	9.96	4.02	41.88	45.55	54.00	-8.45	Vertical
10480.00	33.92	38.94	9.96	4.02	41.88	44.96	54.00	-9.04	Horizontal
Remark:									
1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor.									
2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 1 – 802.11a –TX1									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10360.00	40.47	38.83	9.82	3.95	41.97	51.10	68.20	-17.10	Vertical
10360.00	39.64	38.83	9.82	3.95	41.97	50.27	68.20	-17.93	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10360.00	35.25	38.83	9.82	3.95	41.97	45.88	54.00	-8.12	Vertical
10360.00	33.84	38.83	9.82	3.95	41.97	44.47	54.00	-9.53	Horizontal
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10400.00	38.78	38.87	9.85	3.98	41.95	49.53	68.20	-18.67	Vertical
10400.00	37.41	38.87	9.85	3.98	41.95	48.16	68.20	-20.04	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10400.00	35.05	38.87	9.85	3.98	41.95	45.80	54.00	-8.20	Vertical
10400.00	33.77	38.87	9.85	3.98	41.95	44.52	54.00	-9.48	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10480.00	38.57	38.94	9.96	4.02	41.88	49.61	68.20	-18.59	Vertical
10480.00	37.66	38.94	9.96	4.02	41.88	48.70	68.20	-19.50	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10480.00	35.10	38.94	9.96	4.02	41.88	46.14	54.00	-7.86	Vertical
10480.00	34.66	38.94	9.96	4.02	41.88	45.70	54.00	-8.30	Horizontal

Remark:
 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor.
 2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Band 1 – 802.11n-HT20(MIMO)									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10360.00	39.44	38.83	9.82	3.95	41.97	50.07	68.20	-18.13	Vertical
10360.00	39.54	38.83	9.82	3.95	41.97	50.17	68.20	-18.03	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10360.00	35.13	38.83	9.82	3.95	41.97	45.76	54.00	-8.24	Vertical
10360.00	34.13	38.83	9.82	3.95	41.97	44.76	54.00	-9.24	Horizontal
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10400.00	38.59	38.87	9.85	3.98	41.95	49.34	68.20	-18.86	Vertical
10400.00	37.10	38.87	9.85	3.98	41.95	47.85	68.20	-20.35	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10400.00	34.65	38.87	9.85	3.98	41.95	45.40	54.00	-8.60	Vertical
10400.00	34.62	38.87	9.85	3.98	41.95	45.37	54.00	-8.63	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10480.00	38.63	38.94	9.96	4.02	41.88	49.67	68.20	-18.53	Vertical
10480.00	37.19	38.94	9.96	4.02	41.88	48.23	68.20	-19.97	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10480.00	34.85	38.94	9.96	4.02	41.88	45.89	54.00	-8.11	Vertical
10480.00	34.91	38.94	9.96	4.02	41.88	45.95	54.00	-8.05	Horizontal
Remark: 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 1 – 802.11n-HT40(MIMO)									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10380.00	38.21	38.25	9.85	3.95	41.95	44.36	68.20	-23.84	Vertical
10380.00	37.96	38.25	9.85	3.95	41.95	44.11	68.20	-24.09	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10380.00	34.96	38.25	9.85	3.95	41.95	41.11	54.00	-12.89	Vertical
10380.00	34.89	38.25	9.85	3.95	41.95	41.04	54.00	-12.96	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10460.00	38.37	38.92	9.92	3.98	41.90	45.31	68.20	-22.89	Vertical
10460.00	37.52	38.92	9.92	3.98	41.90	44.46	68.20	-23.74	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10460.00	34.36	38.92	9.92	3.98	41.90	41.30	54.00	-12.70	Vertical
10460.00	34.28	38.92	9.92	3.98	41.90	41.22	54.00	-12.78	Horizontal
Remark: 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 1 – 802.11ac-HT20(MIMO)									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10360.00	39.98	38.83	9.82	3.95	41.97	50.61	68.20	-17.59	Vertical
10360.00	40.08	38.83	9.82	3.95	41.97	50.71	68.20	-17.49	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10360.00	35.33	38.83	9.82	3.95	41.97	45.96	54.00	-8.04	Vertical
10360.00	34.26	38.83	9.82	3.95	41.97	44.89	54.00	-9.11	Horizontal
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10400.00	38.65	38.87	9.85	3.98	41.95	49.40	68.20	-18.80	Vertical
10400.00	37.93	38.87	9.85	3.98	41.95	48.68	68.20	-19.52	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10400.00	34.19	38.87	9.85	3.98	41.95	44.94	54.00	-9.06	Vertical
10400.00	34.29	38.87	9.85	3.98	41.95	45.04	54.00	-8.96	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10480.00	39.33	38.94	9.96	4.02	41.88	50.37	68.20	-17.83	Vertical
10480.00	37.80	38.94	9.96	4.02	41.88	48.84	68.20	-19.36	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10480.00	34.14	38.94	9.96	4.02	41.88	45.18	54.00	-8.82	Vertical
10480.00	34.06	38.94	9.96	4.02	41.88	45.10	54.00	-8.90	Horizontal
Remark: 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 1 – 802.11ac-HT40(MIMO)									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10380.00	39.10	38.25	9.85	3.95	41.95	49.20	68.20	-19.00	Vertical
10380.00	40.06	38.25	9.85	3.95	41.95	50.16	68.20	-18.04	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10380.00	34.76	38.25	9.85	3.95	41.95	44.86	54.00	-9.14	Vertical
10380.00	34.19	38.25	9.85	3.95	41.95	44.29	54.00	-9.71	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10460.00	37.63	38.92	9.92	3.98	41.90	48.55	68.20	-19.65	Vertical
10460.00	37.64	38.92	9.92	3.98	41.90	48.56	68.20	-19.64	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10460.00	34.66	38.92	9.92	3.98	41.90	45.58	54.00	-8.42	Vertical
10460.00	34.92	38.92	9.92	3.98	41.90	45.84	54.00	-8.16	Horizontal
Remark: 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 1 – 802.11ac-HT80(MIMO)									
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10420.00	38.58	38.89	9.89	3.98	41.93	49.41	68.20	-18.79	Vertical
10420.00	39.35	38.89	9.89	3.98	41.93	50.18	68.20	-18.02	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
10420.00	34.67	38.89	9.89	3.98	41.93	45.50	54.00	-8.50	Vertical
10420.00	34.14	38.89	9.89	3.98	41.93	44.97	54.00	-9.03	Horizontal
<i>Remark:</i> 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 4:

Band 4 – 802.11a –TX0									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11490.00	38.59	39.50	10.81	4.21	42.29	46.61	74.00	-27.39	Vertical
11490.00	39.41	39.50	10.81	4.21	42.29	47.43	74.00	-26.57	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11490.00	34.12	39.50	10.81	4.21	42.29	42.14	54.00	-11.86	Vertical
11490.00	34.84	39.50	10.81	4.21	42.29	42.86	54.00	-11.14	Horizontal
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11570.00	38.92	39.52	10.78	4.21	42.27	46.95	74.00	-27.05	Vertical
11570.00	37.97	39.52	10.78	4.21	42.27	46.00	74.00	-28.00	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11570.00	34.07	39.52	10.78	4.21	42.27	42.10	54.00	-11.90	Vertical
11570.00	34.03	39.52	10.78	4.21	42.27	42.06	54.00	-11.94	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11650.00	38.45	39.53	10.76	4.21	42.26	46.48	74.00	-27.52	Vertical
11650.00	38.78	39.53	10.76	4.21	42.26	46.81	74.00	-27.19	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11650.00	34.16	39.53	10.76	4.21	42.26	42.19	54.00	-11.81	Vertical
11650.00	34.77	39.53	10.76	4.21	42.26	42.80	54.00	-11.20	Horizontal
<i>Remark:</i>									
1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor.									
2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 4 – 802.11a –TX1									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11490.00	38.29	39.50	10.81	4.21	42.29	46.31	74.00	-27.69	Vertical
11490.00	39.24	39.50	10.81	4.21	42.29	47.26	74.00	-26.74	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11490.00	33.73	39.50	10.81	4.21	42.29	41.75	54.00	-12.25	Vertical
11490.00	34.85	39.50	10.81	4.21	42.29	42.87	54.00	-11.13	Horizontal
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11570.00	39.10	39.52	10.78	4.21	42.27	47.13	74.00	-26.87	Vertical
11570.00	37.96	39.52	10.78	4.21	42.27	45.99	74.00	-28.01	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11570.00	33.62	39.52	10.78	4.21	42.27	41.65	54.00	-12.35	Vertical
11570.00	33.77	39.52	10.78	4.21	42.27	41.80	54.00	-12.20	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11650.00	38.49	39.53	10.76	4.21	42.26	46.52	74.00	-27.48	Vertical
11650.00	38.82	39.53	10.76	4.21	42.26	46.85	74.00	-27.15	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11650.00	33.96	39.53	10.76	4.21	42.26	41.99	54.00	-12.01	Vertical
11650.00	34.32	39.53	10.76	4.21	42.26	42.35	54.00	-11.65	Horizontal
Remark: 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 4 – 802.11n-HT20(MIMO)									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11490.00	38.24	39.50	10.81	4.21	42.29	46.26	74.00	-27.74	Vertical
11490.00	39.66	39.50	10.81	4.21	42.29	47.68	74.00	-26.32	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11490.00	34.24	39.50	10.81	4.21	42.29	42.26	54.00	-11.74	Vertical
11490.00	34.96	39.50	10.81	4.21	42.29	42.98	54.00	-11.02	Horizontal
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11570.00	38.26	39.52	10.78	4.21	42.27	46.29	74.00	-27.71	Vertical
11570.00	39.78	39.52	10.78	4.21	42.27	47.81	74.00	-26.19	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11570.00	34.08	39.52	10.78	4.21	42.27	42.11	54.00	-11.89	Vertical
11570.00	34.67	39.52	10.78	4.21	42.27	42.70	54.00	-11.30	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11650.00	38.61	39.53	10.76	4.21	42.26	46.64	74.00	-27.36	Vertical
11650.00	39.72	39.53	10.76	4.21	42.26	47.75	74.00	-26.25	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11650.00	34.28	39.53	10.76	4.21	42.26	42.31	54.00	-11.69	Vertical
11650.00	34.85	39.53	10.76	4.21	42.26	42.88	54.00	-11.12	Horizontal
Remark: 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 4 – 802.11n-HT40(MIMO)									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11510.00	39.30	39.50	10.81	4.21	42.29	47.32	74.00	-26.68	Vertical
11510.00	37.18	39.50	10.81	4.21	42.29	45.20	74.00	-28.80	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11510.00	29.59	39.50	10.81	4.21	42.29	37.61	54.00	-16.39	Vertical
11510.00	30.24	39.50	10.81	4.21	42.29	38.26	54.00	-15.74	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11590.00	39.36	39.52	10.77	4.21	42.27	47.38	74.00	-26.62	Vertical
11590.00	37.10	39.52	10.77	4.21	42.27	45.12	74.00	-28.88	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11590.00	29.60	39.52	10.77	4.21	42.27	37.62	54.00	-16.38	Vertical
11590.00	30.00	39.52	10.77	4.21	42.27	38.02	54.00	-15.98	Horizontal
Remark: 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 4 – 802.11ac-HT20(MIMO)									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11490.00	38.51	39.50	10.81	4.21	42.29	46.53	74.00	-27.47	Vertical
11490.00	38.77	39.50	10.81	4.21	42.29	46.79	74.00	-27.21	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11490.00	33.81	39.50	10.81	4.21	42.29	41.83	54.00	-12.17	Vertical
11490.00	34.83	39.50	10.81	4.21	42.29	42.85	54.00	-11.15	Horizontal
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11570.00	39.41	39.52	10.78	4.21	42.27	47.44	74.00	-26.56	Vertical
11570.00	37.59	39.52	10.78	4.21	42.27	45.62	74.00	-28.38	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11570.00	33.81	39.52	10.78	4.21	42.27	41.84	54.00	-12.16	Vertical
11570.00	34.01	39.52	10.78	4.21	42.27	42.04	54.00	-11.96	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11650.00	38.51	39.53	10.76	4.21	42.26	46.54	74.00	-27.46	Vertical
11650.00	39.26	39.53	10.76	4.21	42.26	47.29	74.00	-26.71	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11650.00	33.67	39.53	10.76	4.21	42.26	41.70	54.00	-12.30	Vertical
11650.00	34.29	39.53	10.76	4.21	42.26	42.32	54.00	-11.68	Horizontal
Remark: 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 4 – 802.11ac-HT40(MIMO)									
Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11510.00	38.51	39.50	10.81	4.21	42.29	46.53	74.00	-27.47	Vertical
11510.00	38.67	39.50	10.81	4.21	42.29	46.69	74.00	-27.31	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11510.00	34.28	39.50	10.81	4.21	42.29	42.30	54.00	-11.70	Vertical
11510.00	34.61	39.50	10.81	4.21	42.29	42.63	54.00	-11.37	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11590.00	38.47	39.52	10.77	4.21	42.27	46.49	74.00	-27.51	Vertical
11590.00	39.02	39.52	10.77	4.21	42.27	47.04	74.00	-26.96	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11590.00	34.00	39.52	10.77	4.21	42.27	42.02	54.00	-11.98	Vertical
11590.00	34.23	39.52	10.77	4.21	42.27	42.25	54.00	-11.75	Horizontal
Remark: 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

Band 4 – 802.11ac-HT80(MIMO)									
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11550.00	38.88	39.51	10.80	4.21	42.28	46.91	74.00	-27.09	Vertical
11550.00	40.02	39.51	10.80	4.21	42.28	48.05	74.00	-25.95	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11550.00	34.44	39.51	10.80	4.21	42.28	42.47	54.00	-11.53	Vertical
11550.00	34.71	39.51	10.80	4.21	42.28	42.74	54.00	-11.26	Horizontal
<i>Remark:</i> 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor. 2. The emission levels of other frequencies are very lower than the limit and not show in test report.									

6.7 Frequency stability

Test Requirement:	RSS-Gen section 6.11
Limit:	Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.
Test setup:	<div style="text-align: center;"> <p>The diagram shows a measurement setup. On the left is a 'Spectrum analyzer' box containing a small graph. A line connects it to a box labeled 'Att.' (Attenuator). From the 'Att.' box, a line goes to a large box labeled 'Temperature Chamber'. Inside the chamber is a box labeled 'EUT' (Equipment Under Test). Below the chamber is a box labeled 'Variable Power Supply', with a line connecting it to the EUT box.</p> </div> <p>Note : Measurement setup for testing on Antenna connector</p>
Test procedure:	<ol style="list-style-type: none"> 1. The EUT is installed in an environment test chamber with external power source. 2. Set the chamber to operate at 50 centigrade and external power source to output at nominal voltage of EUT. 3. A sufficient stabilization period at each temperature is used prior to each frequency measurement. 4. When temperature is stabled, measure the frequency stability. 5. The test shall be performed under -30 to 50 centigrade and 85 to 115 percent of the nominal voltage. Change setting of chamber and external power source to complete all conditions.
Test Instruments:	Refer to section 5.10 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Measurement Data (the worst channel and worst ANT port TX0):

Band 1:

Voltage vs. Frequency Stability (Lowest channel=5180MHz)

Test conditions		Frequency(MHz)	Max. Deviation (ppm)
Temp(°C)	Voltage(dc)		
20	3.45V	5179.976681	-4.50
	3.30V	5179.985677	-2.77
	3.00V	5179.989951	-1.94

Temperature vs. Frequency Stability (Lowest channel=5180MHz)

Test conditions		Frequency(MHz)	Max. Deviation (ppm)
Voltage(dc)	Temp(°C)		
3.3V	-20	5179.989036	-2.12
	-10	5179.985487	-2.80
	0	5179.978523	-4.15
	10	5179.984552	-2.98
	20	5179.998647	-0.26
	30	5179.984293	-3.03
	40	5179.973575	-5.10
	50	5179.984926	-2.91

Band 4:

Voltage vs. Frequency Stability (Lowest channel=5745MHz)


Test conditions		Frequency(MHz)	Max. Deviation (ppm)
Temp(°C)	Voltage(dc)		
20	3.45V	5744.976734	-4.05
	3.30V	5744.983343	-2.90
	3.00V	5744.988657	-1.97

Temperature vs. Frequency Stability (Lowest channel=5745MHz)

Test conditions		Frequency(MHz)	Max. Deviation (ppm)
Voltage(dc)	Temp(°C)		
3.3V	-20	5744.979898	-3.50
	-10	5744.983864	-2.81
	0	5744.986571	-2.34
	10	5744.985674	-2.49
	20	5744.983866	-2.81
	30	5744.984439	-2.71
	40	5744.986343	-2.38
	50	5744.979858	-3.51

7 Test Setup Photo


Radiated Spurious Emission (Ceramic Antenna)
Below 1GHz

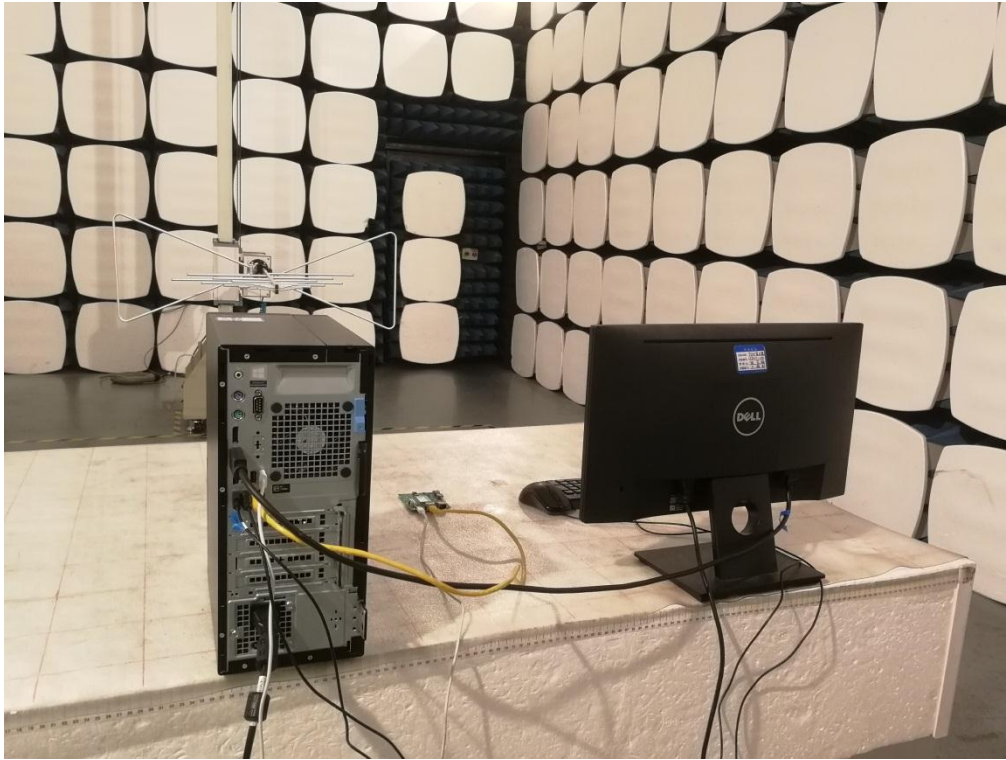

Above 1GHz




Radiated Spurious Emission (Flex Antenna) Below 1GHz

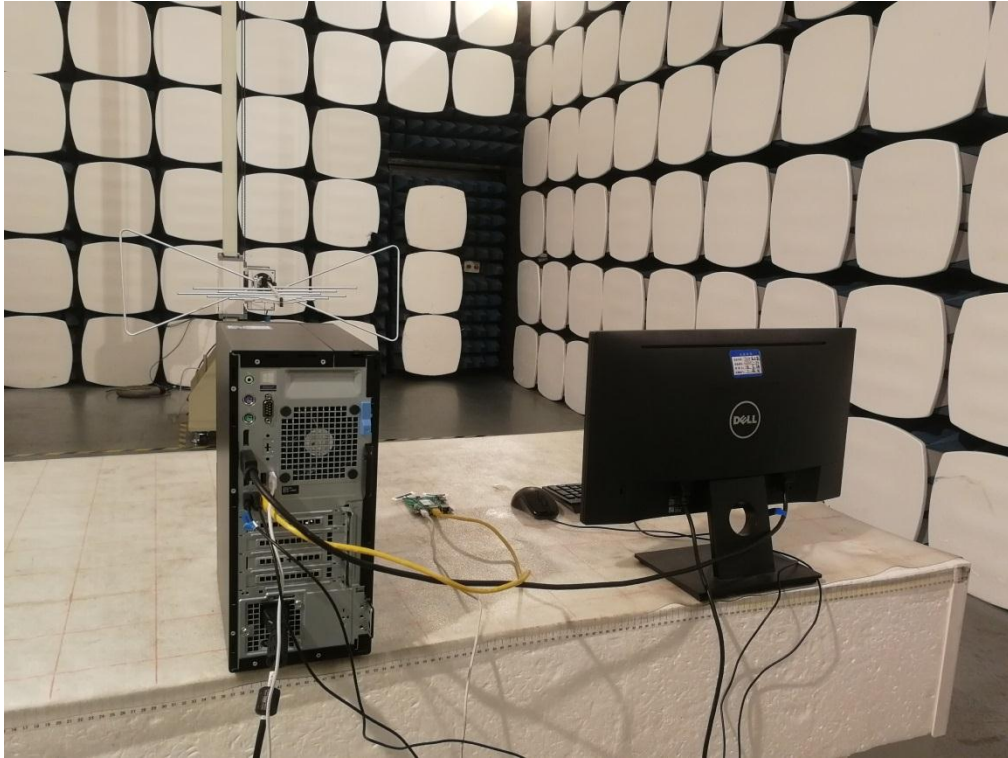

Above 1GHz



Radiated Spurious Emission (Whip Antenna)
Below 1GHz

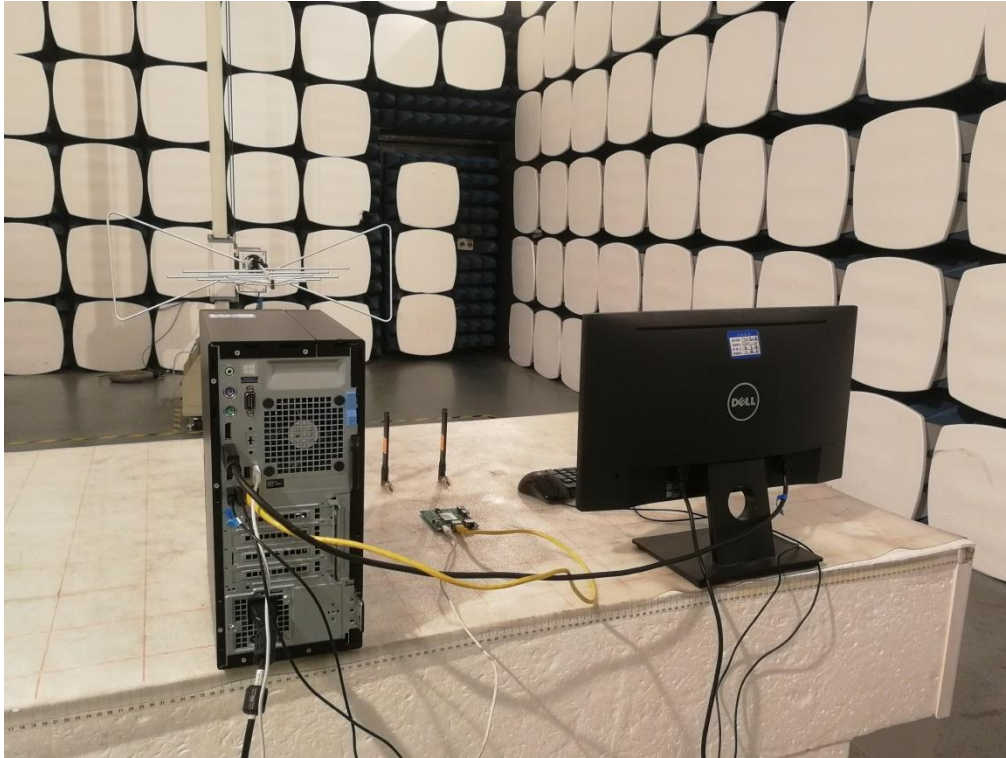

Above 1GHz



Conducted Emission



8 EUT Constructional Details

Reference to the test report No.: CCISE200308101

-----End of report-----