


Detail Pixels
Scale: 200X

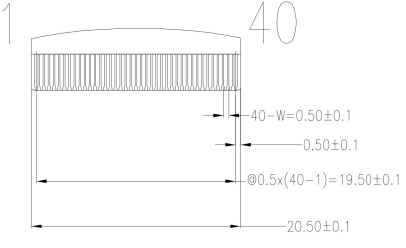

- Specification:**
1. Display mode: 3.5" IPS TFT (16.7M) Normal Black / Transmissive
 2. Viewing direction: FULL VIEW
 3. Operating temperature: -20°C to +70°C Storage temperature: -30°C to +80°C
 4. Drive IC: ST77922
 5. Interface: MIPI
 6. LCM Luminance: 890 cd/m² (min) 1110cd/m² (typ)
 7. LCM Color of CIE Coordinate(white): X: 0.29±0.05; Y: 0.31±0.05
 8. critical dimension, () reference dimension, Unspecified tolerance: ±0.30mm.
 9. ROHS compliant
 10. 产品结构: 全贴

Detail "A"
Scale: 2X

		UNIT	SIZE	SCALE	DESIGNED	CHECKED	VERIFIED	APPROVED	FILE NAME
		mm	A4	N-T-S	梁俊铭				Count Dwg.
MOD. Name	YB-TG320480C122A-N-A								
DESIGNED	梁俊铭								
CHECKED									
VERIFIED									
APPROVED									
Sheet	1								
Of	1								

NO.	SYMBOL	FPC PIN OUT	LED MODULE
1	GND		
2	GND		
3	GND		
4	GND		
5	GND		
6	GND		
7	GND		
8	GND		
9	LEDA		
10	LEDA		
11	LEDA		
12	LEDA		
13	GND		
14	GND		
15	GND		
16	GND		
17	HSD0P		
18	HSD0N		
19	GND		
20	HSGP		
21	HSGN		
22	GND		
23	RESX		
24	VDDI		
25	VDDI		
26	VDD		
27	VDD		
28	GND		
29	TP_SCL		
30	TP_SDA		
31	TP_INT		
32	TP_RESXP		
33	GND		
34	GND		
35	GND		
36	NC		
37	NC		
38	ANT2		
39	ANT1		
40	ANT0		